CITY OF CHICO
INC. 1872

CAPITAL PROJECT SERVICES DEPARTMENT
PUBLIC WORKS PROJECT

NOTICE TO CONTRACTORS
GENERAL AND SPECIAL PROVISIONS
PROPOSAL AND CONTRACT
FOR

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE

BUDGET ACCOUNT NO. MAJGC/15010-300-4150

For use in connection with:

(1) State of California
Department of Transportation
STANDARD SPECIFICATIONS May 2006

(2) City of Chico
STANDARD PLANS
CONSTRUCTION SPECIFICATIONS

Prepared By or Under the Supervision of:

Robert Greenlaw R.C.E. 62529
License Expiration Date: December 31, 2011

REGISTERED PROFESSIONAL ENGINEER
ROBERT GREENLAW
No. C 62,529
Exp: 12/31/11
CIVIL
STATE OF CALIFORNIA

BID OPEN DATE: January 19th, 2012

(BLANK)

FOR INFORMATION PURPOSES ONLY.
THIS IS NOT PART OF THE CONTRACT DOCUMENT

WHEN SUBMITTING YOUR BID, PLEASE SUBMIT **ONLY:**

1. All PF pages from the set of specifications.
2. All addenda (if there are any).
3. Bidder's bond.

IT IS NOT NECESSARY TO SUBMIT THE ENTIRE SET OF SPECIFICATIONS.
PLEASE KEEP THE REMAINDER OF SET FOR YOUR INFORMATION.

Proposal shall be submitted in a sealed envelope plainly marked on the outside with project name, project number, bid opening date, and time of bid opening.

(BLANK)

STATE ROUTE 32 WIDENING (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT NO. MAJGC/15010-300-4150

SPECIAL PROVISIONS
Civil

The special provisions contained herein have been prepared by or under the direction of the following registered persons:

CIVIL:

R. M. B

Registered Civil Engineer — 12-22-11 Date

REGISTERED PROFESSIONAL ENGINEER
Robert Matthew Brogan
No. 63854
Exp. 9/30/2012
STATE OF CALIFORNIA

STRUCTURAL:

Registered Civil Engineer — 12-22-11 Date

REGISTERED PROFESSIONAL ENGINEER
Julia Ann Passalacqua
No. 68407
Exp. 9/30/2013
STATE OF CALIFORNIA

ELECTRICAL:

Kristin S. Calia

Registered Civil Engineer — 12-22-11 Date

REGISTERED PROFESSIONAL ENGINEER
Kristin Calia
No. 62461
Exp. 9/30/2013
STATE OF CALIFORNIA

(Blank)

STATE ROUTE 32 WIDENING (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT NO. MAJGC/15010-300-4150

SPECIAL PROVISIONS
Landscaping

The special provisions contained herein have been prepared by or under the direction of the following registered persons:

LANDSCAPING:

Brian Firth
Registered Civil Engineer

12-22-11
Date

LICENSED LANDSCAPE ARCHITECT
Brian D. Firth
#2752
Exp. 06/13
STATE OF CALIFORNIA

(Blank)

TABLE OF CONTENTS

I. NOTICE TO CONTRACTORS

II. GENERAL PROVISIONS
A. PROPOSAL REQUIREMENTS GP-1
B. CONTRACT AWARD AND EXECUTION GP-1
C. SCOPE OF WORK GP-2
D. CONTROL OF WORK GP-3
E. CONTROL OF MATERIALS GP-4
F. LEGAL RELATIONS AND RESPONSIBILITIES TO PUBLIC GP-5
G. PROSECUTION GP-7
H. MEASUREMENT AND PAYMENT GP-8
I. GUARANTEE GP-10
J. DISPUTE RESOLUTION PROCEDURES GP-10

III. SPECIAL PROVISIONS 1
A. DEFINITIONS 1
B. REQUIRED LISTING OF PROPOSED SUBCONTRACTORS 2
C. PAYMENTS 2
D. SUPPLEMENTAL PROJECT INFORMATION 2
E. LEGAL RELATIONS REGARDING STATE OF CALIFORNIA 3
F. INDEMNIFICATION AND INSURANCE 3
G. COOPERATION 4
H. PROGRESS OF THE WORK AND TIME FOR COMPLETION 5
I. PLANS AND SPECIFICATIONS FURNISHED 5
J. UNDERGROUND FACILITIES 5
K. LINES AND GRADES 6
L. WORK ON PRIVATE PROPERTY 8
M. MATERIALS 9
N. DESCRIPTION OF WORK 36
O. QUANTITIES 37
P. CONSTRUCTION PROCEDURES AND DETAILS 37
1. CONSTRUCTION PROJECT INFORMATION SIGNS 37
2. ORDER OF WORK 37
3. CONTRACTORS DAILY WORK HOURS/NOISE ORDINANCE 40
4. DUST CONTROL / AIR QUALITY 41
5. NOTIFICATION OF RESIDENTS AND BUSINESSES 42
6. ACCESS TO BUSINESSES AND RESIDENCES 43
7. CONFINED SPACE ENTRY 44
8. AREA FOR CONTRACTOR USE 44
9. TESTING 45
10. HAZARDOUS WASTE IN EXCAVATION 45
11. UNANTICIPATED CULTURAL RESOURCES DISCOVERY 46
12. RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD 47
13. RELATIONS WITH CENTRAL VALLEY FLOOD PROTECTION BOARD 49
14. RELATIONS WITH CALIFORNIA DEPARTMENT OF FISH AND GAME 50
15. RELATIONS WITH THE UNITED STATES ARMY CORPS OF ENGINEERS 51
16. RELATIONS WITH THE UNITED STATES FISH AND WILDLIFE SERVICES 51
17. ENVIRONMENTALLY SENSITIVE AREA 52
18. NONHIGHWAY FACILITIES (INCLUDING UTILITIES) 52
19. BIOLOGICAL MONITORING PROGRAM 53

20. NESHAP NOTIFICATION....56
21. RIGHT OF PUBLIC UTILITIES....57
22. PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS....57
23. WATER POLLUTION CONTROL....59
24. CONSTRUCTION SITE MANAGEMENT....81
25. TEMPORARY HYDRAULIC MULCH....96
26. STREET SWEEPING....100
27. TEMPORARY EROSION CONTROL BLANKET....101
28. TEMPORARY COVER....104
29. TEMPORARY CONCRETE WASHOUT FACILITY....109
30. TEMPORARY CONCRETE WASHOUT (PORTABLE)....113
31. TEMPORARY CHECK DAM....115
32. TEMPORARY FIBER ROLL....120
33. TEMPORARY SILT FENCE....123
34. TEMPORARY FENCE (TYPE ESA)....126
35. TEMPORARY CONSTRUCTION ENTRANCE....129
36. TEMPORARY DRAINAGE INLET PROTECTION....133
37. PROGRESS SCHEDULE (CRITICAL PATH METHOD)....144
38. MOBILIZATION....151
39. CONSTRUCTION AREA TRAFFIC CONTROL DEVICES....151
40. CONSTRUCTION AREA SIGNS....153
41. MAINTAINING TRAFFIC....154
42. CLOSURE REQUIREMENTS AND CONDITIONS....160
43. IMPACT ATTENUATOR VEHICLE....162
44. TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE....164
45. TEMPORARY PAVEMENT DELINEATION....166
46. BARRICADE....170
47. PORTABLE CHANGEABLE MESSAGE SIGNS....171
48. TEMPORARY SIGNAL SYSTEM....173
49. TEMPORARY RAILING....177
50. CHANNELIZER....177
51. TEMPORARY CRASH CUSHION (TYPE ABSORB 350)....178
52. EXISTING HIGHWAY FACILITIES....179
52-1.01. REMOVE METAL BEAM GUARD RAILING....179
52-1.02. REMOVE PAVEMENT MARKER....182
52-1.02. REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING (HAZARDOUS WASTE)....183
52-1.04. REMOVE THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING.187
52-1.05. REMOVE FENCE....188
52-1.06. REMOVE DRAINAGE FACILITY....188
52-1.07. REMOVE ROADSIDE SIGN....189
52-1.08. RELOCATE ROADSIDE SIGN....189
52-1.09. MODIFY INLET TO MANHOLE....190
52-1.10. OBLITERATE SURFACING....190
52-1.11. COLD PLANE ASPHALT CONCRETE PAVEMENT....191
52-1.12. BRIDGE REMOVAL....193
52-1.13. CLEAN BRIDGE DECK....195
52-1.14. REMOVE CONCRETE....195
53. CLEARING AND GRUBBING....196
54. MAINTENANCE OF TREES....197
55. REMOVE TREE....199
56. WATERING....200
57. EARTHWORK....201
58. SHOULDER BACKING....202
59. EROSION CONTROL (HYDROSEED)....205
60. COMPOST (INCORPORATE)....212

61. IRRIGATION CROSSOVERS 215
62. AGGREGATE BASE 216
63. COLD FOAM IN-PLACE RECYCLING 217
64. HOT MIX ASPHALT 227
65. HOT MIX ASPHALT OPEN GRADED FRICTION COURSE 229
66. HOT MIX ASPHALT (MISCELLANEOUS AREAS) 230
67. PILING 231
68. CAST-IN-DRILLED-HOLE CONCRETE PILES 232
69. CONCRETE STRUCTURES 248
70 STRUCTURE APPROACH SLABS (TYPE EQ) 250
71. STRUCTURE APPROACH SLABS (TYPE R) 252
72. PAVING NOTCH EXTENSION 257
73. DRILL AND BOND DOWEL (CHEMICAL ADHESIVE) 258
74. DRILL AND BOND DOWELS 259
75. SEALING JOINTS 260
76. REINFORCEMENT 260
77. BRIDGE DECK METHACRYLATE RESIN TREATMENT 261
78. DRAINAGE INLETS 264
79. PRECAST CONCRETE SOUNDWALL 264
80. STEEL STRUCTURES 267
81. ROADSIDE SIGNS 274
82. FURNISH SIGN 274
83. ALTERNATIVE PIPE 280
84. MISCELLANEOUS FACILITIES 281
85. DRAINAGE INLET MARKER 281
86. SLOPE PROTECTION 283
87. MISCELLANEOUS CONCRETE CONSTRUCTION 283
88. MISCELLANEOUS IRON AND STEEL 286
89. MARKERS AND DELINEATORS 286
90. METAL BEAM GUARD RAILING 287
91. TERMINAL SYSTEM (TYPE CAT) 287
92. ALTERNATIVE FLARED TERMINAL SYSTEM 289
93. STEEL-BACKED TIMBER GUARDRAIL 290
94. VEGETATION CONTROL (MINOR CONCRETE) 292
95. METAL BRIDGE RAILING 295
96. CONCRETE BARRIER 295
97. TRANSITION RAILING (TYPE WB) 296
98. THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING 296
99. PAVEMENT MARKERS 298
100. HIGHWAY LANDSCAPING AND DECORATIVE FEATURES 299
100-1.01. LANDSCAPE PLANTING 299
100-1.02 LANDSCAPE IRRIGATION 310
100-1.03 PLANT ESTABLISMENT PERIOD 332
100-1.04 RAISED PLANTER WALLCAP 336
100-1.05 RAISED PLANTER WALLS 340
101. ELECTRICAL SYSTEMS 347
102. STANDARD PLANS LIST 383

AMENDMENTS TO MAY 2006 STANDARD SPECIFICATIONS ..... AS-1 thru AS-369

IV. PERMITS

CENTRAL VALLEY FLOOD PROTECTION BOARD PERMIT ..... CVFP-1 thru CVFP-9

DEPARTMENT OF FISH AND GAME ..... DFG-1 thru DFG-12
STREAMBED ALTERATION AGREEMENT

CALIFORNIA REGIONAL WATER QUALITY CONTROL ..... WQC-1 thru WQC-11
BOARD WATER QUALITY CERTIFICATION

CALIFORNIA REGIONAL WATER QUALITY ..... WQC APP-1 thru WQC APP-5
BOARD WATER QUALITY CERTIFICATION APPLICATION

US ARMY CORPS OF ENGINEERS PERMIT ..... USACE-1 thru USACE-9

US FISH AND WILDLIFE SERVICE – BIOLOGICAL OPINION ..... USFW-1 thru USFW-19

SAMPLE CALTRANS ENCROACHMENT PERMIT ..... EP-1 thru EP-9

V. CITY OF CHICO STANDARD PLANS ..... STD-1 thru STD-4

VI. ARTISAN PRECAST SPECIFICATIOS AND DRAWINGS ..... APSD-1 thru APSD-10

VII. BATTERY BACKSUP SYSTEM DETAILS ..... BBS-1 thru BBS-5

VIII. PROJECT FUNDING SIGN DETAILS PFSD-1

IX. CONTRACT ..... CF-1 thru CF-9

X. PROPOSAL ..... PF-1 thru PF-9

I. NOTICE TO CONTRACTORS

(Blank)

CITY OF CHICO

CAPITAL PROJECT SERVICES DEPARTMENT
CHICO, CALIFORNIA

NOTICE TO CONTRACTORS – PUBLIC WORKS PROJECT

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
(Project Title)

MAJGC/15010-300-4150
(Budget Account No.)

NOTICE INVITING BIDS - The City of Chico will receive sealed bids for the above public works project at the Capital Project Services Department, located at the Chico Municipal Center, 2nd Floor, 411 Main Street, Chico, CA 95928 (Mailing Address: P. O. Box 3420, Chico, CA 95927), until 4:00 PM **JANUARY 19th, 2012**, at which time they will be publicly opened and read aloud. A planholders list or, once the results have been determined by staff, bid results, may be obtained at the following City website address: www.chico.ca.us. On the Home page, click Departments, Capital Project Services, Projects to Bid.

GENERAL WORK DESCRIPTION – The work, in general, to be done under this contract consists of roadway widening, pavement rehabilitation and overlay of existing roadway, bridge widening, drainage improvements, signal modifications, soundwalls, steel-backed timber guardrail, landscaping, and all necessary appurtenances, all in conformance with the attached contract specifications and the details as shown on the contract plans entitled:

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE

BIDDERS INFORMATION – Bid documents (plans and specifications) and supplemental information (Cross-Sections, Geotechnical Reports, Storm Water Pollution Prevention Plan, Bridge As-built information, Bridge Foundation Report with Addendums, and Bridge Design Hydraulic Study Report) may be obtained for a NONREFUNDABLE FEE, plus delivery (if mailed), through Brownie's Digital Imaging, 1322 V Street, Sacramento, CA 95818. Phone: 916-443-1322. Fax: 916-442-5305. Email: central@browniesrepro.com. Inquire with the Planwell department.

Bid documents and supplemental information, shipping and handling charges are determined by Brownie's. Bid documents and supplemental information are also posted on the City of Chico website at www.chico.ca.us, click Departments, Capital Project Services, Projects to bid. Cross-Sections, Geotechnical Reports, Storm Water Pollution Prevention Plan, Bridge As-built information, Bridge Foundation Report with Addendums, and Bridge Design Hydraulic Study Report are provided for informational purposes only. All addenda will be posted through Brownie's Digital Imaging and will also be posted on the City of Chico website. Planholders list is only available through Brownie's Digital Imaging. Contractors will only be listed on the Planholders list if they have purchased through Brownie's Digital Imaging.

Bid documents and supplemental information may be examined at the Capital Project Services Department, located at the Chico Municipal Center, 2nd Floor, 411 Main Street, Chico, CA. Copies of all bid documents and supplemental information are to be requested and obtained through Brownies Digital Imaging. Technical questions should be directed to the City Capital Project Services Department at (530) 879-6931, Fax (530) 895-4899. Responses to questions will be addressed in combination with the designer and contract manager as appropriate. Questions and Requests for Information will not be responded to beginning 7 calendar days prior to bid opening.

BID SUBMITTAL REQUIREMENTS - Bidders may only submit their bids on proposal forms provided by the City. **Bids must be submitted in a sealed envelope plainly marked on its outside with the project title, City budget account number (see above), the bid opening date and bid opening time.** Each bid must be accompanied by cash, a certified or cashier's check, or a bid bond in favor of the CITY OF CHICO in an amount equal to at least ten percent (10%) of the amount bid, such guaranty to be forfeited should the bidder to whom the contract is awarded fail to enter into the contract.

BID AWARD PROVISIONS; REJECTION - An award of bid, if a bid is awarded, will be made to the lowest responsible bidder whose bid complies with the City's requirements within **seventy- five (75) days** of the bid opening date. The City reserves the right, in its sole discretion, to reject any bid which fails to meet bid requirements in any respect, to reject all bids for any reasons whatsoever and to waive minor irregularities in any bid.

In addition to its right to accept or reject any and all bids, the City reserves the right in its sole discretion to base the award of bid on the inclusion of any, all, or none of the additive or alternate bid items, included in the bid proposal.

INSURANCE; BONDS REQUIRED - The bidder to whom a contract is awarded will be required to furnish to the City evidence of insurance coverage(s) and performance/labor and materials bonds in full compliance with the provisions of the contract documents.

OUT OF STATE VENDORS - Since the City is required to pay the California use tax on goods purchased from an out of state vendor, out of state vendors who do not pay California sales tax, directly or subject to a California State Use Tax Permit, must include the use tax in the bid total. The use tax shall be calculated based on the sales tax rate applicable in the City of Chico at the time the bid is prepared.

LICENSING REQUIREMENTS - At the time the City awards the contract for this project, the Contractor shall possess either a Class A Contractor License or a combination of classes required by the categories and types of work included in this contract

PREVAILING WAGES: PAYMENT REQUIRED - Prevailing State wages are required to be paid to members of each craft or classification performing work on this project. A copy of the current State Prevailing Wage Determination for this project is on file in the Capital Project Services Department at 411 Main Street, 2nd Floor. (State prevailing wages are also available on the Internet at *http://www.dir.ca.gov/DLSR/statistics_research.html*).

APPRENTICESHIP STANDARDS - In accordance with the provisions of Part 7, Chapter 1, Article 2, Section 1777.5 of the Labor Code of the State of California, the prime contractor shall be responsible for fully complying with the provisions of this Section, as well as any regulations adopted by the Director of Industrial Relations, for all apprenticeable crafts or trades, and shall also assure compliance by his/her sub-contractors with respect to such apprenticeable crafts or trades.

PAYMENT RETENTIONS; SUBSTITUTION OF SECURITIES - Ten percent (10%) will be withheld from each progress payment made to the contractor for work performed and will be held until completion of the work, its acceptance and the expiration of the period provided by law for filing liens by laborers or materialmen. In accordance with the provisions of Section 22300 of the Public Contract Code of the State of California, securities may be substituted for the monies which the City withholds, or the Contractor may request that retention be paid to an escrow agent.

PUBLISH DATE: DECEMBER 23rd, 2011

II. GENERAL PROVISIONS

(Blank)

CITY OF CHICO
STANDARD GENERAL PROVISIONS

A. PROPOSAL REQUIREMENTS

(a) Examination of Contract Plans, Specifications, General and Special Provisions, and Site of Work. The bidder is required to examine carefully the site of, and the contract plans, specifications and general and special provisions for, the work contemplated. It will be assumed that the bidder has investigated and is satisfied as to the conditions to be encountered as to the character, quality, and quantities of work to be performed and materials to be furnished, and as to the requirements of the specifications, the general and special provisions, and the contract. It is mutually agreed that submission of a proposal shall be considered prima facie evidence that the bidder has made such examination.

(b) Proposal Form. All proposals must be made upon blank forms as furnished in the contract documents. All proposals must give the prices proposed, in figures, and must be signed by the bidder, with his address. If the proposal is made by an individual, his name and post office address must be shown. If made by a firm or partnership, the name and post office address of each member of the firm or partnership must be shown. If made by a corporation, the proposal must show the name of the state under the laws of which the corporation was chartered and the names, titles, and business address of the president, secretary, and treasurer.

(c) Rejection of Proposals Containing Alterations, Erasures, or Irregularities. Proposals may be rejected if they show any alterations of form, additions not called for, conditional or alternative bids, incomplete bids, erasures, or irregularities of any kind.

The City reserves the right to reject any or all proposals and to waive any irregularities in any or all proposals.

(d) Bidder's Guaranty. All bids shall be presented under sealed cover and shall be accompanied by cash, cashier's check, certified check, or bidder's bond, made payable to the City of Chico, for an amount equal to at least ten percent (10%) of the amount of said bid, and no bid shall be considered, unless such cash, cashier's check, certified check, or bidder's bond is enclosed therewith.

B. CONTRACT AWARD AND EXECUTION

(a) Award of Contract. The award of the contract, if it be awarded, will be to the lowest responsible bidder whose proposal complies with all the requirements described. The award, if made, will be made within sixty (60) days after the opening of the bids. All bids will be compared on the basis of the Engineer's Estimate of quantities of work to be done.

(b) Execution of Contract. The contract shall be signed by the successful bidder and returned, together with the contract bonds, within ten (10) days, not including Sundays, after the bidder has received notice that the contract has been awarded. No proposal shall be considered binding upon the City until the execution of the contract.

Failure to execute a contract and file acceptable bonds, as provided herein within ten (10) days, not including Sundays, after the bidder has received notice that the contract has been awarded, shall be just cause for the annulment of the award and the forfeiture of the proposal guaranty.

(c) Return of Bidder's Guaranties. Within ten (10) days after the award of the contract, the City of Chico will return the proposal guaranties accompanying such of the proposals which are not to be considered in making the award. All other proposal guaranties will be held until the contract has been finally executed, after which they will be returned to the respective bidders whose proposals they accompany.

(d) Contract Bonds. The Contractor shall furnish two good and sufficient bonds of a corporate surety authorized to do business in the State of California and having a financial rating in Best's Insurance Guide of at

least "B," or in the alternative, an unlicensed surety having an "A" rating. Each of the said bonds shall be executed in a sum equal to the contract price. One of the said bonds shall guarantee the faithful performance of the said contract by the Contractor; and the other of the said bonds shall be furnished as required by the terms of an act entitled:

"An act to secure the payment of the claims of persons employed by contractors upon public works, and the claims of persons who furnish materials, supplies, teams, implements, or machinery used or consumed by such contractors in the performance of such works, and prescribing the duties of certain public officers with respect thereto:, approved May 10, 1919, as amended.

Form of bond required may be examined at the office of the Capital Project Services Director or copies will be furnished, if desired, to prospective bidders.

Whenever any surety or sureties on any such bonds, or on any bonds required by law for the protection of the claims of laborers and material men, become insufficient, or the Capital Project Services Director has cause to believe that such surety or sureties have become insufficient, a demand in writing may be made of the Contractor for such further bond or bonds or additional surety not exceeding that originally required, as is considered necessary, considering the extent of the work remaining to be done. Thereafter no payment shall be made upon such contract to the Contractor or any assignee of the Contractor until such further bond or bonds or additional surety has been furnished.

C. SCOPE OF WORK

(a) Work to be Done. The work to be done consists of furnishing all labor, methods and processes, implements, tools, machinery, and materials, except as otherwise specified, which are necessary and required to construct and put in complete order for use the portion of the street, road, public right of way, or public property designated in the contract, and to leave the grounds or property in a neat condition.

(b) Alterations. The City of Chico reserves the right to increase or decrease the quantity of any item or portion of the work or to omit portions of the work as may be deemed necessary or expedient by the Engineer, also to make such alterations or deviations, increases or decreases, additions or omissions, in the plans and specifications, as may be determined during the progress of the work to be necessary and advisable.

(c) Extra Work. New and unforeseen work will be classed as extra work when such work cannot be covered by any of the various items or combinations of items for which there is a bid price.

The Contractor shall do no extra work except upon written order from the Engineer. For such extra work, the Contractor shall receive payment as previously agreed upon in writing, or he shall be paid on force account.

Upon receipt of a written order for extra work from the Engineer the Contractor shall provide a written response in no more that five (5) working days detailing the work and the costs for same.

(d) Removal of Obstructions. The Contractor shall remove and dispose of all structures, debris, or other obstructions of any character to the construction of the street or road, if and as required by the Engineer.

The Contractor shall remove and dispose of all trees designated by the Engineer as obstructions to the proper completion of the work.

(e) Final Cleaning Up. Before acceptance and final payment, the Contractor shall clean the street or road, borrow pits, and all ground occupied by him in connection with the work, of all rubbish, excess materials, temporary structures, and equipment; and all parts of the work shall be left in a neat and presentable condition.

D. CONTROL OF THE WORK

(a) Authority of the Engineer. The Engineer shall decide all questions which may arise as to the quality or acceptability of materials furnished and work performed, and as to the manner of performance and rate of progress of the work; all questions which arise as to the interpretation of the plans and specifications; all questions as to the acceptable fulfillment of the contract on the part of the Contractor; and all questions as to claims and compensation.

The Engineer's decision shall be final and he shall have executive authority to enforce and make effective such decisions and orders as the Contractor fails to carry out promptly.

(b) Plans. All authorized alterations affecting the requirements and information given on the approved plans shall be in writing. No changes shall be made of any plan or drawing after the same has been approved by the Engineer, except by direction of the Engineer.

Working drawings or plans for any structure not included in the plans furnished by the Engineer, shall be approved by the Engineer before any work involving these plans shall be performed, unless approval be waived in writing by the Engineer.

It is mutually agreed, however, that approval by the Engineer of the Contractor's working plans does not relieve the Contractor of any responsibility for accuracy of dimensions and details, and that the Contractor shall be responsible for agreement and conformity of his working plans with the approved plans and specifications.

(c) Conformity with Plans and Allowable Deviation. Finished surfaces in all cases shall conform with the lines, grades, cross-sections, and dimensions shown on the approved plans. Deviations from the approved plans, as may be required by the exigencies of construction, will be determined in all cases by the Engineer and authorized in writing.

(d) Interpretation of Plans and Specifications. Should it appear that the work to be done, or any matter relative thereto, is not sufficiently detailed or explained in these specifications, plans, and the special provisions, the Contractor shall apply to the Engineer for such further explanations as may be necessary, and shall conform to such explanation or interpretation as part of the contract, so far as may be consistent with the intent to the original specifications. In the event of doubt or question relative to the true meaning of the specifications, reference shall be made to the Engineer, whose decision thereon shall be final.

In the event of any discrepancy between any drawing and the figures written thereon, the figures shall be taken as correct.

(e) Superintendence. Whenever the Contractor is not present on any part of the work where it may be desired to give direction, orders will be given by the Engineer in writing, and shall be received and obeyed by the superintendent or foreman in charge of the particular work in reference to which orders are given.

(f) Lines and Grades. All distances and measurements are given and will be made in a horizontal plane. Grades are given from the top of stakes or nails, unless otherwise noted on the plans.

Three consecutive points shown on the same rate of slope must be used in common, in order to detect any variance from a straight grade, and in case any such discrepancy exists, it must be reported to the Engineer. If such a discrepancy is not reported to the Engineer, the Contractor shall be responsible for any error in the finished work.

(g) Inspection. The Engineer shall at all times have access to the work during construction, and shall be furnished with every reasonable facility for ascertaining full knowledge respecting the progress, workmanship, and character of materials used and employed in the work.

Whenever the Contractor varies the period during which work is carried on each day, he shall give due notice to the Engineer, so that proper inspection may be provided. Any work done in the absence of the Engineer will be subject to rejection.

The inspection of the work shall not relieve the Contractor of any of his obligations to fulfill the contract as prescribed. Defective work shall be made good, and unsuitable materials may be rejected, notwithstanding the fact that such defective work and unsuitable materials have been previously overlooked by the Engineer and accepted or estimated for payment.

Projects financed in whole or in part with state or federal funds shall be subject to inspection at all times by the authorized representatives of the agencies involved.

(h) Removal of Defective and Unauthorized Work. All work which is defective in its construction or deficient in any of the requirements of these specifications shall be remedied, or removed and replaced by the Contractor in an acceptable manner, and no compensation will be allowed for such correction.

Any work done beyond the lines and grades shown on the plans or established by the Engineer, or any extra work done without written authority, will be considered as unauthorized and will not be paid for.

Upon failure on the part of the Contractor to comply forthwith any order of the Engineer made under the provisions of this article, the Engineer shall have authority to cause defective work to be remedied, or removed and replaced, and unauthorized work to be removed, and to deduct the costs thereof from any moneys due or to become due the Contractor.

(I) Final Inspection. Whenever the work provided and contemplated by the Contract shall have been satisfactorily completed and the final cleaning up performed, the Engineer will make the final inspection.

E. CONTROL OF MATERIALS

(a) Samples and Tests. At the option of the Engineer, the source of supply of each of the materials shall be approved by the Engineer before delivery is started and before such materials are used in the work. Representative preliminary samples of the character and quality prescribed shall be submitted by the Contractor or producer of all materials to be used in the work, for testing or examination as desired by the Engineer.

All tests of materials furnished by the Contractor shall be made in accordance with commonly recognized standards of national organizations, and such special methods and tests as are prescribed in these specifications.

The Contractor shall furnish such samples of materials as are requested by the Engineer, without charge. No material shall be used until it has been approved by the Engineer. Samples will be secured and tested whenever necessary to determine the quality of material.

(b) Defective Materials. All materials not conforming to the requirements of these specifications shall be considered as defective, and all such materials, whether in place or not, shall be rejected. They shall be removed immediately from the site of the work unless otherwise permitted by the Engineer. No rejected material, the defects of which have been subsequently corrected, shall be used until approved in writing by the Engineer.

Upon failure on the part of the Contractor to comply with any order of the Engineer made under the provisions of this article, the Engineer shall have the authority to remove and replace defective material and to deduct the cost of removal and replacement from any moneys due to become due the Contractor.

F. LEGAL RELATIONS AND RESPONSIBILITIES TO THE PUBLIC

(a) Laws to be Observed. The Contractor shall keep himself fully informed of all existing and future State and National laws and all municipal ordinances and regulations of the City of Chico which, in any manner, affect those engaged or employed in the work, or the materials used in the work, or which in any way, affect the conduct of the work, and of all such orders and decrees of bodies or tribunals having any jurisdiction or authority over the same. Unless otherwise provided in these General Provisions or any subdivision thereof, the provisions of the California Public Contract Code shall not apply to the City of Chico, which is a charter city governed by the California Constitution, Article XI, Section 5.

(b) Hours of Labor. The Contractor shall forfeit, as penalty to the City of Chico Twenty-five Dollars ($25) for each laborer, workman or mechanic employed in the execution of the contract by him, or by any subcontractor under him, upon any of the work herein mentioned, for each calendar day during which said laborer, workman, or mechanic is required or permitted to labor more than eight (8) hours in violation of the provisions of the Labor Code, and in particular, Sections 1810 to 1816 thereof, inclusive.

(c) Labor Discrimination. No discrimination shall be made in the employment of persons upon public works because of the race, color, or religion of such persons and every contractor for public works violating this section is subject to all the penalties imposed for a violation of Chapter 1 of Part VII, in accordance with the provisions of Section 1735 of the Labor Code.

(d) Prevailing Wage. The Contractor shall forfeit as penalty to the City of Chico Fifty Dollars ($50) for each laborer, workman, or mechanic employed, for each calendar day or portion thereof, such stipulated (see NC-2) for any work done under the attached contract by him, or by any subcontractor under him, in violation of the provisions of the Labor Code, and in particular, Section 1770 to 1781 thereof, inclusive.

The Director of Industrial Relations has ascertained the general prevailing rate of wages applicable to the work to be done to be as shown on Page NC-2.

(d-1) Apprenticeship. The Contractor is directed to comply with Section 1777.5 of the California Labor Code as amended.

(e) License of Bidders. If the work specified herein requires licensing by the State of California, the low bidder will be required to submit substantiating evidence that he is in compliance with any State requirements relative to the performance of this work, prior to the award of bid by the City of Chico.

(f) Permits and Licenses. The Contractor shall procure all permits and licenses, pay all charges and fees, and give all notices necessary and incidental to the due and lawful prosecution of the work.

(g) Patents. The Contractor shall assume all responsibilities arising from the use of patented materials, equipment, devices, or processes used on or incorporated in the work.

(h) Public Convenience and Safety. The Contractor shall so conduct his operations as to cause the least possible obstruction and inconvenience to public traffic. Unless other existing streets are stipulated in the special provisions to be used as detours, all traffic shall be permitted to pass through the work.

Residents along the road or street shall be provided passage as far as practicable. Convenient access to driveways, houses, and buildings along the road or street shall be maintained and temporary crossings shall be provided and maintained in good condition. Not more than one cross or intersecting street or road shall be closed at any one time without the approval of the Engineer.

The Contractor shall furnish, erect, and maintain such fences, barriers, lights, and signs as are necessary to give adequate warning to the public at all times that the road or street is under construction and of any dangerous conditions to be encountered as a result thereof, and he shall also erect and maintain such warning and directional signs as may be furnished by the City.

(I) Responsibility for Damage. The City of Chico, the City Council, or the Engineer shall not be answerable or accountable in any manner for any loss or damage that may happen to the work or any part thereof; or for any material or equipment used in performing the work; or for injury or damage to any person or persons, either workmen or the public; for damage to adjoining property from any cause whatsoever during the progress of the work or at any time before final acceptance.

(j) Indemnification Clause. The Contractor shall indemnify City, its officers, boards and commissions, and members thereof; its employees and agents from any and all liabilities which might arise out of or relating to this contract. Should City or any of its officers, boards and commissions, and members thereof, its employees or agents, be named in any suit, or should any claim be made against it or any of them by suit or otherwise, whether the same may be groundless or not, arising out of or relating to this contract, Contractor shall defend City and said

officers, boards and commissions and members thereof, its employees and agents, and shall indemnify them for any judgment rendered against them or any sums paid out in settlement or otherwise.

(k) Contractor's Responsibility for Work. Except as provided above, until the formal acceptance of the work by the City of Chico, the Contractor shall have the charge and care thereof and shall bear the risk of injury or damage to any part thereof by the action of the elements or from any other cause, whether arising from the execution or from the non-execution of the work. The Contractor shall rebuild, repair, restore, and make good all injuries or damages to any portion of the work occasioned by any of the above causes before final acceptance and shall bear the expense thereof, except such injuries or damages occasioned by acts of the Federal Government or the public enemy.

(l) No Personal Liability. Neither the City of Chico, the City Council, the Engineer, nor any other officer or authorized assistant or agent, shall be personally responsible for any liability arising under the contract.

(m) Responsibility of City. The City of Chico shall not be held responsible for the care or protection of any material or parts of the work prior to final acceptance, except as expressly provided in these specifications.

(n) General Liability Insurance. Contractor shall obtain commercial general liability insurance (occurrence policy form) from one or more U.S. domiciled insurance companies licensed to do business in the State of California with an A.M. Best Company rating of "B" or better or, in the alternative, an unlicensed U.S. domiciled company or companies with an "A" rating, which provides coverage for bodily injury, personal injury and property damage liability in the amount of at least $2,000,000 per occurrence, and $4,000,000 in the aggregate, with a maximum policy deductible of $5,000. Additionally, Contractor shall obtain a sublimit of liability of $2,000,000 aggregate for products-completed operations.

The insurance coverage required herein shall be evidenced by a certificate of insurance with policy endorsements and shall be executed by an authorized official of the insurer(s). In addition to the limits of coverage described above, the certificate of insurance shall provide that the insurer shall provide to City at least 30 days prior notice of cancellation or material change in coverage, or 10 days prior notice of cancellation for non-payment.

Contractor acknowledges and agrees that City of Chico, its officers, boards and commissions, and members thereof, its employees and agents, are covered as additional insureds with respect to any liability arising out of the activities of Contractor as the named insured. Such additional insured status shall be evidenced by a policy endorsement executed by an authorized official of the insurer(s). A blanket endorsement which provides additional insured status to any person or organization with whom Contractor, as named insured, has entered into a written contract, such as this Agreement, shall satisfy this requirement.

The insurance coverage required herein shall be primary insurance with respect to the City of Chico, its officers, officials and employees. Any insurance or self-insurance maintained by the City of Chico, its officers, officials or employees shall be in excess of the insurance afforded to the named insured by the insurance coverage required herein and shall not contribute to any loss. Such primary insurance status shall be evidenced by a policy endorsement issued by an authorized official of the insurer(s). In the alternative, a letter issued by an authorized official of the insurer(s) and copies of the pertinent page(s) of the policy shall satisfy this requirement.

Automobile Liability Insurance. Contractor shall obtain automobile liability insurance from one or more U.S. domiciled insurance companies licensed to do business in the State of California with an A.M. Best Company rating of "B" or better which provides coverage for bodily injury, personal injury, and property damage liability in the amount of at least $500,000 combined single limit for each occurrence. Evidence of such coverage shall be maintained by Contractor and provided to City upon request.

Subcontractor Insurance. Contractor shall require all subcontractors, who are performing services for Contractor under this Agreement, to obtain and maintain commercial general liability insurance and automobile liability insurance with the same minimum policy limits as set forth above for Contractor. Evidence of such coverages shall be maintained by Contractor and provided to City upon request.

Workers' Compensation Insurance. Contractor shall, at Contractor's expense, purchase and maintain in full force and effect workers' compensation insurance as required by Federal and State of California law. Contractor

shall also require all of Contractor's subcontractors to maintain this insurance coverage. Proof of workers' compensation insurance or other documentation acceptable to City evidencing such insurance coverage shall be provided by Contractor or Contractor's subcontractors to City upon request.

(o) Additional Coverage. In addition to the coverage required hereinabove, City may also require Contractor to provide evidence of such other coverages in connection with this contract as its city manager may from time to time during the term of this contract require. Further, said city manager may also from time to time during the term of this contract require modification of the limits of coverage, hereinabove specified, either raising or lowering them to meet City's best interests. In any event, city manager shall provide Contractor ninety (90) days prior notice of any modification of said limits. No notification as to modifications in required coverage shall be required.

(p) Subrogation. Contractor shall agree to waive all rights of subrogation against City for losses arising from Work performed by the Contractor or Contractor's subcontractors for City under this Agreement.

G. PROSECUTION

(a) Subletting and Assignment. The Contractor shall give his personal attention to the fulfillment of the contract and shall keep the work under his control.

Subcontractors will not be recognized as such, and all persons engaged in the work of construction will be considered as employees of the contractor, and their work shall be subject to the provisions of the contract and specifications.

Where a portion of the work sublet by the Contractor is not being prosecuted in a manner satisfactory to the City Engineer, the subcontractor shall be removed immediately on the requisition of the City Engineer and shall not again be employed on the work.

The contract may be assigned only upon written consent of the City Engineer.

(b) Character of Workmen. If any subcontractor or person employed by the Contractor shall fail or refuse to carry out the directions of the Engineer or shall appear to the Engineer to be incompetent or to act in a disorderly or improper manner, he shall be discharged immediately on the requisition of the Engineer, and such person shall not again be employed on the work.

(c) Temporary Suspension of Work. The Engineer shall have the authority to suspend the work wholly or in part, for such period as he may deem necessary, due to unsuitable weather, or to such other conditions as are considered unfavorable for the suitable prosecution of the work, or for such time as he may deem necessary, due to the failure on the part of the Contractor to carry out orders given, or to perform any provisions of the work. The Contractor shall immediately obey such order of the Engineer and shall not resume the work until ordered in writing by the Engineer.

(d) Time of Completion and Liquidated Damages. It is agreed by the parties to the contract that in case all the work called for under the contract is not completed before or upon the expiration of the time limit as set forth in these specifications, damage will be sustained by the City of Chico, and it is and will be impracticable to determine the actual damage which the City of Chico will sustain in the event of and by reason of such delay; and it is therefore agreed that the Contractor will pay to the City of Chico the sum of Five Hundred Dollars ($500) per day for each and every day's delay beyond the time prescribed to complete the work; and the Contractor agrees to pay such liquidated damages as herein provided, and in case the same are not paid, agrees that the City of Chico may deduct the amount thereof from any money due or that may become due the Contractor under the contract.

It is further agreed that in case the work called for under the contract is not finished and completed in all parts and requirements within the time specified, the City of Chico shall have the right to extend the time for completion or not, as may seem best to serve the interest of the City; and if it decides to extend the time limit for the completion of the contract, it shall further have the right to charge to the Contractor, his heirs, assigns, or sureties, and to deduct from the final payment for the work, all or any part, as it may deem proper, of the actual cost of engineering, inspection, superintendence, and other overhead expenses which are directly chargeable to

the contract and which accrue during the period of such extension, except that the cost of final surveys and preparation of final estimate shall not be included in such charges.

The Contractor shall not be assessed with liquidated damages nor the cost of engineering and inspection during any delay in the completion of the work caused by acts of God or of the public enemy, acts of the City, fire floods, epidemics, quarantine restrictions, strikes, freight embargoes, and unusually severe weather or delays of subcontractors due to such causes; provided, that the Contractor shall within ten (10) days from the beginning of any such delay notify the Engineer in writing of the causes of delay, who shall ascertain the facts and the extend of delay, and his findings of the facts thereon shall be final and conclusive.

(e) Suspension of Contract. If at any time in the opinion of the City of Chico, the Contractor has failed to supply an adequate working force, or material of proper quality, or has failed in any other respect to prosecute the work with the diligence and force specified and intended in and by the terms of the contract, notice thereof in writing will be served upon him, and should he neglect or refuse to provide means for a satisfactory compliance with the contract, as directed by the Engineer, within the time specified in such notice, the City Council in any such case shall have the power to suspend the operation of the contract. Upon receiving notice of such suspension, the Contractor shall discontinue said work, or such parts of it as the City of Chico may designate.

Upon such suspension, the Contractor's control shall terminate, and thereupon, the City of Chico or its duly authorized representative may take possession of all or any part of the Contractor's materials, tools, equipment, and appliances upon the premises, and use the same for the purpose of completing said contract, and hire such force and buy or rent such additional materials and supplies at the Contractor's expense as may be necessary for the proper conduct of the work and for the completion thereof; or may employ other parties to carry the contract to completion, employ the necessary workmen, substitute other machinery or materials, and purchase the materials contracted for, in such manner as the City of Chico may deem proper; or the City of Chico may annul and cancel the contract and relet the work or any part thereof.

Any excess of cost arising therefrom over and above the contract price will be charged against the Contractor and his sureties, who will be liable therefor. In the event of such suspension, all money due the Contractor or retained under the terms of this contract shall be forfeited to the City of Chico, but such forfeiture will not release the Contractor or his sureties from liability or failure to fulfill the contract. The Contractor and his sureties will be credited with the amount of money so forfeited toward any excess of cost over and above the contract price, arising from the suspension of the operations of the contract and the completion of the work by the City of Chico as provided above, and the Contractor will be so credited with any surplus remaining after all just claims for such completion have been paid. In the determination of the question whether there has been any such non-compliance with the contract as to warrant the suspension or annulment thereof, the decision of the City of Chico shall be binding on all parties to the contract.

(f) Right of Way. The right of way for the work to be constructed will be provided by the City. The Contractor shall make his own arrangements, and pay all expenses for additional area required by him outside of the limits of right of way, unless otherwise provided in the Special Provisions.

H. MEASUREMENT AND PAYMENT

(a) Extra and Force Account Work. Extra work as hereinbefore defined, when ordered and accepted, shall be paid for under a written work order in accordance with the terms therein provided. Payment for extra work will be made at the unit price or lump sum previously agreed upon by the Contractor and the Engineer; or by force account.

If the work is done on force account, the Contractor shall receive the actual cost of all materials furnished by him as shown by his paid vouchers, plus fifteen percent (15%), and for all labor, equipment and terms that are necessary, he shall receive the current prices in the locality, which shall have been previously determined and agreed to in writing by the engineer and by the Contractor, plus fifteen percent (15%) provided, however, that the City of Chico reserves the right to furnish such materials required as it deems expedient, and the Contractor shall have no claims for profit on the cost of such materials. The price paid for labor shall include any compensation insurance paid by the Contractor.

All extra work and force account shall be adjusted daily upon report sheets, prepared by the Engineer, furnished to the Contractor and signed by both parties, which daily reports shall thereafter be considered the true record of extra work or force account work done.

(b) Progress Payment. The City of Chico shall, once in each month, cause an estimate in writing to be made by the City Engineer of the total amount of work done and the acceptable materials furnished and delivered by the Contractor on the ground and not used, to the time of such estimate, and the value thereof. The City of Chico shall retain ten percent (10%) of such estimated value of the work done and fifty percent (50%) of the value of the materials so estimated to have been furnished and delivered and unused as aforesaid as part security for the fulfillment of the contract by the Contractor, and shall monthly pay to the Contractor, while carrying on the work, the balance not retained as aforesaid, after deducting therefrom all previous payments and all sums to be kept or retained under the provisions of the contract. No such estimate or payment shall be required to be made when, in the judgment of the City Engineer, the work is not proceeding in accordance with the provisions of the contract, or when in his judgment, the total value of the work done since the last estimate amounts to less than three hundred dollars ($300).

The Contractor may elect to receive 100 percent of payments due under the contract from time to time, without retention of any portion of the payment by the City of Chico, by depositing securities of equivalent value with the City in accordance with the provisions of Section 4590 of the Government Code. Such securities, if deposited by the Contractor, shall be valued by the City, whose decision on valuation of the securities shall be final.

(c) Final Payment. The Engineer shall, after the completion of the contract, make a final estimate of the amount of work done thereunder, and the value of such work and file a Notice of Completion in the County Recorder's Office; and the City of Chico shall pay the entire sum as found to be due after deducting therefrom all previous payments and all amounts to be retained under the provisions of the contract. All prior partial estimates and payments shall be subject to correction in the final estimate and payment. The final payment shall not be due and payable until the expiration of thirty (30) days from the date of recording of the Notice of Completion in the County Recorder's Office.

It is mutually agreed between the parties to the contract that no certificate given or payments made under the contract, except the final certificate or final payment, shall be conclusive evidence of the performance of the contract, either wholly or in part, against any claim of the party of the first part, and no payment shall be construed to be an acceptance of any defective work or improper materials.

And the Contractor further agrees that the payment of the final amount due under the contract, and the adjustment and payment for any work done in accordance with any alterations of the same, shall release the City of Chico, the City Council and the Engineer from any and all claims or liability on account of work performed under the contract or any alteration thereof.

(d) Complete and Operable Facility. Regardless of any and all specific details in the plans, specifications and contract documents, a complete and operable facility is contemplated and required. All questions, clarifications, comments, reservations and other indeterminate factors affecting his execution of the work will be raised by the Contractor prior to his submittal of his bid to do the work and submittal of such bid will be accepted as evidence that he has done so.

All bid items include all labor, materials, tools, transportation, equipment, services and facilities required for the complete, proper and substantial installation of all work shown on the plans and outlined in these specifications. The work shall include all materials, appliances and apparatus not specifically mentioned herein or noted on the plans, but which are necessary to make a complete working installation of systems shown on the plans or described herein.

Items of work shown on the Plans or required in order to complete the work shown on the Plans but for which no separate Bid Item is shown shall be included in the bid price for various items shown and no separate payment therefore shall be made.

I. GUARANTEE

The Contractor shall guarantee all of his work against defective material or faulty workmanship for a period of one year after the date of acceptance of the work by the Owner.

The Contractor shall repair or replace to the satisfaction of the Engineer any or all such work that may prove defective in workmanship or materials within that period, ordinary wear and tear and unusual abuse or neglect excepted, together with any other work which may be damaged or displaced in so doing.

In the event of failure to comply with the above mentioned conditions within a reasonable time after being notified in writing, the owner is authorized to have the defects repaired and made good at the expense of the Contractor who will pay the cost and charges therefore immediately upon demand.

The signing of the agreement by the Contractor shall constitute execution of the above guarantees. The Contract Performance Bond shall remain in full effect during the guarantee period and will not be released until the expiration of such period.

J. DISPUTE RESOLUTION PROCEDURES

1. Meet and Confer

In the event contractor disputes the City's written response, the contractor may demand an informal conference to meet and confer regarding the settlement of the issues in dispute. Upon such a demand, the City and contractor will schedule a meet and confer conference within 30 days.

2. Presentation of Claim Pursuant to Government Code Provisions

If a dispute is not settled pursuant to the meet and confer process, the contractor may file a claim as provided in Government Code sections 900 through 915.4.

III. SPECIAL PROVISIONS

(Blank)

III. SPECIAL PROVISIONS

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NUMBER 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE

A. DEFINITIONS

The work embraced herein shall be done in accordance with the appropriate provisions of construction details of the specifications entitled State of California, Department of Transportation, Standard Specifications dated May 2006 and as revised, which specifications are hereinafter referred to as the Standard Specifications, the latest edition of the Caltrans Construction Manual and the Caltrans Right of Way Manual and the City of Chico Design Criteria and Improvement Standards, insofar as the same may apply, and in accordance with the following special provisions.

Whenever in the Standard Specifications the following terms are used, they shall be understood to mean and refer to the following:

Department of Transportation - The CAPITAL PROJECT SERVICES DEPARTMENT of the City of Chico.

Director, Department of Transportation - The Capital Project Services Director of the City of Chico.

Engineer - The Capital Project Services Director of the City of Chico acting either directly or through properly authorized agents, such agents acting within the scope of the particular duties entrusted to them.

Laboratory - The designated laboratory authorized by the Capital Project Services Director to test materials and work involved in the contract.

State - The City of Chico.

Other terms appearing in the Standard Specifications, the General Provisions, and these Special Provisions, shall have the intent and meaning specified in Section 1, Definition of Terms of the Standard Specifications.

In case of conflict between the Standard Specifications and these Special Provisions, the Special Provisions shall take precedence over and be used in lieu of such conflicting portions.

Amendments to the Standard Specifications set forth in these special provisions shall be considered as part of the Standard Specifications for the purposes set forth in Section 5-1.04, "Coordination and Interpretation of Plans, Standard Specifications and Special Provisions," of the Standard Specifications. Whenever either the term "Standard Specifications is amended" or the term "Standard Specifications are amended" is used in the special provisions, the indented text or table following the term shall be considered an amendment to the Standard Specifications. In case of conflict between such amendments and the Standard Specifications, the amendments shall take precedence over and be used in lieu of the conflicting portions.

B. REQUIRED LISTING OF PROPOSED SUBCONTRACTORS

The third paragraph of section 8-1.01, "Subcontracting," of the state Standard Specifications shall not apply. The Contractor shall not be required to perform at least 50% of the original total contract price with his own organization.

Each proposal shall have listed therein the name and address of each subcontractor, the associated bid item numbers, and the dollar value of the subcontractors work to whom the bidder proposes to subcontract portions of the work, in accordance with the Subletting and Subcontracting Fair Practices Act, commencing with Section 4100 of the Public Contract Code. The list shall include all subcontractors regardless of the value of the subcontract amount. The bidder's attention is invited to other provisions of said Act related to the imposition of penalties for failure to observe its provisions by using unauthorized subcontractors or by making unauthorized substitutions.

A sheet for listing the subcontractors, as required herein, is included in the Proposal. If there will be no subcontractors, enter "None" on the subcontractor's listing sheet.

C. PAYMENTS

In determining the partial payments to be made to the Contractor, only the following listed materials will be considered for inclusion in the payment as materials furnished but not incorporated in the work:

A. Precast Concrete Soundwall
B. Steel-Backed Timber Guardrailing
C. Bar Reinforcing Steel (Bridge)
D. Tubular Bicycle Railing
E. Precast Concrete Piles
F. Schedule 40 PVC
G. Conduit
H. Signal Standards

D. SUPPLEMENTAL PROJECT INFORMATION

The Department makes the following supplemental project information available:

Supplemental Project Information

Means	Description
Available at: City of Chico Capital Projects Front Counter	-Cross sections in PDF format (provided on CD) -Materials Report Dated October 29, 2010 -Materials Report Cold Foam Asphalt Mix Design Dated November 2, 2010 -Deflection Testing & Analysis Dated March 2010 -Geotechnical Design Report Dated October 29, 2010 -Storm Water Pollution Prevention Plan -Bridge As-built Plans -Bridge Foundation Report dated September 22, 2010 with Addendum No. 1 dated October 27, 2010 and Addendum No. 2 dated November 21, 2011 -Bridge Design Hydraulic Study Report dated November 2011
Included in the Appendix of the Special Provisions	BBS Power Connection Diagrams Artisan Precast Soundwall Standard Drawings and Manufacturers Specifications

E. LEGAL RELATIONS REGARDING STATE OF CALIFORNIA

In reference to Section F of the General Provisions, whenever reference is made to City of Chico, it shall be amended to also include the State of California Department of Transportation. The requirements of Section F shall include the naming of the State of California Department of Transportation, including its officers, as an additional insured in all required insurance coverage.

The City has obtained an Encroachment Permit (#0311-NMC1011) through the State of California Department of Transportation (Caltrans). Prior to the start of work Caltrans Right of way, the Contractor is required to obtain an Encroachment Permit (Double Permit) through Caltrans (District 3). The Contractor shall comply with all conditions and provisions listed in the permit. The permit has been provided in Section IV of these special provisions.

Full compensation for conforming to the requirements in the permit, shall be considered as included in the various contract items of work, and no additional payment will be allowed therefor.

F. INDEMNIFICATION AND INSURANCE

Attention is directed to Section 7-1.12A, “Indemnification,” of the Standard Specifications and these Special Provisions. The first paragraph in Section 7-1.12A, “Indemnification,” of the Standard Specifications is amended to read:

With the exception that this section shall in no event be construed to require indemnification by the Contractor to a greater extent than permitted by law, the contractor shall defend, indemnify and save harmless the State, including its officers, directors, agents, and employees, and each of them (Indemnitees), from any and all claims, demands, causes of action, damages,

costs, expenses, actual attorney's fees, losses or liabilities, in law or in equity, of every kind and nature whatsoever (Claims), arising out of or in connection with the Contractor's performance of this contract for:

- Bodily injury including, but not limited to, bodily injury, sickness or disease, emotional injury or death to persons, including, but not limited to, the public, any employees or agents of the Contractor, State, Department, or any other contractor and;

- Damage to property of anyone including loss of use thereof; caused or alleged to be caused in whole or in part by any negligent or otherwise legally actionable act or omission of the Contractor or anyone directly or indirectly employed by the Contractor or anyone for whose acts the Contractor may be liable.

For purposes of the Contractor's obligation to defend, indemnify, and save harmless as defined in Section 7-1.12A, "Indemnification", of the Standard Specifications, the term State shall have the following meaning:

- The City of Chico
- State of California Department of Transportation

The contractors attention is directed to 7-1.12B of the standard specifications regarding State insurance requirements. The contractor shall meet all requirements in this section. Whenever reference is made to the State and / or the Department, it shall be amended to also include the City of Chico.

G. COOPERATION

The Contractor shall comply with Section 7-1.14, "Cooperation," of the Standard Specifications.

It is anticipated that work by another contractor may be in progress adjacent to or within the limits of this project during progress of the work on this contract. The following table lists contracts anticipated to be in progress during this contract.

Responsible Party	Location	Type of Work
City of Chico	Forest Avenue	Trenching & Conduit Installation
Pacific Gas & Electric	Forest Avenue	Overhead to Underground Utility Conversion
Comcast Cable		
AT&T		
Private Development	Forest Avenue	CVS Development

It is anticipated that work by Utility Crews may be in progress within the area of Forest Avenue during progress of this contract. Attention is directed to the Nonhighway Facilities (Including Utilities) section of these special provisions.

Along the west side of Forest Ave, the existing vacant parcel is being redeveloped, and is currently under construction. In general, the work on site consists of site grading, utility construction, building construction, parking lot construction, and curb, gutter, and sidewalk work. The development's private contractors will be working adjacent to and within the project limits during work on this contract. In addition to the private contractors, utility crews providing service to the new development may also be present.

The Contractor shall fully cooperate with the private contractors and all utility crews and utility inspectors. Additionally, the Contractor shall cooperate with the abutting vacant parcel's owner, and agents. The utility companies involved include, but are not limited to the following companies:

a. Pacific Gas & Electric
b. AT&T
c. Comcast
d. California Water Service

The points of contact for the utility companies are listed on the title sheet of the contract plans.

H. PROGRESS OF THE WORK AND TIME FOR COMPLETION

Attention is directed to the provisions in Section 8-1.03, "Beginning of Work;" in Section 8-1.06 "Time of Completion;" and in Section 8-1.07, "Liquidated Damages;" of the Standard Specifications.

The Contractor shall begin work within fifteen (15) calendar days after receiving a written notice to proceed from the City of Chico and shall diligently prosecute the same to completion before the expiration of **175 WORKING DAYS** from said NOTICE TO PROCEED.

The Contractor shall pay to the City of Chico the sum of **$5,400** per day, for each and every calendar day's delay in finishing the work in excess of the number of working days prescribed above. This Liquidated Damages amount hereby amends the amount listed in Section G "Prosecution" paragraph (d) of the General Provisions.

I. PLANS AND SPECIFICATIONS FURNISHED

The Contractor will be furnished, free of charge, eight (8) copies of the contract drawings and contract specifications. Any additional copies requested by the Contractor will be furnished to the Contractor at the actual cost of reproduction. The Contractor shall retain an approved set of plans and specifications on the job at all times during the progress of the work.

J. UNDERGROUND FACILITIES

NOTICE IS HEREBY GIVEN THAT there may be underground water, gas, telephone, electric and other utility pipes located beneath the surface of the roadway.

Prior to submittal of bids, and upon obtaining appropriate encroachment permits, prospective bidders may, at their expense, investigate the nature of the site by digging test holes within public right-of-way areas in the vicinity of the work.

The Contractor shall contact the appropriate utility company prior to any excavation and shall determine the exact vertical and horizontal location of any underground facilities.

Following the award of contract for the work, any cost in locating underground facilities shall be considered as included in the cost of other items of the contract and no additional compensation will be allowed.

Attention is directed to Section 8-1.10 "Utility and Non-Highway Facilities," and Section 15, "Existing Highway Facilities," of the Standards Specifications and these Special Provisions.

K. LINES AND GRADES

Section 5-1.07 of the Standard Specifications is amended to read as follows:

Stakes or marks will be provided by the City to establish the lines and grades required for the completion of the work specified in the standard specifications, on the plans, and in these special provisions. One set of stakes will be provided for the following:

1. *Clearing Stakes:* Clearing stakes will be set only when necessary, as determined by the Engineer to protect and preserve desirable natural features. Clearing limits for the proposed Soundwall will not be provided.

2. *Slope Stakes:* Offset stakes for slope staking will be provided at 50 foot intervals. Slope stakes includes all begin curves, end curves, and profile grade breaks. Line points will be provided only when necessary, as determined by the City.

3. *Final Grade Stakes:* Final grade stakes will be set only once and control all elements of the structural section (grading plane, subbase, base, and pavement). Only Final Improvements will be staked. No individual stages of work or temporary facilities will be staked, including, but not limited to, temporary railing, temporary crash cushions, temporary barricades, temporary pavement and temporary striping. A reference point at a constant horizontal offset, with a cut/fill to the edge of traveled way (ETW) will be set with a longitudinal spacing of 50 feet along tangents and 25 feet along curves with a radius of 1000 feet or less. Two longitudinal rows of stakes will be provided per roadbed. Staking for finished grading will be performed for ramps, bridge approaches, and local streets. Where curb and gutter is the controlling shoulder feature, finish grade stakes will not be set, but will be replaced by curb stakes.

4. *Curb Stakes:* Reference points will be set, with a marker stake showing cuts/fills to flowline, at a constant horizontal offset distance from the flowline of curb with a longitudinal spacing of 50 feet. Spacing will be reduced to 25 feet when the grade is less than 0.3 percent or the curvature radius is less than 1000 feet. One Stake will be set marking the center of each pedestrian ramp and driveway.

5. *Drainage Stakes:* A reference stake with a marker stake and a line point with a marker will be set for the following:

   - Begin / End of Drainage Pipe Culverts
   - Grade breaks
   - Alignment breaks
   - Manholes
   - Inlets and similar facilities

Where the plans show control elevations (invert elevations), reference stakes will show elevations, not cut/fills. Intermediate stakes will be set every 200 feet on straight runs.

6. *Contour Grading*: Contour grading shall be staked on a grid, with maximum spacing of 50 foot intervals.

7. *Electrical*: Street lights and sign structures shall be staked with 2 straddlers showing cut/fill to the edge of pavement or finish grade if not controlled by adjacent facilities or adjacent construction staking.

8. *Retaining Walls and Soundwalls*: Wall stakes will be set to wall lay-out-lines (LOL). Stakes will be set at the beginning and end of each wall and at LOL angle points, footing steps and changes in wall heights. Longitudinal spacing shall not exceed 50 feet. Reference stakes will show elevations, not cut/fills.

9. *Sawcut:* Sawcut stakes will be provided at 50 foot intervals along tangents and 25 foot intervals along curves with a radius of 1000 feet or less, including all begin curves, end curves, and angle points. Sawcut staking will only be provided when not controlled by existing roadway features such as edge of pavement and curbs.

10. *Other Stakes:* Other improvements such as permanent delineation, signs, lighting, signals, traffic detector loops, guardrails, and similar facilities, will not be staked where they are controlled by adjacent construction staking or adjacent facilities. Where staking is necessary, as determined by the City, it shall be performed by the City.

The Contractor shall submit to the Engineer a "Request for Construction Staking" form (per the Caltrans Standard Survey Request Form included in the Caltrans Right of Way Manual) at least two (2) working days in advance of the beginning of the necessary staking operation. In no event shall a notice of less than two (2) working days be accepted for staking requests. Friday to Monday does not constitute two working day notice. Staking requests submitted on a Friday will be started on the following Wednesday.

All staking request shall be approved by the Engineer. The Contractor shall provide staking requests that provide the maximum amount of efficiency for the survey crews.

The Contractor shall be responsible to provide all other "working stakes" as necessary to control the lines and grades in conformance with the plans. The Contractor shall be responsible for the accuracy of his/her own "working stakes." Any deviation from the lines and grades as shown on the plans shall receive prior approval from the Engineer. Where new construction connects to existing facilities, the Contractor shall check and reestablish the exact location of existing facilities prior to construction of the new facilities.

Stakes and marks set by the City shall be carefully preserved by the Contractor. In case the stakes and marks are destroyed or damaged by the Contractor, his/her employees, subcontractors, utility company employees, or the public, they will be replaced at the City's earliest convenience.

The Contractor will be charged for the cost of necessary replacement or restoration of the stakes and marks. The charge will be deducted from any moneys due or to become due the Contractor.

The Contractor shall be responsible for providing a cleared area for staking purposes, so that surveyors can operate safely and stakes can be preserved. The Contractor will be responsible for lane closures or traffic handling necessary to perform requested staking.

The Contractor shall protect and not disturb existing monuments (e.g. property corners, centerline monuments, etc). The Contractor shall be responsible for re-establishing, at his/her own expense, existing monuments disturbed during construction, whether or not they are shown on the plans, in accordance with Professional Land Surveyors Act.

Conformance with the above requirements shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

L. WORK ON PRIVATE PROPERTY

The City has secured Right of Entry Agreements for Construction adjacent to the following properties:

3 Merle Court, APN 002-090-016
1147 El Monte Avenue, APN 002-050-186
1869 Modoc Drive, APN 002-090-002
1873 Modoc Drive, APN 002-090-003
1887 Modoc Drive, APN 002-090-006
1955 Modoc Drive, APN 002-090-009
1959 Modoc Drive, APN 002-090-010

The construction work on private property is related to the placement of Precast Concrete Soundwalls, and shall be **limited to**:

- Fence removal
- Trimming of overhanging vegetation

Before performing any work on private property, the Contractor shall obtain the Right of Entry from the Engineer, and have the Right of Entry present on the work site at all times.

Contractor's attention is directed to Section 7-1.11, "Preservation of Property," of the Standard Specifications. The Contractor shall protect all on-site private improvements, not indicated for removal, from damage. On-site private improvements include, but are not limited to, trees, shrubbery, ground cover, lawns, irrigation facilities, structures, gates, fences, walls, signs, utility facilities, back-flow prevention facilities, sewer clean-outs, drainage facilities, curbs, and pavement. If such objects are damages, they shall be replaced, repaired, and/or restored to a condition as good as when the Contractor entered upon the work, at the expense of the Contractor, as determined by the Engineer.

Existing trees, shrubs, and other plants, that are not shown to be removed as shown on the plans or specified elsewhere in these special provisions, and are injured or damaged by reason of the Contractor's operations, shall be replaced by the Contractor. Replacement planting shall conform to the requirements in Section 20-4.07, "Replacement," of the Standard Specifications. Damaged or injured plants shall be removed and disposed of outside the highway right of way in accordance with the provisions in section 7-1.13 of the Standard Specifications. Replacement planting of injured or damaged trees, shrubs and other plants shall be completed prior to the start of the plant establishment period and shall conform to the provisions in Section 20-4.05, "Planting," of the Standard Specifications.

Full compensation for complying with the "Work on Private Property" provisions above is considered as included in the various items of work, and no additional payment will be allowed therefor.

M. MATERIALS

The Contractor shall furnish for use under these Special Provisions all materials required to complete the attached contract.

QUANTITY CERTIFICATES

The contractor shall present a certified weight slip to the Engineer or his assistants for all materials used in the contract measured by weight. The above-mentioned weight slips shall be submitted to the Engineer on the same day that the material has been delivered to the construction area.

PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS

The Department maintains the following list of Prequalified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Prequalified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Prequalified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Prequalified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Prequalified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Prequalified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

PAVEMENT MARKERS, PERMANENT TYPE

Retroreflective With Abrasion Resistant Surface (ARS)

1. Apex, Model 921AR (4" x 4")
2. Ennis Paint, Models C88 (4" x 4"), 911 (4" x 4") and C80FH
3. Ray-O-Lite, Models "AA" ARC II (4" x 4") and ARC Round Shoulder (4" x 4")
4. 3M Series 290 (3.5" x 4")
5. 3M Series 290 PSA
6. Glowlite, Inc Model 988AR (4" x 4")

Retroreflective With Abrasion Resistant Surface (ARS)

(for recessed applications only)

1. Ennis Paint, Model 948 (2.3" x 4.7")
2. Ennis Paint, Model 944SB (2" x 4")*
3. Ray-O-Lite, Model 2002 (2" x 4.6")
4. Ray-O-Lite, Model 2004 (2" x 4")*

*For use only in 4.5 inch wide (older) recessed slots

Non-Reflective, 4-inch Round

1. Apex Universal (Ceramic)
2. Apex Universal, Models 929 (ABS) and 929PP (Polypropylene)
3. Glowlite, Inc. (Ceramic) and PP (Polypropylene)
4. Hi-Way Safety, Inc., Models P20-2000W and 2001Y (ABS)
5. Interstate Sales, "Diamond Back" (Polypropylene)
6. Novabrite Models Cdot (White) Cdot-y (Yellow), Ceramic
7. Novabrite Models Pdot-w (White) Pdot-y (Yellow), Polypropylene
8. Three D Traffic Works TD10000 (ABS), TD10500 (Polypropylene)
9. Ray-O-Lite, Ray-O-Dot (Polypropylene)

PAVEMENT MARKERS, TEMPORARY TYPE

Temporary Markers For Long Term Day/Night Use (180 days or less)

1. Vega Molded Products "Temporary Road Marker" (3" x 4")
2. Pexco LLC, Halftrack model 25, 26 and 35

Temporary Markers For Short Term Day/Night Use (14 days or less)

(For seal coat or chip seal applications, clear protective covers are required)

1. Apex Universal, Model 932
2. Pexco LLC, Models T.O.M., T.R.P.M., and "HH" (High Heat)
3. Hi-Way Safety, Inc., Model 1280/1281
4. Glowlite, Inc., Model 932

STRIPING AND PAVEMENT MARKING MATERIAL

Permanent Traffic Striping and Pavement Marking Tape

1. Advanced Traffic Marking, Series 300 and 400
2. Brite-Line, Series 1000
3. Brite-Line, "DeltaLine XRP"
4. Swarco Industries, "Director 35" (For transverse application only)

5. Swarco Industries, "Director 60"
6. 3M, "Stamark" Series 380 and 270 ES
7. 3M, "Stamark" Series 420 (For transverse application only)

Temporary (Removable) Striping and Pavement Marking Tape (180 days or less)

1. Advanced Traffic Marking, Series 200
2. Brite-Line, "Series 100", "Deltaline TWR"
3. Garlock Rubber Technologies, Series 2000
4. P.B. Laminations, Aztec, Grade 102
5. Swarco Industries, "Director-2", "Director 2-Wet Reflective"
6. Trelleborg Industries, R140 Series
7. 3M Series 620 "CR", Series 780 and Series 710
8. 3M Series A145, Removable Black Line Mask
   (Black Tape: for use only on Hot mix asphalt surfaces)
9. Advanced Traffic Marking Black "Hide-A-Line"
   (Black Tape: for use only on Hot mix asphalt surfaces)
10. Brite-Line "BTR" Black Removable Tape
    (Black Tape: for use only on Hot mix asphalt surfaces)
11. Trelleborg Industries, RB-140
    (Black Tape: for use only on Hot mix asphalt surfaces)

Preformed Thermoplastic (Heated in place)

1. Flint Trading Inc., "Hot Tape"
2. Flint Trading Inc., "Premark Plus"
3. Flint Trading Inc., "Flametape"

Ceramic Surfacing Laminate, 6" x 6"

1. Highway Ceramics, Inc.

CLASS 1 DELINEATORS

One Piece Driveable Flexible Type, 66-inch

1. Pexco LLC, "Flexi-Guide Models 400 and 566"
2. Carsonite, Curve-Flex CFRM-400
3. Carsonite, Roadmarker CRM-375
4. FlexStake, Model 654 TM
5. GreenLine Model CGD1-66

Special Use Type, 66-inch

1. Pexco LLC, Model FG 560 (with 18-inch U-Channel base)
2. Carsonite, "Survivor" (with 18-inch U-Channel base)
3. Carsonite, Roadmarker CRM-375 (with 18-inch U-Channel base)
4. FlexStake, Model 604
5. GreenLine Model CGD (with 18-inch U-Channel base)
6. Impact Recovery Model D36, with #105 Driveable Base
7. Safe-Hit with 8-inch pavement anchor (SH248-GP1)
8. Safe-Hit with 15-inch soil anchor (SH248-GP2) and with 18-inch soil anchor (SH248-GP3)
9. Safe-Hit RT 360 Post with Soil Mount Anchor (GPS)

10. Shur-Tite Products, Shur-Flex Drivable

Surface Mount Type, 48-inch

1. Bent Manufacturing Company, Masterflex Model MFEX 180-48
2. Carsonite, "Channelizer"
3. FlexStake, Models 704, 754 TM, and EB4
4. Impact Recovery Model D48, with #101 Fixed (Surface-Mount) Base
5. Three D Traffic Works "Channelflex" ID No. 522248W
6. Flexible Marker Support, Flexistiff Model C-9484
7. Safe-Hit, SH 248 SMR

CHANNELIZERS

Surface Mount Type, 36-inch

1. Bent Manufacturing Company, Masterflex Models MF-360-36 (Round) MF-180-36 (Flat) and MFEX 180—36
2. Pexco LLC, Flexi-Guide Models FG300PE, FG300UR, and FG300EFX
3. Carsonite, "Super Duck" (Round SDR-336)
4. Carsonite, Model SDCF03601MB "Channelizer"
5. FlexStake, Models 703, 753 TM, and EB3
6. GreenLine, Model SMD-36
7. Hi-way Safety, Inc. "Channel Guide Channelizer" Model CGC36
8. Impact Recovery Model D36, with #101 Fixed (Surface-Mount) Base
9. Safe-Hit, Guide Post, Model SH236SMA and Dura-Post, Model SHL36SMA
10. Three D Traffic Works "Boomerang" 5200 Series
11. Flexible Marker Support, Flexistiff Model C-9484-36
12. Shur-Tite Products, Shur-Flex

Lane Separation System

1. Pexco LLC, "Flexi-Guide (FG) 300 Curb System"
2. Qwick Kurb, "Klemmfix Guide System"
3. Dura-Curb System
4. Tuff Curb
5. FG 300 Turnpike Curb
6. Shur-Tite Products, SHUR-Curb , Model No. SF0200

CONICAL DELINEATORS, 42-inch

(For 28-inch Traffic Cones, see Standard Specifications)

1. Bent Manufacturing Company "T-Top", TDSC Series
2. Plastic Safety Systems "Navigator-42"
3. TrafFix Devices "Grabber"
4. Three D Traffic Works "Ringtop" TD7000, ID No. 742143
5. Three D Traffic Works, TD7500
6. Work Area Protection Corp. C-42
7. Custom-Pak 4600 (Part No. 93005-0001)

OBJECT MARKERS

Type "K", 18-inch

1. Pexco LLC, Model FG318PE

2. Carsonite, Model SMD 615
3. FlexStake, Model 701 KM
4. Safe-Hit, Model SH718SMA

Type "Q" Object Markers, 24-inch

1. Bent Manufacturing "Masterflex" Model MF-360-24
2. Pexco LLC, Model FG324PE
3. Carsonite, "Channelizer"
4. FlexStake, Model 701KM
5. Safe-Hit, Models SH824SMA_WA and SH824GP3_WA
6. Three D Traffic Works ID No. 531702W and TD 5200
7. Three D Traffic Works ID No. 520896W
8. Safe-Hit, Dura-Post SHLQ-24"

CONCRETE BARRIER MARKERS AND TEMPORARY RAILING (TYPE K) REFLECTORS

Impactable Type

1. ARTUK, "FB"
2. Pexco LLC, Models PCBM-12 and PCBM-T12, PCBM 912
3. Duraflex Corp., "Flexx 2020" and "Electriflexx"
4. Hi-Way Safety, Inc., Model GMKRM100
5. Plastic Safety Systems "BAM" Models OM-BARR and OM-BWAR
6. Three D Traffic Works "Roadguide" Model TD 9300

Non-Impactable Type

1. ARTUK, JD Series
2. Plastic Safety Systems "BAM" Models OM-BITARW and OM-BITARA
3. Vega Molded Products, Models GBM and JD
4. Plastic Vacuum Forming, "Cap-It C400"

METAL BEAM GUARD RAIL POST MARKERS

(For use to the left of traffic)

1. Pexco LLC, "Mini" (3" x 10"), I-Flex
2. Creative Building Products, "Dura-Bull, Model 11201"
3. Duraflex Corp., "Railrider"
4. Plastic Vacuum Forming, "Cap-It C300"

CONCRETE BARRIER DELINEATORS, 16-inch

(For use to the right of traffic)

1. Pexco LLC, Model PCBM T-16
2. Safe-Hit, Model SH216RBM
3. Three D Traffic Works "Roadguide" Model 9400

CONCRETE BARRIER-MOUNTED MINI-DRUM (10" x 14" x 22")

1. Stinson Equipment Company "SaddleMarker"

GUARD RAILING DELINEATOR

(Place top of reflective element at 48 inches above plane of roadway)

Wood Post Type, 27-inch

1. Pexco LLC, FG 427 and FG 527
2. Carsonite, Model 427
3. FlexStake, Model 102 GR
4. GreenLine GRD 27
5. Safe-Hit, Model SH227GRD
6. Three D Traffic Works "Guardflex" TD9100
7. New Directions Mfg, NDM27
8. Shur-Tite Products, Shur-Tite Flat Mount
9. Glasforms, Hiway-Flex, GR-27-00 "(approved 9-27-10)

Barrier, Guardrail Visibility Enhancement

1. UltraGuard Safety System, Potters Industries, Inc.

Steel Post Type

1. Carsonite, Model CFGR-327

RETROREFLECTIVE SHEETING

Channelizers, Barrier Markers, and Delineators

1. Avery Dennison T-6500 Series (For rigid substrate devices only)
2. Avery Dennison WR-7100 Series
3. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
4. Reflexite, PC-1000 Metalized Polycarbonate
5. Reflexite, AC-1000 Acrylic
6. Reflexite, AP-1000 Metalized Polyester
7. Reflexite, Conformalight, AR-1000 Abrasion Resistant Coating
8. 3M, High Intensity

Traffic Cones, 4-inch and 6-inch Sleeves

1. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
2. Reflexite, Vinyl, "TR" (Semi-transparent) or "Conformalight"
3. 3M Series 3840
4. Avery Dennison S-9000C

Drums

1. Avery Dennison WR-6100
2. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
3. Reflexite, "Conformalight", "Super High Intensity" or "High Impact Drum Sheeting"
4. 3M Series 3810

Barricades: Type I, Medium-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Nippon Carbide Industries, CN8117
2. Avery Dennison, W 1100 series
3. 3M Series CW 44

Barricades: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Avery Dennison, W-2100 Series

Vertical Clearance Signs: Structure Mounted

1. 3M Model 4061, Diamond Grade DG3, Fluorescent Yellow

Signs: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

1. Avery Dennison, T-2500 Series
2. Nippon Carbide Industries, Nikkalite 18000

Signs: Type III, High-Intensity (Typically Encapsulated Glass-Bead Element)

1. Avery Dennison, T-5500A and T-6500 Series
2. Nippon Carbide Industries, Nikkalite Brand Ultralite Grade II
3. 3M 3870 and 3930 Series
4. Changzhou Hua R Sheng, Series TM 1200

Signs: Type IV, High-Intensity (Typically Unmetallized Microprismatic Element)

1. Avery Dennison, T-6500 Series
2. Nippon Carbide Industries, Crystal Grade, 94000 Series
3. Nippon Carbide Industries, Model No. 94847 Fluorescent Orange
4. 3M Series 3930 and Series 3924S

Signs: Type VI, Elastomeric (Roll-Up) High-Intensity, without Adhesive

1. Avery Dennison, WU-6014
2. Novabrite LLC, "Econobrite"
3. Reflexite "Vinyl"
4. Reflexite "SuperBright"
5. Reflexite "Marathon"
6. 3M Series RS20

Signs: Type VIII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)

1. Avery Dennison, T-7500 Series
2. Avery Dennison, T-7511 Fluorescent Yellow
3. Avery Dennison, T-7513 Fluorescent Yellow Green
4. Avery Dennison, W-7514 Fluorescent Orange
5. Nippon Carbide Industries, Nikkalite Crystal Grade Series 92800
6. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92847 Fluorescent Orange

Signs: Type IX, Very-High-Intensity (Typically Unmetallized Microprismatic Element)

1. 3M VIP Series 3981 Diamond Grade Fluorescent Yellow
2. 3M VIP Series 3983 Diamond Grade Fluorescent Yellow/Green
3. 3M VIP Series 3990 Diamond Grade

4. Avery Dennison T-9500 Series
5. Avery Dennison, T9513, Fluorescent Yellow Green
6. Avery Dennison, W9514, Fluorescent Orange
7. Avery Dennison, T-9511 Fluorescent Yellow

Signs: Type XI, Very High Intensity (Typically Unmetallized Microprismatic Element)

1 3M Diamond Grade, DG3, Series 4000
2. 3M Diamond Grade, DG3, Series 4081, Fluorescent Yellow
3. 3M Diamond Grade, DG3, Series 4083, Fluorescent Yellow/Green
4. 3M Diamond Grade, DG3, Series 4084, Fluorescent Orange
5. Avery Dennison, OmniCube, T-11500 Series
6. Avery Dennison, OmniCube, T-11511, Fluorescent Yellow
7. Avery Dennison, OmniCube, T-11513, Fluorescent Yellow Green
8. Avery Dennison, OmniCube, W-11514 Fluorescent Orange

SPECIALTY SIGNS

1. Reflexite "Endurance" Work Zone Sign (with Semi-Rigid Plastic Substrate)

ALTERNATIVE SIGN SUBSTRATES

Fiberglass Reinforced Plastic (FRP) and Expanded Foam PVC

1. Fiber-Brite (FRP)
2. Sequentia, "Polyplate" (FRP)
3. Inteplast Group "InteCel" (0.5 inch for Post-Mounted CZ Signs, 48-inch or less)(PVC)

Aluminum Composite, Temporary Construction Signs and Permanent Signs up to 4 foot, 7 Inches

1. Alcan Composites "Dibond Material, 80 mils"
2. Mitsubishi Chemical America, Alpolic 350
3. Bone Safety Signs, Bone Light ACM (temporary construction signs only)

STATE-FURNISHED MATERIALS

The State/City furnishes you with:

- Loop detector sensor units (State)
- Model 170/2070 controller assemblies, including controller unit, completely wired controller cabinet, and detector sensor units (State)
- Modems (State)
- Components of battery backup system as follows (State):
  - Inverter/charger unit
  - Power transfer relay
  - Manually-operated bypass switch
  - Battery harness
  - Utility interconnect wires
  - Battery temperature probe
  - Relay contact wires
  - External cabinet
- Non-reflective green identification strips (State)

- Emergency Vehicle Preemption Detection System (City)

The State furnishes you with completely wired controller cabinets with auxiliary equipment but without controller unit at the Sacramento Electric Specialty Dept. located at 11325 Sanders Drive, Rancho Cordova, 95742. You shall notify the District Warehouse Manager, Telephone (916) 859-7803 and the Engineer not less than 10 (ten) working days before picking up the traffic signal cabinet assemblies (without the controllers). Caltrans will subsequently deliver the actual controllers to the job site at the prearranged time of signal turn-on. (The permittee or the Contractor for a local agency shall pay $6000.00 to Caltrans to compensate the State of California for the costs incurred in obtaining, testing and supplying each Traffic Signal Controller Assembly. An additional fee of $1750.00 will be required for each State Furnished Battery Backup system. These fees do not supersede any other fee charged by Caltrans for review, inspection or field work performed by Department staff as a result of the permitted work. If these fees have not been paid before permit issuance, full payment shall be made to the district cashier before starting any traffic signal work authorized by this permit, and at least 30 (thirty) days before the controller is needed for installation.)

You must furnish replacement plants. The State does not pay you for the replacement plants.

REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES

When the presence of asbestos or hazardous substances are not shown on the plans or indicated in the specifications and the Contractor encounters materials which the Contractor reasonably believes to be asbestos or a hazardous substance as defined in Section 25914.1 of the Health and Safety Code, and the asbestos or hazardous substance has not been rendered harmless, the Contractor may continue work in unaffected areas reasonably believed to be safe. The Contractor shall immediately cease work in the affected area and report the condition to the Engineer in writing.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

If delay of work in the area delays the current controlling operation, the delay will be considered a right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

CONCRETE

PORTLAND CEMENT CONCRETE

Portland cement concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

STRENGTH DEVELOPMENT TIME

The time allowed to obtain the minimum required compressive strength as specified in Section 90-1.01, "Description," of the Standard Specifications will be 56 days when the Contractor chooses cementitious material that satisfies the following equation:

$$\frac{(41 \times UF) + (19 \times F) + (11 \times SL)}{TC} \geq 7.0$$

Where:

F = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N, including the amount in blended cement, pounds per cubic yard. F is equivalent to the sum of FA and FB as defined in Section 90-2.01C, "Required Use of Supplementary Cementitious Materials," of the Standard Specifications

SL = GGBFS, including the amount in blended cement, pounds per cubic yard

UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard

TC = Total amount of cementitious material used, pounds per cubic yard

For concrete satisfying the equation above, the Contractor shall test for the modulus of rupture or compressive strength specified for the concrete involved, at least once every 500 cubic yards, at 28, 42, and 56 days. The Contractor shall submit test results to the Engineer and the Transportation Laboratory, Attention: Office of Concrete Materials.

RAPID STRENGTH CONCRETE FOR STRUCTURES

GENERAL

Summary

This section includes specifications for rapid strength concrete (RSC) for structures. You may only use RSC when specified elsewhere in these special provisions.

Definitions

Opening age: The age at which the concrete will achieve the specified strength for opening to public or construction traffic.

Submittals

Mix Design

Submit the RSC mix design at least 10 days before use. If a trial slab is required, submit the RSC mix design at least 10 days before constructing the trial slab. Include the following in the submittal:

1. Compressive strength test results for prequalification of RSC at age of break, at 3 days, and at 28 days
2. Opening age
3. Proposed aggregate grading
4. Mix proportions of cementitious material, aggregate, and water
5. Types and amounts of chemical admixtures, if used
6. Range of ambient temperatures over which the mix design will achieve the required minimum compressive strength
7. Source of materials

Volumetric Proportioning

When using volumetric proportioning, submit the following:

1. Aggregate moisture test results
2. Log of production data

Certificate of Compliance

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications with each delivery of aggregate, cementitious material, and admixtures used for calibration tests. Include certified copies of the weight of each delivery.

The Certificate of Compliance must state that the source of materials used for the calibration tests is from the same source as to be used for the planned work. The Certificate of Compliance must be signed by an authorized representative.

Quality Control and Assurance

Prequalification of RSC

Prequalification of a RSC mix design includes determining the opening age and achieving the minimum specified 28-day compressive strength.

Prequalify RSC under the specifications for prequalification of concrete specified by compressive strength in Section 90-9.01, "General," of the Standard Specifications. Determine the opening age as follows:

1. Fabricate at least 5 test cylinders to be used to determine the age of break.
2. Immediately after fabrication of the 5 test cylinders, store the cylinders in a temperature medium of 70 ± 3 °F until the cylinders are tested.
3. Determine the age of break to achieve an average strength of the 5 test cylinders of not less than 1200 psi. Not more than 2 test cylinders may have a strength of less than 1150 psi.
4. The opening age is the age of break plus 1 hour.

Weighmaster Certifications

Weighmaster certificates for RSC, regardless of the proportioning method used, must include all information necessary to trace the manufacturer and manufacturer's lot number for the cement being used. When proportioned into fabric containers, the weighmaster certificates for the cement must contain the date of proportioning, location of proportioning, and actual net draft weight of the cement. When proportioned at the job site from a storage silo, the weighmaster certificates must contain the date of proportioning, location of proportioning, and the net draft weight of the cement used in the load.

MATERIALS

General

RSC must comply with one of the following:

1. Concrete made with portland cement. The concrete must comply with Section 90, "Portland Cement Concrete," of the Standard Specifications. Type III cement may be used.

2. Concrete made with any cement that complies with the definition of hydraulic cement or blended hydraulic cement in ASTM C 219. The concrete must comply with Section 90, "Portland Cement Concrete," of the Standard Specifications, except that:

   2.1. Cementitious material must comply with the following:

Test Description	Test Method	Requirement
Contraction in Air	California Test 527, w/c ratio = 0.39±0.010	0.053%, max.
Mortar Expansion in Water	ASTM C 1038	0.04%, max.
Soluble Chloride*	California Test 422	0.05%, max.
Soluble Sulfate*	California Test 417	0.30%, max.
Thermal Stability	California Test 553	90%, min.
Compressive Strength @ 3 days	ASTM C 109	2500 psi

*Test is to be done on a cube specimen fabricated in conformance with the requirements in ASTM C 109, cured at least 14 days, and then pulverized so that 100% passes the No. 50 sieve.

   2.2. Citric acid or borax may be used if requested in writing by the cement manufacturer and a sample is submitted to the Engineer. Chemical admixtures, if used, must be included when testing for requirements listed in the table above.

RSC must have a minimum 28-day compressive strength of 3600 psi, except that RSC placed in bridge decks must have a minimum 28-day compressive strength of 4500 psi and must comply with the shrinkage limitations as specified for bridge deck concrete in Section 90-1.01, "Description," of the Standard Specifications.

Supplementary cementitious material is not required.

Penetration requirements of Section 90-6.06, "Amount of Water and Penetration," of the Standard Specifications do not apply.

CONSTRUCTION

General

RSC may be proportioned and placed by a volumetric mixer.

Volumetric Proportioning

RSC proportioned by a volumetric mixer must comply with the requirements specified herein.

Proportion liquid admixtures under Section 90-4.10, "Proportioning and Dispensing Liquid Admixtures," of the Standard Specifications, except proportion liquid admixtures with a meter.

Batch-mixer trucks must proportion cement, water, aggregate, and additives by volume. Aggregate feeders must be connected directly to the drive on the cement vane feeder. The cement feed rate must be tied directly to the feed rate for the aggregate and other ingredients. Only change the ratio of cement to aggregate by changing the gate opening for the aggregate feed. The drive shaft of the aggregate feeder must have a revolution counter reading to the nearest full or partial revolution of the aggregate delivery belt.

Proportion aggregate with a belt feeder operated with an adjustable cutoff gate delineated to the nearest quarter increment. The gate opening height must be readily determinable. Proportion

cement by any method that complies with the accuracy tolerance specifications. Proportion water with a meter under Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

Calibrate the cutoff gate for each batch-mixer truck used and for each aggregate source. Calibrate batch-mixer trucks at 3 different aggregate gate settings that are commensurate with production needs. Perform at least 2 calibration runs for each aggregate gate.

Individual aggregate delivery rate check-runs must not deviate more than 1.0 percent from the mathematical average of all runs for the same gate and aggregate type. Each test run must be at least 1,000 pounds.

At the time of batching, dry and drain aggregates to a stable moisture content. Do not proportion aggregates with visible separation of water from the aggregate during proportioning. At the time of batching, the free moisture content of fine aggregate must not exceed 8 percent of its saturated, surface-dry weight.

If the proportioning plant has separate supplies of the same size group of aggregate with different moisture content, specific gravity, or surface characteristics affecting workability, exhaust 1 supply before using another supply.

Cover rotating and reciprocating equipment on batch-mixer trucks with metal guards.

Individual cement delivery rate check-runs must not deviate more than 1.0 percent of the mathematical average of 3 runs of at least 1,000 pounds each.

When the water meter operates between 50 percent and 100 percent of production capacity, the indicated weight of water delivered must not differ from the actual weight delivered by more than 1.5 percent for each of 2 runs of 75 gallons. Calibrate the water meter under California Test 109. The water meter must be equipped with a resettable totalizer and display the operating rate.

Conduct calibration tests for aggregate, cement, and water proportioning devices with a platform scale located at the calibration site. Platform scales for weighing test-run calibration material must have a maximum capacity of 2.75 tons with maximum graduations of 1 pound. Error test the platform scale within 8 hours of calibrating the batch-mixer truck proportioning devices. Perform error-testing with test weights under California Test 109. Furnish a witness scale that is within 2 graduations of the test weight load. The witness scale must be available for use at the production site throughout the production period. Equipment needed for the calibration of proportioning systems must remain available at the production site throughout the production period.

The batch-mixer truck must be equipped so that accuracy checks can be made. Recalibrate proportioning devices every 90 days after production begins or when you change the source or type of any ingredient.

A spot calibration is calibration of the cement proportioning system only. Perform a 2-run spot calibration each time 55 tons of cement passes through the batch-mixer truck. If the spot calibration shows the cement proportioning system does not comply with the specifications, complete a full calibration of the cement proportioning system before you resume production.

Locate cement storage immediately before the cement feeder. Equip the system with a device that automatically shuts down power to the cement feeder and aggregate belt feeder when the cement storage level is less than 20 percent of the total volume.

Determine aggregate moisture under California Test 223 at least every 2 hours during proportioning and mixing operations. Record aggregate moisture determinations and submit them at the end of each production shift.

Equip each aggregate bin with a device that automatically shuts down the power to the cement feeder and the aggregate belt feeder when the aggregate discharge rate is less than 95 percent of the scheduled discharge rate.

Proportioning device indicators must be in working order before beginning proportioning and mixing operations and must be visible when standing near the batch-mixer truck.

Identifying numbers of batch-mixer trucks must be at least 3 inches in height, and be located on the front and rear of the vehicle.

Mix volumetric proportioned RSC in a mechanically operated mixer. You may use auger-type mixers. Operate mixers uniformly at the mixing speed recommended by the manufacturer. Do not use mixers that have an accumulation of hard concrete or mortar.

Do not mix more material than will permit complete mixing. Reduce the volume of material in the mixer if complete mixing is not achieved. Continue mixing until a homogeneous mixture is produced at discharge. Do not add water to the RSC after discharge.

Do not use equipment with components made of aluminum or magnesium alloys that may have contact with plastic concrete during mixing or transporting of RSC.

The Engineer determines uniformity of concrete mixtures by differences in penetration measurements made under California Test 533. Differences in penetration are determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load. The differences must not exceed 5/8 inch. Submit samples of freshly mixed concrete. Sampling facilities must be safe, accessible, clean, and produce a sample that is representative of production. Sampling devices and sampling methods must comply with California Test 125.

Do not use ice to cool RSC directly. If ice is used to cool water used in the mix, it must be melted before entering the mixer.

Proportion and charge cement into a mixer such that there is no variance of the required quantity of cement due to wind, accumulation on equipment, or other conditions.

Each mixer must have metal plates that provide the following information:

1. Designed usage
2. Manufacturer's guaranteed mixed concrete volumetric capacity
3. Rotation speed

The device controlling the proportioning of cement, aggregate, and water must produce production data. The production data must be captured at 15-minute intervals throughout daily

production. Each capture of production data represents production activity at that time and is not a summation of data. The amount of material represented by each production capture is the amount produced in the period from 7.5 minutes before to 7.5 minutes after the capture time. Submit the daily production data in electronic or printed media at the end of each production shift. Report the data including data titles in the following order:

1. Weight of cement per revolution count
2. Weight of each aggregate size per revolution count
3. Gate openings for each used aggregate size
4. Weight of water added to the concrete per revolution count
5. Moisture content of each used aggregate size
6. Individual volume of other admixtures per revolution count
7. Time of day
8. Day of week
9. Production start and stop times
10. Batch-mixer truck identification
11. Name of supplier
12. Specific type of concrete being produced
13. Source of the individual aggregate sizes
14. Source, brand, and type of cement
15. Source, brand and type of individual admixtures
16. Name and signature of operator

You may input production data by hand into a pre-printed form or it may be captured and printed by the proportioning device. Present electronic media containing recorded production data in a tab delimited format on a CD or DVD. Each capture of production data must be followed by a line-feed carriage-return with sufficient fields for the specified data.

Curing Concrete

For RSC made with a proprietary cement, the curing method must be as recommended by the manufacturer of the cement and as approved by the Engineer.

For RSC made using portland cement concrete, you must:

1. Cure the concrete using the curing compound method under Section 90-7.03, "Curing Structures," of the Standard Specifications. Fogging of the surface with water after the curing compound has been applied will not be required.
2. Repair immediately any damage to the film of the curing compound with additional compound. Do not repair damage to the curing compound after the concrete is opened to public traffic.
3. Cover the surface with an insulating layer or blanket when the ambient temperature is below 65 °F during the curing period. The insulation layer or blanket must have an R-value rating given in the table below. A heating tent may be used in lieu of or in combination with the insulating layer or blanket:

R-Value Ratings

Temperature Range During Curing Period	R-value, minimum
55 °F to 65 °F	1
45 °F to 55 °F	2
39 °F to 45 °F	3

If compressive strength tests are performed in the field showing that the concrete has achieved 1200 psi, you may open the lane to traffic at the age of break. Perform the compressive strength tests under the provisions for sampling and testing cylinders in Section 90-9.01, "General," of the Standard Specifications. The decision to use this option must be made in writing to the Engineer before beginning construction.

MEASUREMENT AND PAYMENT

If calibration of volumetric batch trucks is performed more than 100 miles from the project limits, payment for rapid strength concrete is reduced by $1,000.

PRECAST CONCRETE QUALITY CONTROL

GENERAL

Precast concrete quality control shall conform to these special provisions.

Unless otherwise specified, precast concrete quality control shall apply when any precast concrete members are fabricated in conformance with the provisions in Section 49, "Piling," or Section 51, "Concrete Structures," of the Standard Specifications.

Precast concrete quality control shall not apply to precast concrete members that are fabricated from minor concrete.

Quality Control (QC) shall be the responsibility of the Contractor. The Contractor's QC inspectors shall perform inspection and testing prior to precasting, during precasting, and after precasting, and as specified in this section and additionally as necessary to ensure that materials and workmanship conform to the details shown on the plans, and to the specifications.

Quality Assurance (QA) is the prerogative of the Engineer. Regardless of the acceptance for a given precast element by the Contractor, the Engineer will evaluate the precast element. The Engineer will reject any precast element that does not conform to the approved Precast Concrete Quality Control Plan (PCQCP), the details shown on the plans, or to these special provisions.

The Contractor shall designate in writing a precast Quality Control Manager (QCM) for each precasting facility. The QCM shall be responsible directly to the Contractor for the quality of precasting, including materials and workmanship, performed by the Contractor and all subcontractors. The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall not be employed or compensated by any subcontractor, or other persons or entities hired by subcontractors, or suppliers, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Prior to submitting the PCQCP required herein, a meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing precast concrete operations for this project, shall be held to discuss the requirements for precast quality control.

QC Inspectors shall either be 1) licensed as Civil Engineers in the State of California, or 2) have a current Plant Quality Personnel Certification, Level II, from the Precast/Prestressed Concrete Institute. A QC Inspector shall witness all precast concrete operations.

PRECAST CONCRETE QUALIFICATION AUDIT

Unless otherwise specified, no Contractors or subcontractors performing precast concrete operations for the project shall commence work without having successfully completed the Department's Precast Fabrication Qualification Audit, hereinafter referred to as the audit. Copies of the audit form, along with procedures for requesting and completing the audit, are available at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smbresources.htm

An audit that was previously approved by the Department no more than 3 years before the award of this contract will be acceptable for the entire period of this contract, provided the Engineer determines the audit is for the same type of work that is to be performed on this contract.

A list of facilities who have successfully completed the audit and are authorized to provide material for this contract is available at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smdocuments/Internet_auditlisting.pdf

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

PRECAST CONCRETE QUALITY CONTROL PLAN

Prior to performing any precasting operations, the Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 3 copies of a separate PCQCP for each item of work to be precast. A separate PCQCP shall be submitted for each facility. As a minimum, each PCQCP shall include the following:

A. The name of the precasting firm, the concrete plants to be used, and any concrete testing firm to be used;
B. A manual prepared by the precasting firm that includes equipment, testing procedures, safety plan, and the names, qualifications, and documentation of certifications for all personnel to be used;
C. The name of the QCM and the names, qualifications, and documentation of certifications for all QC inspection personnel to be used;
D. An organizational chart showing all QC personnel and their assigned QC responsibilities;
E. The methods and frequencies for performing all required quality control procedures, including all inspections, material testing, and any required survey procedures for all components of the precast elements including prestressing systems, concrete, grout,

reinforcement, steel components embedded or attached to the precast member, miscellaneous metal, and formwork;

F. A system for identification and tracking of required precast element repairs, and a procedure for the reinspection of any repaired precast element. The system shall have provisions for a method of reporting nonconforming precast elements to the Engineer; and

G. Forms to be used for Certificates of Compliance, daily production logs, and daily reports.

The Engineer shall have 4 weeks to review the PCQCP submittal after a complete plan has been received. No precasting shall be performed until the PCQCP is approved in writing by the Engineer.

A PCQCP that was previously approved by the Engineer no more than one year prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the PCQCP is for the same type of work that is to be performed on this contract.

An amended PCQCP or addendum shall be submitted to, and approved in writing by the Engineer, for any proposed revisions to the approved PCQCP. An amended PCQCP or addendum will be required for any revisions to the PCQCP, including but not limited to changes in concrete plants or source materials, changes in material testing procedures and testing labs, changes in procedures and equipment, changes in QC personnel, or updated systems for tracking and identifying precast elements. The Engineer shall have 2 weeks to complete the review of the amended PCQCP or addendum, once a complete submittal has been received. Work that is affected by any of the proposed revisions shall not be performed until the amended PCQCP or addendum has been approved.

After final approval of the PCQCP, amended PCQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of each of these approved documents.

It is expressly understood that the Engineer's approval of the Contractor's PCQCP shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformance with the requirements of the plans and specifications. The Engineer's approval shall neither constitute a waiver of any of the requirements of the plans and specifications nor relieve the Contractor of any obligation thereunder; and defective work, materials, and equipment may be rejected notwithstanding approval of the PCQCP.

REPORTING

The QC Inspector shall provide reports to the QCM on a daily basis for each day that precasting operations are performed.

A daily production log for precasting shall be kept by the QCM for each day that precasting operations, including setting forms, placing reinforcement, setting prestressing steel, casting, curing, post tensioning, and form release, are performed. The log shall include the facility location, and shall include a specific description of casting or related operations, any problems or deficiencies discovered, any testing or repair work performed, and the names of all QC personnel and the specific QC inspections they performed that day. The daily report from each QC Inspector shall also be included in the log. This daily log shall be available for viewing by the Engineer, at the precasting facility.

All reports regarding material tests and any required survey checks shall be signed by the person who performed the test or check, and then submitted directly to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or type-written next to all signatures.

The Engineer shall be notified immediately in writing when any precasting problems or deficiencies are discovered and of the proposed repair or process changes required to correct them. The Engineer shall have 4 weeks to review these procedures. No remedial work shall begin until the Engineer approves these procedures in writing.

The following items shall be included in a precast report that is to be submitted to the Engineer following the completion of any precast element:

A. Reports of all material tests and any required survey checks;
B. Documentation that the Contractor has evaluated all tests and corrected all rejected deficiencies, and all repairs have been re-examined with the required tests and found acceptable; and
C. A daily production log.

At the completion of any precast element, and if the QCM determines that element is in conformance with these special provisions, the QCM shall sign and furnish to the Engineer, a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. This Certificate of Compliance shall be submitted with the precast report. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans and the provisions of the Standard Specifications and these special provisions.

PAYMENT

In the event the Engineer fails to complete the review of 1) a PCQCP, 2) an amended PCQCP or addendum, or 3) a proposed repair or process change, within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

All required repair work or process changes required to correct precasting operation deficiencies, whether discovered by the QCM, QC Inspector, or by the Engineer, and any associated delays or expenses to the Contractor caused by performing these repairs, shall be at the Contractor's expense.

Full compensation for conforming to the requirements of this section shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

WELDING

GENERAL

Unless otherwise specified, Section 8-3, "Welding," shall apply to any welding that is specified to conform to an AWS welding code.

Requirements of the AWS welding codes shall apply unless otherwise specified in the Standard Specifications, on the plans, or in these special provisions. Wherever the abbreviation AWS is used, it shall be equivalent to the abbreviations ANSI/AWS or AASHTO/AWS.

Wherever reference is made to the following AWS welding codes in the Standard Specifications, on the plans, or in these special provisions, the year of adoption for these codes shall be as listed:

AWS Code	Year of Adoption
D1.1	2008
D1.3	2008
D1.4	2005
D1.5	2008
D1.6	2007
D1.8	2009

Flux cored welding electrodes conforming to the requirements of AWS A5.20 E6XT-4 or E7XT-4 shall not be used to perform welding for this project.

Unless otherwise specified, Clause 6.1.3 of AWS D1.1, paragraph 1 of Section 7.1.2 of AWS D1.4, and Clause 6.1.1.2 of AWS D1.5, are replaced with the following:

> The QC Inspector shall be the duly designated person who acts for and on behalf of the Contractor for inspection, testing, and quality related matters for all welding.
>
> Quality Assurance (QA) is the prerogative of the Engineer. The QA Inspector is the duly designated person who acts for and on behalf of the Engineer.
>
> The QC Inspector shall be responsible for quality control acceptance or rejection of materials and workmanship.
>
> When the term "Inspector" is used without further qualification, it shall refer to the QC Inspector.

Inspection and approval of all joint preparations, assembly practices, joint fit-ups, welding techniques, and the performance of each welder, welding operator, and tack welder shall be documented by the QC Inspector on a daily basis for each day welding is performed. For each inspection, including fit-up, Welding Procedure Specification (WPS) verification, and final weld inspection, the QC Inspector shall confirm and document compliance with the requirements of the AWS or other specified code criteria and the requirements of these special provisions on all welded joints before welding, during welding, and after the completion of each weld.

The Engineer shall have the authority to verify the qualifications or certifications of any welder, QC Inspector, or NDT personnel to specified levels by retests or other means approved by the Engineer.

When joint weld details that are not prequalified to the details of Clause 3 of AWS D1.1 or to the details of Figure 2.4 or 2.5 of AWS D1.5 are proposed for use in the work, the joint details, their intended locations, and the proposed welding parameters and essential variables, shall be approved by the Engineer. The Contractor shall allow the Engineer 15 days to complete the review of the proposed joint detail locations.

In addition to the requirements of AWS D1.1, welding procedure qualifications for work welded in conformance with this code shall conform to the following:

> When a nonstandard weld joint is to be made using a combination of WPSs, a single test may be conducted combining the WPSs to be used in production, provided the essential variables, including weld bead placement, of each process are limited to those established in Table 4.5.

Upon approval of the proposed joint detail locations and qualification of the proposed joint details, welders and welding operators using these details shall perform a qualification test plate using the WPS variables and the joint detail to be used in production. The test plate shall have the maximum thickness to be used in production and a minimum length of 18 inches. The test plate shall be mechanically and radiographically tested. Mechanical and radiographic testing and acceptance criteria shall be as specified in the applicable AWS codes.

The Engineer will witness all qualification tests for WPSs that were not previously approved by the Department.

In addition to the requirements specified in the applicable code, the period of effectiveness for a welder's or welding operator's qualification shall be a maximum of 3 years for the same weld process, welding position, and weld type. If welding will be performed without gas shielding, then qualification shall also be without gas shielding. Excluding welding of fracture critical members, a valid qualification at the beginning of work on a contract will be acceptable for the entire period of the contract, as long as the welder's or welding operator's work remains satisfactory.

The Contractor shall notify the Engineer 7 days prior to performing any procedure qualification tests. Witnessing of qualification tests by the Engineer shall not constitute approval of the intended joint locations, welding parameters, or essential variables. The Contractor shall notify the Engineer using the "Standard TL-38 Inspection Form" located at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smbforms.htm

Clause 6.14.6, "Personnel Qualification," of AWS D1.1, Section 7.8, "Personnel Qualification," of AWS D1.4, and Clause 6.1.3.4, "Personnel Qualification," of AWS D1.5 are replaced with the following:

> Personnel performing nondestructive testing (NDT) shall be qualified and certified in conformance with the requirements of the American Society for Nondestructive Testing (ASNT) Recommended Practice No. SNT-TC-1A and the Written Practice of the NDT firm. The Written Practice of the NDT firm shall meet or exceed the guidelines of the ASNT Recommended Practice No. SNT-TC-1A. Individuals who perform NDT, review the results, and prepare the written reports shall be either:

A. Certified NDT Level II technicians, or;
B. Level III technicians who hold a current ASNT Level III certificate in that discipline and are authorized and certified to perform the work of Level II technicians.

Clause 6.6.5, "Nonspecified NDT Other than Visual," of AWS D1.1, Section 7.6.5 of AWS D1.4 and Clause 6.6.5 of AWS D1.5 shall not apply.

For any welding, the Engineer may direct the Contractor to perform NDT that is in addition to the visual inspection or NDT specified in the AWS or other specified welding codes, in the Standard Specifications, or in these special provisions. Except as provided for in these special provisions, additional NDT required by the Engineer, and associated repair work, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. Prior to release of welded material by the Engineer, if testing by NDT methods other than those originally specified discloses an attempt to defraud or reveals a gross nonconformance, all costs associated with the repair of the deficient area, including NDT of the weld and of the repair, and any delays caused by the repair, shall be at the Contractor's expense. A gross nonconformance is defined as the sum of planar type rejectable indications in more than 20 percent of the tested length.

When less than 100 percent of NDT is specified for any weld, it is expected that the entire length of weld meet the specified acceptance-rejection criteria. Should any welding deficiencies be discovered by additional NDT directed or performed by the Engineer that utilizes the same NDT method as that originally specified, all costs associated with the repair of the deficient area, including NDT of the weld and of the weld repair, and any delays caused by the repair, shall be at the Contractor's expense.

Repair work to correct welding deficiencies discovered by visual inspection directed or performed by the Engineer, and any associated delays or expenses caused to the Contractor by performing these repairs, shall be at the Contractor's expense.

WELDING QUALITY CONTROL

Welding quality control shall conform to the requirements in the AWS or other specified welding codes, the Standard Specifications, and these special provisions.

Unless otherwise specified, welding quality control shall apply to work welded in conformance with the provisions in the following:

A. Section 49, "Piling," Section 52, "Reinforcement," Section 55, "Steel Structures," and Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications
B. "Structural Steel for Building Work" of these special provisions

Unless otherwise specified, Clauses 6.1.4.1 and 6.1.4.3 of AWS D1.1, paragragh 2 of Section 7.1.2 of AWS D1.4, and Clauses 6.1.3.2 through 6.1.3.3 of AWS D1.5 are replaced with the following:

The QC Inspector shall be currently certified as an AWS Certified Welding Inspector (CWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors."

The QC Inspector may be assisted by an Assistant QC Inspector provided that this individual is currently certified as an AWS Certified Associate Welding Inspector (CAWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors." The Assistant QC Inspector may perform inspection under the direct supervision of the QC Inspector provided the assistant is always within visible and audible range of the QC Inspector. The QC Inspector shall be responsible for signing all reports and for determining if welded materials conform to workmanship and acceptance criteria. The ratio of QC Assistants to QC Inspectors shall not exceed 5 to 1.

The Contractor shall designate in writing a welding Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for the quality of welding, including materials and workmanship, performed by the Contractor and subcontractors.

The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, reviewing, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall be a registered professional engineer or shall be currently certified as a CWI.

Unless the QCM is hired by a subcontractor providing only QC services, the QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

The QCM shall sign and furnish to the Engineer, a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each item of work for which welding was performed. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans, the Standard Specifications, and these special provisions.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for the following conditions:

A. The work is welded in conformance with AWS D1.5 and is performed at a permanent fabrication or manufacturing facility that is certified under the AISC Quality Certification Program, Category CBR, Major Steel Bridges and Fracture Critical endorsement F, when applicable.
B. Structural steel for building work is welded in conformance with AWS D1.1 and is performed at a permanent fabrication or manufacturing facility that is certified under the AISC Quality Certification Program, Category STD, Standard for Steel Building Structures.

For welding performed at such facilities, the inspection personnel or NDT firms may be employed or compensated by the facility performing the welding provided the facility maintains a QC program that is independent from production.

Unless otherwise specified, an approved independent third party will witness the qualification tests for welders or welding operators. The independent third party shall be a current CWI and shall not be an employee of the contractor performing the welding. The Contractor shall allow the Engineer 15 days to review the qualifications and copy of the current certification of the independent third party.

Prior to submitting the Welding Quality Control Plan (WQCP) required herein, a prewelding meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing welding or inspection for this project, shall be held to discuss the requirements for the WQCP.

Information regarding the contents, format, and organization of a WQCP, is available at the Transportation Laboratory and at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smbresources.htm

The Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 2 copies of a separate WQCP for each subcontractor or supplier for each item of work for which welding is to be performed.

The Contractor shall allow the Engineer 15 days to review the WQCP submittal after a complete plan has been received. No welding shall be performed until the WQCP is approved in writing by the Engineer.

An amended WQCP or any addendum to the approved WQCP shall be submitted to, and approved in writing by the Engineer, for proposed revisions to the approved WQCP. An amended WQCP or addendum will be required for revisions to the WQCP, including but not limited to a revised WPS; additional welders; changes in NDT firms, QC, or NDT personnel or procedures; or updated systems for tracking and identifying welds. The Engineer shall have 7 days to complete the review of the amended WQCP or addendum. Work affected by the proposed revisions shall not be performed until the amended WQCP or addendum has been approved.

After final approval of the WQCP, amended WQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of the approved documents. A copy of the Engineer approved document shall be available at each location where welding is to be performed.

All welding will require inspection by the Engineer. The Contractor shall request inspection at least 3 business days prior to the beginning of welding for locations within California and 5 business days for locations outside of California. The Contractor shall request inspection at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smbforms.htm

Continuous inspection shall be provided when any welding is being performed. Continuous inspection, as a minimum, shall include having a QC Inspector within such close proximity of all

welders or welding operators so that inspections by the QC Inspector of each welding operation at each welding location does not lapse for a period exceeding 30 minutes.

A daily production log for welding shall be kept for each day that welding is performed. The log shall clearly indicate the locations of all welding. The log shall include the welders' names, amount of welding performed, any problems or deficiencies discovered, and any testing or repair work performed, at each location. The daily report from each QC Inspector shall also be included in the log.

The following items shall be included in a Welding Report that is to be submitted to the Engineer within 15 days following the performance of any welding:

A. A daily production log.
B. Reports of all visual weld inspections and NDT.
C. Radiographs and radiographic reports, and other required NDT reports.
D. A summary of welding and NDT activities that occurred during the reporting period.
E. Reports of each application of heat straightening.
F. A summarized log listing the rejected lengths of weld by welder, position, process, joint configuration, and piece number.
G. Documentation that the Contractor has evaluated all radiographs and other nondestructive tests and corrected all rejectable deficiencies, and that all repaired welds have been reexamined using the required NDT and found acceptable.

The following information shall be clearly written on the outside of radiographic envelopes: name of the QCM, name of the nondestructive testing firm, name of the radiographer, date, contract number, complete part description, and all included weld numbers, report numbers, and station markers or views, as detailed in the WQCP. In addition, all interleaves shall have clearly written on them the part description and all included weld numbers and station markers or views, as detailed in the WQCP. A maximum of 2 pieces of film shall be used for each interleave.

Reports of all visual inspections and NDT shall be signed by the inspector or technician and submitted daily to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures. Reports of all NDT, whether specified, additional, or informational, performed by the Contractor shall be submitted to the Engineer.

The Engineer will review the Welding Report to determine if the Contractor is in conformance with the WQCP. Except for field welded steel pipe piling, the Engineer shall be allowed 15 days to review the report and respond in writing after the complete Welding Report has been received. Prior to receiving notification from the Engineer of the Contractor's conformance with the WQCP, the Contractor may encase in concrete or cover welds for which the Welding Report has been submitted. However, should the Contractor elect to encase or cover those welds prior to receiving notification from the Engineer, it is expressly understood that the Contractor shall not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection.

For field welded steel pipe piling, including bar reinforcement in the piling, the Contractor shall allow the Engineer 2 business days to review the Welding Report and respond in writing

after the required items have been received. No field welded steel pipe piling shall be installed, and no reinforcement in the piling shall be encased in concrete until the Engineer has approved the above requirements in writing.

In addition to the requirements in AWS D1.1 and AWS D1.5, third-time excavations of welds or base metal to repair unacceptable discontinuities, regardless of NDT method, and all repairs of cracks require prior approval of the Engineer.

The Engineer shall be notified immediately in writing when welding problems, deficiencies, base metal repairs, or any other type of repairs not submitted in the WQCP are discovered, and also of the proposed repair procedures to correct them. For requests to perform third-time excavations or repairs of cracks, the Contractor shall include an engineering evaluation of the proposed repair. The engineering evaluation, at a minimum, shall address the following:

A. What is causing each defect?
B. Why the repair will not degrade the material properties?
C. What steps are being taken to prevent similar defects from happening again?

The Contractor shall allow the Engineer 7 days to review these procedures. No remedial work shall begin until the repair procedures are approved in writing by the Engineer.

Clause 6.5.4 of AWS D1.5 is replaced with the following:

> The QC Inspector shall inspect and approve each joint preparation, assembly practice, welding technique, joint fit-up, and the performance of each welder, welding operator, and tack welder to make certain that the applicable requirements of this code and the approved Welding Procedure Specification (WPS) are met. The QC Inspector shall examine the work to make certain that it meets the requirements of Clauses 3 and 6.26. The size and contour of all welds shall be measured using suitable gages. Visual inspection for cracks in welds and base metal, and for other discontinuities shall be aided by strong light, magnifiers, or such other devices as may be helpful. Acceptance criteria different from those specified in this code may be used when approved by the Engineer.

In addition to the requirements of AWS D1.5, Clause 5.12 or 5.13, welding procedures qualification for work welded in conformance with that code shall conform to the following requirements:

A. Unless considered prequalified, fillet welds shall be qualified in each position. The fillet weld soundness test shall be conducted using the essential variables of the WPS as established by the Procedure Qualification Record (PQR).
B. For qualification of joints that do not conform to Figures 2.4 and 2.5 of AWS D1.5, a minimum of 2 WPS qualification tests are required. The tests shall be conducted using both Figure 5.1 and Figure 5.3. The test conforming to Figure 5.1 shall be conducted in conformance with AWS D1.5, Clause 5.12 or 5.13. The test conforming to Figure 5.3 shall be conducted using the welding electrical parameters that were established for the test conducted conforming to Figure 5.1. The ranges of welding electrical parameters established during welding per Figure 5.1 in conformance with AWS D1.5, Clause 5.12, shall be further restricted according to the limits in Table 5.3 during welding per Figure 5.3.

C. Multiple zones within a weld joint may be qualified. The travel speed, amperage, and voltage values that are used for tests conducted per AWS D1.5 Clause 5.13 shall be consistent for each pass in a weld joint, and shall in no case vary by more than ±10 percent for travel speed, ±10 percent for amperage, and ±7 percent for voltage as measured from a predetermined target value or average within each weld pass or zone. The travel speed shall in no case vary by more than ±15 percent when using submerged arc welding.
D. For a WPS qualified in conformance with AWS D1.5 Clause 5.13, the values to be used for calculating ranges for current and voltage shall be based on the average of all weld passes made in the test. Heat input shall be calculated using the average of current and voltage of all weld passes made in the test for a WPS qualified in conformance with Clause 5.12 or 5.13.
E. Macroetch tests are required for WPS qualification tests, and acceptance shall be per AWS D1.5 Clause 5.19.3.
F. When a nonstandard weld joint is to be made using a combination of WPSs, a test conforming to Figure 5.3 may be conducted combining the WPSs to be used in production, provided the essential variables, including weld bead placement, of each process are limited to those established in Table 5.3.
G. Prior to preparing mechanical test specimens, the PQR welds shall be inspected by visual and radiographic tests. Backing bar shall be 3 inches in width and shall remain in place during NDT testing. Results of the visual and radiographic tests shall comply with AWS D1.5 Clause 6.26.2, excluding Clause 6.26.2.2. Test plates that do not comply with both tests shall not be used.

WELDING FOR OVERHEAD SIGN AND POLE STRUCTURES

The Contractor shall meet the following requirements for any work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor or by other persons or entities hired by subcontractors who will provide other services or materials for the project except for when the welding is performed at a permanent fabrication or manufacturing facility that is certified under the AISC Quality Certification Program. The AISC Certification category for overhead sign structures shall be Simple Steel Bridge Structures (SBR), and the AISC Certification category for pole structures shall be Simple Steel Bridge Structures (SBR) or Standard for Steel Building Structures (STD).

Welding Qualification Audit

Contractors or subcontractors performing welding operations for overhead sign and pole structures shall have successfully completed the Department's "Manufacturing Qualification Audit for Overhead Sign and Pole Structures." Copies of the audit form and procedures for requesting and completing the audit are available at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smbresources.htm

An audit that was approved by the Engineer no more than 3 years prior to the award of the contract will be acceptable for the entire period of this contract provided the Engineer determines the audit was for the same type of work that is to be performed on this contract.

A list of facilities that have successfully completed the audit and are authorized to provide material for this contract is available at:

http://www.dot.ca.gov/hq/esc/Translab/OSM/smdocuments/Internet_auditlisting.pdf

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

Welding Report

For work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, a Welding Report shall be submitted in conformance with the provisions in "Welding Quality Control" of these special provisions.

PAYMENT

Full compensation for conforming to the requirements of "Welding" shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

N. DESCRIPTION OF WORK

The work, in general, to be done under this contract consists of new roadway construction, reconstruction & widening of roadway, widening of the existing Dead Horse Slough Bridge, drainage improvements, street light installation, signal modifications, sound wall construction, landscaping and irrigation, removal of existing trees and vegetation, all in conformance with the attached contract specifications and the details as shown on the contract plans entitled:

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET No. MAJCG/15010-300-4150

The bridge work consists, in general, of modifying the following structure:

Dead Horse Slough Bridge (Widen)
(Bridge No. 12-0135)

Construct a four span cast-in-place Reinforced Concrete Slab Bridge approximately 124.5 feet long and 48.3 feet wide.

O. QUANTITIES

The preliminary estimates of the quantities of work to be done and materials to be furnished are approximate only, being given as a basis for the comparison of bids, and the City of Chico does not expressly or by implication agree that the actual amount of work will correspond therewith, but reserves the right to increase or decrease the amount of any class or portion of the work or to omit portions of the work that may be deemed necessary or expedient by the Engineer.

P. CONSTRUCTION PROCEDURES AND DETAILS

1. CONSTRUCTION PROJECT INFORMATION SIGNS

Before any major physical construction work readily visible to highway users is started on this contract, the Contractor shall furnish and erect 2 2006 State Transportation Bond Funding Identification signs at the locations designated by the Engineer.

The signs and overlays shall be of a type and material consistent with the estimated time of completion of the project and shall conform to the details shown on the plans.

The sign letters, the border and the Department's construction logos shall conform to the colors (non-reflective) and details shown on the plans, and shall be on a white background (non-reflective). The colors blue and orange shall conform to PR Color Number 3 and Number 6, respectively, as specified in the Federal Highway Administration's Color Tolerance Chart.

The letter sizes to be used shall be as shown on the detail provided in these Special Provisions. The information shown on the signs shall be limited to that shown in the provided detail.

The signs shall be kept clean and in good repair by the Contractor.

Upon completion of the work, the signs shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

Full compensation for furnishing and installing the 2006 State Transportation Bond Funding Identification signs, including removal and disposal upon project completion, shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

2. ORDER OF WORK

Order of work shall conform to the provisions in Section 5-1.05, "Order of Work," of the Standard Specifications and these special provisions.

Attention is directed to “Notification of Businesses” of these special provisions.

Attention is directed to “Access to Businesses” of these special provisions.

Attention is directed to “Precast Concrete Soundwall” of these special provisions.

Attention is directed to “Remove Tree” of these special provisions.

Attention is directed to “Clearing and Grubbing” of these special provisions.

Attention is directed to “Nonhighway Facilities (Including Utilities)” of these special provisions.

Attention is directed to the Biological Monitoring Program, the Regional Water Quality Control Permit, the Army Corps of Engineers Permit, and the Reclamation Board Permit Sections located elsewhere in these special provisions. The Contractor shall comply with all Order of Work and time restrictions identified within these sections.

Contractor shall not be allowed on private property for the removal of the existing fence and the construction of the soundwalls.

Attention is directed to "Miscellaneous Concrete Construction" of these special provisions regarding constructing a 2' x 2' test panel prior to constructing curb ramps with detectable warning surfaces.

Attention is directed to "Environmentally Sensitive Area" and "Temporary Fence (Type ESA)" of these special provisions. Prior to beginning work, the boundaries of the Environmentally Sensitive Areas (ESA) shall be clearly delineated in the field. The boundaries shall be delineated by the installation of temporary fence (Type ESA).

The first order of work shall be to place the order for the electrical equipment. The Engineer shall be furnished a statement from the vendor that the order for the electrical equipment has been received and accepted by the vendor.

The uppermost layer of new pavement shall not be placed until all underlying conduits and loop detectors have been installed.

Prior to commencement of the traffic signal functional test at any location, all items of work related to signal control shall be completed and all roadside signs, pavement delineation, and pavement markings shall be in place at that location.

Attention is directed to "Maintaining Traffic" and "Temporary Pavement Delineation" of these special provisions and to the stage construction sheets of the plans.

Attention is directed to "Progress Schedule (Critical Path Method)" of these special provisions regarding the submittal of a general time-scaled logic diagram within 10 days after approval of the contract. The diagram shall be submitted prior to performing any work that may be affected by any proposed deviations to the construction staging of the project.

The work shall be performed in conformance with the stages of construction shown on the plans. Nonconflicting work in subsequent stages may proceed concurrently with work in preceding stages, provided satisfactory progress is maintained in the preceding stages of construction.

The removal of existing pavement delineation shall be as required by the planned work and as directed by the Engineer. Pavement delineation removal shall be coordinated with new delineation so that lane lines are provided at all times on traveled ways open to public traffic.

Before obliterating any pavement delineation (traffic stripes, pavement markings, and pavement markers) that is to be replaced on the same alignment and location, as determined by the Engineer, the pavement delineation shall be referenced by the Contractor, with a sufficient number of control points to reestablish the alignment and location of the new pavement delineation. The references shall include the limits or changes in striping pattern, including one- and 2-way barrier lines, limit lines, crosswalks and other pavement markings. Full compensation for referencing existing pavement delineation shall be considered as included in the contract prices paid for new pavement delineation and no additional compensation will be allowed therefor.

Prior to applying hot mix asphalt, the Contractor shall cover all manholes, valve and monument covers, grates, or other exposed facilities located within the area of application, using a plastic or oil resistant construction paper secured to the facility being covered by tape or adhesive. The covered facilities shall be referenced by the Contractor, with a sufficient number of control points to relocate the facilities after the hot mix asphalt has been placed. After completion of the paving operation, all covers shall be removed and disposed of in a manner satisfactory to the Engineer. Full compensation for covering manholes, valve and monument covers, grates, or other exposed facilities, referencing, and removing temporary cover shall be considered as included in the contract price paid per ton for hot mix asphalt, and no additional compensation will be allowed therefor.

At the end of each working day if a difference in excess of 0.15 foot exists between the elevation of the existing pavement and the elevation of excavations within 8 feet of the traveled way, material shall be placed and compacted against the vertical cuts adjacent to the traveled way. During excavation operations, native material may be used for this purpose; however, once placing of the structural section commences, structural material shall be used. The material shall be placed to the level of the elevation of the top of existing pavement and tapered at a slope of 4:1 (horizontal:vertical) or flatter to the bottom of the excavation. Full compensation for placing the material on a 4:1 slope, regardless of the number of times the material is required, and subsequent removing or reshaping of the material to the lines and grades shown on the plans shall be considered as included in the contract price paid for the materials involved and no additional compensation will be allowed therefor. No payment will be made for material placed in excess of that required for the structural section.

At those locations exposed to public traffic where guard railings or barriers are to be constructed, reconstructed, or removed and replaced, the Contractor shall schedule operations so that at the end of each working day there shall be no post holes open nor shall there be any

railing or barrier posts installed without the blocks and rail elements assembled and mounted thereon.

3. CONTRACTORS DAILY WORK HOURS/NOISE ORDINANCE

Except for the driveway closure provisions outlined in "Access to Businesses and Residences", lane closure provisions in "Maintaining Traffic" and ramp closure provisions in "Closure Requirements and Conditions," all other operations performed by the contractor shall be restricted to 7 a.m. to 9 p.m. daily, except Sundays and holidays, when his work hours shall be from 10 a.m. to 6 p.m. unless otherwise approved by the Engineer. The restriction shall include all associated move on, set up, equipment and material delivery, and other project activities not strictly related to the daily progress of the project.

The City of Chico's Noise Ordinance, contained in Chapter 9.38, Sections 9.38.010 through 9.38.140, of the City's Municipal Code, assigns ambient and maximum noise levels for the City's land use designations. For areas such as the project site that are designated as a mix of public facilities and services and manufacturing and warehousing, the Noise Ordinance states that "no person shall produce, suffer or allow to be produced by human voice, machine, animal, or device, or any combination of same, on commercial or industrial property, a noise level at any point outside of the property plane that exceeds 70 dBA. Where construction is required during nighttime hours, construction activity shall be staged so that it does not occur over an extended period of time (i.e. more than 14 days at a time). Additionally, the Noise Ordinance permits construction activities between the hours listed above subject to one of the following:

1. Project-related noise-generating activities at, or adjacent to, the construction side shall comply with the Chico Municipal Code Section 9.38.060.B. and shall be restricted to the hours of 7:00 a.m. to 9:00 p.m., Monday through Saturday. Should it become necessary to work on Sundays or holidays, construction hours shall be limited to 10:00 a.m. to 6:00 p.m. Should it become necessary to work after 9:00 p.m. and before 7:00 a.m., businesses will be notified and noise levels for the needed work will be subject to a special provision that would limit noise levels from individual devices or pieces of equipment to not exceed 83 dBA at a distance of 25 feet from the source.

2. All internal combustion engine driven equipment shall be equipped with intake and exhaust mufflers, which are in good condition and appropriate for the equipment.

3. "Unnecessary" idling of internal combustion engines shall be strictly prohibited.

4. Avoid staging of construction equipment within 200 feet of Residences and locate all stationary noise-generating construction equipment, such as air compressors and portable power generators, as far as practical from existing noise receptors. Construct temporary barriers to screen noise generating equipment when located in areas adjoining noise-sensitive land uses.

5. "Quiet" air compressors and other stationary noise sources, where technology exists, shall be used.

6. All construction traffic shall be routed to and from the project site via designated truck routes. Construction-related heavy truck traffic shall be prohibited in residential areas

where feasible. Construction truck traffic shall be prohibited in the project vicinity during non-allowed hours.

7. The businesses, residents and schools in the project area shall be notified in writing by the City of the construction schedule.

8. The City shall designate a "noise disturbance coordinator" who will be responsible for responding to any local complaints about construction noise. The disturbance coordinator will determine the cause of the noise complaint (e.g., starting too early, bad muffler, etc.) and will require that reasonable measures warranted to correct the problem will be implemented. The contractor shall conspicuously post a telephone number for the disturbance coordinator at the construction site. The City shall include the telephone number in the notice sent to residents regarding the construction schedule. (The City shall be responsible for posting the phone number and providing construction schedule notices).

Compliance with these standards is incorporated into the "General Provisions" section of all City construction contracts.

Should the Contractor, his subcontractors, or others under the Contractor's control not comply with the requirements contained in this Special Provisions, the City of Chico will deduct a penalty charge from the Contractor's next progress payment for each occurrence. The penalty assessed shall be $500.00 for the first occurrence and $1000.00 for each occurrence thereafter.

If night time construction is required, lights will be installed at the lowest allowable height and the lowest allowable wattage will be used per current Caltrans and City requirements. Lights will be screened and directed away from residential areas to the highest degree possible; and the amount of nighttime lights used will be minimized to the highest degree possible.

Full compensation for conforming to the requirements of this provision shall be considered as included in the prices paid for the various contract items and no additional compensation will be allowed.

4. DUST CONTROL / AIR QUALITY

Dust control shall conform to the provisions in Section 10, "Dust Control," of the Standard Specifications and these special provisions.

The City and the Butte County AQMD require measures to minimize fugitive dust during construction activities. The Contractor shall implement the following mitigation measures during all phases of construction work:

The contractor shall prepare and submit a fugitive dust control plan to the City and to the Butte County AQMD. The plan will be submitted to the district for approval 30 days prior to the commencement of construction. The plan will include the following measures:

1. The contractor shall water all active construction sites at least twice daily. Frequency shall be based on the type of operation, soil, and wind exposure. Water will be applied at rates that do not result in runoff from the construction area.

2. The contractor shall apply chemical soil stabilizers (compatible with adjacent vernal pools and wetlands) to inactive construction areas (disturbed lands within construction projects that are unused for at least four consecutive days). Chemical soil stabilizers will be applied at rates that do not result in runoff of the construction area.
3. The contractor shall limit on-site construction vehicle speeds to 15 mph in unpaved areas.
4. The contractor shall suspend land clearing, grading, earthmoving, or excavation activities when winds exceed 20 mph averaged over 1 hour.
5. The contractor shall apply non-toxic binders (e.g., latex acrylic copolymer) to exposed areas after cut and fill operations, and the area shall be hydroseeded.
6. The contractor shall hydroseed all disturbed areas as soon as possible.
7. The contractor shall cover all inactive soil storage piles.
8. During initial grading, earthmoving, or site preparation, the contractor may be required to construct a paved (or dust-palliative treated) apron, at least 100 feet in length, onto the project site from adjacent staging areas, if applicable.
9. The contractor shall sweep or wash paved streets adjacent to the project site at the end of each day as necessary to remove excessive accumulations of silt and/or mud which may have accumulated as a result of construction activities.
10. The contractor shall post a publicly visible sign, listing the telephone number and person to contact regarding dust complaints. This person will respond and take corrective actions within 24 hours. The telephone number of Butte County AQMD shall also be visible to ensure compliance with Butte County AQMD Rule 201 and 205 (Nuisance and Fugitive Dust Emissions).
11. The contractor will provide temporary traffic control as appropriate during all phases of construction to improve traffic flow.
12. The contractor will maintain equipment engines in good condition and in proper tune according to the manufacturer's specifications.
13. The contractor shall not let construction equipment idle for longs periods (over 15 minutes).
14. The contractor shall schedule construction activities that direct traffic flow to off-peak hours as much as practicable.
15. The contractor shall minimize the area disturbed be construction at all times.

The contractor shall implement the following measures to reduce diesel emissions during construction.

1. Diesel equipment idling shall be minimized.
2. Diesel equipment shall be located away from sensitive receptors.
3. As feasible, newer, cleaner diesel equipment will be used, rather than older equipment.

Full compensation for conformance with the above requirements shall be considered as included in the various items of work and no additional payment will be allowed therefor.

5. NOTIFICATION OF RESIDENTS AND BUSINESSES

The Contractor shall notify all residents and businesses that may be affected by or are in the immediate vicinity of the construction at least 10 days prior to construction. Notification shall be in writing and include a brief description of the work, starting date, scheduled date of completion, Contractor contact person and Contractor telephone number. Notification shall be submitted to the City for review and approval at least 24 hours prior to distribution. Notice to be hand carried by Contractor Representative. Should a change in the work schedule occur after the

residents and/or businesses have been notified the Contractor shall notify the residents and/or businesses of the change in schedule within 24 hours of the originally scheduled starting date.

Attention is directed to "Closure Requirements and Conditions" of these special provisions regarding business and resident notifications during ramp closures.

Contractor shall have at the job site, during contractor's working hours, a full time public relations person to deal with public and business concerns and shall report to the Engineering Department.

When the construction requires prohibiting parking, "No Parking" signs shall be posed along the construction routes. The signs shall include the dates and times that no parking periods will be in effect. "no Parking" signs shall be mounted on Class I barricades and placed in the gutter pan no more than 100 feet apart. Signs shall be posted a minimum of 24 hours in advance of construction and immediately removed up on completion. Should the Contractor not commence work after 24 hours from placement of the signs, the signs shall be removed. If a vehicle is parked in a properly posted no parking area and is prohibiting the progression of work, the Contractor shall notify the Chico Police Department to arrange for removal of the vehicle.

Failure to comply with the provisions for notification shall result in the suspension of all work until the provisions have been met.

Full compensation for conforming to the requirements of this provision shall be considered as included in the prices paid for the various contract items and no additional compensation will be allowed.

6. ACCESS TO BUSINESSES AND RESIDENCES

The Contractor shall maintain vehicular and pedestrian (ADA compliant) access to all businesses and residences within the construction zone at all times throughout the project. When the work requires the closing of a business driveway or other entrance, the Contractor shall post signs directing the public to the most convenient access to the business.

The contractor shall prepare a "Business and Residence Access Plan" which outlines the implementation of the provisions described in this section. The "Business and Residence Access Plan" shall be submitted at least 2 weeks prior to driveway and sidewalk closures, and shall be subject to the approval of the City of Chico and the Engineer.

DRIVEWAY CLOSURE AND SIDEWALK PROVISIONS

Construction activities will be coordinated to avoid blocking or limiting access to homes, business, and properties to the maximum extent possible. Residents and businesses will be advised about potential access or parking effects before construction activities begin.

All requests for driveway closures must be submitted in writing to the Engineer for approval two weeks prior to the beginning of any driveway closure. The request for closure shall include a sequencing plan for the closures, and shall state the durations in which each driveway will be closed. The closure request shall also include proposed signage directing motorists to Alternate Driveway Access.

Full width of driveways shall be open for to traffic from 6:00 am (0600 hours) to 9:00 pm (2100 hours). Half widths of driveways will be allowed from 9:00 pm to 6:00 am. The contractor's equipment and personnel shall be clear of the driveway allowing for unobstructed ingress/egress to and from the business or parking lot.

The contractor's equipment and personnel will completely clear the driveway work area between 6:00am (0600 hours) and 9:00pm (2100 hours). Only those traffic control devices required to close the respective driveway width will be allowed to remain in place between 6:00am and 9:00pm.

Upon demolition of any portion of the driveway or sidewalk, the contractor shall rebuild that portion of the driveway or sidewalk within seventy two (72) hours (including nights and weekends). Driveways and sidewalk which are not planned for replacement within 72 hours shall only be allowed upon the approval of the Engineer.

Work to be performed outside the working hours described in "Contractor Daily Work Hours / Noise Ordinance" of these special provisions, shall be subject to approval by the engineer.

Full compensation for implementing and coordinating the driveway provisions described above, including the preparation, revisions and approval of a "Business and Residence Access Plan", shall be considered as included in the various contract items of work and no additional payment will be allowed therefor.

If the Contractor does not reopen the Driveway at the time specified, the Department will deduct A PENALTY CHARGE FROM THE CONTRACTOR'S NEXT PROGRESS PAYMENTS OR from moneys due or that may become due the Contractor under the contract. THE PENALTY CHARGE SHALL AMOUNT TO $1500 for each hour, or fraction thereof past the time specified to reopen the driveway. The Penalty charge will not be assessed when the Engineer requests that the driveway closure remain in place beyond the scheduled pickup time.

Full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in implementing and coordinating Access to Businesses and Residences, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the various contract items of work and no additional payment will be allowed therefor.

7. CONFINED SPACE ENTRY

The proposed construction involves the entry into confined spaces as defined in Part 1910 of Title 29 of the Code of Federal Regulations and General Safety Order Article 108, Title 8 of the California Administrative Code. The Contractor shall comply with the requirements of said regulations. The Contractor shall submit copies of an Entry Permit(s) and Confined Space Entry Program addressing operating, rescue procedures, surveillance procedures, and training as required by the state regulations.

8. AREA FOR CONTRACTOR USE

Attention is directed to the provisions in Section 7-1.19, "Rights in Land and Improvements," of the Standard Specifications and these special provisions.

The highway right of way shall be used only for purposes that are necessary to perform the required work. The Contractor shall not occupy the right of way, or allow others to occupy the right of way, for purposes which are not necessary to perform the required work.

No State-owned parcels adjacent to the right of way are available for the exclusive use of the Contractor within the contract limits. The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials, or for other purposes.

No area is available within the contract limits for the exclusive use of the Contractor. However, temporary storage of equipment and materials on State property may be arranged with the Engineer, subject to the prior demands of State maintenance forces and to other contract requirements. Use of the Contractor's work areas and other State-owned property shall be at the Contractor's own risk, and the State shall not be held liable for damage to or loss of materials or equipment located within such areas.

Residence trailers will not be allowed within the highway right of way.

The Contractor shall remove equipment, materials, and rubbish from the work areas and other State--owned property which the Contractor occupies. The Contractor shall leave the areas in a presentable condition in conformance with the provisions in Section 4-1.02, "Final Cleaning Up," of the Standard Specifications.

The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials or for other purposes, if sufficient area is not available to the Contractor within the contract limits, or at the sites designated on the plans outside the contract limits.

9. TESTING

Testing shall conform to Section 6-3, “Testing,” of the Standard Specifications.

The Contractor shall pay for all failed tests as determined by the Engineer. The cost of failed tests shall be deducted from the Contractor's progress payment. Tests shall include all tests normally performed by the Engineer to check the Contractor's compliance with the contract provisions.

10. HAZARDOUS WASTE IN EXCAVATION

If the Contractor encounters material in excavation which he/she has reason to believe may be hazardous waste, as defined by §25117 of the Health and Safety code, he/she shall immediately so notify the Engineer in writing. Excavation in the immediate area of the suspected hazardous material shall be suspended until the Engineer authorizes the work to be resumed. If such suspension delays the current controlling operation, the Contractor will be granted an extension of time as provided in Section 8-1.07, "Liquidated Damages”, of the Standard Specifications.

If such suspension delays the current controlling operation more than 2 working days, the delay will be considered a right of way delay and the Contractor will be compensated for such delay as provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The Department reserves the right to use other forces for exploratory work to identify and determine the extent of such material and for removing hazardous material from such area.

If evidence of soil contamination is encountered during earthmoving or excavation activities, testing for hazardous materials would occur. Any soil found to contain hazardous material concentrations above any federal or state remediation action levels would be classified in accordance with Title 22 of the California Code of Regulations, and removed to a suitable off-site facility. If testing indicated that the concentrations were below regulatory action levels, the soil may be used on-site or disposed of at a Class II or Class III landfill.

The contractor will develop and implement a spill prevention and control program to minimize the potential for—and effects from—spills of hazardous, toxic or petroleum substances during construction of the project. The program would be a component of the Storm Water Pollution Prevention Plan. If a spill is reportable under federal, state, or local regulations, the contractor would notify the City of Chico, Butte County Environmental Health and California Department of Toxic Substances Control, which has spill response and cleanup ordinances to govern emergency spill response. A written description of reportable releases would be submitted to the RWQCB. This submittal would include a description of a release, including the type of material and an estimate of the amount spilled; the date of the release; and explanation of why the spill occurred; and a description of the steps taken to prevent and control future releases. The releases would be documented on a spill report form.

The contractor's attention is directed to "Earthwork" of these special provisions regarding the potential for hazardous materials to be found in groundwater during excavation.

11. UNANTICIPATED CULTURAL RESOURCES DISCOVERY

If buried resources, such as chipped or ground stone, historic debris, building foundations, or human bones are encountered during ground-disturbing activities, the contractor will stop work in that area and within 100 feet of the find until a qualified archaeologist can assess the significance of the find and, if necessary, develop appropriate treatment measures in consultation with the City, Caltrans and other appropriate agencies. Further mitigation and/or construction shall be consistent with the recommendations of the archaeologist.

Any cultural resources found during construction will be recorded or described in a professional report and submitted to the Northeast Information Center at California State University, Chico. The City will be responsible for preparing the report.

If human remains are discovered during project constructions, the contractor shall stop all work at the discovery location and any nearby area reasonably suspected to overlie adjacent human remains (Public Resources Code, Section 7050.5). The County Coroner shall be contacted to determine if the cause of death must be investigated.

If the coroner determines that the remains are of Native American origin, it shall be necessary to comply with state laws regarding the disposition of Native American burials, which

fall within the jurisdiction of Native American Heritage Commission (Public Resource Code, Section 5097). The coroner shall contact the Native American Heritage Commission. The descendants or most likely descendants of the deceased shall be contacted. Work shall not resume until the descendants had made a recommendation to the landowner or the person responsible for the excavation work for treating or disposing of, with appropriate dignity, the human remains and any associated grave goods, as provided in Public Resource Code, Section 5097.98. Work may resume if the Native American Heritage Commission is unable to identify descendent or the descendant fails to make a recommendation. If human remains are found, the City and Caltrans shall consult with the NAHC as described on the NAHC web page regarding the treatment of human remains: http://nahc.ca.gov/profguide.html.

The right is reserved to the City and its authorized agents, including a qualified archaeologist and appropriate professionals to enter upon the right-of-way for the purpose of investigating and/or excavating and removing such resources. The Contractor shall cooperate with forces engaged in such work, and shall conduct his operations in such a manner to avoid any unnecessary delay or hindrance to the work being performed by such other forces.

The Contractor shall immediately notify the City of any delays to his operations as a direct result of the discovery of possible cultural resources which were not indicated on the plans or in the Special Provisions. Any such delays will be considered right-of-way delays within the meaning of Section 8-1.09, "Right of Way Delays," and compensation for such delay will be determined in accordance with said Section 8-1.09. The Contractor shall be entitled to no other compensation for any such delay.

Compensation for conforming with the above requirements shall be included in the prices paid for other items of work in the contract, and no additional payment shall be made.

12. RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD

This project lies within the boundaries of the Central Valley Regional Water Quality Control Board (RWQCB).

The State Water Resources Control Board (SWRCB) has issued to the Department a permit that governs storm water and non-storm water discharges from the Department's properties, facilities, and activities. The Department's permit is entitled "Order No. 99 - 06 - DWQ, NPDES No. CAS000003, National Pollutant Discharge Elimination System (NPDES) Permit, Statewide Storm Water Permit and Waste Discharge Requirements (WDRs) for the State of California, Department of Transportation (Caltrans)." Copies of the Department's permit are available for review from the SWRCB, Division of Water Quality, 1001 "I" Street, P.O. Box 100, Sacramento, California 95812-0100, Telephone fax: (916) 341-5463 and may also be obtained at:

http://www.waterboards.ca.gov/water_issues/programs/stormwater/caltrans.shtml

The Department's permit references and incorporates by reference the current statewide general permit issued by the SWRCB entitled "Order No. 2009-0009-DWQ, National Pollutant Discharge Elimination System (NPDES) General Permit No. CAS000002, Waste Discharge Requirements for Discharges of Storm Water Runoff Associated with Construction and Land

Disturbance Activities" that regulates discharges of storm water and non-storm water from construction activities disturbing one acre or more of soil in a common plan of development. Copies of the statewide permit and modifications thereto are available for review from the SWRCB, Division of Water Quality, 1001 "I" Street, P.O. Box 100, Sacramento, California 95812-0100, Telephone fax: (916) 341-5463 and may also be obtained at:

http://www.waterboards.ca.gov/water_issues/programs/stormwater/construction.shtml

The NPDES permits that regulate this project, as referenced above, are collectively referred to in this section as the "permits."

This project shall conform to the permits and modifications thereto. The Contractor shall maintain copies of the permits at the project site and shall make them available during construction.

The Contractor shall know and comply with provisions of Federal, State, and local regulations and requirements that govern the Contractor's operations and storm water and non-storm water discharges from the project site and areas of disturbance outside the project limits during construction. Attention is directed to Sections 7-1.01, "Laws to be Observed," 5-1.18, "Property and Facility Preservation," 7-1.12, "Indemnification and Insurance," and 9-1.07E(5), "Penalty Withholds," of the Standard Specifications.

The contractor shall be responsible for penalties assessed on the contractor or the department as a result of the contractor's failure to comply with the provisions in "Water pollution Control" of these special provisions or with the applicable provisions of the Federal, State, and local regulations and requirements.

Penalties as used in this section shall include fines, penalties, and damages, whether proposed, assessed, or levied against the Department or the contractor, including those levied under the Federal Clean Water Act and the State Porter-Cologne Water Quality Act, by governmental agencies or as a result of citizen suits. Penalties shall also included payments made or costs incurred in settlement for alleged violations of applicable laws, regulations, or requirements. Costs incurred could include sums spent instead of penalties, in mitigation or remediate or correct violations.

WITHHOLDS

The Department will withhold money due the Contractor, in an amount determined by the Department, up to and including the entire amount of penalties proposed, assessed, or levied as a result of the Contractor's violation of the permits, or Federal or State law, regulations, or requirements. Funds will be withheld by the Department until final disposition of penalties has been made. The Contractor shall remain liable for the full amount of penalties until they are finally resolved with the entity seeking the penalties.

If a regulatory agency identifies a failure to comply with the permits and modifications thereto, or other Federal, State, or local requirements, the Department will withhold money due the Contractor, subject to the following:

A. The Department will give the Contractor 30 days notice of the Department's intention to withhold funds from payments which may become due to the Contractor before acceptance of

the contract. Funds withheld after acceptance of the contract will be made without prior notice to the Contractor.

B. No withholds of additional amounts out of payments will be made if the amount to be withheld does not exceed the amount being withheld from partial payments in accordance with Section 9-1.06, "Partial Payments," of the Standard Specifications.

C. If the Department has withheld funds, and it is subsequently determined that the State is not subject to the entire amount of the costs and liabilities assessed or proposed in connection with the matter for which the withhold was made, the Department will be liable for interest on the amount withheld for the period of the withhold. The interest rate payable shall be 6 percent per annum.

The Contractor shall notify the Engineer immediately upon request from the regulatory agencies to enter, inspect, sample, monitor, or otherwise access the project site or the Contractor's records pertaining to water pollution control work. The Contractor and the Department shall provide copies of correspondence, notices of violation, enforcement actions, or proposed fines by regulatory agencies to the requesting regulatory agency.

13. RELATIONS WITH CENTRAL VALLEY FLOOD PROTECTION BOARD

Attention is directed to Section 7-1.11, "Preservation of Property," and Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

The location of the Dead Horse Slough Bridge is within an area controlled by the Central Valley Flood Protection Board. Application No. 18632 has been approved by the Central Valley Flood Protection Board. The Contractor shall be fully informed of rules, regulations and conditions that may govern his operations in the area and shall conduct the work accordingly.

Attention is directed to the conditions in the application that have been approved by the Central Valley Flood Protection Board.

The contractor shall coordinate with the Engineer to contact the Department of Water Resources by telephone, (916) 574-0609, and provide notification for the pre-construction conference. The Department of Water Resources must be notified at least 10 working days prior to the start of work

No work of any kind shall be done during the flood season from November 1 to April 15 without prior approval of the Central Valley Flood Protection Board.

No stockpiles of material, temporary buildings or equipment shall remain in the floodway during the flood season from November 1 to April 15.

All cleared trees and brush shall be completely removed from the floodway, and downed trees or brush shall not remain in the floodway during the flood season from November 1 to april 15.

All temporary fencing, gates and signs shall be removed from the floodway upon completion of the project.

Changes in the above listed conditions proposed by the Contractor shall be submitted to the Engineer for transmittal to the Central Valley Flood Protection Board for approval. Changes shall not be implemented until approved in writing by the State Reclamation Board.

Attention is directed to Section 8-1.06, "Time of Completion," of the Standard Specifications. Days when the Contractor's operations are restricted by the requirements of this section shall not be considered to be nonworking days whether or not the controlling operation is delayed.

Compliance with the above requirements shall be considered as included in the various items of work and no additional compensation will be allowed.

14. RELATIONS WITH CALIFORNIA DEPARTMENT OF FISH AND GAME

A portion of this project is located within the jurisdiction of the California Department of Fish and Game. An agreement regarding a stream or lake has been entered into by the Department of Transportation and the Department of Fish and Game. The Contractor shall be fully informed of the requirements of this agreement as well as rules, regulations, and conditions that may govern the Contractor's operations in these areas and shall conduct the work accordingly. Work within creeks shall be limited to the dry season (June 1st to October 15th).

Copies of the agreement are included within Section IV and may be obtained at the City of Chico, Capital Projects Services Division, Chico Municipal Center, 2nd Floor, 411 Main Street, Chico, CA 95928.

It is unlawful for any person to divert, obstruct or change the natural flow of the bed, channel or bank of a stream, river or lake without first notifying the Department of Fish and Game, unless the project or activity is noticed and constructed in conformance with conditions imposed under Fish and Game Code Section 1602.

Attention is directed to Sections 7-1.01, "Laws to be Observed," 7-1.01G, "Water Pollution," and 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

Attention is directed to Section IV “Permits” of these special provisions regarding environmental permit applications, permits, agreements or additional information.

Modifications to the agreement between the Department of Transportation and the Department of Fish and Game which are proposed by the Contractor shall be submitted in writing to the Engineer for transmittal to the Department of Fish and Game for their consideration.

When the Contractor is notified by the Engineer that a modification to the agreement is under consideration, no work shall be performed which is inconsistent with the original agreement or proposed modification until the departments take action on the proposed modifications. Compensation for delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

Modifications to any agreement between the Department of Transportation and the Department of Fish and Game will be fully binding on the Contractor. The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

Compliance with the above requirements shall be considered as included in the various items of work and no additional compensation will be allowed.

15. RELATIONS WITH THE UNITED STATES ARMY CORPS OF ENGINEERS

The Department and the Army Corps of Engineers (USACE) have entered into an agreement or received permits for project areas located within the jurisdiction of USACE (Identification Number SPK-2007-01149). The Contractor shall be fully informed of the requirements of this agreement and all rules, regulations, and conditions that may govern the Contractor's operations in these areas and shall conduct the work accordingly.

Attention is directed to Section IV "Permits" of these special provisions regarding environmental permit applications, permits, agreements, or additional information.

Modifications to the agreement or permits between the Department and USACE that are proposed by the Contractor shall be submitted in writing to the Engineer for consideration for transmittal to the USACE for their consideration.

No work shall be performed which is inconsistent with the original agreement, permit or proposed modification prior to receiving written approval from the Engineer. Compensation for delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Modifications to the original agreement, permit or proposed modification between the Department and USACE shall be fully binding on the Contractor.

The provisions of this section and approved modifications shall be made a part of every subcontract executed pursuant to this contract.

Compliance with the above requirements shall be considered as included in the various items of work and no additional compensation will be allowed.

16. RELATIONS WITH THE UNITED STATES FISH AND WILDLIFE SERVICES

A portion of this project is located within the jurisdiction of the United States Fish and Wildlife Services (USFWS). The Department has accepted a Biological Opinion for this project. The Contractor shall be fully informed of the requirements and all rules, regulations, and conditions that may govern the Contractor's operations in these areas and shall conduct the work accordingly.

Attention is directed to Section IV "Permits" of these special provisions regarding environmental permit applications, permits, agreements or additional information.

Modifications to the agreement between the Department and USFWS BO that are proposed to the Contractor shall be submitted in writing to the Engineer for consideration for transmittal to USFWS BO for their consideration.

No work shall be performed which is inconsistent with the original agreement or proposed modification prior to receiving written approval from the Engineer. Compensation for delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Modifications to the agreement between the Department and USFWS BO shall be fully binding on the Contractor.

The provisions of this section and approved modifications shall be made a party of every subcontract executed pursuant to this contract.

Conformance with these requirements is considered as included within the various contract items of work, and no additional compensation will be allowed therefor.

17. ENVIRONMENTALLY SENSITIVE AREA

An ESA exists on this project.

Before start of work, protect the ESA by installing temporary fence (Type ESA).

Attention is directed to "Biological Montoring Program" and "Maintenance of Trees" of these special provisions regarding signage required to be placed on ESA fencing.

18. NONHIGHWAY FACILITIES (INCLUDING UTILITIES)

The City of Chico has a concurrent project with a separate contractor, PG&E, AT&T, and Comcast Cable to convert existing overhead facilities to underground along Forest Ave. The utility Owners involved will be responsible to pulling wire, installing communication lines, within a recently constructed joint trench, and demolishing existing poles and appurtenances. The utility Owner's work will be completed on the schedule listed below.

The overhead to underground conversion along Forest Avenue requires coordination with your activities. Make the necessary arrangements with the utility company through the Engineer and submit a schedule:

1. Verified by a representative of the utility company
2. Allowing at least the time shown for the utility owner to complete its work

Utility Relocation and Contractor-Arranged Time for the Relocation

Utility	Utility Address	Location	Estimated Start Date	Estimated Completion Date
PG&E Electric	350 Salem Street Chico, CA 95928 Phone: (530) 342-8868	Forest Ave	10/01/2011	11/15/2011
AT&T	1306 W. 8th Avenue Chico, CA 95926 Phone: (530) 342-8868	Forest Ave	11/15/2011	08/15/2012
Comcast	427 Eaton Chico, CA 95973 Phone: (530) 342-8868	Forest Ave	10/01/2011	11/15/2011

In addition to the overhead to underground conversion, crews will also be in the area to provide new services to the private development located along the west side of Forest Ave, between Humboldt and State Route 32. To eliminate delay, construction of these services requires coordination with your activities.

The Joint Poles along Forest Avenue are scheduled for removal upon completion of Comcast and PG&E's work in the area. Contractor shall work around poles until they are ready to be removed.

Full compensation for coordinating with utility companies shall be considered as included in the various items of work and no additional payment will be allowed therefor.

19. BIOLOGICAL MONITORING PROGRAM

The City shall hire a qualified Biological Monitor to inspect the construction site, identify sensitive environmental areas, and conduct preconstruction surveys for Western Pond Turtle Roosting Bats, and Giant Garter Snake within 24 hours prior to start of construction. Prior to construction, The Biological Monitor shall conduct a Biological Resources Education Program for construction crews and enforce construction restriction and the Contractor shall install Construction Barrier Fencing to protect Sensitive Biological Resources adjacent to the Construction Zone based on the Biologist's survey.

The biological monitor shall inspect construction-related activities at the project site to ensure that no unauthorized take of federally-listed species or destruction of their habitat occurs. The biologist shall be available for monitoring throughout all phases of construction that may result in adverse effects to sensitive habitats.

Due to the potential presence of giant garter snake and its habitat, construction shall generally occur during the snake's active season (May 1 to October 1).

The Contractor's attention is directed to "Relations with Department of Fish and Game" of these special provisions.

During construction operations, the biological monitor will work with the contractor to minimize the number of access routes, number and size of staging areas, and the total area of proposed project activity to the minimum necessary. In sensitive biological areas, routes and

boundaries will be clearly demarcated. Movement of heavy equipment to and from the project site will be restricted to established roadways to minimize habitat disturbance.

During construction operations, the biological monitor will work with the contractor to minimize the loss of trees and vegetation. Attention is directed to "Precast Concrete Soundwall" of these special provisions.

Signs will be posted every 100 feet along the edge of the ESAs. The signs should be clearly readable from a distance of 20 feet, and must be maintained for the duration of construction. The signs will have the following information:

"This area is habitat of federally-threatened and/or endangered species and must not be disturbed. These species are protected by the Endangered Species Act of 1973, as amended. Violators are subject to prosecution, fines and imprisonment."

During construction operations, stockpiling of construction materials, portable equipment, vehicles and supplies will be restricted to the designated construction staging areas and exclusive of the ESAs.

Fencing will be placed in the following fashion:

- Fencing will be established 2 feet from the edge of pavement or a minimum distance of 50 feet from the suitable vernal pool crustacean habitat.
- Fencing will be established 2 feet from the edge of the pavement from the suitable meadowfoam habitat.
- Fencing will be established around Dead Horse Slough and South Fork Dead Horse Slough to minimize the amount of disturbance (heavy equipment movement, vehicle movement) to the creek channel.

After construction activities are complete, any temporary fill or construction debris shall be removed and disturbed areas restored and revegetated to their pre-project conditions. An area subject to "temporary" disturbance includes any area that is disturbed during the project, but that, after project completion, will not be subject to further disturbance and has the potential to be revegetated.

The contractor shall ensure that activities that are inconsistent with the maintenance of the suitability of vernal pool crustacean habitat and the associated on-site watershed are prohibited. These include, but are not limited to:

- The alteration of existing topography that may alter hydrology into habitat for federally-listed vernal pool crustaceans.
- The placement of any equipment within suitable habitat.
- Dumping, burning and/or burying of rubbish, garbage, or any other wastes and fill material.
- The use of pesticides or other toxic chemicals.

To minimize the introduction of exotic weeds, only certified weed-free straw/hay bales, if bales are used, should be used for erosion control or other purposes at the proposed project.

The Sacramento Fish and Wildlife Office is to be notified within one (1) working day of the finding of any dead federally-listed species or any unanticipated harm to the federally listed species. The Service contact person for this is the Chief, Endangered Species Division at (916) 414-6620 and the Resident Agent-in-Charge of the Service's Law Enforcement Division at (916) 414-6660.

The primary contractor and the City of Chico must report to Caltrans, FHWA and the Service immediately (within one working day) any information about take or suspected take of federally-listed species. Notification must include the date, time, and location of the incident or of the finding of a dead or injured animal. The Service contact is the Resident Agent-in-Charge of the Service's Law Enforcement Division at (916) 414-6660.

Any contractor or employee, who during routine operations and maintenance activities, inadvertently kills or injures a State-listed species must immediately (within one working day) report the incident to the City, Caltrans and California Department of Fish and Game. The California Department of Fish and Game contact for immediate assistance is State Dispatch at (916) 445-0045.

Due to the presence of habitat that could potentially be used by Western Pond Turtles, work conducted in Dead Horse Slough shall be limited to the Dry Season.

Due to the presence of habitat that could potentially be used by nesting raptors and other migratory birds, the City's Biological Monitor shall complete pre-construction raptor surveys to be conducted no more than 30 days prior to ground disturbing activity. Surveys shall be conducted by a qualified biologist. When evidence of nesting raptors, or their occupied nests, is discovered that may be adversely affected by construction activities, or when birds are injured or killed as a result of construction activities, the contractor shall stop all work within 50 feet of the occupied nests and the City shall coordinate with DFG to determine whether work can continue with monitoring of the nest.

Nesting swallows are protected under the Migratory Bird Treaty Act (MBTA), making it illegal to destroy active nests. Swallows are known to nest under bridges and large culverts in the Sacramento and Central Valley. The potential exists for nesting swallows within the project limits; therefore, the proposed project activities could potentially affect nesting swallows. Swallows are not considered special-status species, but their occupied nests and eggs are protected by federal and state laws, including the MBTS and the California Fish and Game Code, Sections 3503, 3513, and 3800 (50 CFR 10 and 21). The USFWS oversees compliance with the MBTA, and the CDFG oversees compliance with the California Fish and Game Code. Work at the culverts will be prohibited during the swallow nesting season (generally March 1 to August 1) if swallows are nesting on the structure. Potential impacts can be avoided if all old swallow nests are removed from the bridge prior to March 1 of the construction year.

The removal of existing nests (prior to March 1 when swallows return for nesting) is recommended to avoid impacts to nesting swallows. Old nests should be removed with water and/or by knocking them down with poles and scrapers. Since swallows are strongly attracted to old nests or remnants of nests, all traces of mud will need to be removed. After all old nests have been removed the bridges should be monitored twice a week to ensure no new nests are built. Due to the potential for giant garter snakes to occur on-site, it is not recommended to use netting or other barriers to prevent swallow nesting under bridges. The netting could entrap or hamper

the movement of giant garter snakes. The Contractor shall coordinate with the City biologist to complete regular (twice a week, especially if construction is not ongoing) monitoring of the bridge for nest starts which will be removed with a shovel. Constant monitoring during the nesting season (March 1 through July 15) will be required, as swallows are persistent nesters.

To avoid impacts on nesting non-special-status migratory birds and raptors, Swainson's Hawks, and roosting bats, the contractor will either:

- Conduct tree removal activities outside the nesting season for Swainson's hawk and non-special-status migratory birds and raptors. Potential nest trees will be removed after the young have fledged and prior to nest-building activities in the subsequent breeding season. Trees will be removed from September 16 through February 28.

- If tree removal activities are to take place after January 31 and before September 15, a qualified wildlife biologist shall be hired to conduct focused nest surveys for active Swainson's hawk and non-special-status migratory bird and raptor nests. If an active nest is found during the preconstruction survey, construction will cease within a setback/buffer zone determined by the qualified biologist or until September 1 or until it has been determined by a qualified biologist that the nest is no longer active. If no active nests are found on the project site, construction can proceed without any further mitigation.

Attention is directed to "Temporary Fence (Type ESA)" of these special provisions regarding payment for ESA fencing.

Full compensation for conformance with the above requirements shall be considered as included in the various items of work and no additional payment will be allowed therefor.

Compliance with the above requirements, including supplying and installing the signage on the ESA fencing, shall be considered as included in the various items of work and no additional compensation will be allowed.

20. NESHAP NOTIFICATION

Prior to beginning work on the Dead Horse Slough Bridge, the Contractor shall prepare bridge widening, modification and/or demolition notification form and attachments to be submitted to the California Air Resource Board, Compliance Division, (1001 "I" Street, Sacramento, CA 95814) and to Butte County of Air Quality Quality Management District, AQMD, phone (530) 891-2182, 2525 Dominic Drive Suite J , Chico, CA 95928-7184; Website: www.bcaqmd.org) as required by NESHAP, 40CFR Part 61, and California Air Resources Control Board rules.

The "A" copy of the notification form and attachments shall be provided to the Engineer (NESHAP Coordinator) by certified mail, a minimum of 30 days prior to widening, modification, and/or demolition. No demolition of the structure shall take place until the Contractor has received written confirmation from the Engineer that notification has been approved by the Air Resources Board. If the Contractor does not receive direction from the Engineer within 20 days after submittal that changes to the notification are required, or written confirmation of receipt and approval by the Air Resource Board, then an extension of time commensurate with the delay in completion of the work thus caused will be granted and the

Contractor shall be relieved from any claim for liquidated damages, or engineering and inspection charges or other penalties for the period covered by that extension of time; provided that the Contractor shall notify the Engineer in writing of the causes of delay within 15 days from the beginning of the delay. The Engineer shall ascertain the facts and the extent of the delay, and the Engineer's findings thereof shall be final and conclusive.

Full compensation for conformance with the above requirements, including completing the notification form and addressing any comments by the Engineer shall be considered as included in the various items of work and no additional payment will be allowed therefore.

21. RIGHT OF PUBLIC UTILITIES

The rights of Public Utilities to enter upon the work for the purpose of making changes necessitated by the improvement are as specified in Section 8-1.10 of the Standard Specifications.

22. PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS

GENERAL

Summary

This section applies to asphalt contained in materials for pavement structural sections and pavement surface treatments such as hot mix asphalt (HMA), tack coat, asphaltic emulsions, bituminous seals, asphalt binders, and modified asphalt binders placed in the work. This section does not apply if you opted out of payment adjustment for price index fluctuations at the time of bid.

The Engineer adjusts payment if the California Statewide Crude Oil Price Index for the month the material is placed is more than 5 percent higher or lower than the price index at the time of bid.

The California Statewide Crude Oil Price Index is determined each month on or about the 1st business day of the month by the Department using the average of the posted prices in effect for the previous month as posted by Chevron, ExxonMobil, and ConocoPhillips for the Buena Vista, Huntington Beach, and Midway Sunset fields.

If a company discontinues posting its prices for a field, the Department determines the index from the remaining posted prices. The Department may include additional fields to determine the index.

For the California Statewide Crude Oil Price Index, go to:

http://www.dot.ca.gov/hq/construc/crudeoilindex/

If the adjustment is a decrease in payment, the Department deducts the amount from the monthly progress payment.

The Department includes payment adjustments for price index fluctuations when making adjustments under Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.

If you do not complete the work within the contract time, payment adjustments during the overrun period are determined using the California Statewide Crude Oil Price Index in effect for the month in which the overrun period began.

If the price index at the time of placement increases:

1. 50 percent or more over the price index at bid opening, notify the Engineer.
2. 100 percent or more over the price index at bid opening, do not furnish material containing asphalt until the Engineer authorizes you to proceed with that work. The Department may decrease Bid item quantities, eliminate Bid items, or terminate the contract.

Submittals

Before placing material containing asphalt, submit the current sales and use tax rate in effect in the tax jurisdiction where the material is to be placed.

Submit certified weight slips for HMA including those materials not paid for by weight, as specified in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

ASPHALT QUANTITIES

General

Interpret the term "ton" as "tonne" for projects using metric units.

Hot Mix Asphalt

The Engineer calculates the quantity of asphalt in HMA using the following formula:

$$Qh = HMATT \times [Xa / (100 + Xa)]$$

where:

Qh =	quantity in tons of asphalt used in HMA
HMATT =	HMA total tons placed
Xa =	theoretical asphalt content from job mix formula expressed as percentage of the weight of dry aggregate

PAYMENT ADJUSTMENTS

The Engineer includes payment adjustments for price index fluctuations in progress pay estimates. If material containing asphalt is placed within 2 months during 1 estimate period, the Engineer calculates 2 separate adjustments. Each adjustment is calculated using the price index for the month in which the quantity of material containing asphalt subject to adjustment is placed in the work. The sum of the 2 adjustments is used for increasing or decreasing payment in the progress pay estimate.

The Engineer calculates each payment adjustment as follows:

$$PA = Qt \times A$$

where:

PA = Payment adjustment in dollars for asphalt contained in materials placed in the work for a given month.

Qt = Sum of quantities of asphalt (Qh + Qrh + Qmh + Qrap + Qtc + Qe + Qss + Qmab + Qo).

A = Adjustment in dollars per ton of asphalt used to produce materials placed in the work rounded to the nearest $0.01.

For US Customary projects, use:

A = [(Iu / Ib) - 1.05] x Ib x [1 + (T / 100)] for an increase in the crude oil price index exceeding 5 percent
A = [(Iu / Ib) - 0.95] x Ib x [1 + (T / 100)] for a decrease in the crude oil price index exceeding 5 percent

For metric projects, use:

A = 1.1023 x [(Iu / Ib) - 1.05] x Ib x [1 + (T / 100)] for an increase in the crude oil price index exceeding 5 percent
A = 1.1023 x [(Iu / Ib) - 0.95] x Ib x [1 + (T / 100)] for a decrease in the crude oil price index exceeding 5 percent

Iu = California Statewide Crude Oil Price Index for the month in which the quantity of asphalt subject to adjustment was placed in the work.
Ib = California Statewide Crude Oil Price Index for the month in which the bid opening for the project occurred
T = Sales and use tax rate, expressed as a percent, currently in effect in the tax jurisdiction where the material is placed. If the tax rate information is not submitted timely, the statewide sales and use tax rate is used in the payment adjustment calculations until the tax rate information is submitted.

23. WATER POLLUTION CONTROL

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes developing and implementing a storm water pollution prevention plan (SWPPP).

A SWPPP has been submitted to the board for review and the WDID number has been issued. The Contractor may use the SWPPP submitted to the board as a reference for preparing the SWPPP.

This project is risk level 2.

Discharges of stormwater from the project must comply with National Pollutant Discharge Elimination System (NPDES) General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Order No. 2009-0009-DWQ, NPDES No. CAS000002) referred to herein as "Permit."

Information on forms, reports, and other documents can be found in the following Department manuals:

1. Field Guide for Construction Site Dewatering
2. Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual
3. Construction Site Best Management Practices (BMP) Manual

For the above-referenced manuals, go to the Department's Web site for the Division of Construction, Storm Water and Water Pollution Control Information, or the Department's Publication Distribution Unit.

Do not start job site activities until:

1. The SWPPP is approved by the Engineer.
2. The waste discharge identification number is issued.

If you operate a Contractor-support facility, protect stormwater systems and receiving waters from the discharge of potential pollutants by using water pollution control practices.

Contractor-support facilities include:

1. Staging areas
2. Storage yards for equipment and materials
3. Mobile operations
4. Batch plants for PCC and HMA
5. Crushing plants for rock and aggregate
6. Other facilities installed for your convenience, such as haul roads

Discharges from manufacturing facilities, such as batch plants and crushing plants, must comply with the general waste discharge requirements for Order No. 97-03-DWQ, NPDES General Permit No. CAS000001, issued by the State Water Resources Control Board (SWRCB) for "Discharge of Storm Water Associated with Industrial Activities Excluding Construction Activities" and referred to herein as "General Industrial Permit." For the General Industrial Permit, go to the Web site for the SWRCB.

If you operate a batch plant to manufacture PCC, HMA, or other material or a crushing plant to produce rock or aggregate, obtain coverage under the General Industrial Permit. You must be covered under the General Industrial Permit for batch plants and crushing plants located:

1. Outside of the job site
2. Within the job site that serve 1 or more contracts

If you obtain or dispose of material at a noncommercially operated borrow or disposal site, prevent water pollution due to erosion at the site during and after completion of your activities. Upon completion of your work, leave the site in a condition such that water will not collect or stand therein.

The Department does not pay for water pollution control practices at Contractor-support facilities and noncommercially operated borrow or disposal sites.

Definitions

active area: Area where soil-disturbing work activities have occurred at least once within 15 days.

construction phase: Includes (1) highway construction phase for building roads and structures, (2) plant establishment and maintenance phase for placing vegetation for final stabilization, and (3) suspension phase for suspension of work activities or winter shutdown. The construction phase continues from the start of work activities to contract acceptance.

inactive area: Area where soil-disturbing work activities have not occurred within 15 days.

normal working hours: Hours you normally work on the project.

qualifying rain event: Storm that produces at least 0.5 inch of precipitation with a 48-hour or greater period between rain events.

storm event: Storm that produces or is forecasted to produce at least 0.10 inch of precipitation within a 24-hour period.

Submittals

Storm Water Pollution Prevention Plan

General

Within 20 days of contract approval:

1. Submit 3 copies of your SWPPP for review. Allow 20 days for the Department's review. The Engineer provides comments and specifies the date when the review stopped if revisions are required.
2. Resubmit a revised SWPPP within 15 days of receiving the Engineer's comments. The Department's review resumes when a complete SWPPP has been resubmitted.
3. When the Engineer approves the SWPPP, submit an electronic copy and 4 printed copies of the approved SWPPP.
4. If the RWQCB requires review of the approved SWPPP, the Engineer submits the approved SWPPP to the RWQCB for its review and comment.
5. If the Engineer requests changes to the SWPPP based on the RWQCB's comments, amend the SWPPP within 10 days.

A qualified SWPPP developer (QSD) must develop the SWPPP.

The SWPPP must comply with the Department's Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Plan (WPCP) Preparation Manual. Include the following in the SWPPP:

1. Description of the work involved in the installation, maintenance, repair, and removal of temporary and permanent water pollution control practices.

2. Maps showing:

    2.1. Locations of disturbed soil areas
    2.2. Water bodies and conveyances
    2.3. Locations and types of water pollution control practices that will be used for each Contractor-support facility
    2.4. Locations and types of temporary water pollution control practices that will be used in the work for each construction phase
    2.5. Locations and types of water pollution control practices that will be installed permanently under the contract
    2.6. Pollutant sampling locations
    2.7. Locations planned for storage and use of potential nonvisible pollutants
    2.8. Receiving water sampling locations

3. Copy of permits obtained by the Department, including Fish & Game permits, US Army Corps of Engineers permits, RWQCB 401 certifications, aerially deposited lead variance from the Department of Toxic Substance Control, aerially deposited lead variance notification, and RWQCB waste discharge requirements for aerially deposited lead reuse.

Include the following items in the SWPPP:

1. For all projects:

    1.1. Schedule
    1.2. Construction site monitoring program (CSMP)

2. For risk level 2 projects add:

    2.1. Adherence to effluent standards for numeric action levels (NALs)
    2.2. Rain event action plan (REAP)

Schedule

The SWPPP schedule must show when:

1. Work activities will be performed that could cause the discharge of pollutants into stormwater
2. Water pollution control practices associated with each construction phase will be implemented
3. Soil stabilization and sediment control practices for disturbed soil areas will be implemented

Construction Site Monitoring Program

A QSD must prepare the CSMP. Change the program to reflect current job site activities as needed. The CSMP must include the following:

1. For all projects:

    1.1. Visual monitoring procedures

1.2. Sampling and analysis plan (SAP) for nonvisible pollutants
1.3. SAP for nonstormwater discharges
1.4. SAP for monitoring required by RWQCB

2. For risk level 2 projects add SAP for pH and turbidity

Sampling and Analysis Plan

Include a SAP in the CSMP.
Describe the following water quality sampling procedures in the SAP:

1. Sampling equipment
2. Sample preparation
3. Collection
4. Field measurement methods
5. Analytical methods
6. Quality assurance and quality control
7. Sample preservation and labeling
8. Collection documentation
9. Sample shipping
10. Chain of custody
11. Data management and reporting
12. Precautions from the construction site health and safety plan
13. Laboratory selection and certifications

The SAP must identify the State-certified laboratory, sample containers, preservation requirements, holding times, and analytical method. For a list of State-certified laboratories go to the CDPH Web site.

The SAP must include procedures for sample collection during precipitation.

The SAP must list conditions when you will not be required to physically collect samples such as:

1. Dangerous weather
2. Flooding or electrical storms
3. Times outside of normal working hours

Amend the SAP whenever discharges or sampling locations change because of changed work activities or knowledge of site conditions.

For a risk level 2 or risk level 3 project, include procedures in the SAP for collecting and analyzing at least 3 samples for each day of each qualifying rain event. Describe the collection of effluent samples at all locations where the stormwater is discharged off-site.

The SAP for nonvisible pollutants must describe the sampling and analysis strategy for monitoring nonvisible pollutants.

The SAP for nonvisible pollutants must identify potential nonvisible pollutants present at the job site associated with any of the following:

1. Construction materials and wastes
2. Existing contamination due to historical site usage
3. Application of soil amendments, including soil stabilization materials, with the potential to change pH or contribute toxic pollutants to stormwater

The SAP for nonvisible pollutants must include sampling procedures for the following conditions when observed during a stormwater visual inspection. Include a procedure for collecting at least 1 sample for each storm event for:

1. Materials or wastes containing potential nonvisible pollutants not stored under watertight conditions
2. Materials or wastes containing potential nonvisible pollutants stored under watertight conditions at locations where a breach, leak, malfunction, or spill occurred and was not cleaned up before the precipitation
3. Chemical applications occurring within 24 hours before precipitation or during precipitation that could discharge pollutants to surface waters or drainage systems, including fertilizer, pesticide, herbicide, methyl methacrylate concrete sealant, or nonpigmented curing compound
4. Applied soil amendments, including soil stabilization materials that could change pH levels or contribute toxic pollutants to stormwater runoff and discharge pollutants to surface waters or drainage systems, unless independent test data is available to indicate acceptable concentrations of nonvisible pollutants in the material
5. Stormwater runoff from an area contaminated by historical usage of the site that could discharge pollutants to surface waters or drainage systems

The SAP for nonvisible pollutants must provide sampling procedures and a schedule for:

1. Sample collection during the first 2 hours of rain events that generate runoff
2. Sample collection during normal working hours
3. Each nonvisible pollutant source
4. Uncontaminated control sample

The SAP for nonvisible pollutants must identify locations for sampling downstream and control samples and the reasons for selecting those locations. Select locations for control samples where the sample does not come in contact with materials, wastes, or areas associated with potential nonvisible pollutants or disturbed soil areas.

Amendments

Amend and resubmit the SWPPP:

1. Annually before July 15th
2. Whenever:

    2.1. Changes in work activities could affect the discharge of pollutants
    2.2. Water pollution control practices are added by Contract Change Order
    2.3. Water pollution control practices are added at your discretion
    2.4. Changes in the quantity of disturbed soil are substantial

2.5. Objectives for reducing or eliminating pollutants in stormwater discharges have not been achieved
2.6. You receive a written notice of a permit violation for the project from the RWQCB or any other regulatory agency

Allow the same review time for amendments to the SWPPP as for the original SWPPP.

Training Records

Submit water pollution control training records for all employees and subcontractors who will be working at the job site. Include the training subjects, training dates, ongoing training, and tailgate meetings with your submittal. Submit records for:

1. Existing employees within 5 business days of obtaining SWPPP approval
2. New employees within 5 business days of receiving the training
3. A subcontractor's employees at least 5 business days before the subcontractor starts work

Contractor-Support Facility

At least 5 business days before operating any Contractor-support facility, submit:

1. A plan showing the location and quantity of water pollution control practices associated with the Contractor-support facility
2. A copy of the notice of intent approved by the RWQCB and the SWPPP approved by the RWQCB if you will be operating a batch plant or a crushing plant under the General Industrial Permit

Annual Certification

Submit an annual certification of compliance as described in the Department's Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Plan (WPCP) Preparation Manual before July 15th of each year.

Site Inspection Reports

The water pollution control (WPC) manager must submit the following within 24 hours of completing a weekly inspection:

1. Completed Stormwater Site Inspection Report form.
2. Best management practices (BMP) status report. The WPC manager must oversee the preparation of the report. The report must include:

    2.1. Location and quantity of installed water pollution control practices
    2.2. Location and quantity of disturbed soil for active and inactive areas

Visual Monitoring Reports

Submit a visual monitoring report for:

1. Each storm event. Include:

    1.1. Date, time, and rain gauge reading
    1.2. Visual observations:

1.2.1. Within 2 business days before the storm for:

1.2.1.1. Spills, leaks, and uncontrolled pollutants in drainage areas
1.2.1.2. Proper implementation of water pollution control practices
1.2.1.3. Leaks and adequate freeboard in storage areas

1.2.2. Every 24 hours during the storm for:

1.2.2.1. Effective operation of water pollution control practices
1.2.2.2. Water pollution control practices needing maintenance and repair

1.2.3. Within 2 business days after a qualifying rain event for:

1.2.3.1. Stormwater discharge locations
1.2.3.2. Evaluation of design, implementation, effectiveness, and locations of water pollution control practices including locations where additional water pollution control practices may be needed

2. Nonstormwater discharges during each of the following periods:

2.1. January through March
2.2. April through June
2.3. July through September
2.4. October through December

Use the Stormwater Site Inspection Report form to document visual monitoring. A visual monitoring report must include:

1. Name of personnel performing the inspection, inspection date, and date the inspection report is completed
2. Storm and weather conditions
3. Location of any:

3.1. Floating and suspended material, sheen on the surface, discoloration, turbidity, odor, and source of observed pollutants for flowing and contained stormwater systems
3.2. Nonstormwater discharges and their sources

4. Corrective action taken

Retain visual monitoring reports at the job site as part of the SWPPP.

Sampling and Analysis

Whenever sampling is required, submit a printed copy and electronic copy of water quality analysis results, and quality assurance and quality control reports within 48 hours of field sampling, and within 30 days of laboratory analysis. Electronic copies must be in one of the following formats: (1) xls, (2) .txt, (3) .cvs, (4) .dbs, or (5) .mdb. Include an evaluation of

whether the downstream samples show levels of the tested parameter that are higher than the control sample. The evaluation must include:

1. Sample identification number
2. Contract number
3. Constituent
4. Reported value
5. Analytical method
6. Method detection limit
7. Reported limit

Numeric Action Level Exceedance Reports

Whenever a NAL is exceeded for a risk level 2 or risk level 3 project, notify the Engineer and submit a NAL exceedance report within 48 hours after conclusion of a storm event. The report must include:

1. Field sampling results and inspections, including:

    1.1. Analytical methods, reporting units, and detection limits
    1.2. Date, location, time of sampling, visual observations, and measurements
    1.3. Quantity of precipitation from the storm event

2. Description of BMP and corrective actions taken to manage NAL exceedance

Rain Event Action Plan

For a risk level 2 or risk level 3 project, submit a REAP whenever the National Weather Service is predicting a storm event with at least 50 percent probability of precipitation within 72 hours.

The WPC manager must submit the REAP at least 48 hours before a forecasted storm event.

The REAP must include:

1. Site location
2. Project risk level
3. Contact information including 24-hour emergency phone numbers for:

    3.1. WPC manager
    3.2. Erosion and sediment control providers or subcontractors
    3.3. Stormwater sampling providers or subcontractors

4. Storm information
5. Description of:

    5.1. Construction phase, including active and inactive areas
    5.2. Active work areas and activities
    5.3. Subcontractors and trades on the job site
    5.4. Prestorm activities including:

        5.4.1. Responsibilities of the WPC manager
        5.4.2. Responsibilities of the crew and crew size

5.4.3. Stabilization practices for active and inactive disturbed soil areas
5.4.4. Stockpile management practices
5.4.5. Corrective actions taken for deficiencies identified during prestorm visual inspections

5.5. Activities to be performed during storm events, including:

5.5.1. Responsibilities of the WPC manager
5.5.2. Responsibilities of the crew and crew size
5.5.3. BMP for maintenance and repair

6. Flood contingency measures

Storm Water Annual Report

Submit 2 copies of a storm water annual report that covers the preceeding period from July 1st to June 30th. The report must be submitted before July 15th if construction occurs from July 1st to June 30th or within 15 days after contract acceptance if construction ends before June 30th. Allow 10 days for the Engineer's review. The Engineer provides comments and specifies the date when the review stopped if revisions are required.

Obtain approval for the format of the storm water annual report. The report must include:

1. Project information such as description and work locations
2. Stormwater monitoring information, including:

2.1. Summary and evaluation of sampling and analysis results and laboratory reports
2.2. Analytical methods, reporting units, and detections limits for analytical parameters
2.3. Summary of corrective actions taken
2.4. Identification of corrective actions taken and compliance activities not implemented
2.5. Summary of violations
2.6. Names of individuals performing stormwater inspections and sampling
2.7. Logistical information for inspections and sampling, including location, date, time, and precipitation
2.8. Visual observations and sample collection records

3. Documentation of training for individuals responsible for:

3.1. Permit compliance
3.2. BMP installation, inspection, maintenance, and repair
3.3. Preparing, revising, and amending the SWPPP

Submit a revised storm water annual report within 5 business days of receiving the Engineer's comments. The Engineer's review resumes when a complete report has been resubmitted.

When the storm water annual report is approved, submit 1 electronic copy and 2 printed copies of the report signed by the WPC manager.

Information After Storm Event

Within 48 hours after the conclusion of a storm event resulting in a discharge, after a nonstormwater discharge, or after receiving a written notice or an order from the RWQCB or another regulatory agency, the WPC manager must submit the following information:

1. Date, time, location, and nature of the activity and the cause of the notice or order
2. Type and quantity of discharge
3. Water pollution control practices in use before the discharge or before receiving the notice or order
4. Description of water pollution control practices and corrective actions taken to manage the discharge or cause of the notice

Quality Control and Assurance

Training

Employees must receive initial water pollution control training before starting work at the job site.

For your project managers, supervisory personnel, subcontractors, and employees involved in water pollution control work:

1. Provide stormwater training in the following subjects:

    1.1. Water pollution control rules and regulations
    1.2. Implementation and maintenance for:

        1.2.1. Temporary soil stabilization
        1.2.2. Temporary sediment control
        1.2.3. Tracking control
        1.2.4. Wind erosion control
        1.2.5. Material pollution prevention and control
        1.2.6. Waste management
        1.2.7. Nonstormwater management

2. Conduct weekly training meetings covering:

    2.1. Deficiencies and corrective actions for water pollution control practices
    2.2. Water pollution control practices required for work activities during the week
    2.3. Spill prevention and control
    2.4. Material delivery, storage, usage, and disposal
    2.5. Waste management
    2.6. Nonstormwater management procedures

Training for personnel who collect water quality samples must include:

1. CSMP review
2. Health and safety review
3. Sampling simulations

Water Pollution Control Manager

General

The WPC manager must be a QSD. Assign 1 WPC manager to implement the SWPPP. You may assign a QSD other than the WPC manager to develop the SWPPP.

Qualifications

A QSD must:

1. Have completed stormwater management training described in the Department's Web site for the Division of Construction, Storm Water and Water Pollution Control Information
2. Be one or more of the following:

    2.1. California registered civil engineer
    2.2. California registered professional geologist or engineering geologist
    2.3. California licensed landscape architect
    2.4. Professional hydrologist registered through the American Institute of Hydrology
    2.5. Certified Professional in Erosion and Sediment Control (CPESC)™ registered through Enviro Cert International, Inc.
    2.6. Certified Professional in Storm Water Quality (CPSWQ)™ registered through Enviro Cert International, Inc.
    2.7. Professional in erosion and sediment control registered through the National Institute for Certification in Engineering Technologies (NICET)

3. Have completed SWRCB approved QSD training and passed the QSD exam

Responsibilities

The WPC manager must:

1. Be responsible for water pollution control work
2. Be the primary contact for water pollution control work
3. Oversee:

    3.1. Maintenance of water pollution control practices
    3.2. Inspections of water pollution control practices identified in the SWPPP
    3.3. Inspections and reports for visual monitoring
    3.4. Preparation and implementation of REAPs
    3.5. Sampling and analysis
    3.6. Preparation and submittal of:

        3.6.1. NAL exceedance reports
        3.6.2. NEL violation reports
        3.6.3. SWPPP annual certification
        3.6.4. Annual reports
        3.6.5. BMP status reports

4. Oversee and enforce hazardous waste management practices including spill prevention and control measures

5. Have authority to mobilize crews to make immediate repairs to water pollution control practices
6. Ensure that all employees have current water pollution control training
7. Implement the approved SWPPP
8. Amend the SWPPP if required
9. Be at the job site within 2 hours of being contacted
10. Have the authority to stop construction activities damaging water pollution control practices or causing water pollution

Sampling and Analysis

Assign trained personnel to collect water quality samples. Document the personnel and training in the SAP.

Samples taken by assigned field personnel must comply with the equipment manufacturer's instructions for collection, analytical methods, and equipment calibration.

Samples taken for laboratory analysis must comply with water quality sampling procedures and be analyzed by a State-certified laboratory under 40 CFR part 136, Guidelines Establishing Test Procedures for the Analysis of Pollutants.

Whenever downstream samples show increased levels of pollutants, assess water pollution control practices, site conditions, and surrounding influences to determine the probable cause for the increase.

For a risk level 2 or risk level 3 project, obtain samples of pH and turbidity by the test methods shown in the following table:

Parameter	Test method	Detection limit (min)	Unit
pH	Field test with calibrated portable instrument	0.2	pH units
Turbidity	Field test with calibrated portable instrument	1	NTU

For multiple discharge points, obtain samples from a single upstream and a single downstream location.

Numeric Action Levels

For a risk level 2 or risk level 3 project, NALs must comply with the values shown in the following table:

Numeric Action Levels

Parameter	Test method	Detection limit (min)	Unit	Value
pH	Field test with calibrated portable instrument	0.2	pH	Lower NAL = 6.5 Upper NAL = 8.5
Turbidity	Field test with calibrated portable instrument	1	NTU	250 NTU max

The storm event daily average must not exceed the NAL for pH.
The storm event daily average must not exceed the NAL for turbidity.

MATERIALS

Not Used

CONSTRUCTION

General

Manage work activities to reduce the discharge of pollutants to surface waters, groundwater, and municipal separate storm sewer systems.

Retain a printed copy of the approved SWPPP at the job site.

Install facilities and devices used for water pollution control practices before performing work activities. Install soil stabilization materials for water pollution control practices in all inactive areas or before storm events.

Repair or replace water pollution control practices within 24 hours of discovering any damage, unless a longer period is authorized.

The Department does not pay for the cleanup, repair, removal, disposal, or replacement of water pollution control practices due to improper installation or your negligence.

You may request changes to the water pollution control work or the Engineer may order changes to water pollution control work. Changes may include additional or new water pollution control practices. Additional water pollution control work is paid for as extra work under Section 4-1.03D, "Extra Work," of the Standard Specifications.

You may request or the Engineer may order laboratory analysis of stormwater samples. If ordered, laboratory analysis of stormwater samples is paid for as extra work under Section 4-1.03D, "Extra Work," of the Standard Specifications.

Continue SWPPP implementation during any suspension of work activities.

Monitoring

Monitor the National Weather Service's forecast on a daily basis. For the National Weather Service's forecast, go to the Web site for the National Weather Service.

Obtain, install, and maintain a rain gauge at the job site. Observe and record daily precipitation.

Inspections

Use the Stormwater Site Inspection Report form for documenting site inspections.
The WPC manager must oversee:

1. Inspections of water pollution control practices identified in SWPPP:

    1.1. Before a forecasted storm event
    1.2. After a qualifying rain event that produces site runoff
    1.3. At 24-hour intervals during extended storm events
    1.4. On a predetermined schedule of at least once a week

2. Daily inspections of:

    2.1. Storage areas for hazardous materials and waste
    2.2. Hazardous waste disposal and transporting activities
    2.3. Hazardous material delivery and storage activities

3. Inspections of:

    3.1. Vehicle and equipment cleaning facilities:

        3.1.1. Daily if vehicle and equipment cleaning occurs daily
        3.1.2. Weekly if vehicle and equipment cleaning does not occur daily

    3.2. Vehicle and equipment maintenance and fueling areas:

        3.2.1. Daily if vehicle and equipment maintenance and fueling occurs daily
        3.2.2. Weekly if vehicle and equipment maintenance and fueling does not occur daily

    3.3. Vehicles and equipment at the job site for leaks and spills on a daily schedule. Verify that operators are inspecting vehicles and equipment each day of use.
    3.4. Demolition sites within 50 feet of storm drain systems and receiving waters daily.
    3.5. Pile driving areas for leaks and spills:

        3.5.1. Daily if pile driving occurs daily
        3.5.2. Weekly if pile driving does not occur daily

    3.6. Temporary concrete washouts:

        3.6.1. Daily if concrete work occurs daily
        3.6.2. Weekly if concrete work does not occur daily

3.7. Paved roads at job site access points for street sweeping:

3.7.1. Daily if earthwork and other sediment or debris-generating activities occur daily
3.7.2. Weekly if earthwork and other sediment or debris-generating activities do not occur daily
3.7.3. Within 24 hours of precipitation forecasted by the National Weather Service

3.8. Dewatering work:

3.8.1. Daily if dewatering work occurs daily
3.8.2. Weekly if dewatering work does not occur daily

3.9. Temporary active treatment system:

3.9.1. Daily if temporary active treatment system activities occur daily
3.9.2. Weekly if temporary active treatment system activities do not occur daily

3.10. Work over water:

3.10.1. Daily if work over water occurs daily
3.10.2. Weekly if work over water does not occur daily

Deficiencies

Whenever you or the Engineer identify a deficiency in the implementation of the approved SWPPP, correct the deficiency:

1. Immediately, unless a later date is authorized
2. Before precipitation occurs

The Department may correct the deficiency and deduct the cost of correcting the deficiency from payment if you fail to correct the deficiency by the agreed date or before the onset of precipitation.

Rain Event Action Plan

For a risk level 2 or risk level 3 project, have the REAP at the job site at least 24 hours before a forecasted storm event. The WPC manager must submit the REAP on the following forms:

1. Rain Event Action Plan Highway Construction Phase
2. Rain Event Action Plan Plant Establishment Phase
3. Rain Event Action Plan For Inactive Project

Retain a printed copy of each REAP at the job site as part of the SWPPP.

Implement the REAP, including mobilizing crews to complete activities, within 24 hours before precipitation occurs.

Sampling and Analysis

Perform sample collection during:

1. Normal working hours
2. Each qualifying rain event
3. First 2 hours of each storm event

Do not physically collect samples during dangerous weather conditions, such as flooding or electrical storms.

Document sample collection during precipitation.

Whenever downstream samples show increased levels of pH, turbidity, and other constituents, assess water pollution control practices, site conditions, and surrounding influences to determine the probable cause for the increase.

Collect samples:

1. During a storm event for:

    1.1. Each nonvisible pollutant source and a corresponding uncontaminated control sample
    1.2. All locations identified on the Storm Event Sampling and Analyses Plan form

2. During a qualifying rain event for:

    2.1. Each nonvisible pollutant source and a corresponding uncontaminated control sample
    2.2. pH, turbidity, and other constituents as required
    2.3. At least 3 samples for each day of a qualifying rain event
    2.4. All locations identified on the Qualifying Rain Event Sampling and Analyses Plan form

Collect receiving-water samples for a risk level 3 project and whenever a direct discharge to receiving waters occurs and NELs are violated.

Retain documentation of water quality sampling and analysis results with the SWPPP at the job site.

The Department does not pay for the preparation, collection, laboratory analysis, and reporting of stormwater samples for nonvisible pollutants if water pollution control practices are not implemented before precipitation or if you fail to correct a water pollution control practice before precipitation.

COST BREAK-DOWN

The Contractor shall submit a Water Pollution Control Lump Sum Cost Break-Down which itemizes the contract lump sum for water pollution control work. The Contractor shall use the

Water Pollution Control Lump Sum Cost Break-Down provided in this section as the basis for the cost break-down. The Contractor shall use the Water Pollution Control Lump Sum Cost Break-Down to identify items, quantities and values for water pollution control work, excluding Temporary Water Pollution Control Practices for which there are separate bid items. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-down submitted. Partial payment for the item of water pollution control will not be made until the Water Pollution Control Cost Break-Down is approved by the Engineer.

Line items indicated in the Water Pollution Control Lump Sum Cost Break-Down in this section with a specified Estimated Quantity shall be considered "Project-Specific Minimum Requirements." The Contractor shall incorporate Project-Specific Minimum Requirements with Contractor-designated quantities and values into the Water Pollution Control Lump Sum Cost Break-Down.

Line items indicated in the Water Pollution Control Lump Sum Cost Break-Down in this section without a specified Estimated Quantity shall be considered by the Contractor for selection to meet the applicable "Minimum Requirements" as defined in the Manuals, or for other water pollution control work as identified in the "Construction Site BMPs Consideration Checklist" presented in the Preparation Manual. In the Water Pollution Control Cost Break-Down, the Contractor shall list only those water pollution control practices selected for the project, including quantities and values required to complete the work for those items.

The sum of the amounts for the items of work listed in the Water Pollution Control Cost Break-Down shall be equal to the contract lump sum price bid for water pollution control. Overhead and profit, shall be included in the individual items listed in the cost break-down.

WATER POLLUTION CONTROL LUMP SUM COST BREAK-DOWN

ITEM	ITEM DESCRIPTION	UNIT	ESTIMATED QUANTITY	VALUE	AMOUNT
Soil Stabilization					
SS-1	Scheduling				
SS-2	Preservation of Property/Preservation of Existing Vegetation				
SS-3	Temporary Hydraulic Mulch (Bonded Stabilized Fiber Matrix)				
SS-6	Temporary Erosion Control (Straw Mulch with Stabilizing Emulsion)				
SS-7	Temporary Erosion Control Blanket (On Slope)				
SS-7	Temporary Erosion Control Blanket (In Swale or Ditch)				
SS-7	Temporary Cover (Geotextiles and Mats)				
SS-9	Earth Dikes/Drainage Swales & Lined Ditches				

ITEM	ITEM DESCRIPTION	UNIT	ESTIMATED QUANTITY	VALUE	AMOUNT
SS-10	Outlet Protection/Velocity Dissipation Devices				
SS-12	Streambank Stabilization				
Sediment Control					
SC-1	Temporary Silt Fence				
SC-4	Temporary Check Dam				
SC-5	Fiber Rolls				
SC-7	Street Sweeping				
SC-10	Storm Drain Inlet Protection				
Tracking Control					
TC-1	Temporary Construction Entrance				
Wind Erosion Control					
WE-1	Wind Erosion Control				
Non- Storm Water Management					
NS-1	Water Control and Conservation				
NS-3	Paving, Sealing, Sawcutting, and Grinding Operations				
NS-4	Temporary Stream Crossing				
NS-5	Clear Water Diversion				
NS-6	Illegal Connection and Illegal Discharge Detection Reporting				
NS-7	Potable Water/Irrigation				
NS-8	Vehicle and Equipment Cleaning				
NS-9	Vehicle and Equipment Fueling				
NS-10	Vehicle and Equipment Maintenance				
NS-11	Pile Driving Operations				
NS-12	Concrete Curing				
NS-13	Material and Equipment Used Over Water				
NS-15	Structure Demolition/Removal Over or Adjacent to Water				
Waste Management					
WM-1	Material Delivery and Storage				
WM-2	Material Use				

ITEM	ITEM DESCRIPTION	UNIT	ESTIMATED QUANTITY	VALUE	AMOUNT
WM-3	Stockpile Management				
WM-4	Spill Prevention and Control				
WM-5	Solid Waste Management				
WM-6	Hazardous Waste Management				
WM-8	Concrete Waste Management				
WM-8	Temporary Concrete Washout Facility				
WM-8	Temporary Concrete Washout (Portable)				
WM-9	Sanitary/Septic Waste Management				
	Rain Event Action Plan				
	Storm Water Sampling and Analysis				
TOTAL					

Adjustments in the items of work and quantities listed in the approved cost break-down shall be made when required to address amendments to the SWPPP, except when the adjusted items are paid for as extra work.

No adjustment in compensation will be made to the contract lump sum price paid for water pollution control due to differences between the quantities shown in the approved cost break-down and the quantities required to complete the work as shown on the approved SWPPP. No adjustment in compensation will be made for ordered changes to correct SWPPP work resulting from the Contractor's own operations or from the Contractor's negligence.

At the Engineer's discretion, the approved cost break-down may be used to determine partial payments during the progress of the work and as the basis of calculating the adjustment in compensation fo rhte item or items of work due to changes ordered by the Engineer. When an ordered change increases or decreases the quantities of an approved cost break-down, the adjustment in compensation may be determined, at the Engineer's discretion, in the same manner specified for increases and decreases in the quantity of a contract item of work in Section 4-1.03B, "Increased or Decreased Quantities" of the Standard Specifications.

If requested by the Contractor and approved by the Engineer, changes to the water pollution control practices listed in the approved cost break-down, including addition of new water pollution control practices, will be allowed. Changes shall be included in the approved amendment of the SWPPP. If the requested changes result in a net cost increase to the lump sum price for water pollution control, an adjustment in compensation will be made without change to the water pollution control item. The net cost increase to the water pollution control item will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

B. MEASUREMENT

Water Pollution Control, including all labor, materials, tools, equipment, and incidentals, necessary to implement, monitor, and maintain Temporary Water Pollution Control measures shall be measured by the lump sum.

C. PAYMENT

The contract lump sum price paid for Water Pollution Control shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing, constructing, maintaining, removing, and disposing of water pollution control practices, including but not limited to soil stabilization, sediment control, tracking control, wind erosion control, non-storm water management, and waste management practices included in this section and specified elsehwhere in these Special Provisions, and as directed by the Engineer.

The contract lump sum price for Storm Water Pollution Prevention Plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in developing and implementing a SWPPP, including providing a WPC manager, conducting water pollution control training, and monitoring, inspecting and correcting water pollution control practices at the job site, as shown on the plans, as specified in the Standard Specifications and these special provisions, and directed by the Engineer.

For projects with more than 60 working days, the Department pays you for stormwater pollution prevention plan as follows:

1. A total of 50 percent of the item total upon approval of the SWPPP
2. A total of 90 percent of the item total over the life of the contract
3. A total of 100 percent of the item total upon contract acceptance

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in preparing REAPs, including preparing and submitting REAP forms, and monitoring weather forecasts, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

The Department does not adjust payment for an increase or decrease in the quantity of rain event action plan. Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications does not apply.

Full compensation for storm water annual reports are considered as included in the contract lump sum price paid for Water Pollution Control, and no additional payment will be allowed therefor. Full compensation includes furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and submitting storm water annual reports, including annual certifications, monitoring reports, inspection, and sampling results, and obtaining acceptance of storm water annual reports, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The Department does not adjust payment for an increase or decrease in the quantity of storm water annual report. Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications does not apply.

The work to complete the final storm water annual report contract item is excluded from Section 7-1.17, "Acceptance of Contract," of the Standard Specifications.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in storm water sampling and analysis day , including preparation, collection, analysis of stormwater samples for pH, turbidity, and other constituents, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer. A single day of sampling is counted as 1 unit shall be considered as included in the lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

The Department does not adjust payment for an increase or decrease in the quantity of storm water sampling and analysis day. Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications does not apply.

The Department does not pay for the preparation, collection, laboratory analysis, and reporting of stormwater samples for nonvisible pollutants if water pollution control practices are not implemented before precipitation or if you fail to correct a water pollution control practice before precipitation.

For each failure to submit a completed storm water annual report, the Department withholds $10,000. This withhold is in addition to other withholds under Section 9-1.07E (3) "Performance Failure Withholds," of the Standard Specifications.

Each failure to comply with any part of these special provisions and each failure to implement water pollution control practices are considered separate performance failures.

If the contractor fails to conform to the provisions of this section, “Water Pollution Control,” the Engineer shall order a suspension of work until the project complies with the requirements of this section.

Should the contractor be found not to be in compliance with the approved SWPPP and the requirements in these Special Provsions, the City shall withhold money due the contractor, in the amount of $2,000 for the first occurrence, and $3,000 for each occurrence thereafter. The contractor’s attention is directed to “Legal Relations with the Regional Water Quality Control Board” of these Special Provisions.

24. CONSTRUCTION SITE MANAGEMENT

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes preventing and controlling spills, dewatering, and managing materials, waste, and nonstormwater.

Implement effective handling, storage, usage, and disposal practices to control material pollution and manage waste and nonstormwater at the job site before they come in contact with storm drain systems and receiving waters.

The following abbreviations are used in this special provision:

DTSC: Department of Toxic Substance Control.
ELAP: Environmental Laboratory Accreditation Program.
WPC: Water Pollution Control.

Submittals

Before you start dewatering, submit a dewatering and discharge work plan under Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications and "Water Pollution Control" of these special provisions. The dewatering and discharge work plan must include:

1. Title sheet and table of contents
2. Description of dewatering and discharge activities detailing locations, quantity of water, equipment, and discharge point
3. Estimated schedule for dewatering and discharge start and end dates of intermittent and continuous activities
4. Discharge alternatives, such as dust control or percolation
5. Visual monitoring procedures with inspection log
6. Copy of written approval to discharge into a sanitary sewer system at least 5 business days before starting discharge activities

Submit the following:

1. Material Safety Data Sheet at least 5 business days before material is used or stored
2. Monthly inventory records for material used or stored

Submit written approval from the local health agency, city, county, and sewer district before discharging from a sanitary or septic system directly into a sanitary sewer system.

MATERIALS

Not Used

CONSTRUCTION

Spill Prevention and Control

General

Keep material or waste storage areas clean, well organized, and equipped with enough cleanup supplies for the material being stored.

Implement spill and leak prevention procedures for chemicals and hazardous substances stored on the job site. Whenever you spill or leak chemicals or hazardous substances at the job site, you are responsible for all associated cleanup costs and related liability.

Report minor, semi-significant, and significant or hazardous spills to the WPC manager. The WPC manager must notify the Engineer immediately.

As soon as it is safe, contain and clean up spills of petroleum materials and sanitary and septic waste substances listed under 40 CFR, Parts 110, 117, and 302.

Minor Spills

Minor spills consist of quantities of oil, gasoline, paint, or other materials that are small enough to be controlled by a 1st responder upon discovery of the spill.

Clean up a minor spill using the following procedures:

1. Contain the spread of the spill
2. Recover the spilled material using absorption
3. Clean the contaminated area
4. Dispose of the contaminated material and absorbents promptly and properly under "Waste Management" of these special provisions

Semi-Significant Spills

Semi-significant spills consist of spills that can be controlled by a 1st responder with help from other personnel.

Clean up a semi-significant spill immediately using the following procedures:

1. Contain the spread of the spill.
2. On paved or impervious surfaces, encircle and recover the spilled material with absorbent materials. Do not allow the spill to spread widely.
3. If the spill occurs on soil, contain the spill by constructing an earthen dike and dig up the contaminated soil for disposal.
4. If the spill occurs during precipitation, cover the spill with 10-mil plastic sheeting or other material to prevent contamination of runoff.
5. Dispose of the contaminated material promptly and properly under "Waste Management" of these special provisions.

Significant or Hazardous Spills

Significant or hazardous spills consist of spills that cannot be controlled by job site personnel.

Immediately notify qualified personnel of a significant or hazardous spill. Take the following steps:

1. Do not attempt to clean up the spill until qualified personnel have arrived
2. Notify the Engineer and follow up with a report
3. Obtain the immediate services of a spill contractor or hazardous material team
4. Notify local emergency response teams by dialing 911 and county officials by using the emergency phone numbers retained at the job site
5. Notify the California Emergency Management Agency State Warning Center at (916) 845-8911
6. Notify the National Response Center at (800) 424-8802 regarding spills of Federal reportable quantities under 40 CFR 110, 119, and 302
7. Notify other agencies as appropriate, including:

    7.1. Fire Department
    7.2. Public Works Department
    7.3. Coast Guard
    7.4. Highway Patrol
    7.5. City Police or County Sheriff's Department
    7.6. Department of Toxic Substances
    7.7. California Division of Oil and Gas
    7.8. Cal/OSHA
    7.9. Regional Water Resources Control Board

Prevent a spill from entering stormwater runoff before and during cleanup activities. Do not bury or wash the spill with water.

Material Management

General

Minimize or eliminate discharge of material into the air, storm drain systems, and receiving waters while taking delivery of, using, or storing the following materials:

1. Hazardous chemicals, including acids, lime, glues, adhesives, paints, solvents, and curing compounds
2. Soil stabilizers and binders
3. Fertilizers
4. Detergents
5. Plaster
6. Petroleum materials, including fuel, oil, and grease
7. Asphalt and concrete components
8. Pesticides and herbicides

Employees trained in emergency spill cleanup procedures must be present during the unloading of hazardous materials or chemicals.

Use less hazardous materials if practicable.

The following activities must be performed at least 100 feet from concentrated flows of stormwater, drainage courses, and inlets if within the floodplain and at least 50 feet if outside the floodplain, unless otherwise approved by the Engineer:

1. Stockpiling materials
2. Storing pile-driving equipment and liquid waste containers
3. Washing vehicles and equipment in outside areas
4. Fueling and maintaining vehicles and equipment

Material Storage

If materials are stored:

1. Store liquids, petroleum materials, and substances listed in 40 CFR 110, 117, and 302 and place them in secondary containment facilities as specified by US DOT for storage of hazardous materials.
2. Secondary containment facilities must be impervious to the materials stored there for a minimum contact time of 72 hours.
3. Cover secondary containment facilities during non-working days and whenever precipitation is forecasted. Secondary containment facilities must be adequately ventilated.
4. Keep secondary containment facilities free of accumulated rainwater or spills. After precipitation, or in the event of spills or leaks, collect accumulated liquid and place it into drums within 24 hours. Handle the liquid as hazardous waste under "Waste Management" of these special provisions unless testing confirms that the liquid is nonhazardous.
5. Do not store incompatible materials, such as chlorine and ammonia, in the same secondary containment facility.
6. Store materials in their original containers with the original material labels maintained in legible condition. Immediately replace damaged or illegible labels.
7. Secondary containment facilities must have the capacity to contain precipitation from a 24-hour-long, 25-year storm, plus 10 percent of the aggregate volume of all containers or the entire volume of the largest container within the facility, whichever is greater.
8. Store bagged or boxed material on pallets. Protect bagged or boxed material from wind and rain during non-working days and whenever precipitation is forecasted.
9. Provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas must be kept clean, well organized, and equipped with cleanup supplies appropriate for the materials being stored.
10. Repair or replace perimeter controls, containment structures, covers, and liners as necessary. Inspect storage areas before and after precipitation and at least weekly during other times.

Stockpile Management

Minimize stockpiling of materials at the job site.

Implement water pollution control practices within 72 hours of stockpiling material or before a forecasted storm event, whichever occurs first. If stockpiles are being used, do not allow soil, sediment, or other debris to enter storm drains, open drainages, and watercourses.

Active and inactive soil stockpiles must be:

1. Covered with soil stabilization material or a temporary cover
2. Surrounded with a linear sediment barrier

Stockpiles of asphalt concrete and PCC rubble, HMA, aggregate base, or aggregate subbase must be:

1. Covered with a temporary cover
2. Surrounded with a linear sediment barrier

Stockpiles of pressure-treated wood must be:

1. Placed on pallets
2. Covered with impermeable material

Stockpiles of cold mix asphalt concrete must be:

1. Placed on an impervious surface
2. Covered with an impermeable material
3. Protected from stormwater run-on and runoff

Control wind erosion year round under Section 14-9.02, "Dust Control," of the Standard Specifications.

Repair or replace linear sediment barriers and covers as needed to keep them functioning properly. Whenever sediment accumulates to 1/3 of the linear sediment barrier height, remove the accumulated sediment.

Waste Management

Solid Waste

Do not allow litter, trash, or debris to accumulate anywhere on the job site, including storm drain grates, trash racks, and ditch lines. Pick up and remove litter, trash, and debris from the job site at least once a week. The WPC manager must monitor solid waste storage and disposal procedures on the job site.

If practicable, recycle nonhazardous job site waste and excess material. If recycling is not practicable, dispose of it under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way," of the Standard Specifications.

Furnish enough closed-lid dumpsters of sufficient size to contain the solid waste generated by work activities. When refuse reaches the fill line, empty the dumpsters. Dumpsters must be watertight. Do not wash out dumpsters at the job site. Furnish additional containers and pick up dumpsters more frequently during the demolition phase of construction.

Solid waste includes:

1. Brick
2. Mortar
3. Timber

4. Metal scraps
5. Sawdust
6. Pipe
7. Electrical cuttings
8. Nonhazardous equipment parts
9. Styrofoam and other packaging materials
10. Vegetative material and plant containers from highway planting
11. Litter and smoking material, including litter generated randomly by the public
12. Other trash and debris

Furnish and use trash receptacles in the job site yard, field trailers, and locations where workers gather for lunch and breaks.

Hazardous Waste and Contamination

If hazardous waste is, or will be, generated on the job site, the WPC manager must be thoroughly familiar with proper hazardous waste handling and emergency procedures under 40 CFR § 262.34(d)(5)(iii) and must have successfully completed training under 22 CA Code of Regs § 66265.16.

The WPC manager must:

1. Oversee and enforce hazardous waste management practices
2. Inspect all hazardous waste storage areas daily, including all temporary containment facilities and satellite collection locations
3. Oversee all hazardous waste transportation activities on the job site

Submit a copy of uniform hazardous waste manifest forms to the Engineer within 24 hours of transporting hazardous waste.

Submit receiving landfill documentation of proper disposal to the Engineer within 5 business days of hazardous waste transport from the project.

Unanticipated Discovery of Asbestos and Hazardous Substances

Upon discovery of asbestos or a hazardous substance, comply with Section 14-11.02 "Asbestos and Hazardous Substances," of the Standard Specifications.

Hazardous Waste Management Practices

Handle, store, and dispose of hazardous waste under 22 CA Code of Regs Div 4.5.
Use the following storage procedures:

1. Store hazardous waste and potentially hazardous waste separately from nonhazardous waste at the job site.
2. For hazardous waste storage, use metal containers approved by the United States Department of Transportation for the transportation and temporary storage of hazardous waste.
3. Store hazardous waste in sealed, covered containers labeled with the contents and accumulation start date under 22 CA Code of Regs, Div 4.5. Labels must comply with

the provisions of 22 CA Code of Regs, Div 4.5.§ 66262.31 and § 66262.32. Immediately replace damaged or illegible labels.

4. Handle hazardous waste containers such that no spillage occurs.
5. Store hazardous waste away from storm drains, watercourses, moving vehicles, and equipment.
6. Furnish containers with adequate storage volume at convenient satellite locations for hazardous waste collection. Immediately move these containers to secure temporary containment facilities when no longer needed at the collection location or when full.
7. Store hazardous waste and potentially hazardous waste in secure temporary containment enclosures having secondary containment facilities impervious to the materials stored there for a minimum contact-time of 72 hours. Temporary containment enclosures must be located away from public access. Acceptable secure enclosures include a locked chain link fenced area or a lockable shipping container located within the project limits.
8. Design and construct secondary containment facilities with a capacity to contain precipitation from a 24-hour-long, 25-year storm; and 10 percent of the aggregate volume of all containers, or the entire volume of the largest container within the facility, whichever is greater.
9. Cover secondary containment facilities during non-working days and if a storm event is predicted. Secondary containment facilities must be adequately ventilated.
10. Keep secondary containment facility free of accumulated rainwater or spills. After a storm event, or in the event of spills or leaks, collect accumulated liquid and place into drums within 24 hours. Handle these liquids as hazardous waste unless testing determines them to be nonhazardous.
11. Do not store incompatible wastes, such as chlorine and ammonia, in the same secondary containment facility.
12. Provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas must be kept clean, well organized, and equipped with cleanup supplies appropriate for the wastes being stored.
13. Repair or replace perimeter controls, containment structures, covers, and liners as necessary. Inspect storage areas before and after a storm event, and at least weekly during other times.

Do not:

1. Overfill hazardous waste containers
2. Spill hazardous waste or potentially hazardous waste
3. Mix hazardous wastes
4. Allow hazardous waste or potentially hazardous waste to accumulate on the ground

Dispose of hazardous waste within 90 days of the start of generation. Use a hazardous waste manifest and a transporter registered with the DTSC and in compliance with the CA Highway Patrol Biennial Inspection of Terminals Program to transport hazardous waste to an appropriately permitted hazardous waste management facility.

Dust Control for Hazardous Waste or Contamination

Excavation, transportation, and handling of material containing hazardous waste or contamination must result in no visible dust migration. Have a water truck or tank on the job site at all times while clearing and grubbing and performing earthwork operations in work areas containing hazardous waste or contamination.

Stockpiling of Hazardous Waste or Contamination

Do not stockpile material containing hazardous waste or contamination unless ordered. Stockpiles of material containing hazardous waste or contamination must not be placed where affected by surface run-on or run-off. Cover stockpiles with 13 mils minimum thickness of plastic sheeting or 1 foot of nonhazardous material. Do not place stockpiles in environmentally sensitive areas. Stockpiled material must not enter storm drains, inlets, or waters of the State.

Contractor-Generated Hazardous Waste

You are the generator of hazardous waste generated as a result of materials you bring to the job site. Use hazardous waste management practices if you generate waste on the job site from the following substances:

1. Petroleum materials
2. Asphalt materials
3. Concrete curing compound
4. Pesticides
5. Acids
6. Paints
7. Stains
8. Solvents
9. Wood preservatives
10. Roofing tar
11. Road flares
12. Lime
13. Glues and adhesives
14. Materials classified as hazardous waste under 22 CA Code of Regs, Div 4.5

If hazardous waste constituent concentrations are unknown, use a laboratory certified by the ELAP under the California Department Of Public Health to analyze a minimum of 4 discrete representative samples of the waste to determine whether it is a hazardous waste and to determine safe and lawful methods for storage and disposal. Perform sampling and analysis in compliance with US EPA Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (SW-846) and under 22 CA Code of Regs, Div 4.5.

Use your US EPA Generator Identification Number and sign hazardous waste manifests for the hazardous waste you generate.

Identify contaminated soil resulting from spills or leaks by noticing discoloration, or differences in soil properties. Immediately notify the Engineer of spills or leaks. Clean up spills and leaks under the Engineer's direction and to the satisfaction of the Engineer. Soil with evidence of contamination must be sampled and analysis performed by a laboratory certified by ELAP.

If sampling and analysis of contaminated soil demonstrates that it is a hazardous waste, handle and dispose of the soil as hazardous waste. You are the generator of hazardous waste created as the result of spills or leaks for which you are responsible.

Prevent the flow of water, including ground water, from mixing with contaminated soil by using one or a combination of the following measures:

1. Berms
2. Cofferdams
3. Grout curtains
4. Freeze walls
5. Concrete seal course

If water mixes with contaminated soil and becomes contaminated, sample and analyze the water using a laboratory certified by the ELAP. If analysis results demonstrate that the water is a hazardous waste, manage and dispose of the water as hazardous waste.

Department-Generated Hazardous Waste

If the Department is the generator of hazardous waste during the work performed on this project, use hazardous waste management practices.

Labels must comply with the provisions of 22 CA Code of Regs § 66262.31 and § 66262.32. Mark labels with:

1. Date the hazardous waste is generated
2. The words "Hazardous Waste"
3. Composition and physical state of the hazardous waste (for example, asphalt grindings with thermoplastic or paint)
4. The word "Toxic"
5. Name, address, and telephone number of the Engineer
6. Contract number
7. Contractor or subcontractor name

Handle the containers such that no spillage occurs.

Hazardous Waste Transport and Disposal

Dispose of hazardous waste within California at a disposal site operating under a permit issued by the DTSC.

The Engineer will obtain the US EPA Generator Identification Number for hazardous waste disposal.

The Engineer will sign all hazardous waste manifests. Notify the Engineer 5 business days before the manifests are to be signed.

The Department will not consider you a generator of the hazardous waste and you will not be obligated for further cleanup, removal, or remedial action for such material if handled or disposed of under these specifications and the appropriate State and federal laws and regulations and county and municipal ordinances and regulations regarding hazardous waste.

Paint Waste

Clean water-based and oil-based paint from brushes or equipment within a contained area in a way that does not contaminate soil, receiving waters, or storm drain systems. Handle and dispose of the following as hazardous waste: paints, thinners, solvents, residues, and sludges that cannot be recycled or reused. When thoroughly dry, dispose of the following as solid waste: dry latex paint, paint cans, used brushes, rags, absorbent materials, and drop cloths.

Concrete Waste

Use practices to prevent the discharge of asphalt concrete, PCC, and HMA waste into storm drain systems and receiving waters.

Collect and dispose of asphalt concrete, PCC, and HMA waste generated at locations where:

1. Concrete material, including grout, is used
2. Concrete dust and debris result from demolition
3. Sawcutting, coring, grinding, grooving, or hydro-concrete demolition creates a residue or slurry
4. Concrete trucks or other concrete-coated equipment is cleaned at the job site

Sanitary and Septic Waste

Do not bury or discharge wastewater from a sanitary or septic system within the highway. A sanitary facility discharging into a sanitary sewer system must be properly connected and free from leaks. Place a portable sanitary facility at least 50 feet away from storm drains, receiving waters, and flow lines.

Comply with local health agency provisions if using an on-site disposal system.

Liquid Waste

Use practices that will prevent job-site liquid waste from entering storm drain systems and receiving waters. Liquid waste include the following:

1. Drilling slurries or fluids
2. Grease-free and oil-free wastewater and rinse water
3. Dredgings, including liquid waste from cleaning drainage systems
4. Liquid waste running off a surface, including wash or rinse water
5. Other nonstormwater liquids not covered by separate permits

Hold liquid waste in structurally sound, leak-proof containers, such as roll-off bins or portable tanks.

Liquid waste containers must be of sufficient quantity and volume to prevent overflow, spills, and leaks.

Store containers at least 50 feet from moving vehicles and equipment.

Remove and dispose of deposited solids from sediment traps unless the Engineer approves another method.

Liquid waste may require testing to determine hazardous material content before disposal.

Dispose of drilling fluids and residue.

If a location approved by the Engineer is available within the job site, fluids and residue exempt under 23 CA Code of Regs § 2511(g) may be dried by evaporation in a leak-proof container. Dispose of the remaining as solid waste.

Nonstormwater Management

Water Control and Conservation

Manage water used for work activities in a way that will prevent erosion and the discharge of pollutants into storm drain systems and receiving waters. Obtain authorization before washing anything at the job site with water that could discharge into a storm drain system or receiving waters. Report discharges immediately.

Implement water conservation practices if water is used at the job site. Inspect irrigation areas. Adjust watering schedules to prevent erosion, excess watering, or runoff. Shut off the water source to broken lines, sprinklers, or valves and repair breaks within 24 hours. Reuse water from waterline flushing for landscape irrigation if practicable. Sweep and vacuum paved areas. Do not wash paved areas with water.

Direct runoff water, including water from water line repair, from the job site to areas where it can infiltrate into the ground. Do not allow runoff water to enter storm drain systems and receiving waters. Do not allow spilled water to escape filling areas for water trucks. Direct water from off-site sources around the job site if practicable. Minimize the contact of off-site water with job site water.

Illegal Connection and Discharge Detection and Reporting

Before starting work, inspect the job site and the job site's perimeter for evidence of illicit connections, illegal discharges, and dumping. After starting work, inspect the job site and perimeter on a daily schedule for illicit connections and illegal dumping and discharges.

Whenever illegal connections, discharges, or dumping are discovered, notify the Engineer immediately. Do not take further action unless ordered. Assume that unlabeled or unidentifiable material is hazardous.

Look for the following evidence of illicit connections, illegal discharges, and dumping:

1. Debris or trash piles
2. Staining or discoloration on pavement or soils
3. Pungent odors coming from drainage systems
4. Discoloration or oily sheen on water
5. Stains and residue in ditches, channels, or drain boxes
6. Abnormal water flow during dry weather
7. Excessive sediment deposits
8. Nonstandard drainage junction structures
9. Broken concrete or other disturbances at or near junction structures

Vehicle and Equipment Cleaning

Limit vehicle and equipment cleaning or washing at the job site except what is necessary to control vehicle tracking or hazardous waste. Notify the Engineer before cleaning vehicles and equipment at the job site with soap, solvents, or steam. Contain and recycle or dispose of resulting waste under "Waste Management" of these special provisions, whichever is applicable. Do not use diesel to clean vehicles or equipment. Minimize the use of solvents.

Clean or wash vehicles and equipment in a structure equipped with disposal facilities. You may wash vehicles in an outside area if the area is:

1. Paved with asphalt concrete, HMA, or PCC
2. Surrounded by a containment berm
3. Equipped with a sump to collect and dispose of wash water

Use as little water as practicable whenever washing vehicles and equipment with water. Hoses must be equipped with a positive shutoff valve.

Discharge liquid from wash racks to a recycling system or to another system approved by the Engineer. Remove liquids and sediment as necessary.

Vehicle and Equipment Fueling and Maintenance

If practicable, perform maintenance on vehicles and equipment off-site.

If fueling or maintenance must be done at the job site, assign a site or sites, and obtain authorization before using them. Minimize mobile fueling and maintenance activities. Fueling and maintenance activities must be performed on level ground in areas protected from stormwater run-on and runoff.

Use containment berms or dikes around fueling and maintenance areas. Keep adequate quantities of absorbent spill-cleanup material and spill kits in the fueling or maintenance area and on fueling trucks. Dispose of spill-cleanup material and kits immediately after use under "Waste Management" of these special provisions. Use drip pans or absorbent pads during fueling or maintenance.

Do not leave fueling or maintenance areas unattended during fueling and maintenance activities. Fueling nozzles must be equipped with an automatic shutoff control. Nozzles must be equipped with vapor-recovery fueling nozzles where required by the Air Quality Management District. Secure nozzles in an upright position when not in use. Do not top off fuel tanks.

Recycle or properly dispose of used batteries and tires under "Waste Management" of these special provisions.

If leaks cannot be repaired immediately, remove the vehicle or equipment from the job site.

Material and Equipment Used Over Water

Place drip pans and absorbent pads under vehicles and equipment used over water. Keep an adequate supply of spill-cleanup material with vehicles and equipment. Place drip pans or

plastic sheeting under vehicles and equipment on docks, barges, or other surfaces over water whenever vehicles or equipment will be idle for more than 1 hour.

Furnish watertight curbs or toe boards on barges, platforms, docks, or other surfaces over water to contain material, debris, and tools. Secure material to prevent spills or discharge into the water due to wind.

Report discharges to receiving waters immediately upon discovery. Submit a discharge notification to the Engineer.

Structure Removal Over or Adjacent to Water

Do not allow demolished material to enter storm drain systems and receiving waters. Use covers and platforms approved by the Engineer to collect debris. Use attachments on equipment to catch debris during small demolition activities. Empty debris-catching devices daily.

Paving, Sealing, Sawcutting, Grooving, and Grinding Activities

Prevent material from entering storm drain systems and receiving waters including:

1. Cementitious material
2. Asphaltic material
3. Aggregate or screenings
4. Sawcutting, grooving, and grinding residue
5. Pavement chunks
6. Shoulder backing
7. Methacrylate
8. Sandblasting residue

Cover drainage inlets and use linear sediment barriers to protect downhill receiving waters until paving, sealing, sawcutting, grooving, and grinding activities are completed and excess material has been removed. Cover drainage inlets and manholes during the application of seal coat, tack coat, slurry seal, or fog seal.

Whenever precipitation is forecasted, limit paving, sawcutting, and grinding to places where runoff can be captured.

Do not start seal coat, tack coat, slurry seal, or fog seal activities whenever precipitation is forecasted during the application and curing period. Do not excavate material from existing roadways during precipitation.

Use a vacuum to remove slurry immediately after slurry is produced. Do not allow the slurry to run onto lanes open to traffic or off the pavement.

Collect the residue from PCC grooving and grinding activities with a vacuum attachment on the grinding machine. Do not leave the residue on the pavement or allow the residue to flow across pavement.

You may stockpile material excavated from existing roadways under "Material Management" of these special provisions if approved by the Engineer.

Do not coat asphalt trucks and equipment with substances that contain soap, foaming agents, or toxic chemicals.

Park paving equipment over drip pans or plastic sheeting with absorbent material to catch drips if the paving equipment is not in use.

Thermoplastic Striping and Pavement Markers

Do not preheat, transfer, or load thermoplastic within 50 feet of drainage inlets and receiving waters.

Do not unload, transfer, or load bituminous material for pavement markers within 50 feet of drainage inlets and receiving waters.

Collect and dispose of bituminous material from the roadway after removing markers under "Waste Management" of these special provisions.

Pile Driving

Keep spill kits and cleanup materials at pile driving locations. Park pile driving equipment over drip pans, absorbent pads, or plastic sheeting with absorbent material. Protect pile driving equipment by parking on plywood and covering with plastic whenever precipitation is forecasted.

Store pile driving equipment on level ground and protect it from stormwater run-on when not in use. Use vegetable oil instead of hydraulic fluid if practicable.

Concrete Curing

Do not overspray chemical curing compounds. Minimize the drift by spraying as close to the concrete as practicable. Do not allow runoff of curing compounds. Cover drainage inlets before applying the curing compound.

Minimize the use and discharge of water by using wet blankets or similar methods to maintain moisture when concrete is curing.

Concrete Finishing

Collect and dispose of water and solid waste from high-pressure water blasting under "Waste Management" of these special provisions. Collect and dispose of sand and solid waste from sandblasting under "Waste Management" of these special provisions. Before sandblasting, cover drainage inlets within 50 feet of sandblasting. Minimize the drift of dust and blast material by keeping the nozzle close to the surface of the concrete. If the character of the blast residue is unknown, test it for hazardous materials and dispose of it properly.

Inspect containment structures for concrete finishing for damage before each day of use and before forecasted precipitation. Remove liquid and solid waste from containment structures after each work shift.

Sweeping

Sweep by hand or mechanical methods, such as vacuuming. Do not use methods that use only mechanical kick brooms.

Sweep paved roads at construction entrance and exit locations and paved areas within the job site:

1. During clearing and grubbing activities
2. During earthwork activities
3. During trenching activities
4. During roadway structural-section activities
5. When vehicles are entering and leaving the job site
6. After soil-disturbing activities
7. After observing off-site tracking of material

Monitor paved areas and roadways within the project. Sweep within:

1. 1 hour whenever sediment or debris is observed during activities that require sweeping
2. 24 hours whenever sediment or debris is observed during activities that do not require sweeping

Remove collected material, including sediment, from paved shoulders, drain inlets, curbs and dikes, and other drainage areas. You may stockpile collected material at the job site under "Material Management" of these special provisions. If stockpiled, dispose of collected material at least once per week under "Waste Management" of these special provisions.

You may dispose of sediment within the job site collected during sweeping activities. Protect the disposal areas against erosion.

Keep dust to a minimum during street sweeping activities. Use water or a vacuum whenever dust generation is excessive or sediment pickup is ineffective.

Remove and dispose of trash collected during sweeping under "Waste Management" of these special provisions.

Dewatering

Dewatering consists of discharging accumulated stormwater, groundwater, or surface water from excavations or temporary containment facilities.

Perform dewatering work as specified for the work items involved, such as temporary active treatment system or dewatering and discharge.

If dewatering and discharging activities are not specified under a work item and you perform dewatering activities:

1. Conduct dewatering activities under the Department's Field Guide for Construction Site Dewatering.
2. Ensure that any dewatering discharge does not cause erosion, scour, or sedimentary deposits that could impact natural bedding materials.
3. Discharge the water within the project limits. If the water cannot be discharged within project limits due to site constraints or contamination, dispose of the water as directed by the Engineer.

4. Do not discharge stormwater or nonstormwater that has an odor, discoloration other than sediment, an oily sheen, or foam on the surface. Notify the Engineer immediately upon discovering any such condition.

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for construction site management includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in spill prevention and control, material management, waste management, nonstormwater management, and dewatering activities, including identifying, sampling, testing, handling, and disposing of hazardous waste resulting from your activities, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as ordered by the Engineer.

25. TEMPORARY HYDRAULIC MULCH

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes applying, maintaining, and removing temporary hydraulic mulch. Hydraulic mulch uses a mixture of fiber, tackifier, and water to stabilize active and nonactive disturbed soil areas.

The SWPPP must describe and include the use of temporary hydraulic mulch as a water pollution control practice for soil stabilization.

Submittals

At least 5 business days before applying hydraulic mulch, submit:

1. Material Safety Data Sheet for the tackifier.
2. Product label describing the tackifier as an erosion control product.
3. List of pollutant indicators and potential pollutants for the use of temporary hydraulic mulch. Pollutant indicators are described under "Sampling and Analysis Plan for Non-Visible Pollutants" in the Preparation Manual.
4. Determination of acute and chronic toxicity for aquatic organisms conforming to EPA methods for the tackifier.
5. Composition of ingredients including chemical formulation.

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. Tackifier
2. Fiber

Quality Control and Assurance

Retain and submit records of temporary hydraulic mulch applications including:

1. Compliance with specified rates
2. Application area

3. Application time
4. Quantity

MATERIALS

Tackifier

The tackifier must be:

1. Nonflammable
2. Nontoxic to aquatic organisms
3. Free from growth or germination inhibiting factors
4. Either a plant-based product or a polymeric-emulsion blend

Tackifier classified as a plant-based product must be:

1. A natural high molecular weight polysaccharide
2. A high viscosity hydrocolloid that is miscible in water
3. Functional for at least 180 days
4. Labeled as either guar, psyllium, or starch

Guar must be:

1. A guar gum based product derived from the ground endosperm of the guar plant, cyanmopsis tetragonolobus
2. Treated with dispersant agents for easy mixing
3. Able to be diluted at the rate of 1 to 5 pounds per 100 gallons of water

Psyllium must be:

1. Made of the finely ground muciloid coating of plantago ovata or plantago ispaghula seeds
2. Able to dry and form a firm but rewettable membrane

Starch must be a non-ionic, water-soluble granular material derived from corn, potato, or other plant-based source.

Tackifier classified as polymeric emulsion blend must be:

1. A liquid or dry powder formulation
2. Anionic with a residual monomer content that is at most 0.05 percent by weight
3. Functional for at least 180 days
4. A prepackaged product labeled as containing one of the following as the primary active ingredient of the polymeric emulsion blend:

    4.1 Acrylic copolymers and polymers
    4.2 Polymers of methacrylates and acrylates
    4.3 Copolymers of sodium acrylates and acrylamides
    4.4 Polyacrylamide (PAM) and copolymer of acrylamide
    4.5 Hydrocolloid polymers

Fiber

Fiber must be wood fiber, cellulose fiber, alternate fiber, or a combination of these fibers as specified. Fiber must be:

1. Free from lead paint, printing ink, varnish, petroleum products, seed germination inhibitors, or chlorine bleach
2. Free from synthetic or plastic materials
3. At most 7 percent ash

If wood fiber is specified, wood fiber must be:

1. Long strand, whole wood fibers, thermo-mechanically processed from clean, whole wood chips
2. Not made from sawdust, cardboard, paper, or paper byproducts
3. At least 25 percent of fibers 3/8 inch long
4. At least 40 percent held on a No. 25 sieve

If cellulose fiber is specified, cellulose fiber must be made from natural or recycled pulp fiber, such as wood chips, sawdust, newsprint, chipboard, corrugated cardboard, or a combination of these materials.

If alternate fiber is specified, alternate fiber must be:

1. Long strand, whole natural fibers made from clean straw, cotton, corn, or other natural feed stock
2. At least 25 percent of fibers 3/8 inch long
3. At least 40 percent held on a No. 25 sieve

Coloring Agent

Use a biodegradable nontoxic coloring agent free from copper, mercury, and arsenic to ensure the hydraulic mulch contrasts with the application area.

CONSTRUCTION

Application

Dilute hydraulic mulch with water to spread the mulch evenly.

Use hydroseeding equipment to apply hydraulic mulch.

Apply hydraulic mulch:

1. At the application rate shown. Successive applications or passes may be needed to achieve the required rate:

Material	Application Rate lbs/acre
Wood fiber	1200-1500 lbs/acre
Cellulose fiber	1200-1500 lbs/acre
Wood fiber or alternate fiber may be substituted for cellulose fiber	

2. To form a continuous mat with no gaps between the mat and the soil surface.
3. From 2 or more directions to achieve a continuous mat.
4. In layers to avoid slumping and to aid drying.
5. During dry weather or at least 24 hours before predicted rain.

Do not apply hydraulic mulch if:

1. Water is standing on or moving across the soil surface
2. Soil is frozen
3. Air temperature is below 40 ºF during the tackifier curing period unless allowed by the tackifier manufacturer and approved by the Engineer

Do not over-spray hydraulic much onto the traveled way, sidewalks, lined drainage channels, or existing vegetation.

Maintenance

Reapply hydraulic mulch within 24 hours of discovering visible erosion unless the Engineer approves a longer period.

Temporary hydraulic mulch disturbed or displaced by your vehicles, equipment, or operations must be reapplied at your expense.

Cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence are not included in the cost for performing maintenance.

Removal

Remove hydraulic mulch by mechanically blending it into the soil with track laying equipment, disking, or other approved method.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying Temporary Hydraulic Mulch, complete in place, including maintaining and removal of hydraulic mulch, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

26. STREET SWEEPING

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes street sweeping using machine-operated sweepers.

Street sweeping must comply with the specifications for sweeping in the Section titled, "Construction Site Management," of these special provisions except a machine-operated sweeper must be used.

Street sweeping does not void specifications for main residue collection included in other work activities, such as grooving, grinding, or asphalt concrete planning.

The SWPPP must describe and include the use of street sweeping as a water pollution control practice for sediment control and tracking control.

Submittals

At least 5 business days before you start clearing and grubbing, earthwork, or other activities with the potential for tracking sediment or debris, submit:

1. Number of machine-operated sweepers described in the SWPPP
2. Type of sweeper technology

Quality Control and Assurance

Retain and submit records of street sweeping, including:

1. Quantity of disposed sweeping waste
2. Sweeping times and locations

MATERIALS

Machine-operated sweepers must use one of the following technologies:

1. Mechanical sweeper followed by a vacuum-assisted sweeper
2. Vacuum-assisted dry (waterless) sweeper
3. Regenerative-air sweeper

CONSTRUCTION

At least 1 machine-operated sweeper must be on the job site at all times when street sweeping work is required. The sweeper must be in good working order.

MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in street sweeping, including disposal of collected material, as specified in the Standard Specifications, these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

27. TEMPORARY EROSION CONTROL BLANKET

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary erosion control blanket. Temporary erosion control blanket is used to cover and protect disturbed soil areas and soil from erosion by wind or water. Temporary erosion control blanket reduces channel erosion by protecting against scour created by concentrated flow.

The SWPPP must describe and include the use of temporary erosion control blanket as a water pollution control practice for soil stabilization.

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for erosion control blanket.

If you substitute the steel wire staple with an alternative attachment device, submit a sample of the device for approval at least 5 business days before installation.

MATERIALS

Erosion Control Blanket

Erosion control blanket must be:

1. Described as a rolled erosion control product (RECP)
2. Classified as temporary and degradable or long-term and non-degradable
3. Machine-made mats
4. Provided in rolled strips
5. Classified by the Erosion Control Technology Council (ECTC)

Erosion control blanket classified as temporary and degradable must be one of the following:

1. Double net excelsior blanket:

    1.1. Classified as ECTC Type 2D
    1.2. Classified as an erosion control blanket
    1.3. Designed to last for at least one year after installation
    1.4. With a Universal Soil Loss Equation (USLE) C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
    1.5. With 80 percent of the wood excelsior fibers being 6 inches or longer
    1.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
    1.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
    1.8. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting

2. Double net straw and coconut blanket:

    2.1. Classified as ECTC Type 2D
    2.2. Classified as an erosion control blanket
    2.3. Designed to last for at least one year after installation
    2.4. With a USLE C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
    2.5. Comprised of 70 percent straw and 30 percent coconut fiber
    2.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
    2.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
    2.8. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting

3. Jute netting:

    4.1. Classified as ECTC Type 3B
    4.2. Classified as an open weave textile and have from 14 to 20 strands per foot in each direction
    4.3. Designed to last for at least one year after installation
    4.4. With a USLE C-Factor of not more than 0.25 at a 1.5:1 (horizontal:vertical) slope
    4.5. Comprised of 100 percent unbleached and undyed spun yarn made of jute fiber
    4.6. With an average open area from 63 to 70 percent
    4.7. From 48 to 72 inches in width
    4.8. Capable to withstand a maximum shear stress of 2.0 pounds per square foot under ASTM D6460
    4.9. With a minimum tensile strength of 100 pounds per foot under ASTM D 5035
    4.10. From 0.90 to 1.20 pounds per square yard in weight

4. Coir netting:

    4.1. Classified as ECTC Type 4
    4.2. Classified as an open weave textile and from 13 to 18 strands per foot in each direction
    4.3. Designed to last for at least three years after installation
    4.4. With a USLE C-Factor of not more than 0.25 at a 1:1 (horizontal:vertical) slope
    4.5. Comprised of 100 percent unbleached and undyed spun coir yarn made of coconut fiber
    4.6. With an average open area from 63 to 70 percent
    4.7. From 72 to 158 inches in width
    4.8. Capable to withstand a maximum shear stress of 2.25 pounds per square foot under ASTM D6460
    4.9. With a minimum tensile strength of 125 pounds per foot under ASTM D 5035
    4.10. From 1.20 to 1.67 pounds per square yard in weight

Erosion control blanket classified as long-term and non-degradable must:

1. Be a geosynthetic fabric

2. Comply with the specifications for rock slope protection fabric (Class 8) in Section 88-1.06, "Channel and Shore Protection," of the Standard Specifications

Staples

You may use an alternative attachment device such as a geosynthetic pins or plastic pegs to install erosion control blanket.

CONSTRUCTION

Before placing erosion control blanket, remove obstructions including rocks, clods, and debris greater than 1 inch in diameter from the ground.

If fiber rolls are to be placed in the same area as erosion control blankets, install the blankets before placing the fiber rolls.

If hydroseeding is to be done in the same area as erosion control blanket:

1. You must hydroseed before placing the double net excelsior or straw and coconut blankets
2. You may hydroseed before or after placing the jute or coir netting

If temporary erosion control blanket is installed on disturbed soil areas including embankment and excavation slopes:

1. Place the blanket loosely on the embankment or excavation slope with the longitudinal joints perpendicular to the slope contour lines
3. Place the blanket on the upper portion of the slope overlapping the blanket on the lower portion of the slope for transverse joints
4. Place the blanket on the side of the prevailing wind shall overlapping the blanket on the downwind side of the slope for longitudinal joints
2. Overlap and staple the longitudinal and transverse joints
5. Secure the ends of the blanket in key trenches

If temporary erosion control blanket is installed in area of concentrated runoff including ditches and swales:

1. Place the blanket loosely along the ditch or swale with the longitudinal edges and joints parallel to the centerline of the ditch or swale
2. Place the blanket on the upper portion of the slope overlapping the blanket on the lower portion of the slope for transverse joints
3. Secure transverse joints of blankets in intermediate joint trenches
4. Overlap and staple the longitudinal and transverse joints
5. Secure the ends of the blanket in intermediate and key trenches

MAINTENANCE

Remove sediment deposits, trash, and debris from temporary erosion control blanket as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must

be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary erosion control blanket by:

1. Removing sediment from the surface of the blanket when it is deeper than 2 inches
2. Repairing or replacing the blanket when the area treated with temporary erosion control blanket becomes exposed or exhibits visible erosion
3. Repairing or replacing the erosion control blanket when washouts occur between joints or beneath the erosion control blanket
4. Repairing or replacing the erosion control when it becomes detached, torn, or unraveled

Repair temporary erosion control blanket within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary erosion control blanket, repair erosion control blanket at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

REMOVAL

When the Engineer determines that temporary erosion control blanket is not required, it must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary erosion control blanket must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary erosion control blanket, complete in place, including trench excavation and backfill, and removal of temporary erosion control blanket, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

28. TEMPORARY COVER

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary cover.

The SWPPP must describe and include the use of temporary cover as a water pollution control practice for soil stabilization and stockpile management.

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. Gravel-filled bag fabric
2. Temporary cover fabric

If you substitute a material in the following list, submit a sample of the alternative material for approval at least 5 business days before installation:

1. Alternative restrainer
2. Alternative linear sediment barrier

MATERIALS

Geosynthetic Fabrics

Geosynthetic fabrics must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties are based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

Protect geosynthetics from moisture, sunlight and damage during shipping and storage. Label each unit with the manufacturer's name, identifying information and product identification.

Gravel-filled bag fabric must comply with:

Specification	Requirements
Grab breaking load 1-inch grip, lb, min. in each direction	205
Apparent elongation percent, min., in each direction	50
Water Flow Rate max. average roll value, gallons per minute/square foot	80-150
Permittivity 1/sec., min	1.2
Apparent opening size max. average roll value, U.S. Standard sieve size	40-80
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	70

The temporary cover fabric must be geosynthetic cover fabric, plastic sheeting, or a combination of both.

Temporary cover fabric must be either:

1. Plastic sheeting consisting of a single-ply geomembrane material, 10 mils thick, that complies with ASTM D 5199
2. Geosynthetic cover fabric that complies with the following properties:

Specification	Requirements
Grab breaking load 1-inch grip, lb, min. in each direction	200
Apparent elongation percent, min., in each direction	50
Water Flow Rate max. average roll value, gallons per minute/square foot	75-120
Permittivity 1/sec., min	0.08
Apparent opening size max. average roll value, U.S. Standard sieve size	100
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	70

Gravel

Gravel for gravel-filled bags must be:

1. From 3/8 to 3/4 inch in diameter
2. Clean and free from clay balls, organic matter, and other deleterious materials

Gravel-filled Bags

Gravel-filled bags must:

1. Be made from gravel-filled bag fabric.
2. Have inside dimensions from 24 to 32 inches in length, and from 16 to 20 inches in width.
3. Have the opening bound to retain the gravel. The opening must be sewn with yarn, bound with wire, or secured with a closure device.
4. Weigh from 30 to 50 pounds when filled with gravel.

Restrainers

Restrainers must be used to secure the cover fabric or plastic sheeting to the surface of the slope or stockpile.

Restrainers must be one of the following:

1. Made of gravel-filled bags that are roped together and spaced no more than a 6 feet apart
2. Made of wooden lath and anchor restrainers as shown on the plans and the following:

    2.1 Wooden lath must be 2" x 4" x 8', made from fir or pine, and comply with Section 88-2.12, "Lumber," of the Standard Specifications

    2.2 Anchor restrainers must be made from steel reinforcing bars and spaced no more than 4 feet apart along the wooden lath

3. An approved alternate method

Rope

Rope must be at least 3/8 inch in diameter.

Rope must be one of the following:

1. Biodegradable, such as sisal or manila
2. Nondegradable, such as polypropelene or nylon

Linear Sediment Barrier

Linear sediment barriers consist of one or more of the following:

1. Gravel bag berm
2. Earthen berm
3. Approved alternate method

CONSTRUCTION

Temporary Cover Fabric

Install temporary cover fabric by:

1. Placing the temporary cover fabric loosely on the slope or stockpile with the longitudinal edges perpendicular to the slope contours
2. Placing the temporary cover fabric on the upper portion of the slope to overlap cover fabric on the lower portion of the slope
3. Placing the temporary cover fabric on the side of the prevailing wind to overlap the cover fabric on the downwind side of the slope
4. Anchoring the perimeter edge of the temporary cover fabric in key trenches
5. Overlapping edges of the temporary cover fabric by at least 2 feet
6. Placing restrainers at the overlap area and along the toe of the slope. Between overlaps, the restrainers must be spaced a maximum of 8 feet on center.
7. Ensuring that, if anchor restraints are used, the leg of the steel reinforcing bar pierces the temporary cover fabric and holds the wooden lath firmly against the surface of the slope or stockpile.

Linear Sediment Barrier

Protect excavation and embankment slopes with linear sediment barrier by:

1. Preventing run-on and concentrated flows from damaging the slopes
2. Placing the barrier approximately parallel to the slope contour at the toe of the slope
4. Angling the last 6 feet of the barrier up-slope

Protect stockpiles with linear sediment barrier by:

1. Preventing run-on and concentrated flows from touching the stockpiled material
2. Surrounding the stockpile with a linear sediment barrier
3. Adding more linear sediment barrier within 24 hours of adding more material to the stockpile

If earthen berms are used as a linear sediment barrier, they must be:

1. At least 8 inches high and 36 inches wide
2. Compacted by hand or mechanical method

If gravel bag berms are used as a linear sediment barrier:

1. Place gravel bags as a single layer
2. Place gravel bags end-to-end to eliminate gaps

If you need to increase the height of the gravel bag berm:

1. Increase height by adding rows of gravel-filled bags
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row
3. Stabilize berm by adding rows at the bottom

If you remove the temporary cover to do other work, replace and secure temporary cover within one hour.

MAINTENANCE

Maintain temporary cover to minimize exposure of the slopes or stockpile and prevent movement of the material beyond the linear sediment barrier.

Maintain temporary cover by:

1. Relocating and securring restrainers to keep the erosion control blankets in place. Temporary cover fabric that breaks free must be immediately secured.
2. Repairing or replacing the temporary cover fabric when the area covered by temporary cover becomes exposed or exhibits visible erosion.
3. Repairing or replacing the linear sediment barrier when washouts occur between joints or beneath the linear sediment barrier.
4. Repairing or replacing the temporary cover fabric when it becomes detached, torn, or unraveled.

Repair temporary cover within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary cover, repair temporary cover at your expense.

REMOVAL

When the Engineer determines that temporary cover is not required, it must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary cover must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing Temporary Cover, complete in place, including restrainers and removal of Temporary Cover, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

29. TEMPORARY CONCRETE WASHOUT FACILITY

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removal and disposal of concrete waste by furnishing, maintaining, and removing temporary concrete washout facilities.

SWPPP must describe and include the use of temporary concrete washout facilities as a water pollution control practice for waste management and materials pollution control.

Submittals

At least 5 business days before concrete activities start, submit:

1. Location of washout facilities
2. Name and location of off-site concrete waste disposal facility to receive concrete waste
3. Copy of permit issued by RWQCB for off-site commercial disposal facility
4. Copy of license for off-site commercial disposal facility
5. Copy of permit issued by state or local agency having jurisdiction over disposal facility if disposal site is located outside of the State of California
6. Gravel-filled bag fabric
7. Plastic liner
8. Alternate attachment device for staples, if used

Quality Control and Assurance

Retain and submit records of disposed concrete waste.

MATERIALS

Straw Bales

Straw bales must comply with Section 20-2.06, "Straw," of the Standard Specifications and be:

1. At least 14 inches wide, 18 inches high, 36 inches long, and weigh at least 50 pounds.
2. Composed entirely of vegetative matter, except for binding material.
3. Bound by wire, nylon, or polypropylene string. Do not use jute or cotton binding. Baling wire must be minimum 16 gauge. Nylon or polypropylene string must be approximately 0.08-inch in diameter with 80 pounds of breaking strength.

Stakes

Stakes may be either wood or metal and must comply with the following:

1. Wood stakes must be:

    1.1. Untreated fir, redwood, cedar, or pine and cut from sound timber
    1.2. Straight and free of loose or unsound knots and other defects which would render stakes unfit for use
    1.3. Pointed on the end to be driven into the ground
    1.4. At least 2" x 2" x 48" in size

2. Metal stakes must be at least 0.5-inch diameter and 48 inches long. Tops of metal stakes must be bent at a 90-degree angle or capped with an orange or red plastic safety cap that fits snugly to the metal stake.

Concrete Washout Sign

Concrete washout sign must comply with Section 12-3.06B, "Portable Signs" of the Standard Specifications and:

1. Be approved by the Engineer
2. Consist of base, framework, and sign panel
3. Be made of plywood
4. Be minimum 2' x 4' in size
5. Read "Concrete Washout" with 3 inches high black letters on white background

Gravel-filled Bag Fabric

Geosynthetic fabric for temporary gravel bag berm must consist of one of these:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties must be based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

Protect geosynthetics from moisture, sunlight, and damage during shipping and storage. Label each unit with manufacturer's name, identifying information, and product identification.

Gravel-filled bag fabric must comply with requirements in this table:

Specification	Requirements
Grab breaking load 1-inch grip, lb, min. in each direction	205
Apparent elongation percent, min., in each direction	50
Water Flow Rate max. average roll value, gallons per minute/square foot	80-150
Permittivity 1/sec., min	1.2
Apparent opening size max. average roll value, U.S. Standard sieve size	40-80
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hour, minimum	70

Gravel

Gravel for gravel-filled bags must be:

1. From 3/8 to 3/4 inch in diameter
2. Clean and free of clay balls, organic matter, and other deleterious materials

Gravel-filled Bag

Gravel-filled bag must:

1. Be made of gravel-filled bag fabric.
2. Have inside dimensions from 24 to 32 inches long, and from 16 to 20 inches wide.
3. Have bound opening to retain gravel. Opening must be sewn with yarn, bound with wire, or secured with a closure device.
4. Weigh from 30 to 50 pounds when filled with gravel.

Plastic Liner

Plastic liner must be:

1. Single ply, new polyethylene sheeting
2. At least 10 mils thick
3. Free of holes, punctures, tears or other defects
4. Without seams or overlapping joints

CONSTRUCTION

Placement

Place concrete washout facilities at job site:

1. Before concrete placement activities start
2. In the immediate area of concrete work as approved by the Engineer
3. No closer than 50 feet from storm drain inlets, open drainage facilities, ESAs, or watercourses
4. Away from construction traffic or public access areas

Install a concrete washout sign adjacent to each temporary concrete washout facility location.

For at grade and below grade concrete washout facilities:

1. Build to contain liquid and concrete waste without seepage, spills, or overflow
2. Build in sufficient quantity and size to contain liquid and concrete waste generated by washout activities for concrete wastes
3. Install with plastic liner

If approved, the length and width of temporary concrete washout facility may be increased from minimum dimensions shown on the plans.

If below grade concrete washout facilities are used, construct berms from compacted native material. Gravel may be used in conjunction with compacted native material.

Operation

Use concrete washout facilities for:

1. Washout from concrete delivery trucks
2. Slurries containing portland cement concrete or hot mix asphalt from sawcutting, coring, grinding, grooving, and hydro-concrete demolition
3. Concrete waste from mortar mixing stations

Relocate concrete washout facilities as needed for concrete construction work.

Do not fill higher than 6 inches below rim.

Your WPC manager must inspect concrete washout facilities:

1. Daily if concrete work occurs daily
2. Weekly if concrete work does not occur daily

Maintenance

Maintain temporary concrete washout facility by:

1. Providing adequate holding capacity with 12-inch minimum freeboard
2. Removing and disposing of hardened concrete under Section 15-3.02, "Removal Methods"
3. Patching holes, rips, and voids in plastic liner with tape
4. If plastic liner leaks after patching, replace plastic liner
5. Repairing or replacing gravel-filled bags when they become split, torn, unraveled, or gravel spills out

Repair temporary concrete washout facility within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary concrete washout facility, repair temporary concrete washout facility at your expense.

Removal

Dispose of concrete waste material at a facility specifically licensed to receive solid concrete waste, liquid concrete waste, or both. When concrete washout facility is full, remove and dispose of concrete waste within 2 days.

When the Engineer determines that temporary concrete washout facility is not needed, remove and dispose of it under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Backfill and repair ground disturbance, including holes and depressions, caused by the installation and removal of temporary concrete washout facility, under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing, maintaining, and removing the Temporary Concrete Washout Facility, including removal and disposal of concrete waste, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

30. TEMPORARY CONCRETE WASHOUT (PORTABLE)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removal and disposal of concrete waste by furnishing, maintaining, and removing portable temporary concrete washouts.

SWPPP must describe and include the use of a portable temporary concrete washout as a water pollution control practice for waste management and materials pollution control.

Submittals

At least 5 business days before concrete activities start, submit:

1. Name and location of off-site concrete waste disposal facility to receive concrete waste
2. Copy of permit issued by RWQCB for off-site commercial disposal facility
3. Copy of license for off-site commercial disposal facility
4. Copy of permit issued by state or local agency having jurisdiction over disposal facility if disposal site is located outside of the State of California

Quality Control and Assurance

Retain and submit records of disposed concrete waste including:

1. Weight tickets
2. Delivery and removal of temporary concrete washouts

MATERIALS

Portable Temporary Concrete Washout

Portable temporary concrete washout must:

1. Be a commercially available watertight container.
2. Have sufficient capacity to contain all liquid and concrete waste generated by washout activities without seepage or spills.
3. Have at least 55-gallon capacity.
4. Be labeled for the exclusive use as a concrete waste and washout facility. Stencil "Concrete Waste material" in 3-inch high letters on white background. Top of stenciling must be 12 inches from the top of the container.

Concrete Washout Sign

Concrete washout sign must comply with the provisions in Section 12-3.06B, "Portable Signs" of the Standard Specifications and:

1. Be approved by the Engineer
2. Consist of base, framework, and sign panel
3. Be made of plywood
4. Be minimum 2' x 4' in size
5. Read "Concrete Washout" with 3 inches high black letters on white background

CONSTRUCTION

Placement

Place portable temporary concrete washouts at job site:

1. Before concrete placement activities start
2. In the immediate area of concrete work as approved by the Engineer
3. No closer than 50 feet from storm drain inlets, open drainage facilities, ESAs, or watercourses
4. Away from construction traffic or public access areas

Install a concrete washout sign adjacent to each portable temporary concrete washout location.

Operation

Use portable temporary concrete washouts for:

1. Washout from concrete delivery trucks
2. Slurries containing portland cement concrete or hot mix asphalt from sawcutting, coring, grinding, grooving, and hydro-concrete demolition
3. Concrete waste from mortar mixing stations

Relocate portable temporary concrete washouts as needed for concrete construction work.

Replace portable temporary concrete washouts when filled to capacity. Do not fill higher than 6 inches below rim.

Your WPC manager must inspect portable temporary concrete washouts:

1. Daily if concrete work occurs daily
2. Weekly if concrete work does not occur daily

Maintenance

When relocating or transporting a portable temporary concrete washout within the job site, secure it to prevent spilling of concrete waste material. If any spilled material is observed, remove spilled material and place it into portable temporary concrete washout.

Removal

Dispose of concrete waste material at a facility specifically licensed to receive solid concrete waste, liquid concrete waste, or both. When portable temporary concrete washout is full, remove and dispose of concrete waste within 2 days.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, maintaining, and removing the temporary concrete washout (portable), including removal and disposal of concrete waste, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

31. TEMPORARY CHECK DAM

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary check dams.

The SWPPP must describe and include the use of temporary check dams as a water pollution control practice for soil stabilization in flow conveyances.

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. Fiber rolls
2. Gravel-filled bag fabric

MATERIALS

Fiber Rolls

Fiber rolls must:

1. Last for at least one year after installation
2. Be Type 1 or Type 2

If specified, Type 1 fiber rolls must be:

1. Made from an erosion control blanket:

    1.1. Classified by the Erosion Control Technology Council (ECTC) as ECTC 2D
    1.2. With a Universal Soil Loss Equation (USLE) C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
    1.3. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
    1.4. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
    1.5. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting
    1.6. Either of the following:

        1.6.1. Double net straw and coconut blanket with 70 percent straw and 30 percent coconut fiber
        1.6.2. Double net excelsior blanket with 80 percent of the wood excelsior fibers being 6 inches or longer

2. Rolled along the width
3. Secured with natural fiber twine every 6 feet and 6 inches from each end
4. Finished to be either:

    4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 0.5 pounds per linear foot
    4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 2 pounds per linear foot

If specified, Type 2 fiber rolls must:

1. Be filled with rice or wheat straw, wood excelsior, or coconut fiber
2. Be covered with a photodegradable plastic netting or a biodegradable jute, sisal, or coir fiber netting
3. Have the netting secured tightly at each end
4. Be finished to be either:

    4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 1.1 pounds per linear foot
    4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 3 pounds per linear foot

Wood Stakes

Wood stakes must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects which would render the stakes unfit for use
3. Pointed on the end to be driven into the ground

For fiber rolls, wood stakes must be at least:

1. 1" x 1" x 24" in size for Type 1 installation
2. 1" x 2" x 24" in size for Type 2 installation

Rope

For Type 2 installation, rope must:

1. Be biodegradable, such as sisal or manila
2. Have a minimum diameter of 1/4 inch

Gravel-filled Bag Fabric

Geosynthetic fabric for temporary gravel bag berm must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Sample under ASTM D 4354, Procedure C.

11

Test under ASTM D 4759. All properties are based on Minimum Average Roll Value (MARV).

12

Identify, store, and handle under ASTM D 4873.

13

Protect geosynthetics from moisture, sunlight and damage during shipping and storage. Label each unit with the manufacturer's name, identifying information and product identification.

14

Gravel-filled bag fabric must comply with:

Specification	Requirements
Grab breaking load 1-inch grip, lb, min. in each direction	205
Apparent elongation percent, min., in each direction	50
Water Flow Rate max. average roll value, gallons per minute/square foot	80-150
Permittivity 1/sec., min	1.2
Apparent opening size max. average roll value, U.S. Standard sieve size	40-80
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	70

Gravel

Gravel for gravel-filled bags must be:

1. From 3/8 to 3/4 inch in diameter

2. Clean and free from clay balls, organic matter, and other deleterious materials

Gravel-filled Bags

Gravel-filled bags must:

1. Be made from gravel-filled bag fabric.
2. Have inside dimensions from 24 to 32 inches in length, and from 16 to 20 inches in width.
3. Have the opening bound to retain the gravel. The opening must be sewn with yarn, bound with wire, or secured with a closure device.
4. Weigh from 30 to 50 pounds when filled with gravel.

CONSTRUCTION

Before placing temporary check dam, remove obstructions including rocks, clods, and debris greater than one inch in diameter from the ground.

If check dams are to be placed in the same areas as erosion control blankets, then install the blankets before placing the check dams.

Temporary check dams must be:

1. Placed approximately perpendicular to the centerline of the ditch or drainage line
2. Installed with sufficient spillway depth to prevent flanking of concentrated flow around the ends of the check dam
3. Type 1 for lashed fiber rolls, Type 2 for gravel-filled bags, or a combination:

    3.1. If the ditch is lined with concrete or hot mix asphalt, use temporary check dam (Type 2)
    3.2. If the ditch is unlined, you may use temporary check dam (Type 1) or (Type 2)

Temporary check dam (Type 1) must be:

1. Secured with rope and notched wood stakes.
2. Installed by driving stakes into the soil until the notch is even with the top of the fiber roll.
3. Installed by lacing the rope between stakes and over the fiber roll. Knot the rope at each stake.
4. Tightened by driving the stakes further into the soil forcing the fiber roll against the surface of the ditch or drainage line.

Temporary check dam (Type 2) must be:

1. Placed as a single layer of gravel bags
2. End-to-end to eliminate gaps

If you need to increase the height of the temporary check dam (Type 2):

1. Increase height by adding rows of gravel-filled bags
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row

3. Stabilize dam by adding rows of bags at the bottom

MAINTENANCE

Maintain temporary check dams to provide sediment holding capacity and to reduce concentrated flow velocities.

Remove sediment deposits, trash, and debris from temporary check dams as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary check dams by:

1. Removing sediment from behind the check dam when sediment is 1/3 the height of the check dam above ground
2. Repairing or adjusting the check dams when scour and other evidence of concentrated flow occur beneath the fiber roll
3. Repairing or replacing the fiber rolls or gravel-filled bags when they become split, torn, or unraveled
4. Adding stakes when the fiber rolls slump or sag
5. Replacing broken or split wood stakes

Repair temporary check dams within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary check dams, repair temporary check dams at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

REMOVAL

When the Engineer determines that temporary check dams are not required, they must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary check dams must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. <u>MEASUREMENT AND PAYMENT</u>

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the Temporary Check Dams, complete in place, including maintaining and removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as specified in the Standard Specifications and these special provisions, and as directed by the

Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

32. TEMPORARY FIBER ROLL

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary fiber roll.

The SWPPP must describe and include the use of temporary fiber roll as a water pollution control practice for sediment control.

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for fiber roll.

MATERIALS

Fiber Roll

Fiber roll must:

1. Last for at least one year after installation
2. Be Type 1 or Type 2

If specified, Type 1 fiber roll must be:

1. Made from an erosion control blanket:

    1.1. Classified by the Erosion Control Technology Council (ECTC) as ECTC 2D
    1.2. With a Universal Soil Loss Equation (USLE) C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
    1.3. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
    1.4. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
    1.5. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting
    1.6. That complies with one of the following:

        1.6.1. Double net straw and coconut blanket with 70 percent straw and 30 percent coconut fiber
        1.6.2. Double net excelsior blanket with 80 percent of the wood excelsior fibers being 6 inches or longer

2. Rolled along the width
3. Secured with natural fiber twine every 6 feet and 6 inches from each end
4. Finished to be either:

4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 0.5 pounds per linear foot
4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 2 pounds per linear foot

If specified, Type 2 fiber roll must:

1. Be filled with rice or wheat straw, wood excelsior, or coconut fiber
2. Be covered with a photodegradable plastic netting or a biodegradable jute, sisal, or coir fiber netting
3. Have the netting secured tightly at each end
4. Be finished to be either:

    4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 1.1 pounds per linear foot
    4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 3 pounds per linear foot

Wood Stakes

Wood stakes must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects which would render the stakes unfit for use
3. Pointed on the end to be driven into the ground

For fiber roll, wood stakes must be at least:

1. 1" x 1" x 24" in size for Type 1 installation
2. 1" x 2" x 24" in size for Type 2 installation

Rope

For Type 2 installation, rope must:

1. Be biodegradable, such as sisal or manila
2. Have a minimum diameter of 1/4 inch

CONSTRUCTION

Before placing fiber roll, remove obstructions including rocks, clods, and debris greater than one inch in diameter from the ground.

If fiber roll is to be placed in the same area as erosion control blanket, install the blanket before placing the fiber roll. For other soil stabilization practices such as hydraulic mulch or compost, place the fiber roll and then apply the soil stabilization practice.

Place fiber roll on slopes at the following spacing unless the plans show a different spacing:

1. 10 feet apart for slopes steeper than 2:1 (horizontal:vertical)

2. 15 feet apart for slopes from 2:1 to 4:1 (horizontal:vertical)
3. 20 feet apart for slopes from 4:1 to 10:1 (horizontal:vertical)
4. 50 feet apart for slopes flatter than 10:1 (horizontal:vertical)

Place fiber roll approximately parallel to the slope contour. For any 20 foot section of fiber roll, do not allow the fiber roll to vary more then 5 percent from level.

Type 1 and Type 2 fiber roll may be installed using installation method Type 1, Type 2, or a combination:

For installation method Type 1, install fiber roll by:

1. Placing in a furrow that is from 2 to 4 inches deep
2. Securing with wood stakes every 4 feet along the length of the fiber roll
3. Securing the ends of the fiber roll by placing a stake 6 inches from the end of the roll
4. Driving the stakes into the soil so that the top of the stake is less then 2 inches above the top of the fiber roll

For installation method Type 2, install fiber roll by:

1. Securing with rope and notched wood stakes.
2. Driving stakes into the soil until the notch is even with the top of the fiber roll.
3. Lacing the rope between stakes and over the fiber roll. Knot the rope at each stake.
4. Tightening the fiber roll to the surface of the slope by driving the stakes further into the soil.

MAINTENANCE

Maintain temporary fiber roll to provide sediment holding capacity and to reduce runoff velocities.

Remove sediment deposits, trash, and debris from temporary fiber roll as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary fiber roll by:

1. Removing sediment from behind the fiber roll when sediment is 1/3 the height of the fiber roll above ground
2. Repairing or adjusting the fiber roll when rills and other evidence of concentrated runoff occur beneath the fiber roll.
3. Repairing or replacing the fiber roll when they become split, torn, or unraveled
4. Adding stakes when the fiber roll slump or sag
5. Replacing broken or split wood stakes

Repair temporary fiber roll within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary fiber roll, repair temporary fiber roll at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

REMOVAL

When the Engineer determines that temporary fiber roll is not required, they must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary fiber roll must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the Temporary Fiber Roll, complete in place, including maintaining and removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

33. TEMPORARY SILT FENCE

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes installing, maintaining, and removing temporary silt fence.

The SWPPP must describe and include the use of temporary silt fence as a water pollution control practice for sediment control.

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for silt fence fabric.

MATERIALS

Silt Fence Fabric

Geosynthetic fabric for temporary silt fence must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties must be based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

Protect geosynthetics from moisture, sunlight, and damage during shipping and storage. Label each unit with the manufacturer's name, identifying information, and product identification.

Silt fence fabric must comply with:

Property	ASTM Designation	Specification	
		Woven	Non-woven
Grab breaking load 1-inch grip, lb, min. in each direction	D 4632	120	120
Apparent elongation percent, min., in each direction	D 4632	15	50
Water Flow Rate max. average roll value, gallons per minute/square foot	D 4491	10-50	100-150
Permittivity 1/sec., min.	D 4491	0.05	0.05
Apparent opening size max. average roll value, U.S. Standard sieve size	D 4751	30	30
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	D 4595	70	

Posts

Posts must be wood or metal.

Wood posts must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects that would render the stakes unfit for use
3. Pointed on the end to be driven into the ground
4. At least 2" x 2" in size, and 4 feet long

Metal posts must:

1. Be made of steel.
2. Have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads.
3. Be pointed on the end to be driven into the ground.
4. Weigh at least 0.75-pound per foot.
5. Be at least 4 feet long.
6. Have a safety cap attached to the exposed end. The safety cap must be orange or red plastic and fit snugly to the metal post.

CONSTRUCTION

Silt fence must be:

1. Constructed with silt fence fabric, posts, and fasteners
2. Prefabricated or assembled at the job site

Silt fence fabric must be attached to posts using these methods:

1. If prefabricated silt fence is used, posts must be inserted into sewn pockets
2. If assembled on the job site:

    2.1. If wood posts are used, fasteners must be staples or nails
    2.2. If steel posts are used, fasteners must be tie wires or locking plastic fasteners
    2.3. Spacing of the fasteners must be no more than 8 inches apart

Place silt fence approximately parallel to the slope contour. For any 50 foot section of silt fence, do not allow the elevation at the base of the fence to vary more than 1/3 of the fence height.

Install silt fence by:

1. Placing the bottom of the fabric in a trench that is 6 inches deep
2. Securing with posts placed on the downhill side of the fabric
3. Backfilling the trench with soil and hand or mechanically tamping to secure the fabric in the trench

If you reinforce the silt fence fabric with wire or plastic mesh, you may increase the post spacing to a maximum of 10 feet. The field-assembled reinforced silt fence must be able to retain saturated sediment without collapsing.

Connect silt fence sections by:

1. Joining separate sections of silt fence to form reaches that are no more than 500 feet long
2. Securing the end posts of each section by wrapping the tops of the posts with at least two wraps of 16-gage diameter tie wire
3. Ensuring that each reach is a continuous run of silt fence from end to end or from an end to an opening, including joined panels

If you mechanically push the silt fence fabric vertically through the soil, you must demostrate that the silt fence fabric will not be damaged and will not slip out of the soil, resulting in sediment passing under the silt fence fabric.

MAINTENANCE

Maintain temporary silt fence to provide sediment holding capacity and to reduce runoff velocities.

Remove sediment deposits, trash, and debris from temporary silt fence as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and

disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary silt fence by:

1. Removing sediment from behind the silt fence when sediment is 1/3 the height of the silt fence above ground
2. Repairing or adjusting the silt fence when rills and other evidence of concentrated runoff occur beneath the silt fence fabric
3. Repairing or replacing the silt fence fabric when it become split, torn, or unraveled

Repair temporary silt fence within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary silt fence, repair temporary silt fence at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

REMOVAL

When the Engineer determines that temporary silt fence is not required, remove and dispose of fence under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary silt fence must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the Temporary Silt Fence, complete in place, including maintaining and removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Contorl, and no additional compensation will be allowed therefor.

34. TEMPORARY FENCE (TYPE ESA)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary fence (Type ESA). Temporary fence (Type ESA) provides a visible boundary adjacent to protected areas such as an environmentally sensitive area.

Signs are required for temporary fence (Type ESA).

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. High visibility fabric
2. Safety cap for metal posts

MATERIALS

High Visibility Fabric

4

High visibility fabric for temporary fence (Type ESA) must consist of one of the following:

1. Polyethylene
2. Polypropylene
3. Combined polyethylene and polypropylene

Sample high visibility fabric under ASTM D 4354, Procedure C.

Test high visibility fabric under ASTM D 4759. All properties must be based on Minimum Average Roll Value.

Identify, store, and handle high visibility fabric rolls and samples under ASTM D 4873.

High visibility fabric must:

1. Contain ultraviolet inhibitors
2. Comply with the requirements shown in the following table:

Property	Specifications	Requirements
Width, inches, Min	Measured	48
Opening size inches	Measured	1" x 1" (Min) 2" x 4" (Max)
Color	Observed	Orange
Roll weight, lb Min for 4’ x 100’ roll	Measured	12
Tensile strength, lb Min, machine direction x cross direction	ASTM D 4595	225 x 95
Ultraviolet Degradation Percent of original unexposed grab breaking load 500 hr, minimum	ASTM D 4355	70

Posts

Posts must be wood or steel.

Wood posts must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber

2. Straight and free of loose or unsound knots and other defects that would render the stakes unfit for use
3. Pointed on the end to be driven into the ground
4. At least 2" x 2" in size and 6 feet long

Steel posts must:

1. Have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads.
2. Be pointed on the end to be driven into the ground.
3. Weigh at least 0.75-pound per foot.
4. Be at least 6 feet long.
5. Have a safety cap attached to the exposed end. The safety cap must be yellow, orange or red plastic and fit snugly to the metal post.

Signs

Signs for temporary fence (Type ESA) must be:

1. Weatherproof and fade-proof and may include plastic laminated printed paper affixed to an inflexible weatherproof backer board
2. Attached to the high visibility fabric with tie wire or locking plastic fasteners

CONSTRUCTION

General

Install temporary fence (Type ESA):

1. With high visibility fabric, posts, and fasteners as follows:

    1.1. If wood posts are used, fasteners must be staples or nails
    1.2. If steel posts are used, fasteners must be tie wires or locking plastic fasteners
    1.3. Spacing of the fasteners must be no more than 8 inches apart

2. Before clearing and grubbing activities
3. From outside of the protected area
4. With posts spaced 8 feet apart and embedded at least 16 inches in the soil

Install signs for temporary fence (Type ESA) as follows:

1. Attach signs with the top of the sign panel flush with the top of the high visibility fabric
2. Place signs 100 feet apart along the length and at each end of the fence

If trees and other plants need protection, install fence to:

1. Enclose the foliage canopy (drip line) of protected plants
2. Protect visible roots from encroachment

Maintenance

Maintain temporary fence (Type ESA) by:

1. Keeping posts in a vertical position
2. Reattaching fabric to posts
3. Replacing damaged sections of fabric
4. Replacing and securing signs

Removal

When the Engineer determines that temporary fence (Type ESA) is no longer required, remove and dispose of it under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Backfill and repair ground disturbance caused by the installation and removal of temporary fence (Type ESA), including holes and depressions, under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

Attention is directed to Maintenance of Trees of these Special Provisions

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in construction the Temporary Fence (Type ESA), complete in place, including maintenance, removal of materials, and backfilling and repairing holes, depressions and other ground disturbance, as specified in the Standard Specifications and these special provisions, and as ordered by the Engineer shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in Temporary Fence (Type ESA) Signs, complete in place, including maintenance and sign removal, as specified in the Standard Specifications and these special provisions, and as ordered by the Engineer shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

35. TEMPORARY CONSTRUCTION ENTRANCE

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary construction entrance to provide temporary access.

The SWPPP must describe and include the use of temporary construction entrance as a water pollution control practice for tracking control.

Temporary construction entrance must be Type 1, Type 2, or a combination.

Submittals

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for:

1. Temporary entrance fabric
2. Rock

Submit details for alternatives at least 5 business days before installation. You may propose alternatives for the following items:

1. Alternative sump
2. Alternative corrugated steel panels

If the Engineer approves, you may eliminate the sump.

MATERIALS

Temporary Entrance Fabric

Temporary entrance fabric must comply with Section 88-1.04, "Rock Slope Protection Fabric," of the Standard Specifications and be woven Type B or non-woven Type B.

Rock

Rock must be Type A or Type B.
Rock (Type A) must comply with:

1. Requirements under Section 72-2.02, "Materials," of the Standard Specifications
2. Following sizes:

Square Screen Size (inch)	Percentage Passing	Percentage Retained
6	100	0
3	0	100

Rock (Type B) must be Railway Ballast Number 25. Do not use blast furnace slag. Railway Ballast Number 25 must comply with:

1. Description in AREMA Manual for Railway Engineering.
2. Following sizes:

Nominal Size Square Opening	Percentage Passing								
	3"	2-1/2"	2"	1-1/2"	1"	3/4"	1/2"	3/8"	No. 4
2-1/2"-3/8"	100	80-100	60-85	50-70	25-50	-	5-20	0-10	0-3

3. Following properties:

Specification	Requirements
Percent material passing No. 200 sieve, max. ASTM: C 117	1.0
Bulk specific gravity, min. ASTM: C 127	2.60
Absorption, percent min. ASTM: C 127	1.0
Clay lumps and friable particles, percent max. ASTM: C 142	0.5
Degradation, percent max. ASTM: C 535	30
Soundness (Sodium Sulfate), percent max. ASTM: C 88	5.0
Flat, elongated particles, or both, percent max. ASTM: D 4791	5.0

Corrugated Steel Panels

Corrugated steel panels must:

1. Be made of steel.
2. Be pressed or shop welded
3. Have a slot or hook for connecting panels together

CONSTRUCTION

Prepare location for temporary construction entrance by:

1. Removing vegetation to ground level and clear away debris
2. Grading ground to uniform plane
3. Grading ground surface to drain
4. Removing sharp objects that may damage fabric
5. Compacting the top 1.5 feet of soil to at least 90 percent relative compaction

If temporary entrance (Type 1) is specified, use rock (Type A).

If temporary construction entrance (Type 2) is specified, use Rock (Type B) under corrugated steel panels. Use at least 6 corrugated steel panels for each entrance. Couple panels together.

Install temporary construction entrance by:

1. Positioning fabric along the length of the entrance
2. Overlapping sides and ends of fabric by at least 12 inches
3. Spreading rock over fabric in the direction of traffic
4. Covering fabric with rock within 24 hours
5. Keeping a 6 inch layer of rock over fabric to prevent damage to fabric by spreading equipment

Do not drive on fabric until rock is spread.

Unless the Engineer eliminates the sump, install a sump within 20 feet of each temporary construction entrance.

Repair fabric damaged during rock spreading by placing a new fabric over the damaged area. New fabric must be large enough to cover damaged area and provide at least 18-inch overlap on all edges.

Maintenance

Maintain temporary construction entrance to minimize generation of dust and tracking of soil and sediment onto public roads. If dust or sediment tracking increases, place additional rock unless the Engineer approves another method.

Repair temporary construction entrance if:

1. Fabric is exposed
2. Depressions in the entrance surface develop
3. Rock is displaced

Repair temporary construction entrance within 24 hours of discovering damage unless the Engineer approves a longer period.

During use of temporary construction entrance, do not allow soil, sediment, or other debris tracked onto pavement to enter storm drains, open drainage facilities, or watercourses. When material is tracked onto pavement, remove it within 24 hours unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace the temporary construction entrance, repair it at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

Removal

When the Engineer determines that temporary construction entrance is not required, remove and dispose of it under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Backfill and repair ground disturbance, including holes and depressions, caused by installation and removal of temporary construction entrance under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. <u>MEASUREMENT AND PAYMENT</u>

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing Temporary Construction Entrance, complete in place, including maintaining and removal of temporary construction entrance, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

No additional compensation will be made if the temporary construction entrance is relocated during the course of construction.

36. TEMPORARY DRAINAGE INLET PROTECTION

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing, maintaining, and removing temporary drainage inlet protection. Drainage inlet protection settles and filters sediment before stormwater runoff discharges into storm drainage systems.

The SWPPP must describe and include the use of temporary drainage inlet protection as a water pollution control practice for sediment control.

Provide temporary drainage inlet protection to meet the changing conditions around the drainage inlet. Temporary drainage inlet protection must be the appropriate type to meet the conditions around the drainage inlet.

1. Appropriate type to meet the conditions around the drainage inlet

Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. Erosion control blanket
2. Fiber rolls
3. Safety cap for metal posts
4. Silt fence fabric
5. Sediment filter bag
6. Foam barrier
7. Rigid plastic barrier
8. Gravel-filled bag fabric

If you substitute the steel wire staple with an alternative attachment device, submit a sample of the device for approval at least 5 business days before installation.

MATERIALS

Geosynthetic Fabrics

Geosynthetic fabrics for temporary drainage inlet protection must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Geosynthetic fabrics for temporary drainage inlet must comply with the specifications for water pollution control in Section 88-1.05, "Water Pollution Control," of the Standard Specifications.

Foam barrier must comply with:

Foam Barrier

Property	ASTM Designation	Specification
Grab breaking load 1-inch grip, lb, min. in each direction	D 4632	200
Apparent elongation percent, min., in each direction	D 4632	15
Water Flow Rate max. average roll value, gallons per minute/square foot	D 4491	100-150
Permittivity 1/sec., min.	D 4491	0.05
Apparent opening size max. average roll value, U.S. Standard sieve size	D 4751	40
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	D 4595	70

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties are based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

Erosion Control Blanket

Erosion control blanket must be:

1. Described as a rolled erosion control product (RECP)
2. Classified as temporary and degradable or long-term and non-degradable
3. Machine-made mats
4. Provided in rolled strips
5. Classified by the Erosion Control Technology Council (ECTC)

Erosion control blanket classified as temporary and degradable must be one of the following:

1. Double net excelsior blanket:

    1.1. Classified as ECTC Type 2D
    1.2. Classified as an erosion control blanket
    1.3. Designed to last for at least one year after installation

1.4. With a Universal Soil Loss Equation (USLE) C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
1.5. With 80 percent of the wood excelsior fibers being 6 inches or longer
1.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
1.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
1.8. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting

2. Double net straw and coconut blanket:

2.1. Classified as ECTC Type 2D
2.2. Classified as an erosion control blanket
2.3. Designed to last for at least one year after installation
2.4. With a USLE C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
2.5. Comprised of 70 percent straw and 30 percent coconut fiber
2.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
2.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
2.8. With top and bottom surfaces covered with extruded photodegradable plastic netting or lightweight non-synthetic netting

3. Jute netting:

3.1. Classified as ECTC Type 3B
3.2. Classified as an open weave textile and have from 14 to 20 strands per foot in each direction
3.3. Designed to last for at least one year after installation
3.4. With a USLE C-Factor of not more than 0.25 at a 1.5:1 (horizontal:vertical) slope
3.5. Comprised of 100 percent unbleached and undyed spun yarn made of jute fiber
3.6. With an average open area from 63 to 70 percent
3.7. From 48 to 72 inches in width
3.8. Capable to withstand a maximum shear stress of 2.0 pounds per square foot under ASTM D 6460
3.9. With a minimum tensile strength of 100 pounds per foot under ASTM D 5035
3.10. From 0.90 to 1.20 pounds per square yard in weight

4. Coir netting:

4.1. Classified as ECTC Type 4
4.2. Classified as an open weave textile and from 13 to 18 strands per foot in each direction
4.3. Designed to last for at least three years after installation
4.4. With a USLE C-Factor of not more than 0.25 at a 1:1 (horizontal:vertical) slope
4.5. Comprised of 100 percent unbleached and undyed spun coir yarn made of coconut fiber
4.6. With an average open area from 63 to 70 percent
4.7. From 72 to 158 inches in width

4.8. Capable to withstand a maximum shear stress of 2.25 pounds per square foot under ASTM D6460
4.9. With a minimum tensile strength of 125 pounds per foot under ASTM D 5035
4.10. From 1.20 to 1.67 pounds per square yard in weight

Erosion control blanket classified as long-term and non-degradable must:

1. Be a geosynthetic fabric
2. Comply with the specifications for rock slope protection fabric (Class 8) in Section 88-1.06, "Channel and Shore Protection," of the Standard Specifications

Staples

You may use an alternative attachment device such as a geosynthetic pins or plastic pegs to install erosion control blanket.

Rock

Rock must comply with:

1. Requirements under Section 72-2.02, "Materials," of the Standard Specifications
2. Following sizes:

Square Screen Size (inch)	Percentage Passing	Percentage Retained
6	100	0
3	0	100

Rope

Rope for fiber rolls must be:

1. Biodegradable, such as sisal or manila
2. At least 1/4 inch in diameter

Fiber Rolls

Fiber rolls must:

1. Last for at least one year after installation
2. Be Type 1 or Type 2

For Type 1, fiber rolls must be:

1. Made from an erosion control blanket classified as temporary and degradable
2. Rolled along the width
3. Secured with natural fiber twine every 6'-6" from each end
4. Finished to be either:

4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 0.5 pounds per linear foot
4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 2 pounds per linear foot

For Type 2, fiber rolls must:

1. Be filled with rice or wheat straw, wood excelsior, or coconut fiber
2. Be covered with photodegradable plastic netting, biodegradable jute, sisal, or coir fiber netting
3. Have netting secured tightly at each end
4. Be finished to be either:

    4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 1.1 pounds per linear foot
    4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 3 pounds per linear foot

Wood Stakes

Wood stakes must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects which would render the stakes unfit for use
3. Pointed on the end to be driven into the ground

For fiber rolls, wood stakes must be at least:

1. 1" x 1" x 24" in size for Type 1 installation
2. 1" x 2" x 24" in size for Type 2 installation

Posts

Posts must be wood or metal.

Wood posts must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects that would render the stakes unfit for use
3. Pointed on the end to be driven into the ground
4. At least 2" x 2" in size, and 4 feet long

Metal posts must:

1. Be made of steel.
2. Have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads.
3. Be pointed on the end to be driven into the ground.
4. Weigh at least 0.75-pound per foot.
5. Be at least 4 feet long.
6. Have a safety cap attached to the exposed end. The safety cap must be orange or red plastic and fit snugly to the metal post.

Silt Fence

Silt fence must be:

1. Constructed with silt fence fabric, posts, and fasteners
2. Prefabricated or assembled at the job site

Silt fence fabric must be attached to posts using these methods:

1. If prefabricated silt fence is used, posts must be inserted into sewn pockets
2. If assembled on the job site:

    2.1. If wood posts are used, fasteners must be staples or nails
    2.2. If steel posts are used, fasteners must be tie wires or locking plastic fasteners
    2.3. Spacing of the fasteners must be at least 8 inches

Gravel-filled Bags

Gravel-filled bags must:

1. Be made from fabric.
2. Have inside dimensions from 24 to 32 inches in length, and from 16 to 20 inches in width.
3. Have the opening bound to retain the gravel. The opening must be sewn with yarn, bound with wire, or secured with a closure device.
4. Weigh from 30 to 50 pounds when filled with gravel.

Gravel for gravel-filled bags must be:

1. From 3/8 to 3/4 inch in diameter
2. Clean and free from clay balls, organic matter, and other deleterious materials

Sediment Filter Bag

Sediment filter bag must:

1. Be made of fabric
2. Be sized to fit the catch basin or drainage inlet
3. Include a high-flow bypass

Sediment filter bag may include a metal frame. Sediment filter bags that do not have a metal frame and are deeper than 18 inches must:

1. Include lifting loops and dump straps
2. Include a restraint cord to keep the sides of the bag away from the walls of the catch basin

Foam Barriers

Foam barriers must:

1. Be filled with a urethane foam core

2. Have a geosynthetic fabric cover and flap
3. Have a triangular, circular, or square shaped cross section
4. Have a vertical height of at least 5 inches after installation
5. Have a horizontal flap of at least 8 inches in width
6. Have a length of at least 4 feet per unit
7. Have the ability to interlock separate units into a longer barrier so that water does not flow between the units
8. Be secured to:

    8.1. Pavement with 1-inch concrete nails with 1-inch washers and solvent-free adhesive
    8.2. Soil with 6-inch nails with 1-inch washers

Rigid Plastic Barriers

Rigid plastic barriers must:

1. Have an integrated filter
2. Have a formed outer jacket of perforated high density polyethylene (HDPE) or polyethylene terephthalate (PET)
3. Have a flattened tubular shaped cross section
4. Be made from virgin or recycled materials
5. Be free from biodegradable filler materials that degrade the physical or chemical characteristics of the finished filter core or outer jacket
6. Have a length of at least 4 feet per unit
7. Have the ability to interlock separate units into a longer barrier so that water does not flow between the units
8. Be secured to:

    8.1 Pavement with 1-inch concrete nails with 1-inch washers and solvent-free adhesive, with gravel-filled bags, or a combination
    8.2 Soil with 6-inch nails with 1-inch washers and wood stakes

9. Comply with the following properties:

Specification	Requirements
Grab tensile strength of outer jacket material, pounds/square inch, min. in each direction ASTM D 4632*	4000
Break strength of outer jacket, pounds/square inch ASTM D 4632*	1300
Permittivity of filter core, 1/sec., min. ASTM D 4491	0.38
Flow rate of filter core, gallons per minute per square foot, ASTM D 4491	100 min. 200 max.
Filter core aperture size, max., Average Opening Size (AOS), microns	425
Ultraviolet stability (outer jacket & filter core), percent tensile strength retained after 500 hours, min. ASTM D 4355 (xenon-arc lamp and water spray weathering method)	90

* or appropriate test method for specific polymer

If used at a curb inlet without a grate, rigid plastic barriers must:

1. Have a horizontal flap of at least 6 inches with an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical height of at least 7 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used at a grated catch basin without a curb inlet, rigid plastic barriers must:

1. Cover the grate by at least 2 inches on each side and have an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical height of at least 1.5 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used at a curb inlet with a grate, rigid plastic barriers must:

1. Have a horizontal flap that covers the grate by at least 2 inches on the 3 sides away from the curb opening and have an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical section that covers the curb opening by at least 5 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used as a linear sediment barrier, rigid plastic barriers:

1. Must have an installed height of at least 6 inches
2. May have a horizontal flap of at least 4 inches

Linear Sediment Barrier

Linear sediment barriers must consist of one or more of the following:

1. Silt fence
2. Gravel-filled bags
3. Fiber roll
4. Rigid plastic barrier
5. Foam barrier

Flexible Sediment Barrier

Flexible sediment barriers consist of one or more of the following:

1. Rigid plastic barrier
2. Foam barrier

CONSTRUCTION

For drainage inlet protection at drainage inlets in paved and unpaved areas:

1. Prevent ponded runoff from encroaching on the traveled way or overtopping the curb or dike. Use linear sediment barriers to redirect runoff and control ponding.

2. Clear the area around each drainage inlet of obstructions including rocks, clods, and debris greater than one inch in diameter before installing the drainage inlet protection.
3. Install a linear sediment barrier up-slope of the existing drainage inlet and parallel with the curb, dike, or flow line to prevent sediment from entering the drainage inlet.

Erosion Control Blanket

To install erosion control blanket and geosynthetic fabric:

1. Secure blanket or fabric to the surface of the excavated sediment trap with staples and embed in a trench adjacent to the drainage inlet
2. Anchor the perimeter edge of the erosion control blanket in a trench

Silt Fence

If silt fence is used as a linear sediment barrier:

1. Place fence along the perimeter of the erosion control blanket, with the posts facing the drainage inlet
2. Install fence with the bottom edge of the silt fence fabric in a trench. Backfill the trench with soil and compact manually

Gravel Bag Berm

If gravel bag berm is used as a linear sediment barrier:

1. Place gravel-filled bags end-to-end to eliminate gaps
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row

If gravel bag berms are used for Type 3A and Type 3B:

1. Place gravel-filled bags end-to-end to eliminate gaps
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row
3. Arrange bags to create a spillway by removing one or more gravel-filled bags from the upper layer

If used within shoulder area, place gravel-filled bags behind temporary railing (Type K).

Fiber Rolls

If fiber rolls are used as a linear sediment barrier:

1. Place fiber rolls in a furrow.
2. Secure fiber rolls with stakes installed along the length of the fiber rolls. Stakes must be installed from 6 to 12 inches from the end of the rolls.

If fiber rolls are used as a linear sediment barrier for Type 4A, place them over the erosion control blanket.

Foam Barriers

If foam barriers are used as a linear sediment barrier:

1. Install barriers with the horizontal flap in a 3 inch deep trench and secured with nails and washers placed no more than 4 feet apart
2. Secure barriers with 2 nails at the connection points where separate units overlap
3. Place barriers without nails or stakes piercing the core

Flexible Sediment Barriers

If flexible sediment barriers are used:

1. Secure barriers to the pavement with nails and adhesive, gravel-filled bags, or a combination
2. Install barriers flush against the sides of concrete, asphalt concrete, or hot mix asphalt curbs or dikes
3. Place barriers to provide a tight joint with the curb or dike and anchored in a way that runoff cannot flow behind the barrier

If flexible sediment barriers are used for Type 4B:

1. Secure barriers to the pavement according to the angle and spacing shown on the plans
2. Place barriers to provide a tight joint with the curb or dike. Cut the cover fabric or jacket to ensure a tight fit

Rigid Sediment Barriers

If rigid sediment barriers are used at a grated catch basin without a curb inlet:

1. Place barriers using the gasket to prevent runoff from flowing under the barrier
2. Secure barriers to the pavement with nails and adhesive, gravel-filled bags, or a combination

If rigid sediment barriers are used for linear sediment barriers:

1. Install barriers in a trench. Backfill the trench with soil and compact manually
2. Place barrier with separate units overlapping at least 4 inches
3. Reinforce barriers with a wood stake at each overlap
4. Fasten barriers to the wood stakes with steel screws, 16 gauge galvanized steel wire, or with UV stabilized cable ties that are from 5 to 7 inches in length

Sediment Filter Bags

Install sediment filter bags for Type 5 by:

1. Removing the drainage inlet grate
2. Placing the sediment bag in the opening
3. Replacing the grate to secure the sediment filter bag in place

MAINTENANCE

Maintain temporary drainage inlet protection to provide sediment holding capacity and to reduce runoff velocities.

Remove sediment deposits, trash, and debris from temporary drainage inlet protection as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary drainage inlet protection by removing sediment from:

1. Behind flexible sediment barriers when sediment exceeds 1 inch in depth
2. Surface of the erosion control blanket when sediment exceeds 1 inch in depth
3. Sediment trap for Type 2 when the volume has been reduced by approximately one-half
4. Behind silt fence when the sediment is 1/3 the height of the silt fence fabric above ground
5. Sediment filter bags when filled or when the restraint cords are no longer visible

If rills and other evidence of concentrated runoff occur beneath the linear sediment barrier, repair or adjust the barrier.

If silt fence fabric becomes split, torn, or unraveled, repair or replace silt fence.

If geosynthetic fabric becomes split, torn, or unraveled, repair or replace foam barriers.

Repair or replace sagging or slumping linear sediment barriers with additional stakes. Replace broken or split wood stakes.

Reattach foam barriers and rigid plastic barriers that become detached or dislodged from the pavement.

Repair split or torn rigid plastic barriers with 16 gauge galvanized steel wire or UV stabilized cable ties that are from 5 to 7 inches in length.

For sediment filter bags without metal frames, empty by placing one inch steel reinforcing bars through the lifting loops and then lift the filled bag from the drainage inlet. For sediment filter bags with metal frames, empty by lifting the metal frame from the drainage inlet. Rinse before replacing in the drainage inlet. When rinsing the sediment filter bags, do not allow the rinse water to enter a drain inlet or waterway.

Repair temporary drainage inlet protection within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary drainage inlet protection, repair temporary drainage inlet protection at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

REMOVAL

When the Engineer determines that the temporary drainage inlet protection is not required, it must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary drainage inlet protection must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the Temporary Drainage Inlet Protection, complete in place, including maintaining and removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for Water Pollution Control, and no additional compensation will be allowed therefor.

No additional compensation will be made if the temporary drainage inlet protection is relocated during the course of construction.

37. PROGRESS SCHEDULE (CRITICAL PATH METHOD)

A. DESCRIPTION OF WORK

GENERAL

Summary

Comply with Section 8-1.04, "Progress Schedule," of the Standard Specifications, except you must:

1. Use a computer software to prepare the schedule
2. Furnish compatible software for the Engineer's exclusive possession and use

You are responsible for assuring that all activity sequences are logical and that each schedule shows a coordinated plan for complete performance of the work.

Definitions

contract completion date: The current extended date for completion of the contract shown on the weekly statement of working days furnished by the Engineer as specified in Section 8-1.06, "Time of Completion," of the Standard Specifications.

data date: The day after the date through which a schedule is current. Everything occurring earlier than the data date is "as-built" and everything on or after the data date is "planned."

early completion time: The difference in time between an early scheduled completion date and the contract completion date.

float: The difference between the earliest and latest allowable start or finish times for an activity.

milestone: An event activity that has zero duration and is typically used to represent the beginning or end of a certain stage of the project.

narrative report: A document submitted with each schedule that discusses topics related to project progress and scheduling.

near critical path: A chain of activities with total float exceeding that of the critical path but having no more than 10 working days of total float.

State owned float activity: The activity documenting time saved on the critical path by actions of the State. It is the last activity prior to the scheduled completion date.

time impact analysis: A schedule and narrative report developed specifically to demonstrate what effect a proposed change or delay has on the current scheduled completion date.

time-scaled network diagram: A graphic depiction of a CPM schedule comprised of activity bars with relationships for each activity represented by arrows. The tail of each arrow connects to the activity bar for the predecessor and points to the successor.

total float: The amount of time that an activity or chain of activities can be delayed before extending the scheduled completion date.

Submittals

General Requirements

Submit to the Engineer baseline, monthly updated, and final updated schedules, each consistent in all respects with the time and order of work requirements of the contract. Perform work in the sequence indicated on the current accepted schedule.

Each schedule must show:

1. Calculations using the critical path method to determine controlling activities.
2. Duration activities less than 20 working days.
3. At least 50 but not more than 500 activities, unless authorized. The number of activities must be sufficient to assure adequate planning of the project, to permit monitoring and evaluation of progress, and to do an analysis of time impacts.
4. Each required constraint. Constraints other than those required by the special provisions may be included only if authorized.
5. State-owned float as the predecessor activity to the scheduled completion date.
6. Activities with identification codes for responsibility, stage, work shifts, location, and contract pay item numbers.

You may show early completion time on any schedule provided that the requirements of the contract are met. Early completion time is considered a resource for your exclusive use. You may increase early completion time by improving production, reallocating resources to be more efficient, performing sequential activities concurrently, or by completing activities earlier than planned. You may also submit for approval a VECP as specified in Section 4-1.035B, "Value Engineering Change Proposal." of the Standard Specifications that will reduce time of construction.

You may show a scheduled completion date that is later than the contract completion date on an update schedule, after the baseline schedule is accepted. Provide an explanation for a late scheduled completion date in the narrative report that is included with the schedule.

State-owned float is considered a resource for the exclusive use of the State. The Engineer may accrue State-owned float by the early completion of review of any type of required submittal when it saves time on the critical path. Prepare a time impact analysis, when requested by the Engineer, to determine the effect of the action as specified in "Time Impact Analysis." The Engineer documents State-owned float by directing you to update the State-owned float activity on the next updated schedule. Include a log of the action on the State-owned float activity and include a discussion of the action in the narrative report. The Engineer may use

State-owned float to mitigate past, present, or future State delays by offsetting potential time extensions for contract change orders.

The Engineer may adjust contract working days for ordered changes that affect the scheduled completion date as specified in Section 4-1.03, "Changes," of the Standard Specifications. Prepare a time impact analysis to determine the effect of the change as specified in "Time Impact Analysis" and include the impacts acceptable to the Engineer in the next updated schedule. Changes that do not affect the controlling operation on the critical path will not be considered as the basis for a time adjustment. Changes that do affect the controlling operation on the critical path will be considered by the Engineer in decreasing time or granting an extension of time for completion of the contract. Time extensions will only be granted if the total float is absorbed and the scheduled completion date is delayed one or more working days because of the ordered change.

The Engineer's review and acceptance of schedules does not waive any contract requirements and does not relieve you of any obligation or responsibility for submitting complete and accurate information. Correct rejected schedules and resubmit them within 7 days of notification by the Engineer, at which time a new review period of 7 days will begin.

Errors or omissions on schedules do not relieve you from finishing all work within the time limit specified for completion of the contract. If, after a schedule has been accepted by the Engineer, either you or the Engineer discover that any aspect of the schedule has an error or omission, you must correct it on the next updated schedule.

Computer Software

Submit to the Engineer for review a description of proposed schedule software to be used. After the Engineer accepts the proposed software, furnish schedule software and all original software instruction manuals. All software must be compatible with the current version of the Windows operating system in use by the Engineer. The schedule software must include the latest version of Oracle Primavera P6 Professional Project Management for Windows, or equivalent.

If a schedule software equivalent to P6 is proposed, it must be capable of:

1. Generating files that can be imported into P6
2. Comparing 2 schedules and providing reports of changes in activity ID, activity description, constraints, calendar assignments, durations, and logic ties

The schedule software and schedule-comparing software will be returned to you before the final estimate. The Department will compensate you as specified in Section 4-1.03D, "Extra Work," of the Standard Specifications for replacement of software or manuals damaged, lost, or stolen after delivery to the Engineer.

Instruct the Engineer in the use of the software and provide software support until the contract is accepted. Within 15 days of contract approval, provide a commercial 8-hour training session for 2 Department employees in the use of the software at a location acceptable to the Engineer. It is recommended that you also send at least 2 employees to the same training session to facilitate development of similar knowledge and skills in the use of the software. If schedule

software other than P6 is submitted, then the training session must be a total of 16-hours for each Department employee.

Network Diagrams, Reports, and Data

Include the following with each schedule submittal:

1. Two sets of originally plotted, time-scaled network diagrams
2. Two copies of a narrative report
3. One read-only compact disk or floppy diskette containing the schedule data

The time-scaled network diagrams must conform to the following:

1. Show a continuous flow of information from left to right
2. Be based on early start and early finish dates of activities
3. Clearly show the primary paths of criticality using graphical presentation
4. Be prepared on 34" x 44"
5. Include a title block and a timeline on each page

The narrative report must be organized in the following sequence with all applicable documents included:

1. Transmittal letter
2. Work completed during the period
3. Identification of unusual conditions or restrictions regarding labor, equipment or material; including multiple shifts, 6-day work weeks, specified overtime or work at times other than regular days or hours
4. Description of the current critical path
5. Changes to the critical path and scheduled completion date since the last schedule submittal
6. Description of problem areas
7. Current and anticipated delays:

    7.1. Cause of delay
    7.2. Impact of delay on other activities, milestones, and completion dates
    7.3. Corrective action and schedule adjustments to correct the delay

8. Pending items and status thereof:

    8.1. Permits
    8.2. Change orders
    8.3. Time adjustments
    8.4. Noncompliance notices

9. Reasons for an early or late scheduled completion date in comparison to the contract completion date

Schedule submittals will only be considered complete when all documents and data have been submitted as described above.

Preconstruction Scheduling Conference

Schedule a preconstruction scheduling conference with your project manager and the Engineer within 15 days after contract approval. The Engineer will conduct the meeting and review the requirements of this section with you.

Submit a general time-scaled logic diagram displaying the major activities and sequence of planned operations and be prepared to discuss the proposed work plan and schedule methodology that comply with the requirements of this section. If you propose deviations to the construction staging, then the general time-scaled logic diagram must also display the deviations and resulting time impacts. Be prepared to discuss the proposal.

At this meeting, also submit the alphanumeric coding structure and activity identification system for labeling work activities. To easily identify relationships, each activity description must indicate its associated scope or location of work by including such terms as quantity of material, type of work, bridge number, station to station location, side of highway (such as left, right, northbound, southbound), lane number, shoulder, ramp name, ramp line descriptor, or mainline.

The Engineer reviews the logic diagram, coding structure, and activity identification system, and provide any required baseline schedule changes to you for implementation.

Baseline Schedule

Beginning the week following the preconstruction scheduling conference, meet with the Engineer weekly to discuss schedule development and resolve schedule issues until the baseline schedule is accepted.

Submit a baseline schedule within 20 days of contract approval. Allow 20 days for the Engineer's review after the baseline schedule and all support data are submitted. In addition, the baseline schedule submittal is not considered complete until the computer software is delivered and installed for use in review of the schedule.

The baseline schedule must include the entire scope of work and how you plan to complete all work contemplated. The baseline schedule must show the activities that define the critical path. Multiple critical paths and near-critical paths must be kept to a minimum. A total of not more than 50 percent of the baseline schedule activities must be critical or near critical, unless otherwise authorized.

The baseline schedule must not extend beyond the number of contract working days. The baseline schedule must have a data date of contract approval. If you start work before contract approval, the baseline schedule must have a data date of the 1st day you performed work at the job site.

If you submit an early completion baseline schedule that shows contract completion in less than 85 percent of the contract working days, the baseline schedule must be supplemented with resource allocations for every task activity and include time-scaled resource histograms. The resource allocations must be shown to a level of detail that facilitates report generation based on labor crafts and equipment classes for you and your subcontractors. Use average composite crews to display the labor loading of on-site construction activities. Optimize and level labor to reflect a reasonable plan for accomplishing the work of the contract and to assure that resources

are not duplicated in concurrent activities. The time-scaled resource histograms must show labor crafts and equipment classes to be used. The Engineer may review the baseline schedule activity resource allocations using Means Productivity Standards or equivalent to determine if the schedule is practicable.

Updated Schedule

Submit an updated schedule and meet with the Engineer to review contract progress, on or before the 1st day of each month, beginning one month after the baseline schedule is accepted. Allow 15 days for the Engineer's review after the updated schedule and all support data are submitted, except that the review period will not start until the previous month's required schedule is accepted. Updated schedules that are not accepted or rejected within the review period are considered accepted by the Engineer.

The updated schedule must have a data date of the 21st day of the month or other date established by the Engineer. The updated schedule must show the status of work actually completed to date and the work yet to be performed as planned. Actual activity start dates, percent complete, and finish dates must be shown as applicable. Durations for work that has been completed must be shown on the updated schedule as the work actually occurred, including Engineer submittal review and your resubmittal times.

You may include modifications such as adding or deleting activities or changing activity constraints, durations, or logic that do not (1) alter the critical path(s) or near critical path(s) or (2) extend the scheduled completion date compared to that shown on the current accepted schedule. Justify in writing the reasons for any changes to planned work. If any proposed changes in planned work will result in (1) or (2) above, then submit a time impact analysis as specified in this section.

Time Impact Analysis

Submit a written time impact analysis (TIA) with each request for adjustment of contract time, or when you or the Engineer consider that an approved or anticipated change may impact the critical path or contract progress.

The TIA must illustrate the impacts of each change or delay on the current scheduled completion date or internal milestone, as appropriate. The analysis must use the accepted schedule that has a data date closest to and before the event. If the Engineer determines that the accepted schedule used does not appropriately represent the conditions before the event, the accepted schedule must be updated to the day before the event being analyzed. The TIA must include an impact schedule developed from incorporating the event into the accepted schedule by adding or deleting activities, or by changing durations or logic of existing activities. If the impact schedule shows that incorporating the event modifies the critical path and scheduled completion date of the accepted schedule, the difference between scheduled completion dates of the two schedules must be equal to the adjustment of contract time. The Engineer may construct and use an appropriate project schedule or other recognized method to determine adjustments in contract time until you provide the TIA.

Submit 2 copies of your TIA within 20 days of receiving a written request for a TIA from the Engineer. Allow the Engineer 15 days after receipt to review the submitted TIA. All approved TIA schedule changes must be shown on the next updated schedule.

If a TIA you submit is rejected, meet with the Engineer to discuss and resolve issues related to the TIA. If clarification is still needed, you are allowed 15 days to submit a protest as specified in Section 5-1.011, "Protests," of the Standard Specifications. If agreement is not reached, you are allowed 5 days from the date you receive the Engineer's response to your protest to submit an Initial Potential Claim Record as specified in Section 5-1.146B, "Initial Potential Claim Record," of the Standard Specifications. Only show actual as-built work, not unapproved changes related to the TIA, in subsequent updated schedules. If agreement is reached at a later date, approved TIA schedule changes must be shown on the next updated schedule. The Engineer withholds remaining payment on the schedule contract item if a TIA is requested and not submitted within 20 days. The schedule item payment resumes on the next estimate after the requested TIA is submitted. No other contract payment is withheld regarding TIA submittals.

Final Updated Schedule

Submit a final update, as-built schedule with actual start and finish dates for the activities, within 30 days after completion of contract work. Provide a written certificate with this submittal signed by your project manager or an officer of the company stating, "To my knowledge and belief, the enclosed final update schedule reflects the actual start and finish dates of the actual activities for the project contained herein." An officer of the company may delegate in writing the authority to sign the certificate to a responsible manager.

B. MEASUREMENT AND PAYMENT

Progress schedule (critical path method) will be paid for at a lump sum price. The contract lump sum price paid for progress schedule (critical path method) includes full compensation for furnishing all labor, material, tools, equipment, and incidentals, including computer software, and for doing all the work involved in preparing, furnishing, and updating schedules, and instructing and assisting the Engineer in the use of computer software, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Payments for the progress schedule (critical path method) contract item will be made progressively as follows:

1. A total of 25 percent of the item amount will be paid upon achieving all of the following:

    1.1. Completion of 5 percent of all contract item work.
    1.2. Acceptance of all schedules and approval of all TIAs required to the time when 5 percent of all contract item work is complete.
    1.3. Delivery of schedule software to the Engineer.
    1.4. Completion of required schedule software training.

2. A total of 50 percent of the item amount will be paid upon completion of 25 percent of all contract item work and acceptance of all schedules and approval of all TIAs required to the time when 25 percent of all contract item work is complete.
3. A total of 75 percent of the item amount will be paid upon completion of 50 percent of all contract item work and acceptance of all schedules and approval of all TIAs required to the time when 50 percent of all contract item work is complete.
4. A total of 100 percent of the item amount will be paid upon completion of all contract item work, acceptance of all schedules and approval of all TIAs required to the time

when all contract item work is complete, and submittal of the certified final update schedule.

If you fail to complete any of the work or provide any of the schedules required by this section, the Engineer makes an adjustment in compensation as specified in Section 4-1.03C, "Changes in Character of Work," of the Standard Specifications for the work not performed. Adjustments in compensation for schedules will not be made for any increased or decreased work ordered by the Engineer in submitting schedules.

38. MOBILIZATION

Mobilization shall conform to the provisions in Section 11, "Mobilization," of the Standard Specifications.

39. CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

A. DESCRIPTION OF WORK

Flagging, signs, and temporary traffic control devices furnished, installed, maintained, and removed when no longer required shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Category 1 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices. These devices shall be certified as crashworthy by crash testing, crash testing of similar devices, or years of demonstrable safe performance. Category 1 temporary traffic control devices include traffic cones, plastic drums, portable delineators, and channelizers.

If requested by the Engineer, the Contractor shall provide written self-certification for crashworthiness of Category 1 temporary traffic control devices at least 5 business days before beginning any work using the devices or within 2 business days after the request if the devices are already in use. Self-certification shall be provided by the manufacturer or Contractor and shall include the following:

A. Date,
B. Federal Aid number (if applicable),
C. Contract number, district, county, route and post mile of project limits,
D. Company name of certifying vendor, street address, city, state and zip code,
E. Printed name, signature and title of certifying person; and
F. Category 1 temporary traffic control devices that will be used on the project.

The Contractor may obtain a standard form for self-certification from the Engineer.

Category 2 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices that are not expected to produce significant vehicular velocity change, but may cause potential harm to impacting vehicles. Category 2 temporary traffic control devices include barricades and portable sign supports.

Category 2 temporary traffic control devices shall be on the Federal Highway Administration's (FHWA) list of Acceptable Crashworthy Category 2 Hardware for Work Zones. This list is maintained by FHWA and can be located at:

http://safety.fhwa.dot.gov/roadway_dept/policy_guide/road_hardware/listing.cfm?code=workzone

The Department also maintains this list at:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/pdf/Category2.pdf

Category 2 temporary traffic control devices that have not received FHWA acceptance shall not be used. Category 2 temporary traffic control devices in use that have received FHWA acceptance shall be labeled with the FHWA acceptance letter number and the name of the manufacturer. The label shall be readable and permanently affixed by the manufacturer. Category 2 temporary traffic control devices without a label shall not be used.

If requested by the Engineer, the Contractor shall provide a written list of Category 2 temporary traffic control devices to be used on the project at least 5 business days before beginning any work using the devices or within 2 business days after the request if the devices are already in use.

Category 3 temporary traffic control devices consist of temporary traffic-handling equipment and devices that weigh 100 pounds or more and are expected to produce significant vehicular velocity change to impacting vehicles. Temporary traffic-handling equipment and devices include crash cushions, truck-mounted attenuators, temporary railing, temporary barrier, and end treatments for temporary railing and barrier.

Type III barricades may be used as sign supports if the barricades have been successfully crash tested, meeting the NCHRP Report 350 criteria, as one unit with a construction area sign attached.

Category 3 temporary traffic control devices shall be shown on the plans or on the Department's Highway Safety Features list. This list is maintained by the Division of Engineering Services and can be found at:

http://www.dot.ca.gov/hq/esc/approved_products_list/

Category 3 temporary traffic control devices that are not shown on the plans or not listed on the Department's Highway Safety Features list shall not be used.

B. MEASUREMENT AND PAYMENT

Full compensation for providing self-certification for crashworthiness of Category 1 temporary traffic control devices and for providing a list of Category 2 temporary traffic control devices used on the project shall be considered as included in the prices paid for the various items of work requiring the use of the Category 1 or Category 2 temporary traffic control devices and no additional compensation will be allowed therefor.

40. CONSTRUCTION AREA SIGNS

A. DESCRIPTION OF WORK

Construction area signs for temporary traffic control shall be furnished, installed, maintained, and removed when no longer required in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Furnish Sign" of these special provisions.

Attention is directed to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Type II retroreflective sheeting shall not be used on construction area sign panels. Type III, IV, VII, VIII, or IX retroreflective sheeting shall be used for stationary mounted construction area sign panels.

Attention is directed to "Construction Project Information Signs" of these special provisions regarding the number and type of construction project information signs to be furnished, erected, maintained, and removed and disposed of.

The Contractor shall furnish and install 2 2006 State Transportation Bond Funding Identification signs at locations designated by the Engineer before starting major construction activities visible to highway users. Upon completion of the project, the Contractor shall remove and dispose of 2006 State Transportation Bond Funding Identification signs. Manufacturing details are provided in these Special Provisions. Unless otherwise shown on the plans or specified in these special provisions, the color of construction area warning and guide signs shall have black legend and border on orange background, except W10-1 or W47(CA) (Highway-Rail Grade Crossing Advance Warning) sign shall have black legend and border on yellow background.

Orange background on construction area signs shall be fluorescent orange.

Repair to construction area sign panels will not be allowed, except when approved by the Engineer. At nighttime under vehicular headlight illumination, sign panels that exhibit irregular luminance, shadowing or dark blotches shall be immediately replaced at the Contractor's expense.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 business days, but not more than 14 days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert	811 OR (800)227-2600

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes. The post hole

diameter, if backfilled with portland cement concrete, shall be at least 4 inches greater than the longer dimension of the post cross section.

Construction area signs placed within 15 feet from the edge of the travel way shall be mounted on stationary mounted sign supports as specified in "Construction Area Traffic Control Devices" of these special provisions.

The Contractor shall maintain accurate information on construction area signs. Signs that are no longer required shall be immediately covered or removed. Signs that convey inaccurate information shall be immediately replaced or the information shall be corrected. Covers shall be replaced when they no longer cover the signs properly. The Contractor shall immediately restore to the original position and location any sign that is displaced or overturned, from any cause, during the progress of work.

B. MEASUREMENT AND PAYMENT

Construction Area Signs shall be measured and paid for in the same manner specified for Construction Area Signs as provided in Section 12 “Construction Area Traffic Control Devices” of the Standard Specifications.

Full compensation for furnishing and installing 2006 State Transportation Bond Funding Identification signs, including removal and disposal upon project completion, is included in the contract lump sum price paid for Construction Area Signs**,** and no separate payment will be allowed therefor.

41. MAINTAINING TRAFFIC

A. DESCRIPTION OF WORK

General

Maintaining traffic shall conform to the provisions in Sections 7-1.08, "Public Convenience," Section 7-1.09, "Public Safety," and Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Nothing in these Special Provisions shall be constructed as relieving the contractor from his responsibility as provided in said section 7-1.09.

Closure is defined as the closure of a traffic lane or lanes, including shoulder, ramp or connector lanes, within a single traffic control system.

Closures shall conform to the provisions in "Traffic Control System for Lane Closure" of these special provisions.

Work that interferes with public traffic shall be limited to the hours when lane closures are allowed, except for work required under Sections 7-1.08, "Public Convenience," and Section 7-1.09, "Public Safety."

The full width of the traveled way shall be open for use by public traffic as shown in the table "Lane Closure Restriction for Designated Legal Holidays and Special Days" included in this section, "Maintaining Traffic."

Designated legal holidays are: January 1st, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, and December 25th. When a designated legal holiday falls on a Sunday, the following Monday shall be a designated legal holiday. When November 11th falls on a Saturday, the preceding Friday shall be a designated legal holiday.

Under one-way reversing traffic control operations, public traffic may be stopped in one direction for periods not to exceed 10 minutes. After each stoppage, all accumulated traffic for that direction shall pass through the work zone before another stoppage is made. When traffic is under one-way reversible control, delays to public traffic shall not exceed a total of 20 minutes.

The maximum length of a single stationary lane closure shall be 1 mile.

Not more than 1 separate stationary lane closure will be allowed in each direction of travel at one time.

Local street closures shall conform to the lane closure charts.

Accurate information shall be maintained on the SC6-3(CA) or SC6-4(CA) signs. The SC6-3(CA) or SC6-4(CA) signs, when no longer required, shall be immediately covered or removed.

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders including sections closed to public traffic.

On multilane roadways, when work vehicles or equipment are parked within 6 feet of a traffic lane to perform active construction, the shoulder area shall be closed as shown on the plans.

On 2-lane, 2-way roadways, when work vehicles or equipment are parked within 6 feet of a traffic lane to perform active construction, the shoulder area shall be closed with fluorescent orange traffic cones or portable delineators placed on a taper in advance of the parked vehicles or equipment and along the edge of the pavement at 25-foot intervals to a point not less than 25 feet past the last vehicle or piece of equipment. A minimum of 9 traffic cones or portable delineators shall be used for the taper. A W20-1 (ROAD WORK AHEAD) or W21-5b (RIGHT/LEFT SHOULDER CLOSED AHEAD) or C24(CA) (SHOULDER WORK AHEAD) sign shall be mounted on a crashworthy portable sign support with flags. The sign shall be placed where designated by the Engineer. The sign shall be a minimum of 48" x 48" in size. The Contractor shall immediately restore to the original position and location a traffic cone or delineator that is displaced or overturned, during the progress of work.

On multilane roadways, w minimum of one paved traffic lane, not less than 11 feet wide, shall be open for use by public traffic in each direction of travel.

On 2-lane, 2-way roadways, a minimum of one paved traffic lane, not less than 11 feet wide, shall be open for use by public traffic.

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the signs shown on the plans shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

Lane Closure Restriction for Designated Legal Holidays and Special Days										
Thu	Fri	Sat	Sun	Mon	Tues	Wed	Thu	Fri	Sat	Sun
x	**H** xx	xx	xx							
	SD xx									
x	xx	**H** xx	xx							
		SD xx								
	x	xx	**H** xx	xx						
			SD xx							
	x	xx	xx	**H** xx	xxx					
	x	xx	xx	**SD** xx	xxx					
				x	**H** xx					
				x	**SD** xx					
					x	**H** xx				
						SD xx				
						x	**H** xx	xx	xx	xx
							SD xx			

Legends:	
	Refer to lane closure charts
x	The full width of the traveled way shall be open for use by public traffic after 0600 hours.
xx	The full width of the traveled way shall be open for use by public traffic.
xxx	The full width of the traveled way shall be open for use by public traffic until 1900 hours.
H	Designated Legal Holiday
SD	Special Day

The contractor will prepare and implement a coordinated Transportation Management Plan (TMP) for the project that addresses local and Caltrans concerns. The TMP shall be submitted to the City, Caltrans, Butte Regional Transit, California Highway Patrol, and Chico Unified School District 30 days prior to commencement of construction. The TMP shall be consistent with City and Caltrans policies and procedures.

The TMP will identify the locations of any temporary detours and signage to facilitate local traffic patterns and through traffic requirements. The TMP will also identify TMP strategies that will be considered for the project, including Construction Zone Enhanced Enforcement Patrol, lane closures, and maintaining traffic.

The TMP will include measures to facilitate coordination with Butte Regional Transit to ensure that B-Line bus routes are not adversely affected during project construction. The TMP

will also include measures to facilitate coordination with the California Highway Patrol to ensure that operations out of its office at 995 Fir Street will not be affected during project construction.

The Contractor will provide 10 days notice to residents, businesses, and the school to minimize construction conflicts. Construction activities will be coordinated to avoid blocking or limiting access to homes, businesses, and properties to the maximum extent possible. Residents and businesses will be advised about potential access or parking affects before construction activities begin.

The Contractor shall provide 10 days notice to emergency service providers (i.e. law enforcement, fire protection, ambulance service, and the California Highway Patrol), Butte Regional Transit, and the Chico Unified School District of any construction activity that would hinder emergency vehicle response time, bus travel routes, or access to or from a school.

The Contractor shall keep current and notify the local Police, California Highway Patrol, Butte Regional Transit (B-Line), Chico Unified School District, and Fire Departments of his construction operations and traffic control changes three (3) days before traffic changes are made. The Contractor shall cooperate with local authorities relative to handling traffic through the area and shall make his own arrangements in keeping the work area clear of parked vehicles.

When leaving a work area and entering a roadway carrying public traffic, the Contractor's equipment, whether empty or loaded, shall in all cases yield to public traffic.

Signage used for traffic handling during construction shall conform with the latest edition of the California MUTCD, and these Special Provisions.

Pavement that has been planed shall be repaved within 72 hours of the initial grinding operation. Pavement shall not be left planed over the weekend; repaving shall be completed by Friday.

The Traffic Management Plan shall include a parking plan to accommodate construction equipment and parking for construction workers at the same sites. For each construction phase, the parking plan will identify sites for construction staging/parking to avoid effects on local residents and businesses. Personal vehicles of the Contractor's employees shall not be marked on the traveled way or shoulders, including any section closed to the public.

Full compensation for preparing the Traffic Management Plan shall be considered as included in various items of work, and no additional payment will be allowed therefor.

Pedestrian and Bicycle Provisions

Pedestrian and bicycle access facilities shall be provided through construction areas within the right of way as shown on the plans and as specified herein. Pedestrian walkways and bicycle access shall be surfaced with hot mix asphalt, portland cement concrete or timber. The surface shall be skid resistant and free of irregularities. Hand railings shall be provided on each side of pedestrian walkways as necessary to protect pedestrian traffic from hazards due to construction operations or adjacent vehicular traffic. All pedestrian walkways shall be ADA complaint. Protective overhead covering shall be provided as necessary to insure protection from falling objects and drip from overhead structures.

Pedestrian facilities shall be provided during pile driving, footing, and wall construction operations. At least one walkway shall be available at all times. If the Contractor's operations require the closure of one walkway, then another walkway shall be provided nearby, off the traveled roadway.

The contractor shall be responsible for preparing a pedestrian and bicycle access plan to accommodate pedestrians and bicyclists during construction activities, and shall include it in the "Traffic Management Plan" discussed previously.

Railings shall be constructed of wood, S4S, and shall be painted white. Railings and walkways shall be maintained in good condition. Walkways shall be kept clear of obstructions.

Full compensation for providing pedestrian and bicycle facilities shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

Temporary signal plans for the Forest Ave. intersection have been included with this work, and include temporary pedestrian facilities. The contractor's attention is directed to the signal and lighting plans and "Temporary Signal System" of these special provisions for further details.

Lane Closure Charts

Chart No. 1
Expressway Lane Requirements

County: BUT	Route/Direction: 32/ EB & WB	PM: 10.3/11.3

Closure Limits: 10.3/10.66

FROM HOUR TO HOUR	24	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Mondays through Thursdays	1	1	1	1	1	1	1	1	1	1	1	1								1	1	1	1	1	
Fridays	1	1	1	1	1	1	1	1	1	1	1	1								1	1	1	1	1	
Saturdays	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Sundays	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

Legend:

1	Provide at least one through lane, not less than 11 feet in width, open in each direction of travel
	Work permitted within project right of way where shoulder or lane closure is not required.

REMARKS:

- **See Lane Closure Restriction for Designated Legal Holidays and Special Days table in Maintain Traffic of these special provisions for additional closure restrictions.**

Chart No. 2
Conventional Highway Lane Requirements

County: BUT	Route/Direction: 32 / EB & WB	PM: 10.3/11.3

Closure Limits: 10.66/11.3

FROM HOUR TO HOUR	24	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Mondays through Thursdays	R	R	R	R	R	R	R															R	R	R	
Fridays	R	R	R	R	R	R	R															R	R	R	
Saturdays	R	R	R	R	R	R	R	R													R	R	R	R	
Sundays	R	R	R	R	R	R	R	R	R													R	R	R	

Legend:

R	Provide at least one through traffic lane, not less than 11 feet in width, for use by both directions of travel . (Reversing Control)

REMARKS:

- **See Lane Closure Restriction for Designated Legal Holidays and Special Days table in Maintain Traffic of these special provisions for additional closure restrictions**

Chart No. 3
Conventional Highway Lane Requirements

County: BUT	Route/Direction: 32 / EB & WB	PM: 10.3/11.3

Closure Limits: Forest Ave between Humboldt Road and Modoc Dr.

FROM HOUR TO HOUR	24	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Mondays through Thursdays	R	R	R	R	R	R	R															R	R	R	
Fridays	R	R	R	R	R	R	R															R	R	R	
Saturdays	R	R	R	R	R	R	R	R													R	R	R	R	
Sundays	R	R	R	R	R	R	R	R	R													R	R	R	

Legend:

R Provide at least one through traffic lane, not less than 11 feet in width, for use by both directions of travel . (Reversing Control)

REMARKS:

- **Flaggers may be used at the intersection of SR 32 and Forest Ave**
- **See Lane Closure Restriction for Designated Legal Holidays and Special Days table in Maintain Traffic of these special provisions for additional closure restrictions**

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for traffic control system shall include full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in Maintaining Traffic, including preparing a Traffic Management Plan that incorporates a Pedestrian and Bicycle Access Plan, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for preparing the Pedestrian and Bicycle Access Plan as part of the "Traffic Management Plan" is included in the contract lump sum price for Traffic Control System and no additional payment will be made therefor.

Full compensation for providing pedestrian and bicycle facilities shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

The cost of furnishing all flaggers, including transporting flaggers, to provide for passage of public traffic through the work under the provisions in Sections 7-1.08, "Public Convenience," and 7-1.09, "Public Safety," will be borne entirely by the Contractor.

42. CLOSURE REQUIREMENTS AND CONDITIONS

A. DESCRIPTION OF WORK

Closures shall conform to the provisions in "Maintaining Traffic" of these special provisions and these special provisions.

CLOSURE SCHEDULE

A written schedule of planned closures for the next week period, defined as Sunday noon through the following Sunday noon, shall be submitted by noon each Monday. A written schedule shall be submitted not less than 25 days and not more than 125 days before the anticipated start of any operation that will:

1. Reduce horizontal clearances, traveled way, including shoulders, to two lanes or less due to such operations as temporary barrier placement and paving
2. Reduce the vertical clearances available to the public due to such operations as pavement overlay, overhead sign installation, or falsework or girder erection

The Closure Schedule shall show the locations and times of the proposed closures. The Closure Schedule request forms furnished by the Engineer shall be used. Closure Schedules submitted to the Engineer with incomplete or inaccurate information will be rejected and returned for correction and resubmittal. The Contractor will be notified of disapproved closures or closures that require coordination with other parties as a condition of approval.

Closure Schedule amendments, including adding additional closures, shall be submitted by noon to the Engineer, in writing, at least 3 business days in advance of a planned closure. Approval of Closure Schedule amendments will be at the discretion of the Engineer.

The Engineer shall be notified of cancelled closures 2 business days before the date of closure.

Closures that are cancelled due to unsuitable weather may be rescheduled at the discretion of the Engineer.

CONTINGENCY PLAN

A detailed contingency plan shall be prepared for reopening closures to public traffic. If required by "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions, the contingency plan shall be submitted to the Engineer before work at the job site begins. Otherwise, the contingency plan shall be submitted to the Engineer within one business day of the Engineer's request.

LATE REOPENING OF CLOSURES

If a closure is not reopened to public traffic by the specified time, work shall be suspended in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. No further closures are to be made until the Engineer has accepted a work plan, submitted by the Contractor, that will insure that future closures will be reopened to public traffic at the specified time. The Engineer will have 2 business days to accept or reject the Contractor's proposed work plan. The Contractor will not be entitled to compensation for the suspension of work resulting from the late reopening of closures.

COMPENSATION

The Engineer shall be notified of delays in the Contractor's operations due to the following conditions, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of those conditions, and the Contractor's loss due to that delay could not have been avoided by rescheduling the affected closure or by judicious handling of forces, equipment and plant, the delay will be considered a right of way delay and will be compensated in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications:

1. The Contractor's proposed Closure Schedule is denied and his planned closures are within the time frame allowed for closures in "Maintaining Traffic" of these special provisions, except that the Contractor will not be entitled to compensation for amendments to the Closure Schedule that are not approved.
2. The Contractor is denied a confirmed closure.

Should the Engineer direct the Contractor to remove a closure before the time designated in the approved Closure Schedule, delay to the Contractor's schedule due to removal of the closure will be considered a right of way delay and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for implementing lane closures shall be considered as included in the contract lump sum price paid for Traffic Control System, and no additional payment will be allowed therefor.

43. IMPACT ATTENUATOR VEHICLE

A. DESCRIPTION OF WORK

GENERAL

Summary

Work includes protecting traffic and workers by using impact attenuator vehicle as a shadow vehicle when placing and removing components of a traffic control system, and when performing a moving lane closure.

Comply with Section 12-3.03, "Flashing Arrow Signs," of the Standard Specifications.

Impact attenuator vehicle must comply with the following test levels under National Cooperative Highway Research Program 350:

1. Test level 3 for pre-construction posted speed limit of 50 mph or more
2. Test levels 2 or 3 for pre-construction posted speed limit of 45 mph or less

Comply with the attenuator manufacturer's recommendations for:

1. Support truck

2. Trailer-mounted operation
3. Truck-mounted operation

Definitions

impact attenuator vehicle: Support truck towing a deployed attenuator mounted to a trailer or support truck with a deployed attenuator mounted to the support truck.

Submittals

Upon request, submit a Certificate of Compliance for attenuator to the Engineer under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Quality Control and Assurance

Attenuator must be a brand listed on the Department's pre-approved list under Highway Safety Features at:

http://www.dot.ca.gov/hq/esc/approved_products_list/

MATERIALS

The combined weight of the support truck and the attenuator must be at least 19,800 pounds, except the weight of the support truck must not be less than 16,100 pounds or greater than 26,400 pounds.

If using the Trinity MPS-350 truck-mounted attenuator, the support truck must not have any underneath fuel tank mounted within 10'-6" of the rear of the support truck.

Each impact attenuator vehicle must:

1. Have standard brake lights, taillights, sidelights, and turn signals
2. Have an inverted "V" chevron pattern placed across the entire rear of the attenuator composed of alternating 4 inch wide non-reflective black stripes and 4 inch wide yellow retroreflective stripes sloping at 45 degrees
3. Have a Type II flashing arrow sign
4. Have a flashing or rotating amber light
5. Have an operable 2-way communication system for maintaining contact with workers

CONSTRUCTION

Use impact attenuator vehicle to follow behind equipment and workers who are placing and removing components of a traffic control system for a lane closure. Flashing arrow sign must be operating in arrow mode during this activity. Follow at a distance to prevent intrusion into the workspace from passing traffic.

After placing components of a traffic control system for a lane closure you may use impact attenuator vehicle in a closed lane and in advance of a work area to protect traffic and workers.

Use impact attenuator vehicle as a shadow vehicle under traffic control for a moving lane closure.

Secure objects including equipment, tools and ballast on impact attenuator vehicle to prevent loosening upon impact by an errant vehicle.

Do not use a damaged attenuator in the work. Replace, at your expense, an attenuator damaged from an impact during work.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing and operating impact attenuator vehicle is included in the contract lump sum price paid for traffic control system, and no additional compensation will be allowed therefor.

44. TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE

A. DESCRIPTION OF WORK

A traffic control system shall consist of closing traffic lanes in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, the provisions under "Maintaining Traffic" and "Construction Area Signs" of these special provisions, and these special provisions.

The provisions in this section will not relieve the Contractor of responsibility for providing additional devices or taking measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

During traffic stripe operations and pavement marker placement operations using bituminous adhesive, traffic shall be controlled, at the option of the Contractor, with either stationary or moving lane closures. During other operations, traffic shall be controlled with stationary lane closures. Attention is directed to the provisions in Section 84-1.04, "Protection From Damage," and Section 85-1.06, "Placement," of the Standard Specifications.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

STATIONARY LANE CLOSURE

When lane closures are made for work periods only, at the end of each work period, components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations, designated by the Engineer within the limits of the highway right of way.

Each vehicle used to place, maintain and remove components of a traffic control system on multilane highways shall be equipped with a Type II flashing arrow sign which shall be in operation when the vehicle is being used for placing, maintaining or removing the components. Vehicles equipped with Type II flashing arrow sign not involved in placing, maintaining or

removing the components when operated within a stationary type lane closure shall only display the caution display mode. The sign shall be controllable by the operator of the vehicle while the vehicle is in motion. The flashing arrow sign shown on the plans shall not be used on the vehicles which are doing the placing, maintaining and removing of components of a traffic control system and shall be in place before a lane closure requiring the sign's use is completed.

MOVING LANE CLOSURE

Flashing arrow signs used in moving lane closures shall be truck-mounted. Changeable message signs used in moving lane closure operations shall conform to the provisions in Section 12-3.12, "Portable Changeable Message Signs," of the Standard Specifications, except the signs shall be truck-mounted and the full operation height of the bottom of the sign may be less than 7 feet above the ground, but should be as high as practicable.

Truck-mounted attenuators (TMA) for use in moving lane closures shall be any of the following approved models, or equal:

1. Hexfoam TMA Series 3000, Alpha 1000 TMA Series 1000, and Alpha 2001 TMA Series 2001, manufactured by Energy Absorption Systems, Inc., 35 East Wacker Drive, Suite 1100, Chicago, IL 60601:

    1.1. Northern California: Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828, telephone (800) 884-8274, FAX (916) 387-9734
    1.2. Southern California: Traffic Control Service, Inc., 1818 E. Orangethorpe, Fullerton, CA 92831-5324, telephone (800) 222-8274, FAX (714) 526-9501

2. Cal T–001 Model 2 or Model 3, manufacturer and distributor: Hexcel Corporation, 11711 Dublin Boulevard, P.O. Box 2312, Dublin, CA 94568, telephone (925) 551–4900
3. Renco Rengard Model Nos. CAM 8–815 and RAM 8–815, manufacturer and distributor: Renco Inc., 1582 Pflugerville Loop Road, P.O. Box 730, Pflugerville, TX 78660–0730, telephone (800) 654–8182

Each TMA shall be individually identified with the manufacturer's name, address, TMA model number, and a specific serial number. The names and numbers shall each be a minimum 1/2 inch high and located on the left (street) side at the lower front corner. The TMA shall have a message next to the name and model number in 1/2 inch high letters which states, "The bottom of this TMA shall be 24 to 36 inches above the ground at all points for proper impact performance." Any TMA which is damaged or appears to be in poor condition shall not be used unless recertified by the manufacturer. The Engineer shall be the sole judge as to whether used TMAs supplied under this contract need recertification. Each unit shall be certified by the manufacturer to meet the requirements for TMA in conformance with the standards established by the Transportation Laboratory.

Approvals for new TMA designs proposed as equal to the above approved models shall be in conformance with the procedures (including crash testing) established by the Transportation Laboratory. For information regarding submittal of new designs for evaluation contact: Transportation Laboratory, 5900 Folsom Boulevard, Sacramento, California 95819.

New TMAs proposed as equal to approved TMAs or approved TMAs determined by the Engineer to need recertification shall not be used until approved or recertified by the Transportation Laboratory.

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for traffic control system shall include full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in placing, removing, storing, maintaining, moving to new locations, replacing and disposing of the components of the traffic control system shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The adjustment provisions in Section 4-1.03, "Changes," of the Standard Specifications shall not apply to the item of traffic control system. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.03, "Force Account Payment," of the Standard Specifications for increased work and estimated on the same basis in the case of decreased work.

Traffic control system required by work which is classed as extra work, as provided in Section 4-1.03D of the Standard Specifications, will be paid for as a part of the extra work.

45. TEMPORARY PAVEMENT DELINEATION

A. DESCRIPTION OF WORK

Temporary pavement delineation shall be furnished, placed, maintained, and removed in conformance with the provisions in Section 12-3.01, "General," of the Standard Specifications and these special provisions. Nothing in these special provisions shall be construed as reducing the minimum standards specified in the California MUTCD or as relieving the Contractor from the responsibilities specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

GENERAL

When the work causes obliteration of pavement delineation, temporary or permanent pavement delineation shall be in place before opening the traveled way to public traffic. Laneline or centerline pavement delineation shall be provided for traveled ways open to public traffic. On multilane roadways (freeways and expressways) edgeline delineation shall be provided for traveled ways open to public traffic.

The Contractor shall perform the work necessary to establish the alignment of temporary pavement delineation, including required lines or markers. Surfaces to receive application of paint or removable traffic tape temporary pavement delineation shall be dry and free of dirt and loose material. Temporary pavement delineation shall not be applied over existing pavement delineation or other temporary pavement delineation. Temporary pavement delineation shall be maintained until superseded or replaced with a new pattern of temporary pavement delineation or permanent pavement delineation, or as determined by the Engineer.

Temporary pavement markers, including underlying adhesive, and removable traffic tape that are applied to the final layer of surfacing or existing pavement to remain in place or that conflicts with a subsequent or new traffic pattern for the area shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

TEMPORARY LANELINE AND CENTERLINE DELINEATION

When lanelines or centerlines are obliterated and temporary pavement delineation to replace the lines is not shown on the plans, the minimum laneline and centerline delineation to be provided for that area shall be temporary pavement markers placed at longitudinal intervals of not more than 24 feet. The temporary pavement markers shall be the same color as the laneline or centerline the pavement markers replace. Temporary pavement markers shall be, at the option of the Contractor, one of the temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (180 days or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. The temporary pavement markers shall be placed in conformance with the manufacturer's instructions. Temporary pavement markers for long term day/night use (180 days or less) shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used to place the temporary pavement markers in areas where removal of the temporary pavement markers will be required.

Temporary laneline or centerline delineation consisting entirely of temporary pavement markers listed for short term day/night use (14 days or less), shall be placed on longitudinal intervals of not more than 24 feet and shall be used for a maximum of 14 days on lanes opened to public traffic. Before the end of the 14 days the permanent pavement delineation shall be placed. If the permanent pavement delineation is not placed within the 14 days, the Contractor shall replace the temporary pavement markers and provide additional temporary pavement delineation and shall bear the cost thereof. The additional temporary pavement delineation to be provided shall be equivalent to the pattern specified for the permanent pavement delineation for the area, as determined by the Engineer.

Where "no passing" centerline pavement delineation is obliterated, the following "no passing" zone signing shall be installed before opening the lanes to public traffic. W20-1 (ROAD WORK AHEAD) signs shall be installed from 1,000 feet to 2,000 feet in advance of "no passing" zones. R4-1 (DO NOT PASS) signs shall be installed at the beginning and at every 2,000-foot interval within "no passing" zones. R4-2 (PASS WITH CARE) signs shall be installed at the end of "no passing" zones. The exact location of "no passing" zone signing will be as determined by the Engineer and shall be maintained in place until permanent "no passing" centerline pavement delineation has been applied. The signing for "no passing" zones, shall be removed when no longer required for the direction of public traffic. The signing for "no passing" zones shall conform to the provisions in "Construction Area Signs" of these special provisions, except for payment.

TEMPORARY EDGELINE DELINEATION

On multilane roadways (freeways and expressways), when edgelines are obliterated and temporary pavement delineation to replace those edgelines is not shown on the plans, the

edgeline delineation to be provided for those areas adjacent to lanes open to public traffic shall be as follows:

1. Temporary pavement delineation for right edgelines shall, at the option of the Contractor, consist of either a solid 4-inch wide traffic stripe tape of the same color as the stripe it replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 100 feet.
2. Temporary pavement delineation for left edgelines shall, at the option of the Contractor, consist of either solid 4-inch wide traffic stripe tape of the same color as the stripe it replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 100 feet or temporary pavement markers placed at longitudinal intervals of not more than 6 feet.

Where removal of the 4-inch wide traffic stripe will not be required, painted traffic stripe conforming to the provisions of "Temporary Traffic Stripe (Paint)" of these special provisions may be used.

The lateral offset for traffic cones, portable delineators or channelizers used for temporary edgeline delineation shall be as determined by the Engineer. If traffic cones or portable delineators are used as temporary pavement delineation for edgelines, the Contractor shall provide personnel to remain at the project site to maintain the cones or delineators during the hours of the day that the portable delineators are in use.

Channelizers used for temporary edgeline delineation shall be the surface mounted type and shall be orange in color. Channelizer bases shall be cemented to the pavement in the same manner provided for cementing pavement markers to pavement in "Pavement Markers" of these special provisions, except epoxy adhesive shall not be used to place channelizers on the top layer of pavement. Channelizers shall be, at the Contractor's option, one of the surface mount types (36 inch) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary edgeline delineation shall be removed when no longer required for the direction of public traffic as determined by the Engineer.

TEMPORARY TRAFFIC STRIPE (PAINT)

The painted temporary traffic stripe shall be complete in place at the location shown before opening the traveled way to public traffic. Removal of painted temporary traffic stripe will not be required.

Temporary painted traffic stripe shall conform to the provisions in Section 84-3, "Painted Traffic Stripes and Pavement Markings," of the Standard Specifications, except for payment. At the option of the Contractor, either one or 2 coats shall be applied regardless of whether on new or existing pavement.

TEMPORARY PAVEMENT MARKING (PAINT)

Temporary pavement marking consisting of painted pavement marking shall be applied and maintained at the locations shown on the plans. The painted temporary pavement marking shall be complete in place at the location shown before opening the traveled way to public traffic. Removal of painted temporary pavement marking will not be required.

Temporary painted pavement marking shall conform to the provisions in "Paint Traffic Stripe and Pavement Marking" of these special provisions, except for payment. At the option of the Contractor, either one or 2 coats shall be applied regardless whether on new or existing pavement.

At the Contractor's option, temporary removable pavement marking tape or permanent pavement marking tape listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be used instead of painted temporary pavement markings. When pavement marking tape is used, regardless of which type of tape is placed, the tape will be measured and paid for by the square foot as temporary pavement marking (paint).

TEMPORARY PAVEMENT MARKERS

Temporary pavement markers shall be applied complete in place before opening the traveled way to public traffic.

Temporary pavement markers shall be, at the option of the Contractor, one of the temporary pavement markers for long term day/night use (180 days or less) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary pavement markers shall be placed in conformance with the manufacturer's instructions and shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used in areas where removal of the pavement markers will be required.

Retroreflective pavement markers conforming to the provisions in "Pavement Markers" of these special provisionsmay be used in place of temporary pavement markers for long term day/night use (180 days or less) except to simulate patterns of broken traffic stripe. Placement of the retroreflective pavement markers used for temporary pavement markers shall conform to the provisions in "Pavement Markers" of these special provisions except the waiting period provisions before placing the pavement markers on new hot mix asphalt surfacing as specified in Section 85-1.06, "Placement," of the Standard Specifications shall not apply and epoxy adhesive shall not be used to place pavement markers in areas where removal of the pavement markers will be required.

B. <u>MEASUREMENT AND PAYMENT</u>

Temporary traffic stripe and temporary pavement marking shown on the plans will be measured and paid for in the same manner specified for paint traffic stripe and paint pavement marking in Section 84-3.06, "Measurement," and Section 84-3.07, "Payment," of the Standard Specifications.

Temporary pavement markers shown on the plans will be measured and paid for by the unit in the same manner specified for retroreflective pavement markers in Section 85-1.08, "Measurement," and Section 85-1.09, "Payment," of the Standard Specifications.

Full compensation for furnishing, placing, maintaining, and removing the temporary pavement markers (including underlying adhesive, layout (dribble) lines to establish alignment of temporary pavement markers or used for temporary laneline and centerline delineation and signing specified for "no passing" zones) for those areas where temporary laneline and centerline delineation is not shown on the plans and for providing equivalent patterns of permanent traffic lines for those areas when required, shall be considered as included in the contract prices paid for the items of work that obliterated the laneline and centerline pavement delineation and no separate payment will be made therefor.

Full compensation for furnishing, placing, maintaining, and removing temporary edgeline delineation not shown on the plans shall be considered as included in the contract prices paid for the items of work that obliterated the edgeline pavement delineation and no separate payment will be made therefor. The quantity of channelizers used as temporary edgeline delineation will not be included in the quantity of channelizer (surface mounted) to be paid for.

Full compensation for removing temporary pavement delineation, shall be considered as included in the contract prices paid temporary pavement delineation, and additional payment will be made therefor.

46. BARRICADE

A. DESCRIPTION OF WORK

Barricades shall be furnished, placed and maintained at the locations shown on the plans, specified in the Standard Specifications or in these special provisions or where designated by the Engineer. Barricades shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Prequalified and Tested Signing and Delineation Materials" of these special provisions regarding retroreflective sheeting for barricades.

Construction area sign and marker panels conforming to the provisions in Section 12-3.06, "Construction Area Signs," of the Standard Specifications shall be installed on barricades in a manner determined by the Engineer at the locations shown on the plans.

Sign panels for construction area signs and marker panels installed on barricades shall conform to the provisions in Section 12-3.06A, "Stationary Mounted Signs," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing, installing, maintaining, and removing construction area signs and marker panels on barricades shall be considered as included in the contract unit price paid for the type of barricade involved and no separate payment will be made therefor.

Barricades shown on the plans as part of a traffic control system will be paid for as provided in "Traffic Control System for Lane Closure" of these special provisions and will not be included in the count for payment of barricades.

Barricades shown on the plans will be measured and paid for in the same manner specified for Barricades in Section 12-4.01, “Measurement and Payment,” of the Standard Specifications.

47. PORTABLE CHANGEABLE MESSAGE SIGNS

A. DESCRIPTION OF WORK

GENERAL

Summary

Work includes furnishing, placing, operating, maintaining, and removing portable changeable message signs.

Comply with Section 12-3.12 "Portable Changeable Message Signs," of the Standard Specifications.

Definitions

useable shoulder area: Paved or unpaved contiguous surface adjacent to the traveled way with:

1. Sufficient weight bearing capacity to support portable changeable message sign
2. Slope not greater than 6:1 (horizontal:vertical)

Submittals

Upon request, submit a Certificate of Compliance for each portable changeable message sign under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Quality Control and Assurance

Comply with the manufacturer's operating instructions for portable changeable message sign.

Approaching drivers must be able to read the entire message for all phases at least twice at the posted speed limit before passing portable changeable message sign. You may use more than 1 portable changeable message sign to meet this requirement.

MATERIALS

The text of the message displayed on portable changeable message sign must not scroll, or travel horizontally or vertically across the face of the message panel.

CONSTRUCTION

Continuously repeat the entire message in no more than 2 phases of at least 3 seconds per phase.

If useable shoulder area is at least 15 feet wide, the displayed message on portable changeable message sign must be minimum 18-inch character height. If useable shoulder area is less than 15 feet wide, you may use a smaller message panel with minimum 12-inch character height to prevent encroachment in the traveled way.

Start displaying the message on portable changeable message sign 15 minutes before closing the lane.

Place portable changeable message sign in advance of the first warning sign for:

1. Each stationary lane closure
2. Each ramp closure
3. Each connector closure
4. Each shoulder closure
5. Each speed reduction zone

Place portable changeable message sign as far from the traveled way as practicable where it is legible to traffic and does not encroach on the traveled way. Place portable changeable sign before or at the crest of vertical roadway curvature where it is visible to approaching traffic. Avoid placing portable changeable message sign within or immediately after horizontal roadway curvature. Where possible, place portable changeable message sign behind guardrail or temporary railing (Type K).

Except where placed behind guardrail or temporary railing (Type K) use traffic control for shoulder closure to delineate portable changeable message sign.

Remove portable changeable message sign when not in use.

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for portable changeable message signs includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, placing, operating, modifying messages, maintaining portable changeable message signs, complete in place, including transporting from location to location, removing, and repairing or replacing defective or damaged portable changeable message signs, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Portable changeable message signs ordered by the Engineer in excess of the number shown on the plans or specified in these special provisions will be paid for as extra work under Section 4-1.03D, "Extra Work," of the Standard Specifications.

48. TEMPORARY SIGNAL SYSTEM

A. DESCRIPTION OF WORK

The temporary signal system (TSS) shall consist of installing and maintaining temporary traffic signal, lighting and flashing beacons for traffic control in conformance with the details shown on the plan entitled "TemporarySignal," the provisions in "Maintaining Traffic" of these special provisions, the provisions in Section 86, "Electrical Systems," of the Standard Specifications, and these special provisions.

The provisions in this section shall not relieve the Contractor from the responsibility to provide the additional devices or take the measures as may be necessary to conform to the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

One Model 2070 traffic signal controller assembly (including wired cabinet, controller unit and loop detector sensor units) will be furnished to the Contractor.

Other materials and equipment for a temporary signal system including, but not limited to, flashing beacons, signal heads, mast arms, luminaires, wood poles, conductors, and hardware shall be furnished by the Contractor.

Materials and equipment to be used in the temporary signal system shall be either new or used suitable for the intended use.

Each signal face shall be oriented to be clearly visible to traffic approaching from the direction which the signal is intended to control.

OPERATION

Temporary signal system shall operate at nominal 120 V (ac). Lighting shall operate at 120 V (ac) or 240 V (ac).

Unless otherwise directed by the Engineer, the system shall be operated on a continuous 24-hour basis except for the periods when it is necessary to control traffic by flaggers.

Timing of a temporary signal system will be performed by State forces.

MAINTAINING TEMPORARY SIGNAL SYSTEM

Maintaining a temporary signal system, except the controller assembly, shall be the sole responsibility of the Contractor.

If components in the temporary signal system are damaged, displaced or cease to operate or function as specified, from any cause during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location. Components shall include signs, generator, flashing beacons, and signal equipment.

In the event the temporary signal system is out of operation, for any reason, the Contractor shall provide flaggers, at the Contractor's expense, to maintain traffic control until the traffic signals are returned to service.

CONDUIT

At those locations where conduit is to be installed under pavement, if delay to vehicles will not exceed 5 minutes, conduit may be installed by the trenching in pavement method in conformance with the provisions for "Trenching in Pavement Method" in Section 86-2.05C, "Installation," of the Standard Specifications and these special provisions.

CONDUCTORS AND WIRING

Conductors shall be the types specified in Section 86-2.08, "Conductors and Cables," of the Standard Specifications or shall be Type UF cable of the size and number of conductors shown on the plans. Minimum conductor size shall be No. 12.

Where conductors are to be placed across paved areas, the conductors shall be placed in conduit or in slots cut in the pavement as specified for inductive loop detectors in Section 86-5.01A(4), "Installation Details," of the Standard Specifications, including placing sealant over the conductors, or the conductors shall be suspended at least 25 feet above the roadway.

Conductors to be placed outside of paved areas shall be placed by one of the following methods:

1. Direct burial method with Type UF cable installed at a minimum depth of 24 inches below grade.
2. Placed in conduit. If Type 1 or Type 2 conduit is used, the minimum depth shall be 12 inches. If Type 3 conduit is used, the minimum depth shall be 18 inches.
3. Suspended from wood poles with a minimum clearance at any point of 10 feet. Conductors on the pole within 10 feet above ground shall be enclosed in a Type 3 or Type 4 conduit.

Conductors to be placed across structures shall be placed in a Type 1, Type 2 or Type 3 conduit. The conduit shall be installed on the outside face of the railing and secured by a method determined by the Engineer.

Conductors to a terminal compartment or signal head on a pole may be spliced to through conductors of the same phase in a pull box adjacent to the pole. Conductors or cables shall not be spliced except in pull boxes or in NEMA Type 3R enclosures.

BONDING AND GROUNDING

Flashing beacons, signal heads, standards with metal bases and the controller cabinet shall be mechanically and electrically secure to form a continuous system effectively grounded by the grounding conductor.

Generator neutral grounding shall conform to the provisions for multiple service points in Section 86-2.10, "Bonding and Grounding," of the Standard Specifications.

SERVICE

At the option of the Contractor, one of the following methods shall be used to provide power for the TSS:

1. Obtain commercial power from an existing utility company.
2. Commercial power with a generator backup.

COMMERCIAL POWER

Commercial power shall be 120 V (ac) or 120/240 V (ac). Power sources shall be protected in locked enclosures. The Engineer shall be provided with keys to all locks.

Power shall not be obtained from private parties, other than a direct connection to a utility company service point.

Electrical power shall not be used from existing highway facilities, except when approved in writing by the Engineer.

The Contractor shall make arrangements with the utility company for providing service.

Commercial electrical power is available at the work site.

GENERATOR

Generators shall be 120-V or 120/240-V, 60 Hz, 2.5 kW minimum, continuous duty type. Generators may be powered by gasoline, LPG or diesel engines operating at approximately 1800 revolutions per minute. Engines shall be provided with automatic oil feed. Generator systems shall be equipped to provide automatic start-stop operation, with a 12-V starting system. Generator output circuits shall have overcurrent protection with a maximum setting of 15 A or as shown on the plans.

Fuel storage shall be sufficient for periods of time during which the generator system will be operated unattended.

Engines shall be equipped with approved spark arresters.

GENERATOR OPERATION

A generator shall be provided to back up the commercial power.

An automatic transfer switch shall provide the following functions:

1. Monitor line voltage and, in the event of a power outage, signal the generator to start.
2. An engine start delay, adjustable from 0 seconds to 6 seconds, to prevent starting if the power outage is only momentary and an engine stop delay, adjustable from 0 minutes to 8 minutes, to allow the generator set to run unloaded to cool prior to shut down.

3. A transfer delay of 0 seconds to 120 seconds to allow the generator to stabilize before connecting to the load and retransfer delay of 0 minutes to 32 minutes to allow the line voltage to stabilize.
4. A "Load-No Load" switch to allow test with or without load.
5. A "Normal-Test" switch that will start and run the generator in the "Test" position. "Normal" position shall return the generator to automatic operation.
6. A battery charger that is powered by the normal line voltage.
7. A generator voltage sensor that signals for a transfer when the generator output is ready.

A mechanical interlock shall be provided to prevent application of power to the load from both sources and to prevent backfeeding from the generator to the line.

The automatic transfer switch shall be rated at 100 A, 120/240-V, 3-wire, single-phase and shall be compatible with the generator furnished.

STATE-FURNISHED CONTROLLER ASSEMBLY

The Contractor shall construct the controller cabinet foundation as shown for Model 332, 334 or 336 cabinets (including furnishing and installing anchor bolts), shall install the controller cabinet on the foundation, and shall make field wiring connections to the terminal blocks in the controller cabinet.

A listing of field conductor terminations, in each State-furnished controller cabinet, will be furnished free of charge to the Contractor at the site of the work.

State or local forces will maintain all controller assemblies.

DETECTORS

Loop detector sensor units will be State-furnished as part of the controller assembly.

Loop detector lead-in cable shall be Type B.

SALVAGING SIGNAL SYSTEM

Upon completion of the work requiring traffic signals, as determined by the Engineer, State-furnished components of the temporary signal system shall be salvaged and delivered to the District Recycle Center at 2001 Evergreen St., Sacramento. The district coordinator is Richard Johnson at 916-263-4921.

Other materials and equipment shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way," of the Standard Specifications. Pole holes shall be backfilled.

Conductors placed in slots across paved areas as specified herein, when no longer required, shall be abandoned in place when determined by the Engineer. Direct buried conductors, installed 12 inches or more below the ground surface, and conduit may be abandoned in place.

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for signal and lighting (temporary) shall include full compensation for furnishing all labor, materials , tools, equipment, and incidentals, and for doing all the work involved in installing, maintaining, and removing the temporary traffic signal, lighting, and flashing beacon system, and hauling State-furnished materials from and to the location specified, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

49. TEMPORARY RAILING

A. DESCRIPTION OF WORK

Temporary railing (Type K) shall be placed as shown on the plans, as specified in the Standard Specifications or these special provisions or where ordered by the Engineer and shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Temporary railing (Type K) shall be secured in place before starting work for which the temporary railing is required.

Reflectors on temporary railing (Type K) shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary railing (Type K) placed in conformance with the provisions in "Public Safety" of these special provisions will be neither measured nor paid for.

B. MEASUREMENT

The Temporary Railing (Type K) will be measured by the linear foot along the top of the railing, at each location shown on the plans, specified, or ordered by the Engineer.

C. PAYMENT

The contract price paid per linear foot for temporary railing (Type K) shall include full compensation for furnishing all labor, materials (including reinforcement, Type P marker panels and reflectors), tools, equipment and incidentals, and for replacing, and removing the temporary railing, including excavation and backfill, drilling holes and bonding threaded rods or dowels when required, removing threaded rods or dowels and filling the drilled holes with mortar and moving and replacing removable panels as required, complete in place, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

50. CHANNELIZER

A. DESCRIPTION OF WORK

Channelizers shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Channelizers shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

When no longer required for the work as determined by the Engineer, channelizers and underlying adhesive used to cement the channelizer bases to the pavement shall be removed. Removed channelizers and adhesive shall become the property of the Contractor and shall be removed from the site of work.

B. MEASUREMENT

Channelizers (Surface Mounted) shall be measured per each.

C. PAYMENT

The contract unit price paid for Channelizer (Surface Mounted) shall include full compensations for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, placing, maintaining, repairing, replacing and removing Channelizers (Surface Mounted), complete in place, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

51. TEMPORARY CRASH CUSHION (TYPE ABSORB 350)

A. DESCRIPTION OF WORK

This work shall consist of furnishing, installing, and maintaining temporary crash cushion (Type ABSORB 350) at each location shown on the plans, as specified in these special provisions, or where designated by the Engineer.

Temporary crash cushion shall be an ABSORB-350, 9-element system, as manufactured by Barrier Systems, Inc., and shall include the items detailed for temporary crash cushion shown on the plans.

The successful bidder can obtain the crash cushion from the distributor, Statewide Safety and Signs, Inc., at 130 Grobric Court, Fairfield, California, telephone 1-707-864-9952.

The Contractor shall furnish the Engineer with one copy of the manufacturer's plan and parts list.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificated of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the crash cushion conforms to the contract plans and specifications, conforms to the prequalified design and material requirements, and was manufactured in conformance with the approved quality control program.

Crash cushion shall be installed in conformance with the approved quality control program.

Temporary crash cushions (Type ABSORB 350) shall be maintained in place at each location, including times when work is not actively in progress. When no longer required, as

determined by the Engineer, temporary crash cushions (Type ABSORB 350) shall be removed from the site of the work.

Temporary crash cushion systems damaged due to the Contractor's operations shall be repaired immediately by the Contractor at the Contractor's expense. Temporary crash cushion systems damaged beyond repair, as determined by the Engineer, due to the Contractor's operations shall be removed and replaced by the Contractor at the Contractor's expense.

At the completion of the project, temporary crash cushion systems shall become the property of the contractor and shall be removed from the site of the work. Temporary crash cushion systems shall not be installed in the permanent work.

Repairing temporary crash cushion systems damaged by public traffic will be paid for as extra work as provided in Section 4-103D of the Standard Specifications. Temporary crash cushion systems damaged beyond repair by public traffic, when ordered by the Engineer, shall be removed and replaced immediately by the Contractor. Temporary crash cushion systems replaced due to damage by public traffic will be measured and paid for as temporary crash cushion (Type ABSORB 350).

B. MEASUREMENT

Temporary Crash Cushions (Type ABSORB 350) shall be measured per each system.

C. PAYMENT

The contract unit price paid for temporary crash cushion (Type ABSORB 350) shall include full compensation for furnishing all labor, materials (including marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing, installing, maintaining, moving, and removing from the site of the work when no longer required (including those damaged by public traffic) temporary crash cushion systems, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

52. EXISTING HIGHWAY FACILITIES

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

Existing abutment diaphragm concrete that is below ground and interferes with new abutment diaphragm concrete as shown on the contract plans shall be removed as directed by the Engineer and will be paid in conformance with Section 4-l.03D, "Extra Work," of the Standard Specifications.

52-1.01. REMOVE METAL BEAM GUARD RAILING

A. DESCRIPTION OF WORK

Existing metal beam guard railing, where shown on the plans to be removed, shall be removed and disposed of.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing concrete anchors shall be considered as included in the contract price paid per linear foot for remove metal beam guard railing and no separate payment will be made therefor.

TREATED WOOD WASTE

GENERAL

Summary

This work includes handling, storing, transporting, and disposing of treated wood waste (TWW).

Wood removed from metal beam guard railing and roadside signs is treated with one or more of the following:

1. Creosote
2. Pentachlorophenol
3. Copper azole
4. Copper boron azole
5. Chromated copper arsenate
6. Ammoniacal copper zinc arsenate
7. Copper naphthenate
8. Alkaline copper quaternary

Manage TWW under Title 22 CA Code of Regulations, Division 4.5, Chapter 34.

Submittals

For disposal of TWW submit a copy of each completed shipping record and weight receipt to the Engineer within 5 business days of disposal.

CONSTRUCTION

Provide training to personnel who handle TWW or may come in contact with TWW that includes:

1. All applicable requirements of Title 8 CA Code of Regulations
2. Procedures for identifying and segregating TWW
3. Safe handling practices
4. Requirements of Title 22 CA Code of Regulations, Division 4.5, Chapter 34
5. Proper disposal methods

Store TWW before disposal using any of the following methods:

1. Elevate on blocks above a reasonably foreseeable run-on elevation and protect from precipitation

2. Place in water-resistant containers designed for shipping or solid waste collection
3. Place on a containment surface or pad protected from run-on and precipitation
4. Place in a storage building as defined in Title 22 CA Code of Regulations, Div. 4.5, Chp. 34, Section 67386.6 (a)(2)(c).

Prevent unauthorized access to TWW using a secured enclosure such as a locked chain link fenced area or a lockable shipping container located within the project limits.

Resize and segregate TWW at a location where debris from the operation including sawdust and chips can be contained. Collect and manage the debris as TWW.

Provide water-resistant labels, that comply with Title 22 CA Code of Regulations, Division 4.5, Chapter 34, to clearly mark and identify TWW and accumulation areas. Labels must include:

1. Caltrans, District number, Construction, contract number
2. District office address
3. Engineer's name, address, and telephone number
4. Contractor's contact name and telephone number
5. Date placed in storage

Before transporting TWW, obtain an agreement from the receiving facility that the treated wood waste will be accepted. Protect shipments of treated wood waste from loss and exposure to precipitation. For projects with 10,000 pounds or more of TWW, request a hazardous waste generator identification number from the Engineer at least 5 business days before the first shipment. Each shipment must be accompanied by a shipping record such as a bill of lading or invoice that includes:

1. Caltrans with district number
2. Construction contract number
3. District office address
4. Engineer's name, address, and telephone number
5. Contractor's contact name and telephone number
6. Receiving facility name and address
7. Waste description: treated wood waste (preservative type if known or unknown/mixture)
8. Project location
9. Estimated quantity of shipment by weight or volume
10. Date of transport
11. Date of receipt by the receiving TWW facility
12. Weight of shipment as measured by the receiving TWW facility
13. For projects with 10,000 pounds or more of TWW include the generator identification number

The shipping record must be at least a 4-part carbon or carbonless 8-1/2" x 11" form to allow retention of copies by the Engineer, transporter, and disposal facility.

Dispose of TWW at an approved TWW facility. A list of currently approved TWW facilities may be viewed at:

http://www.dtsc.ca.gov/HazardousWaste/upload/TWW_Confirmed_Landfill_List.pdf

Dispose of TWW within:

1. 90 days of generation if stored on blocks
2. 180 days of generation if stored on a containment surface or pad.
3. One year of generation if filling a water-resistant container, or 90 days after the container is full, whichever is shorter
4. One year of generation if storing in a storage building as defined in Title 22 CA code of Regulations, Div. 4.5, Chp. 34, Section 67386.6(a)(2)(C)

B. MEASUREMENT

Remove Metal Beam Guard Railing shall be paid for by the linear foot.

C. PAYMENT

The contract unit price paid per linear foot for Remove Metal Beam Guard Railing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in Remove Metal Beam Guard Railing, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer

Full compensation for handling, storing, transporting, and disposing TWW, including personnel training, is included in the contract price paid for the various items of work involved and no additional compensation will be allowed therefor.

Full compensation for removing cable anchor assemblies, terminal anchor assemblies or steel foundation tubes shall be considered as included in the contract price paid per linear foot for remove metal beam guard railing and no separate payment will be made therefor.

52-1.02. REMOVE PAVEMENT MARKER

A. DESCRIPTION OF WORK

Existing pavement markers, including underlying adhesive, when no longer required for traffic lane delineation as determined by the Engineer, shall be removed and disposed of.

B. MEASUREMENT

Remove Pavement Marker shall be measured per each.

C. PAYMENT

The contract unit price paid per each Remove Pavement Marker shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing

all work involved in removing pavement markers, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

52-1.02. REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING (HAZARDOUS WASTE)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removing existing yellow thermoplastic at the locations shown on the plans. The residue from the removal of this material is a hazardous waste.

Residue from removal of yellow thermoplastic contains lead chromate. The average lead concentration is greater than or equal to 1000 mg/kg total lead or 5 mg/l soluble lead. When applied to the roadway, the yellow thermoplastic traffic stripe contained as much as 2.6 percent lead. Residue produced from the removal of this yellow thermoplastic traffic stripe contains heavy metals in concentrations that exceed thresholds established by the Health and Safety Code and 22 CA Code of Regs. For bidding purposes, assume that the residue is not regulated under the Federal Resource Conservation and Recovery Act (RCRA), 42 USC § 6901 et seq.. Yellow thermoplastic may produce toxic fumes when heated.

Submittals

Lead Compliance Plan: Submit a lead compliance plan under Section 7-1.07, "Lead Compliance Plan," of the Standard Specifications.

Work Plan: Submit a work plan for the removal, containment, storage, and disposal of yellow thermoplastic traffic stripe for acceptance not less than 15 days prior to the start of the removal operations. The work plan must include:

1. Objective of the operation
2. Removal equipment
3. Type of hazardous waste storage containers
4. Container storage location and how it will be secured
5. Hazardous waste sampling protocol and QA/QC requirements and procedures
6. Qualifications of sampling personnel
7. Analytical lab that will perform the analyses
8. CA Department of Toxic Substances Control (DTSC) registration certificate and California Highway Partol (CHP) Biennial Inspection of Terminals (BIT) Program compliance documentation of the hazardous waste hauler that will transport the hazardous waste
9. Disposal site that will accept the hazardous waste residue

The Engineer will review the work plan within 5 business days of receipt.

Do not perform work that generates hazardous waste residue until the work plan has been accepted by the Engineer. The Engineer's review and acceptance does not waive any contract

requirements and does not relieve the Contractor from complying with Federal, State, and local laws, regulations, and requirements.

Correct any rejected work plan and resubmit a corrected work plan within 5 business days of notification by the Engineer; at which time a new review period of 5 business days will begin.

Analytical Test Results: Submit analytical test results of the residue from removal of yellow thermoplastic traffic stripe, including chain of custody documentation, for review and acceptance before:

1. Requesting the Engineer's signature on the waste profile requested by the disposal facility
2. Requesting the Engineer obtain an EPA ID no. for disposal
3. Removing the residue from the site

United States Environmental Protection Agency Identification Number Request: Submit a request for the U.S. EPA ID no. when the Engineer accepts analytical test results documenting that residue from removal of yellow thermoplastic traffic stripe is a hazardous waste.

Disposal Documentation: Submit receiving landfill documentation of proper disposal within 5 business days of residue transport from the project.

CONSTRUCTION

Where grinding or other approved methods are used to remove yellow thermoplastic traffic stripe that will produce a hazardous waste residue, the removed residue, including dust, must be contained and collected immediately. Use a HEPA filter-equipped vacuum attachment operated concurrently with the removal operations or other equally effective approved methods for collection of the residue.

Store hazardous waste residue in labeled and covered containers. Labels must comply with the provisions of 22 CA Code of Regs §§66262.31 and 66262.32. Mark labels with:

1. Date the hazardous waste is generated
2. The words "Hazardous Waste"
3. Composition and physical state of the hazardous waste (for example, asphalt grindings with thermoplastic or paint)
4. The word "Toxic"
5. Name, address, and telephone no. of the Engineer
6. Contract no.
7. Contractor or subcontractor name

Use metal containers approved by the U.S. Department of Transportation for the transportation and temporary storage of the removed residue. Handle the containers such that no spillage occurs. Store containers in a secured enclosure. Acceptable secure enclosures include a locked chain link fenced area or a lockable shipping container located within the project limits until disposal as approved.

Make necessary arrangements to test the yellow thermoplastic hazardous waste residue as required by the disposal facility and these special provisions. Testing must include, at a minimum:

1. Total lead by EPA Method 6010C
2. Total chromium by US EPA Method 7000 series
3. Soluble lead by California Waste Extraction Test
4. Soluble chromium by California Waste Extraction Test
5. Soluble lead by Toxicity Characteristic Leaching Procedure
6. Soluble chromium by Toxicity Characteristic Leaching Procedure

From the 1st 220 gallons of hazardous waste or portion thereof if less than 220 gallons of hazardous waste are produced, a minimum of 4 randomly selected samples must be taken and analyzed individually. Samples must not be composited. From each additional 880 gallons of hazardous waste or portion thereof if less than 880 gallons are produced, a minimum of 1 additional random sample must be taken and analyzed. Use chain of custody procedures consistent with Chapter 9 of U.S. EPA Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (SW-846) while transporting samples from the project to the laboratory. Each sample must be homogenized before analysis by the laboratory performing the analyses. A sample aliquot sufficient to cover the amount necessary for the total and the soluble analyses must then be taken. This aliquot must be homogenized a 2nd time and the total and soluble analyses run on this aliquot. The homogenization process must not include grinding of the samples. Submit the name and location of the disposal facility that will be accepting the hazardous waste and the analytical laboratory along with the testing requirements not less than 5 business days before the start of removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking. The analytical laboratory must be certified by the CA Department of Public Health Environmental Laboratory Accreditation Program for all analyses to be performed.

After the Engineer accepts the analytical test results, dispose of yellow thermoplastic hazardous waste residue at a California Department of Toxic Substance Control permitted Class 1 disposal facility located in CA under the requirements of the disposal facility operator within 30 days after accumulating 220 pounds of residue and dust.

If less than 220 pounds of hazardous waste residue and dust is generated in total, it must be disposed of within 90 days after the start of accumulation of the residue and dust.

Use a hazardous waste manifest and a transporter registered with the CA Department of Toxic Substance Control and in compliance with the CHP BIT Program.. The Engineer will obtain the U.S. EPA ID no. and will sign all manifests as the generator within 2 business days of receiving and accepting the analytical test results and receiving your request for the U.S. EPA ID no.

If analytical test results demonstrate that the residue is a non–hazardous waste and the Engineer agrees, dispose of the residue at an appropriately permitted Class II or Class III facility

under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

B. MEASUREMENT

Remove Yellow Thermoplastic Traffic Stripe (Hazardous Waste) will be measured by the linear foot. Double or triple traffic stripes will be measured as one traffic stripe, and 6-inch wide or 8-inch wide traffic stripes will be measured as one traffic stripe. In measuring traffic stripes, deduction will not be made for gaps in the broken traffic stripes.

C. PAYMENT

The contract price paid per linear foot for remove yellow thermoplastic traffic stripe includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all of the work involved in removal, containment, storage, and disposal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for (1) work plan for the removal, containment, storage, and disposal of yellow thermoplastic traffic stripe hazardous waste residue, (2) analytical test results, (3) US EPA ID no. request, and (4) receiving landfill documentation of proper disposal are included in the contract prices paid per linear foot for remove yellow thermoplastic traffic stripe and no separate payment will be made therefor.

The contract lump sum price paid for Lead Compliance Plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and implementing the plan, including submitting air monitoring or job site inspection reports and providing safety training program, personal protective equipment, training, and washing facilities, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Additional disposal costs for hazardous waste residue regulated under RCRA, as determined by test results, will be paid for as extra work as specified in Section 4-1.03D, "Extra Work," of the Standard Specifications.

If analytical test results demonstrate that the residue is a non–hazardous waste and the Engineer agrees to disposal at a non–hazardous waste disposal facility, no cost adjustment will be made.

C. PAYMENT

The contract price paid per linear foot for remove yellow thermoplastic traffic stripe includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all of the work involved in removal, containment, storage, and disposal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for (1) work plan for the removal, containment, storage, and disposal of yellow thermoplastic traffic stripe hazardous waste residue, (2) analytical test results, (3) US EPA ID no. request, and (4) receiving landfill documentation of proper disposal are included in the contract prices paid per linear foot for remove yellow thermoplastic traffic stripe and no separate payment will be made therefor.

The contract lump sum price paid for Lead Compliance Plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and implementing the plan, including submitting air monitoring or job site inspection reports and providing safety training program, personal protective equipment, training, and washing facilities, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Additional disposal costs for hazardous waste residue regulated under RCRA, as determined by test results, will be paid for as extra work as specified in Section 4-1.03D, "Extra Work," of the Standard Specifications.

If analytical test results demonstrate that the residue is a non–hazardous waste and the Engineer agrees to disposal at a non–hazardous waste disposal facility, no cost adjustment will be made.

52-1.04. REMOVE THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING

A. DESCRITPION OF WORK

This work includes removing existing thermoplastic traffic stripe and pavement marking at the locations shown on the plans.

Submit a lead compliance plan under Section 7-1.07, "Lead Compliance Plan," of the Standard Specifications.

Waste residue from removal of thermoplastic traffic stripe and pavement marking is a non–hazardous waste residue and contains lead in average concentrations less than 1000 mg/kg total lead and 5 mg/L soluble lead. This waste residue does not contain heavy metals in concentrations that exceed thresholds established by the Health and Safety Code and 22 CA Code of Regs and is not regulated under the Federal Resource Conservation and Recovery Act (RCRA), 42 USC § 6901 et seq.

B. MEASUREMENT

Remove Thermoplastic Traffic Stripe will be measured by the linear foot. Double or triple traffic stripes will be measured as one traffic stripe, and 6-inch wide or 8-inch wide traffic stripes will be measured as one traffic stripe. In measuring traffic stripes, deduction will not be made for gaps in the broken traffic stripes.

Remove Thermoplastic Pavement Marking will be measured by area in square feet.

C. PAYMENT

The contract unit price paid per linear foot for Remove Thermoplastic Traffic Stripe shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in removing thermoplastic traffic stripe as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

The contract unit price paid per square foot for Remove Thermoplastic Pavement Marking shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in removing thermoplastic pavement marking, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

52-1.05. REMOVE FENCE

A. DESCRIPTION OF WORK

Existing fences shall be removed as shown on the plans or as directed by the Engineer.

The Contractor is hereby notified that quantity of "Remove Fence" as listed in the contract documents may change. Increases or decreases in the quantity, regardless of the magnitude of the change, the percentage change from the engineer's estimate does **not** constitute a change requiring a change order, a change in the scope of work, or a change in the character of the work. The Contractor shall be paid the unit price quoted in the contract for the actual quantities used.

B. MEASUREMENT

Remove Fence shall be measured by the linear foot.

C. PAYMENT

The contract price paid per linear foot for Remove Fence shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in removing and disposing of fences, including the removal and disposal of existing footings, as specified in the Standard Specifications and these special provisions and as directed by the Engineer.

52-1.06. REMOVE DRAINAGE FACILITY

A. DESCRIPTION OF WORK

Existing drainage pipes, and flared end sections, where any portion of these structures is within 3 feet of the grading plane in excavation areas, or within one foot of original ground in embankment areas, or where shown on the plans to be removed, shall be completely removed and disposed of.

B. MEASUREMENT

Remove Flared End Section shall be measured per each.

C. PAYMENT

The contract unit price paid for Remove Flared End Section shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in Remove Flared End Section, including disposal of all materials as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in Remove Pipe, including disposal of all materials as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in various items of work involved for alternative pipe culvert and no separate payments will be made therefor.

52-1.07. REMOVE ROADSIDE SIGN

A. DESCRIPTION OF WORK

Existing roadside signs, at those locations shown on the plans to be removed, shall be removed and disposed of.

Existing roadside signs shall not be removed until replacement signs have been installed or until the existing signs are no longer required for the direction of public traffic, unless otherwise directed by the Engineer.

B. MEASUREMENT

Remove Roadside Sign shall be measured per each.

C. PAYMENT

The contract unit price paid for Remove Roadside Sign shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in Remove Roadside Sign, including disposal of all materials as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

52-1.08. RELOCATE ROADSIDE SIGN

A. DESCRIPTION OF WORK

Existing roadside signs shall be removed and relocated to the new locations shown on the plans.

Each roadside sign shall be installed at the new location on the same day that the sign is removed from its original location.

Two holes shall be drilled in each existing post as required to provide the breakaway feature shown on the plans.

B. MEASUREMENT

Relocate Roadside Sign will be measured by the unit from actual count.

C. PAYMENT

The contract unit price paid per each Relocate Roadside Sign shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in Relocate Roadside Sign, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

52-1.09. MODIFY INLET TO MANHOLE

A. DESCRIPTION OF WORK

Existing inlets, where shown to be modified to manholes shall be modified as shown on the plans. All concrete removed as a result of these modifications shall be properly disposed of outside the right-of-way in accordance with Section 7-1.13 of the Standard Specifications.

Concrete shall be minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," of the Standard Specifications. The concrete shall contain no less than 590 pounds of cementious material per cubic yard.

Bar Reinforcing Steel shall conform to Section 52, "Reinforcement," of the Standard Specifications.

Modification of inlets shall be performed before paving and shall be limited to the area to be paved or surfaced during the wording day in which the modification is performed. The top of the inlet grate or cover shall be protected from the hot mix asphalt during paving operations by means of heavy plywood covers, steel plate covers or by other methods approved by the Engineer. Excess paving material shall be removed before rolling.

B. MEASUREMENT

Modify Inlet to Manhole will be measured per each.

C. PAYMENT

The contract unit price paid for Modify Inlet to Manhole shall include full compensation for furnishing all labor, materials, equipment, and incidentals, and for doing all work involved in Modify Inlet to Manhole, including, but not limited to, grade rings, reinforcing steel, concrete slabs, covers and pipe connections, removing and disposing of the excess material, as shown on the plans, as specified in these Special Provision, and as directed by the Engineer and no additional compensation will be allowed therefor.

52-1.10. OBLITERATE SURFACING

A. DESCRIPTION OF WORK

Existing surfacing, when no longer required for the passage of public traffic, shall be obliterated at the locations shown on the plans.

Surfacing shall not be obliterated by the earth cover method.

Obliteration shall consist of rooting, plowing, pulverizing or scarifying the existing surfacing in conformance with the provisions in Section 15-2.02A, "Obliterating Roads and Detours," of the Standard Specifications.

Where obliterate surfacing is shown adjacent to existing pavement which will still be used for the passage of public traffic, the Contractor shall sawcut at the new edge of shoulder.

B. MEASUREMENT

Obliterate Surfacing shall be measured by the square yard

C. PAYMENT

The contract unit price paid per square yard for Obliterate Surfacing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in obliterating surfacing, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

52-1.11. COLD PLANE ASPHALT CONCRETE PAVEMENT

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes cold planing existing asphalt concrete pavement.

Sequencing and Scheduling

Schedule cold planing activities so that not more than 24 hours elapses between the time the pavement is cold planed and the HMA is placed.

MATERIALS

HMA for temporary tapers must be of the same quality as the HMA used elsewhere on the project.

CONSTRUCTION

General

Perform planing of asphalt concrete pavement without the use of a heating device to soften the pavement.

Cold Planing Equipment

Cold planing machine must be:

1. Equipped with a cutter head width that matches the planing width. If the only available cutter head width is wider than the cold plane area shown, submit to the Engineer a request for using a wider cutter head. Do not cold plane until the Engineer approves your request.

2. Equipped with automatic controls to control the longitudinal grade and transverse slope of the cutter head and:

    2.1. If a ski device is used, it must be at least 30 feet long, rigid, and 1 piece unit. The entire length must be used in activating the sensor.
    2.2. If referencing from existing pavement, the cold planing machine must be controlled by a self-contained grade reference system. The system must be used at or near the centerline of the roadway. On the adjacent pass with the cold planing machine, a joint matching shoe may be used.

3. Equipped to effectively control dust generated by the planing operation.
4. Operated so that no fumes or smoke is produced.

Replace broken, missing, or worn machine teeth.

Grade Control and Surface Smoothness

Furnish, install, and maintain grade and transverse slope references.

The depth, length, width, and shape of the cut must be as shown or as ordered. The final cut must result in a neat and uniform surface. Do not damage remaining surface.

The completed surface of the planed asphalt concrete pavement must not vary more than 0.02 foot when measured with a 12-foot straightedge parallel with the centerline. The transverse slope of the planed surface must not vary more than 0.03 foot from the straightedge when placed at right angles to the centerline.

A drop-off of more than 0.15 foot is not allowed between adjacent lanes open to public traffic.

Temporary HMA Tapers

If a drop-off between the existing pavement and the planed area at transverse joints cannot be avoided before opening to traffic, construct a temporary HMA taper. HMA for temporary taper must be:

1. Placed to the level of the existing pavement and tapered on a slope of 30:1 (Horizontal: Vertical) or flatter to the level of the planed area
2. Compacted by any method that will produce a smooth riding surface
3. Completely removed before placing the permanent surfacing. The removed material must be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Disposal of Planed Material

Remove cold planed material concurrent with planing activities, within 50 feet of the planer or as ordered.

Dispose of planed material and under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

B. MEASUREMENT

Cold Plane Asphalt Concrete Pavement (0.15' Max) is measured by the square yard.

C. PAYMENT

The contract price paid per square yard for Cold Plane Asphalt Concrete Pavement (0.15' Max) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Cold Planing Asphalt Concrete Surfacing and disposing of planed material, including constructing, maintaining, removing temporary HMA tapers if applicable, as specified in the Standard Specifications and these special provisions and as directed by the Engineer.

Full compensation for removal of thermoplastic traffic stripe, painted traffic stripe, and pavement marking in areas of cold plane asphalt concrete is included in the contract price paid for cold plane asphalt concrete and no separate payment will be made therefor.

52-1.12. BRIDGE REMOVAL

A. DESCRIPTION OF WORK

Removing bridges or portions of bridges shall conform to the provisions in Section 15-4, "Bridge Removal," of the Standard Specifications and these special provisions.

Bridge removal (portion) shall consist of removing the existing metal beam bridge railings along with the top portion of the existing north side wingwalls and the existing conduit as shown on the Contract Plans.

Removed materials that are not to be salvaged or used in the reconstruction shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The Contractor shall submit a complete bridge removal plan to the Engineer, detailing procedures, sequences, and all features required to perform the removal in a safe and controlled manner.

The bridge removal plan shall include, but not be limited to, the following:

A. The removal sequence, including staging of removal operations.
B. Equipment locations on the structure during removal operations.
C. Temporary support shoring or temporary bracing.

D. Details, locations, and types of protective covers to be used.
E. Measures to assure that people, property, utilities, and improvements will not be endangered.
F. Details and measures for preventing material, equipment, and debris from falling into the waterway.

When protective covers are required for removal of portions of a bridge or when superstructure removal work on bridges is involved, the Contractor shall submit working drawings with design calculations to the Engineer for the proposed bridge removal plan, and the bridge removal plan shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California. The design calculations shall be adequate to demonstrate the stability of the structure during all stages of the removal operations. Calculations shall be provided for each stage of bridge removal and shall include dead and live load values assumed in the design of protective covers. At a minimum, a stage will be considered to be removal of the deck, the soffit, or the girders, in any span; or walls, bent caps, or columns at support locations.

Temporary support shoring, temporary bracing, and protective covers, as required, shall be designed and constructed in conformance with the provisions in Section 51-1.06, "Falsework," of the Standard Specifications and these special provisions.

The assumed horizontal load to be resisted by the temporary support shoring and temporary bracing, for removal operations only, shall be the sum of the actual horizontal loads due to equipment, construction sequence, or other causes and an allowance for wind, but in no case shall the assumed horizontal load to be resisted in any direction be less than 5 percent of the total dead load of the structure to be removed.

The bridge removal plan shall conform to the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The number of sets of drawings, design calculations, and the time for reviewing bridge removal plans shall be the same as specified for falsework working drawings in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications.

For bridge removal work that requires the Contractor's registered engineer to prepare and sign the bridge removal plan, the Contractor's registered engineer shall be present at all times when bridge removal operations are in progress. The Contractor's registered engineer shall inspect the bridge removal operation and report in writing on a daily basis the progress of the operation and the status of the remaining structure. A copy of the daily report shall be available at the site of the work at all times. Should an unplanned event occur or the bridge operation deviate from the approved bridge removal plan, the Contractor's registered engineer shall submit immediately to the Engineer for approval the procedure of operation proposed to correct or remedy the occurrence.

B. PAYMENT

Bridge Removal (Portion) shall be paid for as specified in Section 15-4.03 “Payment” of the Standard Specifications.

52-1.13. CLEAN BRIDGE DECK

A. DESCRIPTION OF WORK

This work includes abrasive blast cleaning the portland cement concrete bridge deck.

Construction

Abrasive blast clean the deck surface. Sweep the deck surface clean. Blow loose material from cracks using high-pressure air.

The deck surface must be dry when abrasive blast cleaning is performed. Laitance, surface contaminants, and foreign material must be removed from the bridge deck surface.

If the deck surface becomes contaminated before placing methacrylate resin, abrasive blast clean the contaminated area and sweep the deck clean.

Dispose of removed materials under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

B. MEASUREMENT

Clean bridge deck will be measured and paid for by the square foot of deck surface cleaned.

C. PAYMENT

The contract price paid per square foot for clean bridge deck includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in cleaning the bridge deck, including removing contrast treatment except slurry or chip seal contrast treatment, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

52-1.14. REMOVE CONCRETE

A. DESCRIPTION OF WORK

Concrete (Curb and Gutter) and Concrete (Sidewalk), where shown on the plans to be removed, shall be removed.

B. MEASUREMENT

Removing Concrete (Curb and Gutter) will be measured by the linear foot, measured along the curb before removal operations.

Removing Concrete (Sidewalk) will be measured by the cubic yard, measured before and during removal operations.

Concrete removed shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

C. PAYMENT

The contract unit price paid per cubic yard for Remove Concrete (Sidewalk) and per linear foot for Remove Concrete (Curb and Gutter) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in removing concrete, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

Full compensation for concrete to be removed within the roadway prism, as described in Section 19 "Earthwork" of the Standard Specifications shall be considered as included in the contract unit price paid for roadway excavation, and no additional payment will be made therefor.

Full compensation for removing bituminous or other overlying materials and sawing joints at removal lines, as required, shall be considered as included in the contract price paid per cubic yard for Excavation and no additional compensation will be allowed therefor.

53. CLEARING AND GRUBBING

A. DESCRIPTION OF WORK

Clearing and grubbing shall conform to the provisions in Section 16, "Clearing and Grubbing," of the Standard Specifications and these special provisions.

Vegetation shall be cleared and grubbed only within the excavation and embankment slope lines.

Clearing and Grubbing work shall include removal of shrubs or small trees with diameter breast heights less than 4-inches. Compensation for removal of trees with diameter breast heights of 4-inches or greater shall be included in "Remove Tree", and no additional payment will be allowed.

The trimming and pruning of existing trees shall conform with "Maintenance of Trees" of these special provisions.

Trimming of existing trees required to complete the work involved in Clearing and Grubbing, will be considered as included in the contract unit price of "Clearing and Grubbing" and no additional payment will be allowed therefor. Preservation of existing vegetation outside of the limits of grading and landscape planting will be considered as included in the contract unit price for "Clearing and Grubbing" and no additional payment will be allowed therefor.

The contractor shall schedule the clearing and grubbing operations as to complete them in a timely and workman-like manner. Shrubs and other vegetation to be removed shall be removed in their entirety before moving on to other items of work. The contractor shall not, under any circumstance, leave shrubs or other vegetation partially removed. If the contractor partially removes shrubs or other vegetation resulting in unsightly conditions, the Engineer may order an immediate action to complete the work at no additional cost to the City.

B. MEASUREMENT AND PAYMENT

The contract lump sum price paid for Clearing and Grubbing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in clearing and grubbing as shown on the plans, and as specified in these special provisions, and as directed by the Engineer, including the removal and disposal of the resulting material, and trimming of trees.

The contract lump sum price paid for Clearing and Grubbing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in removing any vegetation including trees under 4 inches in diameter breast height that are within the excavation and embankment slope lines.

Full compensation for coordinating coordination with the Engineer and Arborist shall be included in the contract lump sum price paid for Clearing and Grubbing and no additional payment will be allowed therefor.

54. MAINTENANCE OF TREES

A. DESCRIPTION OF WORK

Work under this section includes tree trimming and root pruning, placement of 4-inch Chip Mulch and Construction Fence (Temporary fence (ESA)) and work as shown on the Plans within the limits of this project. The Contractor shall be, or contract with, a Certified Arborist, Certified Tree Workers under the general guidance of the Certified Arborist or the contractor under the direct supervision of the Certified Arborist, whenever trimming, pruning, root pruning, or removing part or all of any tree within the project. The Contractor's Certified Arborist shall also attend Pre-construction Meetings and site meetings with the Engineer or the Urban Forester.

The City of Chico is concerned with the preservation and protection of its trees during construction activities. These specifications detail the procedures necessary to achieve the preservation and protection during construction activities.

All tree maintenance work shall be done to the satisfaction of the Engineer.

At the pre-construction meeting, the Engineer and Urban Forester will review the tree maintenance requirements with the contractor and the contractor's Certified Arborist.

Workers completing the maintenance of trees shall be qualified as follows.

i) The arborist supervising the work shall maintain at all times, certification in good standing from the International Society of Arboriculture. In lieu of the certification, the arborist may be a member in good standing of the American Society of Consulting Arborists.

ii) Tree workers performing the trimming or root pruning work shall maintain at all times certification in good standing from the Western Chapter, International Society of Arboriculture.

All pruning work shall be accomplished in accordance with the ANSI A300 (latest edition) Pruning Standards, incorporating the Western Chapter, International Society of Arboriculture Pruning Standards. The pruning standards to be applied are as follows.

i) Canopy Reduction Pruning: Reduction pruning shall be noted and completed by the tree workers as follows, "Prune to Reduce, 1 1/2" minimum sized limbs, 33% maximum canopy removal during reduction operations."

ii) Canopy Thinning: Thinning shall be noted and completed by the tree workers as follows, "Prune to Thin, 1" minimum sized limbs, 25% maximum canopy removal during thinning operations.

Trimming and Reduction Pruning shall incorporate the 1:2 rule, that is, for a 1" diameter lateral, the parent leader can be no larger than 2" in diameter. All trimming of limbs necessary to prevent damage to the tree due to the contractor's operations will be performed by the Certified Arborist, Certified Tree Workers under the general guidance of the Certified Arborist or the contractor under the direct supervision of the Certified Arborist.

Every effort shall be made during demolition, excavation and trenching operations to avoid abrading the bark on the roots. Once the concrete is removed from the top of roots, construction equipment shall not be driven on the exposed roots.

Where it is anticipated that roots two (2) inches in diameter or larger will be encountered during construction activities, the contractor shall use techniques such as probing, pneumatic or hydraulic excavation, or hand digging to locate roots. These techniques shall be used until the activities are clear of roots.

The practice of "directional root pruning" shall be used to prune roots in conflict with planned improvements. Directional root pruning is accomplished by pruning main roots back to lateral roots, similar in concept to pruning limbs in the canopy. The techniques are defined more thoroughly below.

i) Roots are not to be stub pruned or ground, unless the tree is slated for removal.
ii) Roots less than two (2) inches in diameter are to be clean cut to a parent root or another lateral root outside of the work area.
iii) Roots two (2) inches in diameter and larger shall not be cut without the specific approval of the Certified Arborist. Where roots greater than two (2) inches in diameter must be cut, they are to be clean cut to a parent root or another lateral root outside of the work area.
iv) Roots two (2) inches in diameter and larger exposed to the air are to be kept covered and moist at all times during construction operations.

v) Root pruning shall be done by the Certified Arborist, Certified Tree Workers under the general guidance of the Certified Arborist or the contractor under the direct supervision of the Certified Arborist.

If roots two (2) inches in diameter or larger are accidentally damaged, the contractor shall notify the Engineer immediately. The Engineer, in consultation with the Urban Forester, will take appropriate action to repair or mitigate the damage. The contractor shall be responsible for paying all costs incurred by the city to repair or mitigate the damage caused as a result of the contractor's negligence.

Where roots cannot be cut without adversely affecting the tree, hardscape improvements may be modified with the approval of the Engineer to accommodate the tree or tree roots. Curb, gutter and sidewalk improvements shall be constructed in accordance with Chico Standard Plan S-2A, "Curb, Gutter and Sidewalk Installation at Trees."

B. MEASUREMENT AND PAYMENT

Maintenance of trees as described herein, as shown on the Plans and as directed by the Engineer, including tree trimming, root pruning, 4" chip mulch and the services of the Certified Arborist shall be considered to be included in the payment for other work items included in the contract and no additional compensation shall be made. Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for all the work involved in placing 4-inch Chip Mulch shall be included in the payment for other work items included in the contract and no additional compensation shall be made. Measurement and payment for Construction Fence (Temporary fence (Type ESA)) as shown on the plans shall be as described in Temporary fence (Type ESA) of these Special Provisions.

55. REMOVE TREE

A. DESCRIPTION OF WORK

Remove Tree shall conform to the provisions in Section 16 "Clearing and Grubbing" and Section 7-1.13 "Disposal of Material Outside the Highway Right of Way" of the Standard Specifications and these Special Provisions.

Remove Tree work shall consist of removing trees with diameter breast heights of 4-inches or greater; smaller trees shall be covered under clearing and grubbing.

Attention is directed to "Biological Monitoring Program" of these special provisions regarding the potential nesting of migratory birds.

Attention is directed to "Precast Concrete Soundwall" of these special provisions.

The Contractor is hereby notified that quantity of "Remove Tree" as listed in the contract documents may change. Increases or decreases in the quantity, regardless of the magnitude of the change, does **not** constitute a change requiring a change order, a change in the scope of work, or a change in the character of the work. The Contractor shall be paid the unit price quoted in the contract for the actual quantities used.

All roots of trees to be removed shall be cleared to a point not less than two (2) feet below the surface. Root voids shall be backfilled to the original ground elevation with native material and shall be jetted into place. All portions of trees shall be removed from the public right of way. Stumps shall be ground out, to protect the roots of remaining trees.

To avoid impacts on nesting non-special-status migratory birds and raptors and Swainson's hawks, the contractor will either:

- Conduct tree removal activities outside the nesting season for Swainson's hawk and non-special-status migratory birds and raptors. Potential nest trees will be removed after the young have fledged and prior to nest-building activities in the subsequent breeding season. Trees will be removed from September 16 through February 29.

- If tree removal activities are to take place after January 31 and before September 15, a qualified wildlife biologist shall be hired to conduct focused nest surveys for active Swainson's hawk and non-special-status migratory bird and raptor nests. If an active nest is found during the preconstruction survey, construction will cease within a setback/buffer zone determined by the qualified biologist or until September 1 or until it has been determined by a qualified biologist that the nest is no longer active. If no active nests are found on the project site, construction can proceed without any further mitigation.

The contractor shall schedule the tree removal operations as to complete them in a timely and workman-like manner. Trees to be removed shall be removed in their entirety before moving on to other items of work. The contractor shall not, under any circumstance, leave trees partially removed. If the contractor partially removes trees resulting in unsightly conditions, the Engineer may order an immediate action to complete the work at no additional cost to the City.

B. MEASUREMENT

Remove Tree shall be determined by the actual count removed.

C. PAYMENT

The contract unit price paid per each for Remove Tree shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in Remove Tree, complete in place, including conforming to all biological requirements, excavation, stump removal, and disposal, and tree trimming, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer. Compensation for removal of trees with diameter breast heights of less than 4-inches shall be included in "Clearing and Grubbing", and no additional payment will be allowed.

56. WATERING

A. DESCRIPTION OF WORK

Developing a water supply and applying watering shall conform to the provisions in Section 17, "Watering," of the Standard Specifications and these special provisions.

B. MEASUREMENT AND PAYMENT

Develop Water Supply shall be paid for in the same manner specified for Develop Water Supply in Section 17-1.04, “Payment” of the Standard Specifications.

57. EARTHWORK

A. DESCRIPTION OF WORK

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Where a portion of the existing surfacing is to be removed, the outline of the area to be removed shall be cut on a neat line with a power-driven saw to a minimum depth of 0.17-foot before removing the surfacing. Full compensation for cutting the existing surfacing shall be considered as included in the contract price paid per cubic yard for roadway excavation and no additional compensation will be allowed therefor.

Reinforcement or metal attached to reinforced concrete rubble placed in embankments shall not protrude above the grading plane. Prior to placement within 2 feet below the grading plane of embankments, reinforcement or metal shall be trimmed to no greater than 3/4 inch from the face of reinforced concrete rubble. Full compensation for trimming reinforcement or metal shall be considered as included in the contract prices paid per cubic yard for the types of excavation shown in the Engineer's estimate, or the contract prices paid for furnishing and placing imported borrow or embankment material, as the case may be, and no additional compensation will be allowed therefor.

At the option of the Contractor, and to the extent that material from required excavation within the project limits is available, embankment shall be constructed of imported borrow or of material obtained from required excavation within the project limits or a combination of borrow and material obtained from required excavation within the project limits.

Excavated materials not used in embankments shall be disposed of in conformance with the provisions of Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. However, the Contractor's prerogative to dispose of excavated material outside the highway right of way before the embankments are completed is subject to proof that environmentally clear sources of material in sufficient quantity to complete required embankments are available. Obtaining necessary clearances for new borrow sources or for exceeding limitations on previously cleared sources shall be the responsibility of the Contractor. No time extension or other waiver of working days requirements will be granted in the event the Contractor is delayed by reason of there being an insufficient quantity of acceptable material available from environmentally cleared sources to replace excavated material previously disposed of outside the right of way.

Excavation required for placement of new trees in accordance with the landscape plans shall be included in roadway excavation.

B. MEASUREMENT AND PAYMENT

Roadway Excavation limits shall be per Standard Plans A62A through A62F and as shown on the plans.

Roadway Excavation will be measured in the same manner as specified for Roadway Excavation in Section 19-2.08 "Measurement" of the Standard Specifications.

Roadway Excavation will be paid for in the same manner as specified for Roadway Excavation in Section 19-2.09 "Payment" of the Standard Specifications.

Ditch Excavation will be measured in the same manner as specified for Ditch Excavation in Section 19-4.02 "Measurement" of the Standard Specifications.

Ditch Excavation will be paid for in the same manner as specified for Ditch Excavation in Section 19-4.03 "Payment" of the Standard Specifications.

Imported Borrow will be measured in the same manner as specified for Imported Borrow in Section 19-7.04 "Measurement" of the Standard Specifications.

Imported Borrow will be paid for in the same manner as specified for Imported Borrow in Section 19-7.05 "Payment" of the Standard Specifications.

Placement of embankment shall be considered as included in the price paid for Roadway Excavation, Ditch Excavation, and Import Borrow, and no additional compensation will be allowed therefor.

Full compensation for tree excavations shall be considered as included in the contract lunit price paid per cubic yard for roadway excavation and no additional payment will be allowed therefor.

Pervious backfill material placed within the limits of payment for bridges will be measured and paid for as structure backfill (bridge).

Pervious backfill material placed within the limits of payment for retaining walls will be measured and paid for as structure backfill (retaining wall).

If structure excavation or structure backfill for bridges is not otherwise designated by type and payment for the structure excavation or structure backfill has not otherwise been provided for in the Standard Specifications or these special provisions, the structure excavation or structure backfill will be measured and paid for as structure excavation (bridge) or structure backfill (bridge), respectively.

58. SHOULDER BACKING

A. DESCRIPTION OF WORK

This work shall consist of constructing shoulder backing adjacent to the edge of new pavement surfacing in conformance with the details shown on the plans and these special provisions.

Shoulder backing material shall be clean and free from organic matter and other deleterious substances. Shoulder backing may include any combination of broken stone, crushed gravel, natural rough-surfaced gravel, sand, and processed reclaimed asphalt concrete pavement, portland cement concrete pavement, lean concrete base, and cement treated base. Shoulder backing material shall conform to the following grading requirements:

Shoulder Backing Grading Requirements

Sieve Sizes	Percentage Passing
2"	100
1"	75 - 100
3/4"	65 - 100
No. 4	35 - 60
No. 30	10 - 35
No. 200	5 - 15

Sand Equivalent for shoulder backing material shall be from 10 to 35 determined in conformance with California Test 217 except if 100 percent reclaimed asphalt concrete pavement is used, the Sand Equivalent requirement is 10 minimum.

If 100 percent reclaimed asphalt concrete pavement is used, shoulder backing material must conform to the following grading requirements:

Shoulder Backing Grading Requirements Using 100% Reclaimed Asphalt Concrete Pavement

Sieve Sizes	Percentage Passing
1-1/2"	100
3/4"	70 - 100
No. 4	30 - 80

If a combination of broken stone, crushed gravel, natural rough-surfaced gravel, and sand material is used, shoulder backing material shall conform to the following quality requirements:

Shoulder Backing Quality Requirements Using Non-Reclaimed Materials

Specification	California Test	Requirement
Sand equivalent	217	10 - 30
Percentage crushed particles (%, min.) [a]	205	
One fractured face		75
Two fractured faces		50
Durability index (min.)	229	25

Note:
[a] Applies to material retained on No. 4 sieve only

Shoulder backing material shall have a minimum unit weight of 105 pounds per cubic foot determined in conformance with California Test 212 using the Rodding Method.

The areas where shoulder backing is to be constructed shall be cleared of weeds, grass, and debris. Removed weeds, grass, and debris shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Prior to placement of shoulder backing material, basement material shall be scarified to a minimum depth of 0.25 foot. Immediately prior to placement of shoulder backing material, scarified material shall be watered. Shoulder backing material shall be placed, watered, and rolled a minimum of two passes with a steel tired roller weighing not less than 8 tons to form a smooth, compacted surface. Watering shall conform to the provisions in Section 17, "Watering," of the Standard Specifications.

Shoulder backing material shall not be deposited on new pavement surfacing prior to placing the material in the final position, nor shall the material be deposited onto new pavement surfacing during mixing, watering, and blading operations.

Shoulder backing construction shall be completed along the edges of any portion of new pavement surfacing within 5 days after completion of that portion of the new surfacing. Prior to opening a lane adjacent to uncompleted shoulder backing to uncontrolled public traffic, the Contractor shall furnish, place, and maintain portable delineators and W8-9 (LOW SHOULDER) signs off of and adjacent to the new pavement surfacing. Portable delineators shall be placed at the beginning and along the drop-off of the edge of pavement, in the direction of travel, at successive maximum intervals of 500 feet on tangents and 200 feet on curves. W8-9 (LOW SHOULDER) signs shall be placed at the beginning and along the drop-off at successive maximum intervals of 2,000 feet. The portable delineators and W8-9 (LOW SHOULDER) signs shall be maintained in place at each location until the shoulder backing is completed at that location. Portable delineators and signs shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, except the signs may be set on temporary portable supports or on barricades.

B. MEASUREMENT

Quantities of Imported Material (Shoulder Backing) will be measured by the ton in conformance with the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

C. PAYMENT

The contract price paid per ton for Imported Material (Shoulder Backing) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing shoulder backing, complete in place, including furnishing, placing, maintaining, and removing portable delineators, W8-9 (LOW SHOULDER) signs, and temporary supports or barricades for the signs, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

59. EROSION CONTROL (HYDROSEED)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removing and disposing of weeds and applying erosion control and bioswale materials including seed, fiber, commercial fertilizer, organic fertilizer, straw, and tackifier to erosion control and bioswale (Hydroseed) areas shown on the plans.

Comply with Section 20-3, "Erosion control and bioswale," of the Standard Specifications.

If notified by the Engineer that an area is ready to receive erosion control and bioswale materials, start erosion control and bioswale (Hydroseed) work within 5 business days of the Engineer's notification to perform the work.

The Engineer will designate the ground location of all erosion control and bioswale (Hydroseed) areas in increments of one acre or smaller by directing the placing of stakes or other suitable markers. Furnish all tools, labor, materials, and transportation required to adequately indicate the various erosion control and bioswale (Hydroseed) locations.

MATERIALS

Seed

Seed not required to be labeled under the California Food and Agricultural Code must be tested for purity and germination by a seed laboratory certified by the Association of Official Seed Analysts or by a seed technologist certified by the Society of Commercial Seed Technologists. Measure and mix individual seed species in the presence of the Engineer.

Seed must contain at most 1.0 percent total weed seed by weight.

Deliver seed to the job site in unopened separate containers with the seed tag attached. Containers without a seed tag attached are not accepted. The Engineer takes a sample of approximately one ounce or 0.25 cup of seed for each seed lot greater than 2 pounds.

Erosion control and bioswale Seed must comply with the following:

Seed

Botanical Name (Common Name)	Percent Germination (Minimum)	Pounds Pure Live Seed Per Acre (Slope Measurement)
Lipines Bicolor (Pgymy Leafed Lupine)	50	3.3
Louts purshianus[1] (Pershings Lotus)	50	2.2
Achillea millefolium[1] (Yarrow)	50	0.10
Clarkia elegans[1]	50	0.33
Collinsia heterophylla[1] (Chinese Houses)	70	2.2
Eschshcholizia California[1] (California Poppy)	50	0.33
Phacelia Campanularia 50[1] (California Bluebells)	50	1.1
Layia Platyglossa[1] (Tidy Tips)	50	0.33
Nemophila menzeisii[1] (Baby Blue Eyes)	50	0.33
	Total	10.19

Applicable when numbers below are shown after a Botanical Name/(Common Name) above:
[1]Seed produced in California only.

Bio swale (including bio-swales, bio strips and bio filters) seed must comply with the following:

Seed

Botanical Name (Common Name)	Percent Germination (Minimum)	Pounds Pure Live Seed Per Acre (Slope Measurement)
Carex praegrcilis W. Boott (Clustered field sedge)	50	5.0
Hordeum Brachyantherum Nevski[1] (Barley)	50	25.0
Achillea millefolium L. subsp. Lanulosa (Nutt.) piper[1] (Western Yarrow)	50	1.0
Leymus Triticoides[1] (Beardless Wildrye)	70	15.0
Mimmulus Guttatus[1] (Monkey Flower)	50	0.33
Limnanthus douglasii 50[1] (Meadow Foam)	50	0.33
	Total	46.66

Applicable when numbers below are shown after a Botanical Name/(Common Name) above:
[1]Seed produced in California only.

Seed Sampling Supplies

At the time of seed sampling, provide the Engineer a glassine lined bag and custody seal tag for each seed lot sample.

Commercial Fertilizer

Must have a guaranteed chemical analysis within 10 percent of 6-7 percent nitrogen, 2 percent phosphoric acid and 3-4 percent water soluble potash.

Organic Fertilizer

Must be a pelleted or granular form and must be one of the following:

Organic Fertilizer

Products	Guaranteed Chemical Analysis (N-P-K) (%)	Company
Biosol Mix® - Granular	7-2-3	Rocky Mountains Bioproducts Edwards, CO
Fertil-Fibers™	6-4-1	Quattro Environmental Coronado, CA
Sustane®	5-2-4	Natural Fertilizer of America Cannon Falls, MN

Approved Equal[1]	(N) 5 to 7 (P) 1 to 5 (K) 2 to 10	

[1]Approved equal must be within the ranges shown for N-P-K. The cumulative (N) release rate must be no more than 70 percent the first 70 days after incubation (86° F) with 100 percent at 350 days or more.

Straw

Straw must be:

1. Wheat
2. Barley
3. Wheat and Barley
4. Wheat or Barley
5. Rice

Wheat and barley straw must be derived from irrigated crops.

Straw must be free of plastic, glass, metal, rocks, and refuse or other deleterious material.

Tackifier

Tackifier must be:

1. Guar (Plant Based)
2. Psyllium (Plant Based)
3. Starch (Plant Based)
4. Polymeric Emulsion Blend

Tackifier must comply with the following:

1. Nonflammable
2. Nontoxic to aquatic organisms
3. Free from growth or germination inhibiting factors
4. Either a plant-based product or a polymeric-emulsion blend

Tackifier classified as a plant based product must comply with the following:

1. A natural high molecular weight polysaccharide
2. A high viscosity hydrocolloid that is miscible in water
3. Functional for at least 180 days
4. Labeled as either guar, psyllium, or starch

Guar:

1. A guar gum based product derived from the ground endosperm of the guar plant, cyanmopsis tetragonolobus
2. Treated with dispersant agents for easy mixing
3. Able to be diluted at the rate of 1 to 5 pounds per 100 gallons of water

Psyllium:

1. Made of the finely ground muciloid coating of plantago ovata or plantago ispaghula seeds
2. Able to dry and form a firm but rewettable membrane

Starch:

1. A non-ionic, water-soluble granular material derived from corn, potato, or other plant-based source.

Tackifier classified as polymeric emulsion blend must comply with the following:

1. A liquid or dry powder formulation
2. Anionic with a residual monomer content that is at most 0.05 percent by weight
3. Functional for at least 180 days
4. A prepackaged product labeled as containing one of the following as the primary active ingredient of the polymeric emulsion blend:

   4.1 Acrylic copolymers and polymers
   4.2 Polymers of methacrylates and acrylates
   4.3 Copolymers of sodium acrylates and acrylamides
   4.4 Polyacrylamide (PAM) and copolymer of acrylamide
   4.5 Hydrocolloid polymers

Fiber

Fiber must be:

1. Wood
2. Cellulose
3. Alternate
4. A combination of Wood, Cellulose, or Alternate

Fiber must comply with the following:

1. Free from lead paint, printing ink, varnish, petroleum products, seed germination inhibitors, or chlorine bleach
2. Free from synthetic or plastic materials
3. At most 7 percent ash

Wood Fiber must comply with the following:

1. Long strand, whole wood fibers, thermo-mechanically processed from clean, whole wood chips
2. Not made from sawdust, cardboard, paper, or paper byproducts
3. At least 25 percent of fibers 3/8 inch long
4. At least 40 percent held on a No. 25 sieve

Cellulose Fiber must comply with the following:

1. Made from natural or recycled pulp fiber, such as wood chips, sawdust, newsprint, chipboard, corrugated cardboard, or a combination of these materials

Alternate Fiber must comply with the following:

1. Long strand, whole natural fibers made from clean straw, cotton, corn, or other natural feed stock
2. At least 25 percent of fibers 3/8 inch long
3. At least 40 percent held on a No. 25 sieve

Coloring Agent

Use a biodegradable, nontoxic coloring agent free from copper, mercury, and arsenic.

CONSTRUCTION

Site Preparation

Immediately prior to applying seed to erosion control and bioswale (Hydroseed) areas, trash and debris and weeds must be removed.

Removed weeds must be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Application

Refer to plans for locations of erosion control hydroseed and bioswale hydroseed to apply respective seed mixes to respective areas. Apply erosion control and bioswale (Hydroseed) materials in separate applications in the following sequence:

1. Apply the following mixture with hydroseeding equipment at the rates indicated within 60 minutes after the seed has been added to the mixture:

Material	Pounds Per Acre (Slope Measurement)
Seed	15.93
Fiber	495
Commercial Fertilizer	770
Organic Fertilizer	2.3

2. Apply straw at the rate of 2 tons per acre based on slope measurements. Incorporation of straw will not be required. Distribute straw evenly without clumping or piling.
3. Apply the following mixture with hydro-seeding equipment at the corresponding rates:

Material	Pounds Per Acre (Slope Measurement)
Fiber	750
Commercial Fertilizer	770
Organic Fertilizer	4
Tackifier	149

The ratio of total water to total tackifier in the mixture must be as recommended by the manufacturer.

Hydraulic application of erosion control and bioswale and bio-swale (Hydroseed) materials for rolled erosion control and bioswale product (Netting) areas must be applied by hose, from the ground. Erosion control and bioswale (Hydroseed) materials must be applied onto the slope face such that the materials are well integrated into the rolled erosion control and bioswale product (Netting) and in contact with ground surface. Application must be perpendicular to the slope face such that rolled erosion control and bioswale product (Netting) materials are not damaged or displaced.Once straw work is started in an area, complete tackifier applications in that area on the same working day.

The Engineer may change the rates of erosion control and bioswale (Hydroseed) materials to meet field conditions.

For any area where erosion control and bioswale (Hydroseed) materials are to be applied, the application of all erosion control and bioswale (Hydroseed) materials to be applied to that area must be completed within 72 hours from when the first materials were applied.

B. <u>MEASUREMENT</u>

Erosion Control (Hydroseed) will be measured by the square foot. The area will be calculated on the basis of actual or computed slope measurements.

C. <u>PAYMENT</u>

The contract price paid per square foot for Erosion Control (Hydroseed) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Erosion Control (Hydroseed) complete in place, as shown on the plans,

as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

60. COMPOST (INCORPORATE)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removing and disposing of weeds and incorporating compost into the surface of compost (Incorporate) areas with a slope of 4:1 (horizontal:vertical) or flatter as shown on the plans.

Comply with Section 20-3, "Erosion Control," of the Standard Specifications and these special provisions.

Apply compost when an area is ready to receive it as determined by the Engineer.

The Engineer will designate the ground location of all compost (Incorporate) areas in increments of one acre or smaller by directing the placing of stakes or other suitable markers. Furnish all tools, labor, materials, and transportation required to adequately indicate the various compost (Incorporate) locations.

MATERIALS

Compost

The compost producer must be fully permitted as specified under the California Integrated Waste Management Board, Local Enforcement Agencies and any other State and Local Agencies that regulate solid waste facilities. If exempt from State permitting requirements, the composting facility must certify that it follows guidelines and procedures for production of compost meeting the environmental health standards of Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7.

The compost producer must be a participant in the United States Composting Council's Seal of Testing Assurance program.

Compost may be derived from any single or mixture of any of the following feedstock materials:

1. Green material consisting of chipped, shredded, or ground vegetation; or clean processed recycled wood products
2. Biosolids
3. Manure
4. Mixed food waste

Compost feedstock materials such that weed seeds, pathogens and deleterious materials are reduced as specified under Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7, Section 17868.3.

Compost must not be derived from mixed municipal solid waste and must be reasonably free of visible contaminates. Compost must not contain paint, petroleum products, pesticides or any other chemical residues harmful to animal life or plant growth. Compost must not possess objectionable odors.

Metal concentrations in compost must not exceed the maximum metal concentrations listed in Title 14, California Code of Regulations, Division 7, Chapter 3.1, Section 17868.2.

Compost must comply with the following:

Physical and Chemical Requirements

Property	Test Method	Requirement
pH	TMECC 04.11-A Elastometric pH 1:5 Slurry Method pH Units	6.0–8.0
Soluble Salts	TMECC 04.10-A Electrical Conductivity 1:5 Slurry Method dS/m (mmhos/cm)	0–10.0
Moisture Content	TMECC 03.09-A Total Solids & Moisture at 70+/- 5 deg C % Wet Weight Basis	30–60
Organic Matter Content	TMECC 05.07-A Loss-On-Ignition Organic Matter Method (LOI) % Dry Weight Basis	30–65
Maturity	TMECC 05.05-A Germination and Vigor Seed Emergence Seedling Vigor % Relative to Positive Control	 80 or Above 80 or Above
Stability	TMECC 05.08-B Carbon Dioxide Evolution Rate mg CO_2-C/g OM per day	8 or below
Particle Size	TMECC 02.02-B Sample Sieving for Aggregate Size Classification % Dry Weight Basis	Inches % Passing 3 99% 3/8 < 25% Max. Length 4 inches
Pathogen	TMECC 07.01-B Fecal Coliform Bacteria < 1000 MPN/gram dry wt.	Pass
Pathogen	TMECC 07.01-B Salmonella < 3 MPN/4 grams dry wt.	Pass
Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Plastic, Glass and Metal % > 4mm fraction	Combined Total: < 1.0
Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Sharps (Sewing needles, straight pins and hypodermic needles) % > 4mm fraction	None Detected

NOTE: TMECC refers to "Test Methods for the Examination of Composting and Compost," published by the United States Department of Agriculture and the United States Compost Council (USCC).

Before compost application, submit a copy of the compost producer's compost technical data sheet and a copy of the compost producers Seal of Testing Assurance certification. The compost technical data sheet must include:

1. Laboratory analytical test results
2. List of product ingredients

Before compost application, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

CONSTRUCTION

Site Preparation

Immediately prior to applying compost to compost (Incorporate) areas, remove trash, debris and weeds.

Removed weeds must be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Application

Apply and incorporate compost in separate applications in the following sequence:

1. Apply compost to a depth of 4 inches by using specialized equipment such as a pneumatic blower or side discharge spreader.
2. You may incorporate the compost by hand; by using a backhoe, bulldozer, or grading blade to a depth between 12 and 18 inches. Do not incorporate compost to a strip 2 feet wide adjacent to the edge of pavement.
3. Following incorporation, compact the area to a relative compaction between 82 percent and 90 percent except as otherwise specified in Section 19-5 "Compaction," of the Standard Specifications.
4. Apply erosion control (hydroseed) specified and paid for elsewhere in these special provisions.

B. MEASUREMENT

Compost (Incorporate) will be measured by the square yard.

C. PAYMENT

The contract price paid per square yard for Compost (Incorporate) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in compost (Incorporate) complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

61. IRRIGATION CROSSOVERS

A. DESCRIPTION OF WORK

Irrigation crossovers shall conform to the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications and these special provisions.

Conduits shall be placed in open trenches in conformance with the provisions in Section 20-5.03B, "Conduit for Irrigation Crossovers," of the Standard Specifications.

Conduits shall be alternative conduits and, at the option of the Contractor, shall be one of the following:

A. Bituminous coated corrugated steel pipe,
B. Corrugated aluminum pipe,

C. Acrylonitrile-butadiene-styrene (ABS) composite pipe,
D. Corrugated high density polyethylene (CHDPE) pipe conforming to the requirements in ASTM Designation: F 405 or F 667, or AASHTO Designation: M 252 or M 294 and shall be Type S. Couplings and fittings for CHDPE pipe shall be as recommended by the pipe manufacturer.

Sprinkler control crossovers shall conform to the provisions in Section 20-5.027D, "Sprinkler Control Crossovers," of the Standard Specifications.

Installation of pull boxes shall conform to the provisions in Section 20-5.027I, "Conductors, Electrical Conduit and Pull Boxes," of the Standard Specifications. When no conductors are installed in electrical conduits, pull boxes for irrigation crossovers shall be installed on a foundation of compacted soil.

B. MEASUREMENT

6" Conduit, 3" Conduit, and 2" Conduit shall be measured by the linear foot as specified in Section 20-5.04 "Measurement" of the Standard Specifications.

C. PAYMENT

6" Conduit, 3" Conduit, and 2" Conduit shall be paid for in the same manner as specified in Section 20-5.05 "Payment" of the Standard Specifications.

62. AGGREGATE BASE

A. DESCRIPTION OF WORK

Aggregate base must comply with Section 26, "Aggregate Bases," of the Standard Specifications and these special provisions.

Aggregate base must be Class 2.

Do not store reclaimed asphalt concrete or aggregate base with reclaimed asphalt concrete within 100 feet measured horizontally of any culvert, watercourse, or bridge.

B. MEASUREMENT

Aggregate Base shall be measured by the cubic yard.

C. PAYMENT

The contract price paid per cubic yard for Aggregate Base shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Aggregate Base, as shown on the plans, as specified in the standard Specifications and these Special Provisions, and as directed by the Engineer.

63. COLD FOAM IN-PLACE RECYCLING

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing a homogeneous stabilized base of cold foam in-place recycling (CFIPR) by milling existing asphalt concrete and existing underlying materials, mixing with water and stabilizing agent, and shaping and compacting the mixture.

Definitions

Stabilizing agent: Foamed asphalt binder used with cementitious material and mixed with milled asphalt concrete, existing underlying materials, and water to form a stabilized base.

Submittals

Test Strip

For the test strip, submit a written report within 24 hours of obtaining results that includes:

1. Test results
2. Asphalt binder temperature
3. Stabilizing agent:
    a. Ingredients
    b. Application rate
    c. Quantity
    d. Expansion ratio (maximum volume divided by original volume)
    e. Half-life in seconds
4. Water application rate and quantity
5. Moisture content of:
    a. Existing pavement
    b. Compacted CFIPR
6. In-place density of compacted CFIPR
7. Relative compaction of compacted CFIPR
8. Dilution rate of asphaltic emulsion
9. Recorded depth of cut measurements

Just-In-Time-Training

At least 7 days before Just-In-Time-Training (JITT), submit copies of:

1. Syllabus
2. Handouts
3. Presentation material

Submit the JITT instructor's:

1. Name
2. Address
3. Phone number
4. State engineering registration number

Production

For each day you work on CFIPR, submit within 24 hours of obtaining results:

1. Recorded depth of cut measurements
2. Stabilizing agent:
    a. Temperature
    b. Application rate and quantity
    c. Expansion Ratio (maximum volume divided by original volume)
    d. Half-life in seconds
3. Water application rate and quantity
4. CFIPR gradation
5. Moisture content of compacted CFIPR
6. In-place density of compacted CFIPR
7. Relative compaction of compacted CFIPR
8. Tensile strength test results from the previous day's work
9. Core data including:
    a. Thickness
    b. Sublot
    c. Location by station or post mile
    d. Offset

Asphlatic Emulsion

With each dilution of asphaltic emulsion, submit in writing:

1. Weight ratio of water to bituminous material in the original asphaltic emulsion
2. Weight of asphaltic emulsion before diluting
3. Weight of added water
4. Final dilution weight ratio of water to asphaltic emulsion

Quality Control and Assurance

The asphalt meter must comply with the specifications for metering devices in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications. Calibrate the asphalt meter in the presence of the Engineer. The Engineer determines the frequency of testing and calibration. Perform California Test 109 on the asphalt meter before starting CFIPR work.

Just-In-Time Training

Your personnel must complete JITT. JITT is a formal training class for CFIPR work by an instructor you provide.

JITT must be:

1. At least 2 hours long
2. Conducted within 3 miles of the job site
3. Completed within 5 business days before you start pulverizing the roadbed
4. Conducted during normal working hours

The following staff must complete JITT:

5. Project manager
6. Project superintendent
7. Quality control staff
8. Equipment operators

The JITT instructor must be experienced with CFIPR methods, materials, and tests. The instructor must be neither your employee nor a Department field staff member. The instructor must be registered as an engineer in the State. Upon completion of JITT, the instructor must issue a certificate of completion to the participants.

The Engineer may waive training for personnel who have completed equivalent training within the 12 months preceding JITT. Submit each certificate of completion for the equivalent training.

Test Strip

On the first day of CFIPR activities and within the limits of the CFIPR, construct a test strip of CFIPR to the specified depth for a single lane width at least 1,000 feet long. Use the same equipment, materials, and construction methods for the test strip as the rest of the CFIPR.

The test strip must determine that:

1. Equipment, materials, and processes produce CFIPR in compliance with the specifications
2. Effect of varying the reclaiming machine's forward speed and drum rotation rate on the consistency of the recycled material
3. Optimal proportions of aggregate base, stabilizing agent, and water
4. Rolling method and sequence to comply with the compaction specifications
5. Dilution rate of asphaltic emulsion

Measure asphalt binder temperature for the test strip at the truck's tank for each load delivered to the job site.

Test the test strip for:

1. Moisture content
2. Gradation
3. Relative compaction

If the test strip does not comply with the specifications, stop CFIPR activities. Reprocess, recompact, or remove and replace the test strip until it complies with the specifications. Do not resume CFIPR activities until you inform the Engineer of the adjustments you will make. Construct a new test strip.

After approval of a test strip, if CFIPR does not comply with the compaction specifications, stop CFIPR activities and construct a new test strip.

Quality Control Inspection, Sampling, and Testing

Establish, maintain, and update a quality control system that includes inspection, sampling, and testing. Meet with the Engineer 1 week before starting CFIPR activities to review the quality control system.

Take samples under California Test 125. Give the Engineer unrestricted access to sampling and testing.

Furnish a testing laboratory with testing personnel for quality control that has been qualified under the Department's Independent Assurance Program.

Perform moisture content tests of existing asphalt concrete and underlying materials under California Test 226 not more than 7 days in advance of CFIPR activities. Take a minimum of four samples per project. Submit sample locations to the Engineer for approval not less than 3 days prior to sampling.

Take a 1-quart asphalt binder sample and record the temperature for each load delivered to the job site.

Test a 3-pound sample of CFIPR material for gradation under California Test 202 for every 1,000 square yards of CFIPR. Before compaction, take samples 3 feet from either longitudinal edge of the CFIPR section. If the test results do not comply with the specifications, stop CFIPR activities and inform the Engineer. Before resuming CFIPR activities, reprocess the noncompliant CFIPR material until it complies with gradation specifications.

Daily, take 6 samples of uncompacted CFIPR material that are each 0.5' x 0.5' in area and to the specified depth. Evenly space the samples across the CFIPR section's full width. Perform a sieve analysis on each sample under California Test 202 and discard the material retained on the 1-inch sieve. From the material passing the 1-inch sieve, make 6 sample briquettes under California Test 304, Part 2. Cure the briquettes at 100 °F for 72 hours. After curing, allow the briquettes to cool to room temperature. Test 3 briquettes for tensile strength at room temperature under California Test 371. Test the remaining 3 briquettes for tensile strength under California

Test 371 after soaking in water for 24 hours. The minimum dry/wet tensile strength will be 75% of the average tensile strengths given in the Materials Handout. The Materials Handout can be found as an Appendix in the Final Materials Report Cold Foam Asphalt Mix Design.

Measure and record the actual cut depth at both ends of the milling drum at least once every 300 feet along the cut length. Take measurements in the Engineer's presence.

Determine the in-place density and relative compaction of the finished CFIPR layer for every 1,000 square yards of CFIPR. Determine the relative compaction under California Test 231 modified as follows:

1. Take nuclear gauge counts at 3 elevations within the CFIPR layer. These elevations are identified as E1, E2, and E3. The elevations are:
    a. E1 = 1/3 x (CFIPR thickness - 1 inch)
    b. E2 = 2/3 x (CFIPR thickness - 1 inch)
    c. E3 = (CFIPR thickness - 1 inch)
2. Correction for oversize material does not apply
3. A sample must contain no more than 5 percent retained on the 1-inch sieve and 10 percent retained on the 3/4-inch sieve

Measure the moisture content of the compacted CFIPR material under California Test 226 each time you take a compaction test.

If the test results do not comply with the specifications, stop CFIPR activities and inform the Engineer. Before resuming activities:

1. Inform the Engineer of the adjustments you will make
2. Update the quality control system
3. Construct a test strip demonstrating ability to comply with the compaction specifications
4. Reprocess the noncompliant material until it complies with compaction specifications

MATERIALS

Aggregate Base

Aggregate base must comply with "Aggregate Base." Use the 3/4-inch maximum grading. Aggregate base must not include cinders. Do not use aggregate base with more than 50 percent by volume of reclaimed asphalt pavement. Aggregate base must weigh at least 105 pounds per cubic foot, determined under California Test 212, Compacted Method (by Rodding).

Asphalt Binder

Asphalt binder used in the stabilizing agent must comply with Section 92, "Asphalts," of the Standard Specifications. The grade of asphalt binder must be PG 64-22. Do not heat asphalt binder above 375 °F.

Cementitious Material

In the stabilizing agent, add 2 percent cementitious material by dry weight of CFIPR material. Cementitious material must be Type II portland cement under ASTM C 150.

Water

Water for CFIPR must be clean and contain no more than 650 parts per million of chlorides as Cl, and no more than 1,300 parts per million of sulfates as S04.

Asphaltic Emulsion

Asphaltic emulsion must comply with Section 94, "Asphaltic Emulsions," of the Standard Specifications. The grade of asphaltic emulsion must be SS1h or CSS1h.
For dilution, the weight ratio of added water to asphaltic emulsion must not exceed 1 to 1.

Rapid Strength Concrete

Rapid strength concrete must be one of the following, or equal:

1. Set 45
2. Burke Fast Set
3. Ceratech DOT
4. Ceratech SL

CONSTRUCTION

General

Do not start CFIPR activities if the National Weather Service forecasts rain at the job site within 24 hours. Do not start CFIPR activities if the ambient air temperature is below 50 °F or the road surface is below 50 °F. If the ambient air temperature is below 50 °F, you may only finish and compact CFIPR.
Before starting each day's CFIPR activities, sweep the CFIPR area you constructed the previous day to remove loose material.

Equipment

CFIPR equipment for water and stabilizing agent must be independent, interlocked, and each must include the following:

1. Digital electronic controller system
2. Pumping system
3. Spray bar system

Operating in relation to the equipment's forward speed and the weight of material being recycled, the controller, pumping, and spray bar systems must regulate stabilizing agent and moisture content of the milled pavement and underlying material. The rate by weight of water added to make stabilizing agent must be controlled with the same controller.

Spray bars must be fitted with self-cleaning nozzles or nozzles that indicate flow. Space the nozzles evenly at a rate of 1 nozzle for every 6 to 8 inches of mixing chamber width.

Apply the stabilizing agent atomized under pressure through individual and separate small orifices.

Fit an inspection nozzle at 1 end of the stabilizing agent spray bar. The inspection nozzle must produce a representative sample of stabilizing agent.

Use a heating system to maintain the temperature of asphalt binder above 340 °F including when the asphalt binder is injected. Use a thermometer in the asphalt binder feed line to the CFIPR machine before introduction of water to the asphalt binder to measure asphalt binder temperature.

Use a mass flow, coriolis effect type asphalt meter. The meter must have a controller, a visible readout display, and printing capabilities.

The distance from the stabilizing agent spray nozzle to the top of the cutter tooth holder must be at least the depth of cut.

Mobile asphalt binder storage equipment must:

1. Attach to the CFIPR machine
2. Not leak
3. Have a sampling valve

Do not service CFIPR equipment on the travelled way.

Spreading equipment must be mechanical. Spreading equipment may be any of the following:

1. Screed mounted on the rear of the mixing equipment
2. Mixing equipment
3. Motor grader

Compacting equipment must consist of 1 vibratory sheepsfoot roller with a blade for each CFIPR machine, a vibratory steel drum roller, and a pneumatic-tired roller. Compacting equipment must be self-propelled and reversible. The frequency and amplitude of vibrating rollers must be adjustable and exceed a static weight of 15 tons in vibratory mode.

Surface Preparation

Before CFIPR activities start, prepare the existing roadway surface by:

1. Clearing foreign matter including vegetation
2. Removing standing water
3. Referencing the profile and cross slope

4. Marking the proposed longitudinal cut lines on the existing pavement as follows:
    a. Cut lines must coincide with points where the existing cross slope changes, approximately at the centerline and edge of traveled way
    b. Cut lines must indicate the sequence of the cuts

Spreading Materials

Spread cementitious material immediately before the operation that blends the milled material with stabilizing agent. Spread dried cementitious material uniformly over the full width. The spread rate must be 2.5 lbs per square foot. Do not spread cementitious materials in windy conditions.

Inform the Engineer if adjustments to the stabilizing agent injection rate are necessary.

Do not apply water to an uncompacted surface.

Milling and Mixing

If you encounter unsuitable material under Section 19-2.02, "Unsuitable Material," of the Standard Specifications, remove subgrade to at least 2 feet below milling depth. Replace unsuitable material with Class 2 aggregate base under Section 26, "Aggregate Base," of the Standard Specifications to the level of the existing pavement surface.

The CFIPR equipment's forward speed must not exceed 6 yards per minute. Set the speed so that, when combined with the other adjustable components, the specified depth is milled in 1 pass. Do not pulverize asphalt concrete before CFIPR activities.

The mixture of milled material, aggregate base, and cementitious material must comply with the following grading:

CFIPR Gradation

Sieve Size	Percentage Passing
4"	100
3"	95 - 100
1.5"	85 - 100

The first cut width must equal the width of the milling drum and subsequent cut widths must be less than the drum width by at least 2 inches. If a cut deviates more than 2 inches inside the cut line, immediately reverse to where the deviation began and mill along the correct line without any further water or stabilizing agent. If a cut deviates more than 2 inches outside the cut line, immediately adjust. With each cut, adjust the amount of water and stabilizing agent proportionally to the actual cut width.

Do not leave a gap of unmilled material between cuts. Do not leave a wedge at the entry of the milling drum into the existing material.

Mark the existing pavement where each cut will terminate. Position the mark to where the milling drum's center will be when the milling stops. Start the following cut on this alignment at least 2 feet behind this mark.

The maximum time period between mixing the milled material with stabilizing agent and compacting the CFIPR is 3 hours.

Compaction

Compact immediately after spreading CFIPR.

During compaction, the moisture content determined under California Test 216 must be from 2 percent below the optimum moisture content to the optimum moisture content.

Compact CFIPR to a relative compaction of at least 98 percent before opening to traffic.

The profile and cross slope of the compacted CFIPR must be within 0.05 foot of the grade shown on the plans.

After compaction, apply water and roll with pneumatic-tired rollers. The final surface must be free of ruts, bumps, indentations, and segregation.

Keep the compacted surface damp by lightly watering the surface 4 times per day for 4 days after compacting.

Apply a coat of diluted asphaltic emulsion to the finished surface. The residual application rate of asphaltic emulsion must be from 0.13 to 0.25 gallons per square yard. The dilution must be 50 percent water and 50 percent asphaltic emulsion. Do not apply asphaltic emulsion until the moisture content is 2 percent below the optimum moisture content at mid-depth determined under California Test 216 and California Test 231. Do not apply water to applied asphaltic emulsion.

Before placing HMA, take cores to determine the finished compacted CFIPR thickness. Record each core's measurements in the Engineer's presence. Each core's record must include the location, sublot, and station or postmile. Take 1 core every 1,000 square yards except at day's end. At day's end, if the quantity of CFIPR since the last core is from 500 to 1,000 square yards, take a core to represent this quantity. If the quantity is less than 500 square yards, this quantity is represented by the previous core. Fill core holes with rapid strength concrete.

If a core is more than 0.05 foot less than the specified thickness, core at intermediate sites to determine the extent of the deficient thickness. Remove the CFIPR material deficient in thickness by cold planing to a depth of 0.2 foot below the finished CFIPR grade. Replace the planed CFIPR with the hot mix asphalt specified for the project and compact thoroughly.

Sweep the entire surface and install construction area traffic control devices.

Do not open to traffic without the Engineer's approval.

Protect and maintain CFIPR until you place hot mix asphalt. After applying asphaltic emulsion, keep the surface dry. Repair damaged CFIPR material with hot mix asphalt.

B. MEASUREMENT

Cold foam in-place recycling (including test strips) is measured by the square yard. The Engineer measures the area for payment using the in-place length and width of CFIPR.

C. PAYMENT

The contract price paid per square yard for cold foam in-place recycling includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in cold foam in-place recycling including coring, and test strips, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Additional areas of CFIPR due to dimensions and capabilities of equipment, beyond what is shown on the plans or directed by the engineer, shall be considered as incidental work, and no additional compensation will be made therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all work involved in Aggregate Base required for the CFIPR process, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the contract square yard price for cold foam in-place recycling, and no additional compensation will be allowed therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all work involved in stabilizing agent (foamed asphalt), as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the contract square yard price for cold foam in-place recycling, and no additional compensation will be allowed therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all work involved in stabilizing agent (cementious material), as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the contract square yard price for cold foam in-place recycling, and no additional compensation will be allowed therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all work involved in asphaltic emulsion, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer shall be considered as included in the contract square yard price for cold foam in-place recycling, and no additional compensation will be allowed therefor.

Costs for providing JITT shall be considered as included in the contract price per square yard for Cold-Foam In-Place Recycling and no additional compensation will be allowed therefor.

64. HOT MIX ASPHALT

GENERAL

Summary

This work includes producing and placing hot mix asphalt (HMA) Type A using the Standard process.

Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

Submittals

Quality Control / Quality Assurance Projects

Data Cores

Three business days before starting coring, submit proposed methods and materials for backfilling data core holes.

Submit to the Engineer and electronically to Coring@dot.ca.gov:

1. A summary of data cores taken
2. A photograph of each data core

For each data core, the summary must include:

1. Project identification number
2. Date cored
3. Core identification number
4. Type of materials recovered
5. Type and approximate thickness of unstabilized material not recovered
6. Total core thickness
7. Thickness of each individual material to within:

    7.1. For recovered material, 1/2 inch
    7.2. For unstabilized material, 1.0 inch

8. Location including:

    8.1. County
    8.2. Route
    8.3. Post mile
    8.4. Lane number
    8.5. Lane direction
    8.6. Station

Each data core digital photograph must include a ruler laid next to the data core. Each photograph must include:

1. The core
2. Project identification number

3. Core identification number
4. Date cored
5. County
6. Route
7. Post mile
8. Lane number
9. Lane direction

After data core summary and photograph submittal, dispose of cores under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

MATERIALS

Asphalt Binder

The grade of asphalt binder mixed with aggregate for HMA Type A must be PG 64-16.

Aggregate

The aggregate for HMA Type A must comply with the ¾-inch grading.

CONSTRUCTION

Vertical Joints

Before opening the lane to public traffic, pave shoulders and median borders adjacent to a lane being paved.

Do not leave a vertical joint more than 0.15 foot high between adjacent lanes open to public traffic.

Widening

If widening existing pavement, construct new structural section to match the elevation of the existing pavement's edge at each location before placing HMA over the existing pavement.

Conform Tapers

Place shoulder conform tapers concurrently with the adjacent lane's paving.

Data Cores

Take data cores that include the completed HMA pavement, underlying base, and subbase material. Protect data cores and surrounding pavement from damage.

Take 4-inch or 6-inch diameter data cores:

1. At the beginning, end, and every 1/2 mile within the paving limits of each route on the project
2. After all paving is complete
3. From the center of the specified lane

On a 2-lane roadway, take data cores from either lane. On a 4-lane roadway, take data cores from each direction in the outermost lane. On a roadway with more than 4 lanes, take data cores from the median lane and the outermost lane in each direction.

Each core must include the stabilized materials encountered. You may choose not to recover unstabilized material but you must identify the material. Unstabilized material includes:

1. Granular material
2. Crumbled or cracked stabilized material
3. Sandy or clayey soil

B. MEASUREMENT

Hot Mix Asphalt will be measured in the same manner as specified for Asphalt Concrete in Section 39-5.01 “Measurement” of the Standard Specifications.

C. PAYMENT

Full compensation for data coring will be considered as included in the prices paid for the various contract items of work involved in data coring and no separate payment will be made therefore.

In Addition to the requirements of Section 39-5.02 of the Standard Specifications, the contract unit price paid per ton for Hot Mix Asphalt shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals to perform Hot Mix Asphalt work including, but not limited to, preparation of work areas, spreading Asphalt Emulsion and Hot Mix Asphalt, rolling and compacting.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals for spreading hot mix asphalt (leveling), including additional pavement grinding shall be considered as included in the contract price paid per ton for the various types of hot mix asphalt and no additional compensation will be allowed therefor.

65. HOT MIX ASPHALT OPEN GRADED FRICTION COURSE

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes producing and placing hot mix asphalt (open graded)[HMA-O] using the standard process.

Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

MATERIALS

The grade of asphalt binder mixed with aggregate for HMA-O must be PG 64-16.

The aggregate for HMA-O must comply with the ½-inch grading.

CONSTRUCTION

Vertical Joints

Before opening the lane to public traffic, pave shoulders and median borders adjacent to a lane being paved.

Place HMA-O on adjacent traveled way lanes so that at the end of each work shift, the distance between the ends of HMA-O layers on adjacent lanes is between 5 feet and 10 feet. Place additional HMA-O along the transverse edge at each lane's end and along the exposed longitudinal edges between adjacent lanes. Hand rake and compact the additional HMA-O to form temporary conforms. You may place Kraft paper, or another approved bond breaker, under the conform tapers to facilitate the taper removal when paving operations resume.

B. MEASUREMENT

Hot Mix Asphalt (Open Graded Friction Course) will be measured in the same manner specified for Asphalt Concrete in Section 39-8 "Measurement and Payment" of the Standard Specifications.

C. PAYMENT

In addition to the requirements of Section 39-8.02 of the Standard Specifications, the contract unit price paid per ton for Hot Mix Asphalt (Open Graded Friction Course) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals to perform Hot Mix Asphalt (Open Graded Friction Course) work including, but not limited to, preparation of work areas, spreading asphalt concrete emulsion and Hot Mix Asphalt (Open Graded Friction Course), rolling and compacting.

66. HOT MIX ASPHALT (MISCELLANEOUS AREAS)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes producing hot mix asphalt (HMA) and placing it on miscellaneous areas.

Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

If there is a contract item for place hot mix asphalt (miscellaneous area) paid for by the square yard, this item is limited to the areas listed on the plans and is in addition to the contract items for the materials involved.

Full compensation for tack coat for miscellaneous areas is considered as included in the contract price paid per ton for the hot mix asphalt used in miscellaneous areas and no separate payment will be made therefor.

Place HMA Dikes (Types C, E and F) shall be measured by the linear foot along the face of dike. In addition to the quantities for placing hot mix asphalt dike measured on a linear foot, the hot mix asphalt to be placed will also be measured for payment.

The contract price paid per linear foot for place hot mix asphalt dike as designated in the Engineer's Estimate include full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in placing HMA dike, complete in place, including excavation, backfill, and preparation of the area to receive the dike, as shown on the plans, as specified in these specifications, and as directed by the Engineer.

67. PILING

A. DESCRIPTION OF WORK

GENERAL

Piling shall conform to the provisions in Section 49, "Piling," of the Standard Specifications, and these special provisions.

Unless otherwise specified, welding of any work performed in conformance with the provisions in Section 49, "Piling," of the Standard Specifications, shall be in conformance with the requirements in AWS D1.1.

Attention is directed to "Project Information," "Precast Concrete Quality Control," and "Welding" of these special provisions.

Difficult pile installation is anticipated due to the presence of locally dense sand and gravel layers above the specified tip elevations.

Jetting

Jetting to obtain the specified penetration in conformance with the provisions in Section 49-1.05, "Driving Equipment," of the Standard Specifications shall not be used for driven type piles.

Drilling

Drilling to obtain the specified penetration in conformance with the provisions in Section 49-1.05, "Driving Equipment," of the Standard Specifications shall only be used for driven type piles at the locations and to the bottom of hole elevations listed in the following table. Drill hole diameters shall be no greater than 8 inches in diameter. Materials resulting from drilling holes shall be disposed of in conformance with the provisions in Section 19-2.06, "Surplus Material," of the Standard Specifications.

Bridge Number	Abutment Number	Bent Number	Elevation of Bottom ofHole
12-0135	1&5	2, 3,&4	213

Pile Driving Acceptance Criteria

The nominal driving resistance shown on the plans for driven piles shall be exceeded by “p” and “Ru” in the equations shown below:

1.

$$P = \frac{E_r}{6(s + 2.54)}$$

"P" is the safe load in pounds, "E_r" is the manufacturer's rating for foot-pounds of energy developed by the hammer, and "s" is the penetration per blow in inches, averaged over the last few blows. The penetration "s" shall be measured only when there is no appreciable rebound of the hammer and only when the last blow is struck upon a sound pile head or driving block. The penetration per blow "s" may be measured either during initial driving or during redriving following a set period as determined by the Engineer.

2.

$$R_u = (1.83 * (E_r)^{1/2} * \log_{10} (0.83 * N)) - 124$$

"R_u" is the nominal resistance in kips, "E_r" is the manufacturer's rating for foot-pounds of energy developed by the hammer at the observed field drop height, and "N" is the number of hammer blows in the last foot, (maximum value to be used for N is 100).

B. <u>MEASUREMENT AND PAYMENT (PILING)</u>

Measurement and payment for the various types and classes of piles shall conform to the provisions in Sections 49-6.01, "Measurement," and 49-6.02, "Payment," of the Standard Specifications and these special provisions.

68. CAST-IN-DRILLED-HOLE CONCRETE PILES

GENERAL

Summary

Cast-in-drilled-hole (CIDH) concrete piling shall conform to the provisions in Section 49-4, "Cast-In-Place Concrete Piles," of the Standard Specifications and these special provisions

.

The provisions of "Welding" of these special provisions shall not apply to temporary steel casings.

SUBMITTALS

Pile Installation Plan

The Contractor shall submit a pile installation plan to the Engineer for approval for all CIDH concrete piling. The pile installation plan shall be submitted at least 15 days before constructing CIDH concrete piling and shall include complete descriptions, details, and supporting calculations for the following:

A. Concrete mix design, certified test data, and trial batch reports.
B. Drilling or coring methods and equipment.
C. Proposed method for casing installation and removal when necessary.
D. Methods for placing, positioning, and supporting bar reinforcement
E. Methods and equipment for determining the depth of concrete and actual and theoretical volume placed, including effects on volume of concrete when any casings are withdrawn.
F. Methods and equipment for verifying that the bottom of the drilled hole is clean before placing concrete.
G. Methods and equipment for preventing upward movement of reinforcement, including the Contractor's means of detecting and measuring upward movement during concrete placement operations.

For concrete placed under slurry, the pile installation plan shall also include complete descriptions, details, and supporting calculations for the following:

A. Concrete batching, delivery, and placing systems, including time schedules and capacities. Time schedules shall include the time required for each concrete placing operation at each pile.
B. Concrete placing rate calculations. When requested by the Engineer, calculations shall be based on the initial pump pressures or static head on the concrete and losses throughout the placing system, including anticipated head of slurry and concrete to be displaced.
C. Suppliers' test reports on the physical and chemical properties of the slurry and any proposed slurry chemical additives, including Material Safety Data Sheet.
D. Slurry testing equipment and procedures.
E. Methods of removal and disposal of excavation, slurry, and contaminated concrete, including removal rates.
F. Methods and equipment for slurry agitating, recirculating, and cleaning.

QUALITY ASSURANCE

Concrete Test Batch

Before concrete is deposited under slurry, a concrete test batch shall be produced and delivered to the project under conditions and in time periods similar to those expected during placement of concrete in the piles. Concrete shall be placed in an excavated hole or suitable container of adequate size to allow for testing as specified herein. Depositing of concrete under slurry will not be required. In addition to meeting the specified nominal slump, the concrete test batch shall meet the following requirements:

A. For piles where the time required for each concrete placing operation, as submitted in the placing plan, will be 2 hours or less, the concrete test batch shall demonstrate that the proposed concrete mix design achieves a slump of at least 7 inches after twice that time has elapsed.
B. For piles where the time required for each concrete placing operation, as submitted in the placing plan, will be more than 2 hours, the concrete test batch shall demonstrate that the

proposed concrete mix design achieves a slump of at least 7 inches after that time plus 2 hours has elapsed.

The time period shall begin at the start of placement. Concrete shall not be vibrated or agitated during the test period. Slump tests will be performed in conformance with the requirements in California Test 556.

Upon completion of testing, concrete shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Preconstruction Meeting

A preconstruction meeting for CIDH concrete pile construction shall be held (1) at least 5 business days after submitting the pile installation plan and (2) at least 10 days before the start of CIDH concrete pile construction.

The meeting shall include the Engineer, the Contractor, and any subcontractors involved in the CIDH concrete pile construction.

The purpose of this meeting is to:

A. Establish contacts and communication protocol between the Contractor, any subcontractors involved in CIDH concrete pile construction, and the Engineer
B. Review the construction process, acceptance testing, and anomaly mitigation of CIDH concrete piles

The Contractor shall provide a facility for the meeting. The Engineer will conduct the meeting. The following will be discussed at the meeting:

A. Pile placement plan, dry and wet
B. Acceptance testing, including gamma-gamma logging, cross-hole sonic logging, and coring
C. Pile Design Data Form
D. Mitigation process
E. Timeline and critical path activities
F. Structural, geotechnical, and corrosion design requirements
G. Future meetings, if necessary, for pile mitigation and pile mitigation plan review
H. Safety requirements, including Cal/OSHA and Tunnel Safety Orders

MATERIALS

Concrete

Concrete deposited under slurry shall have a nominal slump equal to or greater than 7 inches, contain not less than 675 pounds of cementitious material per cubic yard, and be proportioned to prevent excessive bleed water and segregation. The nominal and maximum slump and

penetration requirements in Section 90-6.06, "Amount of Water and Penetration," of the Standard Specifications shall not apply.

Aggregate Grading

The combined aggregate grading shall be either the 1-inch maximum grading, the 1/2-inch maximum grading, or the 3/8-inch maximum grading and shall conform to the requirements in Section 90-3, "Aggregate Gradings," of the Standard Specifications.

When concrete is placed under slurry, the combined aggregate grading shall be either the 1/2-inch maximum grading or the 3/8-inch maximum grading and shall conform to the requirements in Section 90-3, "Aggregate Gradings," of the Standard Specifications.

Slurry

Mineral Slurry

Mineral slurry shall be mixed and thoroughly hydrated in slurry tanks, and slurry shall be sampled from the slurry tanks and tested before placement in the drilled hole.

Slurry shall be recirculated or continuously agitated in the drilled hole to maintain the specified properties.

Recirculation shall include removal of drill cuttings from the slurry before discharging the slurry back into the drilled hole. When recirculation is used, the slurry shall be sampled and tested at least every 2 hours after beginning its use until tests show that the samples taken from the slurry tank and from near the bottom of the hole have consistent specified properties. Subsequently, slurry shall be sampled at least twice per shift as long as the specified properties remain consistent.

Slurry that is not recirculated in the drilled hole shall be sampled and tested at least every 2 hours after beginning its use. The slurry shall be sampled mid-height and near the bottom of the hole. Slurry shall be recirculated when tests show that the samples taken from mid-height and near the bottom of the hole do not have consistent specified properties.

Slurry shall also be sampled and tested before final cleaning of the bottom of the hole and again just before placing concrete. Samples shall be taken from mid-height and near the bottom of the hole. Cleaning of the bottom of the hole and placement of the concrete shall not start until tests show that the samples taken from mid-height and near the bottom of the hole have consistent specified properties.

Mineral slurry shall be tested for conformance to the requirements shown in the following table:

MINERAL SLURRY		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - before placement in the drilled hole - during drilling - before final cleaning - immediately before placing concrete	64.3* to 69.1* 64.3* to 75.0*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/quart) bentonite attapulgite	28 to 50 28 to 40	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8 to 10.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - before final cleaning - immediately before placing concrete	less than or equal to 4.0	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 2 pcf. Slurry temperature shall be at least 40°F when tested.		

Any caked slurry on the sides or bottom of hole shall be removed before placing reinforcement. If concrete is not placed immediately after placing reinforcement, the reinforcement shall be removed and cleaned of slurry, the sides of the drilled hole cleaned of caked slurry, and the reinforcement again placed in the hole for concrete placement.

Synthetic Slurry

Synthetic slurries shall be used in conformance with the manufacturer's recommendations and these special provisions. The following synthetic slurries may be used:

PRODUCT	MANUFACTURER
SlurryPro CDP	KB Technologies Ltd. 3648 FM 1960 West Suite 107 Houston, TX 77068 (800) 525-5237
Super Mud	PDS Company c/o Champion Equipment Company 8140 East Rosecrans Ave. Paramount, CA 90723 (562) 634-8180
Shore Pac GCV	CETCO Drilling Products Group 1350 West Shure Drive Arlington Heights, IL 60004 (847) 392-5800
Novagel Polymer	Geo-Tech Drilling Fluids 220 N. Zapata Hwy, Suite 11A Laredo, TX 78043 (210) 587-4758

Inclusion of a synthetic slurry on the above list may be obtained by meeting the Department's requirements for synthetic slurries. The requirements can be obtained from the Offices of Structures Design, P.O. Box 168041, MS# 9-4/11G, Sacramento, CA 95816-8041.

Synthetic slurries listed may not be appropriate for a given site.

Synthetic slurries shall not be used in holes drilled in primarily soft or very soft cohesive soils as determined by the Engineer.

A manufacturer's representative, as approved by the Engineer, shall provide technical assistance for the use of their product, shall be at the site before introduction of the synthetic slurry into a drilled hole, and shall remain at the site until released by the Engineer.

Synthetic slurries shall be sampled and tested at both mid-height and near the bottom of the drilled hole. Samples shall be taken and tested during drilling as necessary to verify the control of the properties of the slurry. Samples shall be taken and tested when drilling is complete, but before final cleaning of the bottom of the hole. When samples are in conformance with the requirements shown in the following tables for each slurry product, the bottom of the hole shall be cleaned and any loose or settled material removed. Samples shall be obtained and tested after final cleaning and immediately before placing concrete.

SlurryPro CDP synthetic slurries shall be tested for conformance to the requirements shown in the following table:

SLURRYPRO CDP KB Technologies Ltd.		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - during drilling - before final cleaning - just before placing concrete	 less than or equal to 67.0* less than or equal to 64.0*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/quart) - during drilling -before final cleaning - just before placing concrete	 50 to 120 less than or equal to 70	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	6 to 11.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - before final cleaning - just before placing concrete	 less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 2 pcf. Slurry temperature shall be at least 40°F when tested.		

Super Mud synthetic slurries shall be tested for conformance to the requirements shown in the following table:

SUPER MUD PDS Company		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - before final cleaning - just before placing concrete	less than or equal to 64.0*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/quart) - during drilling - before final cleaning - just before placing concrete	32 to 60 less than or equal to 60	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8 to 10.0	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - before final cleaning -just before placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 2 pcf. Slurry temperature shall be at least 40°F when tested.		

Shore Pac GCV synthetic slurries shall be tested for conformance to the requirements shown in the following table:

Shore Pac GCV CETCO Drilling Products Group		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - before final cleaning - just before placing concrete	less than or equal to 64.0*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/quart) - during drilling - before final cleaning - just before placing concrete	33 to 74 less than or equal to 57	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8.0 to 11.0	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - before final cleaning -just before placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 2 pcf. Slurry temperature shall be at least 40°F when tested.		

Novagel Polymer synthetic slurries shall be tested for conformance to the requirements shown in the following table:

NOVAGEL POLYMER Geo-Tech Drilling Fluids		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - during drilling - before final cleaning - just before placing concrete	 less than or equal to 67.0* less than or equal to 64.0*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/quart) - during drilling - before final cleaning - just before placing concrete	 45 to 104 less than or equal to 104	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	6.0 to 11.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - before final cleaning -just before placing concrete	 less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 2 pcf. Slurry temperature shall be at least 40°F when tested.		

Water Slurry

At the option of the Contractor, water may be used as slurry when casing is used for the entire length of the drilled hole.

Water slurry shall be tested for conformance to the requirements shown in the following table:

WATER SLURRY		
PROPERTY	REQUIREMENT	TEST
Density (pcf) - before final cleaning - just before placing concrete	63.5*	Mud Weight (Density) API 13B-1 Section 1
Sand Content (percent) - before final cleaning -just before placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, salt water slurry may be used and the allowable densities may be increased up to 2 pcf.		

CONSTRUCTION

General

CIDH concrete piling 24 inches in diameter or larger may be constructed by excavation and depositing concrete under slurry.

Portions of CIDH concrete piling shown on the plans to be formed shall be formed and finished in conformance with the provisions for concrete structures in Section 51, "Concrete Structures," of the Standard Specifications.

Permanent Steel Casing Installation

Placing Concrete

Concrete deposited under slurry shall be carefully placed in a compact, monolithic mass and by a method that will prevent washing of the concrete. Concrete deposited under slurry need not be vibrated. Placing concrete shall be a continuous operation lasting not more than the time required for each concrete placing operation at each pile, as submitted in the placing plan, unless otherwise approved in writing by the Engineer. Concrete shall be placed with concrete pumps and delivery tube system of adequate number and size to complete the placing of concrete in the time specified. The delivery tube system shall consist of one of the following:

A. A tremie tube or tubes, each of which are at least 10 inches in diameter, fed by one or more concrete pumps.
B. One or more concrete pump tubes, each fed by a single concrete pump.

The delivery tube system shall consist of watertight tubes with sufficient rigidity to keep the ends always in the mass of concrete placed. If only one delivery tube is utilized to place the concrete, the tube shall be placed near the center of the drilled hole. Multiple tubes shall be uniformly spaced in the hole. Internal bracing for the steel reinforcing cage shall accommodate the delivery tube system. Tremies shall not be used for piles without space for a 10-inch tube.

Spillage of concrete into the slurry during concrete placing operations shall not be allowed. Delivery tubes shall be capped with a watertight cap, or plugged above the slurry level with a good quality, tight fitting, moving plug that will expel the slurry from the tube as the tube is charged with concrete. The cap or plug shall be designed to be released as the tube is charged. The pump discharge or tremie tube shall extend to the bottom of the hole before charging the tube with concrete. After charging the delivery tube system with concrete, the flow of concrete through a tube shall be induced by slightly raising the discharge end. During concrete placement, the tip of the delivery tube shall be maintained as follows to prevent reentry of the slurry into the tube. Until at least 10 feet of concrete has been placed, the tip of the delivery tube shall be within 6 inches of the bottom of the drilled hole, and then the embedment of the tip shall be maintained at least 10 feet below the top surface of the concrete. Rapid raising or lowering of the delivery tube shall not be permitted. If the seal is lost or the delivery tube becomes plugged and must be removed, the tube shall be withdrawn, the tube cleaned, the tip of the tube capped to prevent entrance of the slurry, and the operation restarted by pushing the capped tube 10 feet into the concrete and then reinitiating the flow of concrete.

When slurry is used, a fully operational standby concrete pump, adequate to complete the work in the time specified, shall be provided at the site during concrete placement. The slurry level shall be maintained 10 feet above the piezometric head or within 12 inches of the top of the drilled hole, whichever is higher.

A log of concrete placement for each drilled hole shall be maintained by the Contractor when concrete is deposited under slurry. The log shall show the pile location, tip elevation, dates of excavation and concrete placement, total quantity of concrete deposited, length and tip elevation of any casing, and details of any hole stabilization method and materials used. The log shall include a 8-1/2" x 11" sized graph of the concrete placed versus depth of hole filled. The graph shall be plotted continuously throughout placing of concrete. The depth of drilled hole filled shall be plotted vertically with the pile tip oriented at the bottom and the quantity of concrete shall be plotted horizontally. Readings shall be made at least at each 5 feet of pile depth, and the time of the reading shall be indicated. The graph shall be labeled with the pile location, tip elevation, cutoff elevation, and the dates of excavation and concrete placement. The log shall be delivered to the Engineer within 1 working day of completion of placing concrete in the pile.

After placing reinforcement and before placing concrete in the drilled hole, if drill cuttings settle out of the slurry, the bottom of the drilled hole shall be cleaned. The Contractor shall verify that the bottom of the drilled hole is clean.

If a temporary casing is used, maintain concrete placed under slurry at a level at least 5 feet above the bottom of the casing. The equivalent hydrostatic pressure inside the casing must be greater than the hydrostatic pressure on the outside of the casing. The withdrawal of the casing must not cause contamination of the concrete with slurry.

Material resulting from using slurry shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Acceptance Testing and Mitigation

Vertical inspection pipes for acceptance testing shall be provided in all CIDH concrete piling 24 inches in diameter or larger, except when the holes are dry or when the holes are dewatered without the use of temporary casing in a manner that controls ground water.

The furnishing and placing of inspection pipes shall conform to the following:

A. Inspection pipes shall be Schedule 40 PVC pipe with a nominal inside diameter of 2 inches. Watertight PVC couplers are permitted to facilitate pipe lengths in excess of those which are commercially available. The Contractor shall log the location of the inspection pipe couplers with respect to the plane of pile cut off, and these logs shall be delivered to the Engineer upon completion of the placement of concrete in the drilled hole.
B. Each inspection pipe shall be capped at the bottom and shall extend from 3 feet above the pile cutoff down to the bottom of the reinforcing cage. A temporary top cap or similar means shall be provided to keep the pipes clean before testing. If pile cutoff is below the ground surface or working platform, inspection pipes shall be extended to 3 feet above the ground surface or working platform. Approved covers or railings shall be provided and inspection pipes shall be located as necessary to minimize exposure of testing personnel to potential falling hazards.
C. Inspection pipes shall be completely clean, dry, and unobstructed at the time of testing providing a 2-inch diameter clear opening.
D. The inspection pipes shall be installed in straight alignment, parallel to the main reinforcement, and securely fastened in place to prevent misalignment during installation of the reinforcement and placing of concrete in the hole. The CIDH concrete piling shall be constructed so that the relative distance of inspection pipes to vertical steel reinforcement shall remain constant.
E. When any changes are made to the tip of CIDH concrete piling, the Contractor shall also extend the inspection pipes to the bottom of the reinforcing cage.

The following additional requirements apply if inspection pipes are not shown on the plans:

A. Inspection pipes shall be placed radially around the pile, inside the outermost spiral or hoop reinforcement and no more than 1 inch clear of the outermost spiral or hoop reinforcement.

B. Inspection pipes shall be placed around the pile at a uniform spacing not exceeding 33 inches measured along the circle passing through the centers of inspection pipes. A minimum of 2 inspection pipes per pile shall be used. Inspection pipes shall be placed to provide the maximum diameter circle that passes through the centers of the inspection pipes while maintaining the spacing required herein.
C. Inspection pipes shall be placed a minimum of 3 inches clear of the vertical reinforcement. When the vertical reinforcement configuration does not permit this clearance while achieving radial location requirements, distance to vertical rebar shall be maximized while still maintaining the requirement for radial location.
D. Where the dimensions of the pile reinforcement do not permit inspection pipes to be placed per these requirements, a plan for tube placement shall be submitted to the Engineer for approval in the Pile Placement Plan with a request for deviation before fabricating pile reinforcement.

After placing concrete, inspection pipes shall be filled with water to prevent debonding of the pipe. Before requesting acceptance tests, each inspection pipe shall be tested by the Contractor in the presence of the Engineer by passing a 1-1/4-inch-diameter rigid cylinder 4.5 feet long through the length of pipe. If an inspection pipe fails to pass the 1-1/4-inch-diameter cylinder, the Contractor shall immediately fill all inspection pipes in the pile with water.

For each inspection pipe that does not pass the 1-1/4-inch-diameter cylinder, the Contractor shall core a nominal 2-inch diameter hole through the concrete for the entire length of the pile. Cored holes shall be located as close as possible to the inspection pipes they are replacing and shall be no more than 5 inches clear from the reinforcement.

Coring shall not damage the pile reinforcement. Cored holes shall be made with a double wall core barrel system utilizing a split tube type inner barrel. Coring with a solid type inner barrel will not be allowed. Coring methods and equipment shall provide intact cores for the entire length of the pile. The coring operation shall be logged by an Engineering Geologist or Civil Engineer licensed in the State of California and experienced in core logging. Coring logs shall be in conformance with the Department's "Soil and Rock Logging, Classification, and Presentation Manual." Coring logs shall include Core Recovery (REC), Rock Quality Designation (RQD), locations of breaks, and complete descriptions of inclusions and voids encountered during coring, and shall be delivered to the Engineer upon completion. Concrete cores shall be preserved, identified with the exact location the core was recovered from within the pile, and delivered to the Engineer upon completion. The Engineer will evaluate the portion of the pile represented by the cored hole based on the submitted core logs.

Acceptance tests of the concrete will be made by the Engineer, without cost to the Contractor. Acceptance tests will evaluate the homogeneity of the placed concrete. Tests will include gamma-gamma logging conducted in conformance with California Test 233. The Contractor shall not conduct operations within 25 feet of the gamma-gamma logging operations. The Contractor shall separate reinforcing steel as necessary to allow the Engineer access to the inspection pipes to perform gamma-gamma logging or other acceptance testing. After requesting acceptance tests and providing access to the piles, the Contractor shall allow 15 days for the Engineer to conduct these tests and make determination of acceptance.

The Engineer may elect to perform additional tests to further evaluate a pile. These tests may include crosshole sonic logging and other means of inspection selected by the Engineer. The pile acceptance test report will indicate if the Department intends to perform any additional testing and when the testing will be performed. The Contractor shall allow the Department 20 additional days for a total of 50 days to perform these tests and to provide supplemental results. The Contractor may progress with the mitigation plan process without waiting for these supplemental results.

Inspection pipes and cored holes shall be dewatered and filled with grout after notification by the Engineer that the pile is acceptable. Grout shall conform to the provisions in Section 50-1.09, "Bonding and Grouting," of the Standard Specifications. Inspection pipes and holes shall be filled using grout tubes that extend to the bottom of the pipe or hole or into the grout already placed.

If acceptance testing performed by the Engineer determines that a pile does not meet the requirements of the specifications and California Test 233, Part 5C, then that pile will be rejected and all depositing of concrete under slurry or concrete placed using temporary casing for the purpose of controlling groundwater shall be suspended until written changes to the methods of pile construction are approved in writing by the Engineer.

The Engineer will determine whether the rejected pile requires mitigation due to structural, geotechnical, or corrosion concerns. The Engineer will consider the estimated size and location of the anomaly and potential effects upon the design. The Engineer will provide the conclusions of this analysis to the Contractor for development of a mitigation plan, if required. The Contractor shall allow 30 days for the Engineer to determine whether the pile requires mitigation and provide information to the Contractor. Day 1 of the 30 days shall be the 1st day after access has been provided to the Engineer to perform acceptance testing. If the Contractor submits additional information to the Engineer that modifies the size, shape, or nature of the anomaly, the Contractor shall allow 10 additional days for the subsequent analysis.

If a rejected pile does not require mitigation, you may repair the pile per an approved mitigation plan or the Department will deduct the amount shown in the table for each anomaly up to the maximum total deduction:

Anomaly Location	Anomaly Deduction		
	$D < 4$ feet	$4 \leq D < 6$	$D \geq 6$
Entirely or partially within the upper 2/3 of the pile length	$1,000	$2,000	$4,000
Entirely within the lower 1/3 of the pile length	$500	$1,000	$2,000
Maximum total deduction	$2,000	$4,000	$8,000

Note:
D = Nominal pile diameter

The Department deducts the amount from any moneys due, or that may become due to the Contractor under the Contract.

If the Engineer determines that a rejected pile requires mitigation, the Contractor shall submit to the Engineer for approval a mitigation plan for repair, supplementation, or replacement for each rejected CIDH concrete pile conforming to the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. If the Engineer determines that it is not feasible to repair the rejected pile, the Contractor shall not include repair as a means of mitigation and shall proceed with the submittal of a mitigation plan for replacement or supplementation of the rejected pile.

Pile mitigation plans shall include the following:

A. The designation and location of the pile addressed by the mitigation plan.
B. A review of the structural, geotechnical, and corrosion design requirements of the rejected pile.
C. A step by step description of the mitigation work to be performed, including drawings if necessary.
D. An assessment of how the proposed mitigation work will address the structural, geotechnical, and corrosion design requirements of the rejected pile.
E. Methods for preservation or restoration of existing earthen materials.
F. A list of affected facilities, if any, with methods and equipment for protection of these facilities during mitigation.
G. The State assigned contract number, bridge number, full name of the structure as shown on the contract plans, District-County-Route-Post Mile, and the Contractor's (and Subcontractor's if applicable) name on each sheet.
H. A list of materials, with quantity estimates, and personnel, with qualifications, to be used to perform the mitigation work.
I. The seal and signature of an engineer who is licensed as a Civil Engineer by the State of California. This requirement is waived for approved mitigation plans when either of the following conditions are present:

    1. The proposed mitigation will be performed in conformance with the most recent Department approved version of "ADSC Standard Mitigation Plan 'A' - Basic Repair" without exception or modification.
    2. The Engineer has determined that the rejected pile does not require mitigation due to structural, geotechnical, or corrosion concerns, and the Contractor elects to repair the pile using most recent Department approved version of "ADSC Standard Mitigation Plan 'B' - Grouting Repair" without exception or modification.

The most recent Department approved version of the "ADSC Standard Mitigation Plan" is available at:

http://www.dot.ca.gov/hq/esc/geotech/ft/adscmitplan.htm

For rejected piles to be repaired, the Contractor shall submit a pile mitigation plan that contains the following additional information:

A. An assessment of the nature and size of the anomalies in the rejected pile.
B. Provisions for access for additional pile testing if required by the Engineer.

For rejected piles to be replaced or supplemented, the Contractor shall submit a pile mitigation plan that contains the following additional information:

A. The proposed location and size of additional piles.
B. Structural details and calculations for any modification to the structure to accommodate the replacement or supplemental piles.

All provisions for CIDH concrete piling shall apply to replacement piles.

The Contractor shall allow the Engineer 20 days to review the mitigation plan after a complete submittal has been received.

When repairs are performed, the Contractor shall submit a mitigation report to the Engineer within 10 days of completion of the repair. This report shall state exactly what repair work was performed and quantify the success of the repairs relative to the submitted mitigation plan. The mitigation report shall be stamped and signed by an engineer that is licensed as a Civil Engineer by the State of California. The mitigation report shall show the State assigned contract number, bridge number, full name of the structure as shown on the contract plans, District-County-Route-Post Mile, and the Contractor (and subcontractor if applicable) name on each sheet. The Engineer will be the sole judge as to whether a mitigation proposal is acceptable, the mitigation efforts are successful, and to whether additional repairs, removal and replacement, or construction of a supplemental foundation is required.

B. MEASUREMENT AND PAYMENT

Full compensation for cast-in-drilled-hole concrete piling including slurry, depositing concrete under slurry, test batches, inspection pipes, filling inspection holes and pipes with grout, drilling oversized cast-in-drilled-hole concrete piling, filling cave-ins and oversized piles with concrete, and redrilling through concrete shall be considered as included in the contract prices paid per lump sum for Modify Signal and Lighting , and no additional compensation will be allowed therefor.

69. CONCRETE STRUCTURES

A. DESCRIPTION OF WORK

Portland cement concrete structures shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

GENERAL

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

Shotcrete shall not be used as an alternative construction method for reinforced concrete members unless otherwise specified.

When a roughened concrete surface is shown on the plans, the existing concrete surface shall be roughened to a full amplitude of approximately 1/4 inch by abrasive blasting, water blasting, or mechanical equipment.

FALSEWORK

Falsework shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

The Contractor's engineer who signs the falsework drawings shall also certify in writing that the falsework is constructed in conformance with the approved drawings and the contract specifications prior to placing concrete. This certification shall include performing any testing necessary to verify the ability of the falsework members to sustain the stresses required by the falsework design. The engineer who signs the drawings may designate a representative to perform this certification. Where falsework contains openings for railroads, vehicular traffic, or pedestrians, the designated representative shall be qualified to perform this work, shall have at least 3 years of combined experience in falsework design or supervising falsework construction, and shall be registered as a Civil Engineer in the State of California. For other falsework, the designated representative shall be qualified to perform this work and shall have at least 3 years of combined experience in falsework design or supervising falsework construction. The Contractor shall certify the experience of the designated representative in writing and provide supporting documentation demonstrating the required experience if requested by the Engineer.

Welding and Nondestructive Testing

Welding of steel members, except for previously welded splices and except for when fillet welds are used where load demands are less than or equal to 1,000 pounds per inch for each 1/8 inch of fillet weld, shall conform to AWS D1.1 or other recognized welding standard. The welding standard to be utilized shall be specified by the Contractor on the working drawings. Previously welded splices for falsework members are defined as splices made prior to the member being shipped to the project site.

Splices made by field welding of steel beams at the project site shall undergo nondestructive testing (NDT). At the option of the Contractor, either ultrasonic testing (UT) or radiographic testing (RT) shall be used as the method of NDT for each field weld and any repair made to a previously welded splice in a steel beam. Testing shall be performed at locations selected by the Contractor. The length of a splice weld where NDT is to be performed, shall be a cumulative weld length equal to 25 percent of the original splice weld length. The cover pass shall be ground smooth at the locations to be tested. The acceptance criteria shall conform to the requirements of AWS D1.1, Section 6, for cyclically loaded nontubular connections subject to tensile stress. If repairs are required in a portion of the weld, additional NDT shall be performed on the repaired sections. The NDT method chosen shall be used for an entire splice evaluation including any required repairs.

For all field welded splices, the Contractor shall furnish to the Engineer a letter of certification which certifies that all welding and NDT, including visual inspection, are in conformance with the specifications and the welding standard shown on the approved working drawings. This letter of certification shall be signed by an engineer who is registered as a Civil

Engineer in the State of California and shall be provided prior to placing any concrete for which the falsework is being erected to support.

For previously welded splices, the Contractor shall determine and perform all necessary testing and inspection required to certify the ability of the falsework members to sustain the stresses required by the falsework design. This welding certification shall (1) itemize the testing and inspection methods used, (2) include the tracking and identifying documents for previously welded members, (3) be signed by an engineer who is registered as a Civil Engineer in the State of California, (4) and shall be provided prior to erecting the members.

DECK CLOSURE POURS

Where a deck closure pour is shown on the plans, reinforcement protruding into the closure space and forms for the closure pour shall conform to the following:

A. During the time of placement of concrete in the deck, other than for the closure pour itself, reinforcing steel which protrudes into the closure space shall be completely free from any connection to the reinforcing steel, concrete, or other attachments of the adjacent structure, including forms. The reinforcing steel shall remain free of any connection for a period of not less than 24 hours following completion of the pour.
B. Forms for the closure pour shall be supported from the superstructure on both sides of the closure space.

B. MEASUREMENT AND PAYMENT

Measurement and payment for concrete in structures shall conform to the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for roughening existing concrete surfaces to a full amplitude of approximately 1/4 inch, where shown on the plans, shall be considered as included in the contract price paid per cubic yard for structural concrete, bridge and no separate payment will be made therefor.

Full compensation for public notification and airborne monitoring for deck crack treatment shall be considered as included in the contract price paid per cubic yard for structural concrete, bridge, and no additional compensation will be allowed therefor.

70 STRUCTURE APPROACH SLABS (TYPE EQ)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes constructing reinforced concrete approach slabs.

Reinforced concrete approach slabs must comply with Section 51, "Concrete Structures," of the Standard Specifications.

MATERIALS

Concrete

Concrete for structure approach slabs must contain not less than 675 pounds of cementitious material per cubic yard and must either:

1. Cure for not less than 5 days before opening to public traffic, or
2. Comply with "Rapid Strength Concrete for Structures" of these special provisions.

Miscellaneous Materials

Steel components of abutment ties, including plates, nuts, washers, and rods, must comply with Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Steel angles, plates, and bars at the concrete barrier joints must comply with Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Hardboard and expanded polystyrene must comply with Section 51-1.12D, "Sheet Packing, Preformed Pads, and Board Fillers," of the Standard Specifications.

Building paper must be commercial quality 30-pound asphalt felt.

PVC conduit used to encase the abutment tie rod must be commercial quality.

CONSTRUCTION

Finishing Approach Slabs

Finish and treat the top surface of approach slabs under Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications. Edges of slabs must be edger finished.

Cure approach slabs with pigmented curing compound (1) under the specifications for curing structures in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

Sealing Joints

Type AL joint seals must comply with Section 51-1.12F, "Sealed Joints," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods.

The pourable seal between the steel angle and concrete barrier must comply with the requirements for Type A and AL seals in Section 51-1.12F(3), "Materials and Installation," of the Standard Specifications.

The sealant may be mixed by hand-held power-driven agitators and placed by hand methods. Immediately before placing the seal, thoroughly clean the joint, including abrasive blast cleaning of the concrete surfaces, so that all foreign material and concrete spillage are removed from all joint surfaces. Joint surfaces must be dry at the time the seal is placed.

B. MEASUREMENT AND PAYMENT

Structural concrete, approach slab (Type EQ) will be measured and paid for in conformance with the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for miscellaneous bridge metal, pourable seals, and bar reinforcement, shall be considered as included in the contract price paid per cubic yard for structural concrete, approach slab (Type EQ), and no additional compensation will be allowed therefor.

71. STRUCTURE APPROACH SLABS (TYPE R)

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes removing portions of existing structures, existing pavement and base , asphalt concrete surfacing, and constructing new reinforced concrete approach slabs at structure approaches.

Reinforced concrete approach slabs must comply with Section 51, "Concrete Structures," of the Standard Specifications.

Quality Control and Assurance

Trial Slab

Before beginning work on approach slabs constructed using RSC, you must successfully complete one or more trial slabs for each concrete mix design to be used in constructing the approach slabs.

Trial slabs must be constructed, finished, cured, and tested with the materials, tools, equipment, personnel, and methods to be used in completing the approach slab. Trial slabs must demonstrate that you are capable of producing approach slabs in conformance with the provisions in this section, within anticipated time periods including delivery, placement, finishing, and curing times, and under similar atmospheric and temperature conditions expected during construction operations. Multiple trial slabs for each approach slab concrete mix design may be required to envelop variable atmospheric conditions.

The minimum trial slab dimensions must be 10' x 20' x 9". Place trial slabs near the job site at a location acceptable to the Engineer except slabs must not be placed on the roadway or within the project limits.

Perform compressive strength testing under Section 90-9, "Compressive Strength," of the Standard Specifications. Trial slab concrete must develop compressive strengths of at least 1200 psi at the age of break used for prequalification of the concrete, and at least 2500 psi at 3 days.

MATERIALS

Concrete

Concrete for structure approach slabs must contain not less than 675 pounds of cementitious material per cubic yard and must either:

1. Cure for not less than 5 days before opening to public traffic, or
2. Comply with "Rapid Strength Concrete for Structures" of these special provisions.

Temporary Structural Section

HMA must consist of commercial quality aggregate and asphalt binder. The grading of the aggregate must comply with the 3/4-inch HMA Types A and B grading specified in Section 39-1.02E, "Aggregate," of the Standard Specifications. The asphalt binder must comply with the requirements for liquid asphalt SC-800 in Section 93, "Liquid Asphalts," of the Standard Specifications. The amount of asphalt binder to be mixed with the aggregate must be approximately 0.3 percent less than the optimum bitumen content as determined by California Test 367.

Aggregate Base (Approach Slab)

Aggregate base (approach slab) for filling voids below the reinforced structure approach slab concrete must be produced from commercial quality aggregates consisting of broken stone, crushed gravel or natural rough-surfaced gravel, and sand, or any combination thereof. The grading of the aggregate base must comply with the 3/4-inch maximum grading specified in Section 26-1.02A, "Class 2 Aggregate Base," of the Standard Specifications.

Miscellaneous Materials

Steel components of abutment ties, including plates, nuts, washers, and rods, must comply with Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Steel angles, plates, and bars at the concrete barrier joints must comply with Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

Hardboard and expanded polystyrene must comply with Section 51-1.12D, "Sheet Packing, Preformed Pads, and Board Fillers," of the Standard Specifications.

Building paper must be commercial quality 30-pound asphalt felt.

PVC conduit used to encase the abutment tie rod must be commercial quality.

CONSTRUCTION

General

The thickness shown on the plans for structure approach slabs is the minimum thickness. The thickness may vary depending on the thickness of the pavement and base materials removed.

At locations where the removal of existing materials and approach slab construction is not required to be completed within the same work period, the requirements in "Temporary Roadway Structural Section" and "Trial Slab" do not apply.

Dispose of all materials no longer required in the work under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

If the existing pavement and base materials are removed, and you are unable to construct, finish, and cure the new approach slab by the time the lane is to be opened to public traffic, you must fill the excavation with a temporary roadway structural section as specified in this section, "Structure Approach Slabs (Type R)."

Temporary Roadway Structural Section

Provide a standby quantity of hot mix asphalt (HMA) and aggregate base at the job site equal to the quantity of pavement removed during the work shift for construction of a temporary roadway structural section. The temporary structural section must consist of a 0.3-foot-thick layer of HMA over aggregate base.

Spread and compact aggregate base and HMA by methods that will produce a well-compacted, uniform base, free from pockets of coarse or fine material and a surfacing of uniform smoothness, texture, and density. The aggregate base and the HMA may each be spread and compacted in one layer. The finished surface of the HMA must not vary more than 0.05 foot from the lower edge of a 12-foot straightedge placed parallel with the centerline and must match the elevation of the existing pavement and structure along the joints between the existing pavement and structure and the temporary surfacing.

Maintain the temporary structural section until you are able to construct and cure the approach slab with the prescribed time limit.

Removing Existing Pavement And Base Materials

Sawcut full depth the outline of portland cement concrete to be removed with a power-driven concrete saw.

Cut the outlines of excavations in asphalt concrete on a neat line to a minimum depth of 0.25 foot with a power-driven concrete saw or wheel-type rock cutting excavator before any asphalt concrete material is removed. These excavations must be permanently or temporarily backfilled to conform to the grade of the adjacent pavement before opening the lane to public traffic. Surplus excavated material may be used as temporary backfill material.

Regardless of the type of equipment used to remove concrete within the sawed outline, do not use power impact tools within 1.5 feet of the pavement that is required to remain in place.

Uniformally grade and compact the existing base material remaining in place after removing the existing pavement and base materials to the required depth. The finished surface of the base material at any point must not extend above the grade approved by the Engineer.

Fill areas of base material that are low as a result of over excavation with structure approach slab concrete in the same operation that the new concrete is placed.

Where pavement subsealing has been performed under existing approach slabs, remove the full depth of subsealing material. Where removal of cement treated base is required to construct the approach slab, remove the full depth of the cement treated base.

Fill voids between the new structure approach slab and the base material remaining in place that are caused by removal of subsealing material or cement treated base with either aggregate base (approach slab) or structure approach slab concrete. If you choose to fill these voids with structure approach slab concrete, fill the voids in the same operation that the new concrete is placed.

Establish a grade line for the new approach slab that will provide a smooth profile grade. The profile grade will be subject to approval by the Engineer.

Aggregate Base (Approach Slab)

Spread and compact aggregate base (approach slab) for filling voids below the reinforced structure approach slab concrete by methods that will produce a well-compacted, uniform base, free from pockets of coarse or fine material to the grade approved by the Engineer. Where the required thickness of aggregate base is 8 inches or less, the base may be spread and compacted in one layer. Where the required thickness of aggregate base is more than 8 inches, the base must be spread and compacted in 2 or more layers of approximately equal thickness. The maximum compacted thickness of any one layer shall not exceed 8 inches.

The finished surface of the base material at any point must not extend above the grade approved by the Engineer. Fill areas of base material that are lower than the grade approved by the Engineer with structure approach slab concrete in the same operation that the new concrete is placed.

Bonding Bar Reinforcement

Bond abutment tie rods in drilled holes under the provisions for drilling and bonding dowels in Section 83-2.02D(1), "General," of the Standard Specifications.

If reinforcement is encountered during drilling before the specified depth is attained, notify the Engineer. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole must be drilled adjacent to the rejected hole to the depth shown on the plans.

Finishing Approach Slabs

Finish the top surface of the approach slab under the provisions for decks in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications. The finished top surface must not vary more than 0.02 foot from the lower edge of a 12-foot straightedge placed parallel with the centerline. Edges of slabs must be edger finished. The provisions for deck crack treatment do not apply to Type R approach slabs.

The surface of the approach slab will not be profiled, and the Profile Index requirements do not apply.

Approach slab concrete shall be cured before the time the lane is to be opened to public traffic as specified in "Maintaining Traffic" of these special provisions.

Sealing Joints

Type AL joint seals must comply with Section 51-1.12F, "Sealed Joints," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods.

The pourable seal between the steel angle and concrete barrier must comply with the requirements for Type A and AL seals in Section 51-1.12F(3), "Materials and Installation," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods. Immediately before placing the seal, thoroughly clean the joint, including abrasive blast cleaning of the concrete surfaces, so that all foreign material and concrete spillage are removed from all joint surfaces. Joint surfaces must be dry at the time the seal is placed.

B. MEASUREMENT AND PAYMENT

Structural concrete, approach slab (Type R) will be measured and paid for in conformance with the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for removing and disposing of portions of existing structures and pavement materials, and for furnishing and pourable seals shall be considered as included in the contract price paid per cubic yard for structural concrete, approach slab (Type R), and no separate payment will be made therefor.

The quantity of aggregate base (approach slab) to be paid for shall include the actual volume of aggregate base (approach slab) used to fill voids below the reinforced structure approach slab concrete, except for the volume of areas low as a result of over excavation. The volume to be paid for will be calculated on the basis of the constructed length, width, and thickness of the filled voids. Structure approach slab concrete used to fill voids lower than the approved grade of the base, except for the areas low as a result of over excavation, will be measured and paid for by the cubic yard as aggregate base (approach slab).

The contract price paid per cubic yard for aggregate base (approach slab) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing aggregate base (approach slab), complete in place, including excavation and removing and disposing of base and subsealing materials, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing, stockpiling, and disposing of standby material for construction of temporary structural sections; and for constructing, maintaining, removing, and disposing of temporary structural sections shall be considered as included in the contract price paid per cubic yard for structural concrete, approach slab (Type R), and no separate payment will be made therefor.

Full compensation for drilling and bonding of abutment tie rods shall be considered as included in the contract price paid per cubic yard for structural concrete, approach slab (Type R), and no separate payment will be made therefor.

Full compensation for constructing, testing, and removing trial slabs shall be considered as included in the contract price paid per cubic yard for structural concrete, approach slab (Type R), and no separate payment will be made therefor.

72. PAVING NOTCH EXTENSION

A. DESCRIPTION OF WORK

This work shall consist of extending existing paving notches at the abutments and constructing new paving notches at the existing wingwalls in conformance with the details shown on the plans and these special provisions.

Concrete for the paving notch extensions shall conform to the provisions for structure approach slab concrete of these special provisions.

At least 12 hours shall elapse between the time of placing concrete for the paving notch extension and placing concrete for the structure approach slab.

The construction joint between the paving notch extension and the existing abutment and between the paving notch and the existing wingwall shall conform to the provisions for horizontal construction joints in Section 51-1.13, "Bonding," of the Standard Specifications. Concrete shall be placed in the spalled portions of the existing paving notch and existing wingwall concurrently with the concrete for the paving notch extension.

Attention is directed to "Reinforcement" of these special provisions.

Structure excavation and backfill shall conform to the provisions in Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications, except for payment.

Drilling of holes and bonding of reinforcing steel dowels shall conform to the provisions for drilling and bonding dowels in Section 83-2.02D(1), "General," of the Standard Specifications. If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

B. MEASUREMENT

The quantity of concrete for paving notch extension will be measured by the cubic foot.

C. PAYMENT

The contract price paid per cubic foot for paving notch extension shall include full compensation for furnishing all labor, materials (including concrete for the paving notch spalled areas), tools, equipment, and incidentals, and for doing all the work involved in constructing the

paving notch extension, complete in place, including structure excavation and backfill, reinforcement, and drilling and bonding dowels, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

73. DRILL AND BOND DOWEL (CHEMICAL ADHESIVE)

A. DESCRIPTION OF WORK

Drilling and bonding dowels with chemical adhesives shall conform to the details shown on the plans and these special provisions.

Reinforcing steel dowels shall conform to the provisions in "Reinforcement" of these special provisions.

Threaded rods used as dowels shall conform to the provisions in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications. The threaded rods shall be installed in conformance with the requirements for dowels specified herein.

Chemical adhesives to be used shall be selected from the Pre-Qualified Products List at:

http://www.dot.ca.gov/hq/esc/approved_products_list/

The Contractor may propose to use a chemical adhesive not on the Pre-Qualified Products List. Information regarding product qualification can be obtained at the Transportation Laboratory.

The chemical adhesive system used shall be appropriate for the concrete temperature and installation conditions in conformance with the requirements in the Department's prequalified list.

Chemical adhesive systems shall be accompanied by a Certificate of Compliance as provided in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The certificate shall state that the material complies in all respects to the requirements of ICBO AC58 and Caltrans Augmentation/Revisions to ICBO AC58 available at the Transportation Laboratory and at:

http://www.dot.ca.gov/hq/esc/approved_products_list/

At least 25 days prior to use, the Contractor shall submit one sample of each chemical adhesive system per lot to the Transportation Laboratory for testing. The sample shall consist of one unit of chemical adhesive, one mixing nozzle, and one retaining nut. A lot of chemical adhesives is defined as 100 units, or fraction thereof, of the same brand and product name.

Each chemical adhesive system shall be clearly and permanently marked with the manufacturer's name, model number of the system, manufacturing date, lot number, shelf life or expiration date, and current ICBO Evaluation Report (ER) number. Each carton of chemical

adhesives shall contain the manufacturer's recommended installation procedures and warnings or precautions concerning the contents as may be required by State or Federal laws and regulations.

The holes shall be drilled by methods that will not shatter or damage the concrete adjacent to the holes. If reinforcement is encountered during drilling, before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole. The drilled holes shall be cleaned in conformance with the manufacturer's instructions and shall be dry at the time of placing the chemical adhesive. Unless otherwise specified, the diameter and depth of drilled holes shall conform to the values listed in the ICBO ER for the size of dowel or rod being installed.

Storage and installation procedures shall be as recommended by the manufacturer. A copy of the manufacturer's recommended installation procedure shall be provided to the Engineer at least 2 days prior to the start of work.

Immediately after inserting the dowels into the chemical adhesive, the dowels shall be supported as necessary to prevent movement during curing and shall remain undisturbed until the epoxy has cured a minimum time as specified in the Department's Pre-Qualified Products List. Dowels that are improperly bonded, as determined by the Engineer, will be rejected. Adjacent new holes shall be drilled, and new dowels shall be placed and securely bonded to the concrete. All work necessary to correct improperly bonded dowels shall be performed at the Contractor's expense.

B. MEASUREMENT AND PAYMENT

Unless otherwise provided, dowels to be bonded into drilled holes will be measured and paid for as bar reinforcing steel (bridge).

Unless otherwise provided, drilling and bonding dowels with chemical adhesives will be measured and paid for by the unit as drill and bond dowel (chemical adhesive). The number of units to be paid for will be determined from actual count of the completed units in place.

The contract unit price paid for drill and bond dowel (chemical adhesive) shall include full compensation for furnishing all labor, materials (except dowels), tools, equipment, and incidentals, and for doing all the work involved in drilling the holes and bonding dowels with chemical adhesives, including coring through reinforcement when approved by the Engineer, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

74. DRILL AND BOND DOWELS

A. DESCRIPTION OF WORK

Drilling and bonding dowels shall conform to the details shown on the plans, the provisions in Section 83-2.02D(1), "General," of the Standard Specifications, and these special provisions.

Dowels shall conform to the provisions for bar reinforcement in "Reinforcement" of these special provisions.

If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and a new hole, in which reinforcement is not encountered, shall be drilled adjacent to the rejected hole to the depth shown on the plans.

B. MEASUREMENT AND PAYMENT

Unless otherwise provided, dowels to be bonded into drilled holes will be paid for as bar reinforcing steel (bridge).

Unless otherwise provided, drilling and bonding dowels will be measured and paid for by the linear foot determined by the number and the required depth of holes as shown on the plans or as ordered by the Engineer.

The contract price paid per linear foot for drill and bond dowel shall include full compensation for furnishing all labor, materials (except reinforcing steel dowels), tools, equipment, and incidentals, and for doing all the work involved in drilling the holes, including coring through reinforcement when approved by the Engineer, and bonding the dowels, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

75. SEALING JOINTS

A. DESCRIPTION OF WORK

Joints in concrete bridge decks and joints between concrete structures and concrete approach slabs must be sealed in conformance with the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

When ordered by the Engineer, a joint seal larger than called for by the Movement Rating shown on the plans must be furnished and installed. Payment to the Contractor for furnishing the larger seal and for saw cutting the increment of additional depth of groove required will be determined as provided in Section 4-1.03, "Changes," of the Standard Specifications.

B. MEASUREMENT

Joint Seal (MR ½") shall be measured in the same manner as specified in Section 51-1.22 "Measurement" of the Standard Specifications.

C. PAYMENT

Joint Seal (M/R ½") shall be paid for in the same manner as specified in Section 51-1.23 "Payment" of the Standard Specifications.

76. REINFORCEMENT

A. DESCRIPTION OF WORK

Reinforcement shall conform to the provisions in Section 52, "Reinforcement," of the Standard Specifications and these special provisions.

The provisions in "Welding Quality Control" of these special provisions do not apply to resistance butt welding.

B. MEASUREMENT

Reinforcement shall be measured in the same manner as specified in Section 52-1.10 “Measurement” of the Standard Specifications.

C. PAYMENT

Reinforcement shall be paid for in the same manner as specified in Section 52-1.11 “Payment” of the Standard Specifications.

77. BRIDGE DECK METHACRYLATE RESIN TREATMENT

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes applying a high molecular weight methacrylate (HMWM) resin system with sand and absorbent material to bridge decks.

Submittals

Submit a HMWM resin system placement plan under Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The plan review time is 15 days.

The HMWM resin system placement plan must include:

1. Schedule of work and testing for each bridge
2. Description of equipment for applying HMWM resin
3. Range of gel time and final cure time for HMWM resin
4. Absorbent material to be used
5. Description of equipment for applying and removing excess sand and absorbent material
6. Procedure for removing HMWM resin from the deck, including equipment
7. Storage and handling of HMWM resin components and absorbent material
8. Disposal of excess HMWM resin and containers

Submit a material safety data sheet for each HMWM resin system component and diatomaceous earth shipment before use.

Quality Control and Assurance

Submit samples of HMWM resin components 15 days before use under Section 6-3, "Testing," of the Standard Specifications. Notify the Engineer 15 days before delivery of HMWM resin components in containers over 55 gallons to the job site.

Complete a test area before starting work. Results from airborne emissions monitoring of the test area must be submitted to the Engineer before starting production work.

The test area must:

1. Be approximately 500 sq ft
2. Be placed within the project limits outside the traveled way at an approved location
3. Be constructed using the same equipment as the production work
4. Replicate field conditions for the production work
5. Demonstrate proposed means and methods meet the acceptance criteria
6. Demonstrate production work will be completed within the time allowed
7. Demonstrate suitability of the airborne emissions monitoring plan

The test area will be acceptable if:

1. The treated deck surface is tack free and non-oily
2. The sand cover adheres and resists brushing by hand
3. Excess sand and absorbent material has been removed
4. The coefficient of friction is at least 0.35 when tested under California Test 342

MATERIALS

HMWM resin system consists of a resin, promoter, and initiator. HMWM resin must be low odor and comply with the following:

HMWM Resin

Property	Requirement	Test Method
Volatile Content*	30 percent, maximum	ASTM D 2369
Viscosity*	25 cP, maximum, (Brookfield RVT with UL adaptor, 50 RPM at 77°F)	ASTM D 2196
Specific Gravity*	0.90 minimum, at 77°F	ASTM D 1475
Flash Point*	180°F, minimum	ASTM D 3278
Vapor Pressure*	1.0 mm Hg, maximum, at 77°F	ASTM D 323
Tack-free Time	400 minutes, maximum, at 25°C	Specimens prepared per California Test 551
PCC Saturated Surface-Dry Bond Strength	3.5 MPa, minimum at 24 hours and 21 ± 1°C	California Test 551

*Test must be performed before adding initiator.

Sand for abrasive sand finish must:

1. Be commercial quality dry blast sand
2. Have at least 95 percent pass the No. 8 sieve and at least 95 percent retained on the No. 20 sieve when tested under California Test 205

Absorbent material must be diatomaceous earth, abrasive blast dust, or substitute recommended by the HMWM resin supplier and approved by the Engineer.

CONSTRUCTION

HMWM resin system applied by machine must be:

1. Combined in volumetric streams of promoted resin to initiated resin by static in-line mixers
2. Applied without atomization

HMWM resin system may be applied manually. Limit the quantity of resin mixed for manual application to 5 gallons at a time.

Prepare the deck under "Clean Bridge Deck" of these special provisions.

The deck must be dry before applying HMWM resin. The concrete surface must be at least 50 degrees F and at most 100 degrees F. Relative humidity must be expected to be at most 85 percent during the work shift.

Thoroughly mix all components of HMWM resin. Apply HMWM resin to the deck surface within 5 minutes of mixing at approximately 90 sq ft per gallon. The Engineer determines the exact application rate. The resin gel time must be between 40 and 90 minutes. HMWM resin that thickens during application is rejected.

Spread the HMWM resin uniformly. Completely cover surfaces to be treated and fill all cracks. Redistribute excess resin using squeegees or brooms within 10 minutes of application. For textured or grooved deck surfaces, excess resin must be removed from the texture indentations.

Apply the abrasive sand finish of at least 2 lbs per sq yd or until saturation as determined by the Engineer no sooner than 20 minutes after applying resin. Apply absorbent material before opening lane to traffic. Remove excess sand and absorbent material by vacuuming or power sweeping.

Traffic or equipment will be allowed on the overlay after the Engineer has determined:

1. The treated deck surface is tack free and non-oily
2. The sand cover adheres and resists brushing by hand
3. Excess sand and absorbent material has been removed
4. No material will be tracked beyond limits of treatmen by traffic

Remove the HMWM resin from the deck surface if the Engineer determines (1) the above listed conditions have not been met and (2) the allowable lane closure time will be exceeded.

The Engineer performs California Test 342 on treated deck surfaces. The Engineer provides at least a 15-day notice for the Contractor to provide traffic control for each bridge location. The coefficient of friction of the treated deck must be at least 0.35.

B. MEASUREMENT AND PAYMENT

Bridge deck methacrylate resin treatment will be measured by the square foot based on the dimensions shown on the plans and will be paid for as treat bridge deck. Furnish bridge deck treatment material will be measured by the gallon of mixed HMWM resin actually placed and will be paid for as furnish bridge deck treatment material. No payment will be made for materials wasted or not incorporated in the work.

The contract price paid per square foot for treat bridge deck shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and applying bridge deck HMWM resin treatment, including sand and absorbent material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for providing traffic control for the Engineer to perform inspections and testing shall be considered as included in the contract prices paid for the items of work involving bridge deck methacrylate resin treatment and no additional compensation will be allowed therefor.

78. DRAINAGE INLETS

A. DESCRIPTION OF WORK

The construction of the drainage inlet shall conform to the provision of Section 51, “Concrete Structures,” of the Standard Specifications, details shown on the contract plans, and these special provisions.

Attention is directed to "Drainage Inlet Marker" of these special provisions regarding installation of drainage inlet markers.

B. MEASUREMENT

Drainage Inlet will be measured as units from actual count.

C. PAYMENT

The contract unit price paid for Drainage Inlet shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing Drainage Inlet, including structure excavation, structure backfill, furnishing and placing all drainage inlet markers, bar reinforcing steel, as specified on the plans and as specified in these Special Provisions and State Standard Specifications, and as directed by the Engineer.

79. PRECAST CONCRETE SOUNDWALL

A. DESCRIPTION OF WORK

Precast Concrete Soundwall, consisting of reinforced concrete panels and supports, shall be an Artisan Precast Cedarcrete Wall or approved equal. The Contractors attention is directed to the supplemental information included with this contract, which includes detailed drawings and specifications for the Artisen Precast Soundwalls.

Any requests for approved equivalent material shall be submitted in writing two calendar weeks prior to the date of bid opening. The City will respond as to whether the request is approved no later than 1 week prior to the Bid Opening.

General Construction Provisions

The Contractor is responsible for laying out the wall, including angle points, and for clearing all trees and underbrush which may be in-line with the wall. The Contracto shall provide a competent crew with a minimum of three workers focused on the wall placement at all times throughout the duration of the wall placement.

The Contractor shall layout the alignment of the proposed soundwalls in the field a minimum of 5 days prior to any clearing and grubbing, or tree removal for the Precast Soundwall construction. The Contractor shall coordinate a field meeting with the Engineer, City representatives, and the precast concrete soundwall representative to review the wall alignment in the field. Limits of tree removal and clearing and grubbing will be directly affected by the wall alignment, and shall be approved by the Engineer. Upon approval of the clearing limits, tree removal limits, and soundwall location, the Contractor may proceed with installation of the soundwall.

Trimming of existing trees is required for the construction of the soundwall. Attention is directed to "Clearing and Grubbing" of these Special Provisions.

To reduce the impact of construction noise during construction, the contractor shall install the soundwalls prior to any paving or grading operations.

Contractor can refer to manufacturer's specification or contact them at:

Artisan Precast, Inc.:
Contact: Christopher Miller
1180 S. Beverly Drive, Suite 608
Los Angeles, CA 90035

Phone:(800) 511-2747
Fax: (310) 556-3201

Submittals

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the precast concrete soundwall conforms to the contract plans and specifications, conforms to the

prequalified design and material requirements, and was manufactured in conformance with the approved quality control programs.

The Precast Concrete Soundwall shall be installed in conformance with the manufacturer's installation instructions.

The Precast Concrete Soundwall shall be Davis color 6130 "Cocoa" at 4 pounds per 94 pound sack, or approved equal.

Clearing and Grubbing shall be performed by the Contractor in advance of precast concrete soundwall installation. Attention is directed to "Clearing and Grubbing" of these special provisions.

The contractor, if requested, will provide working drawings indicating all information necessary for the precast wall elements. The drawings shall illustrate the shape and dimension of precast components; the size, quantity and details of the reinforcing steel; the quantity, type, size and details of connection and lifting hardware (if needed); the size and location of drain openings, and any additional details necessary. Drawings shall bear the seal of a registered professional engineer.

Quality Assurance

The contractor shall engage an experienced Installer who has experience with architectural precast wall projects with the same materials and similar scope of this project. All materials must be trademarked by Artisan Precast, or approved equal, manufactured in the United States.

Safety

The Contractor shall be responsible for the observance of proper safety practices and the avoidance of damage to property by all personnel engages in the work. The contractor shall be responsible for maintaining the security and function of each existing fence (including pet containment and swimming pools) until the wall has been completed and accepted by the Engineer.

Excess Quantities

The contractor shall furnish excess quantities (100 LF total) of Precast Concrete Soundwall and will be on hand after the completion of the project. This includes all materials (panels, posts, hardware, caps, etc) required to place a fully functional wall. The excess quantities should be delivered by the Contractor to the City of Chico Municipal Services Center, 901 Fir Street, Chico, CA 95928. The Contractor shall coordinate the delivery of these materials with the Engineer.

B. MEASUREMENT

Precast Concrete Soundwall will be measured by the square foot of the area of wall projected on a vertical plane between the elevation lines shown on the plans and length of wall (including the exposed posts).

C. PAYMENT

The contract price paid per square foot for Precast Concrete Soundwall shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the precast concrete soundwall including panels, posts, piers (post footings) with reinforcing steel, and panel caps, complete in place, including clearing and grubbing, excavation and backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

80. STEEL STRUCTURES

A. DESCRIPTION OF WORK

Construction of steel structures shall conform to the provisions in Section 55, "Steel Structures," of the Standard Specifications and these special provisions.

Attention is directed to "Welding" in Section 8, "Materials," of these special provisions.

MATERIALS

ROTATIONAL CAPACITY TESTING PRIOR TO SHIPMENT TO JOB SITE

Rotational capacity tests shall be performed on all lots of high-strength fastener assemblies prior to shipment of these lots to the project site. Zinc-coated assemblies shall be tested after all fabrication, coating, and lubrication of components has been completed. One hardened washer shall be used under each nut for the tests.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Each combination of bolt production lot, nut lot, and washer lot shall be tested as an assembly.

A rotational capacity lot number shall be assigned to each combination of lots tested. Each shipping unit of fastener assemblies shall be plainly marked with the rotational capacity lot number.

Two fastener assemblies from each rotational capacity lot shall be tested.

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of ASTM A 325 long bolts. Fasteners are considered to be long bolts when full nut thread engagement can be achieved when installed in a bolt tension measuring device:

A. Long Bolt Test Equipment:

1. Calibrated bolt tension measuring device with adequate tension capacity for the bolts being tested.

2. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Long Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F 436.
4. Steel beam or member, such as a girder flange or cross frame, to which the bolt tension measuring device will be attached. The device shall be accessible from the ground.

B Long Bolt Test Procedure:

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.
2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.
3. Insert the bolt into the bolt tension measuring device and install the required number of washers, and additional spacers as needed, directly beneath the nut to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug tension shall not be less than the Table A value but may exceed the Table A value by a maximum of 2 kips.

Table A

High-Strength Fastener Assembly Tension Values to Approximate Snug-Tight Condition	
Bolt Diameter (inches)	Snug Tension (kips)
1/2	1
5/8	2
3/4	3
7/8	4
1	5
1-1/8	6
1-1/4	7
1-3/8	9
1-1/2	10

5. Match-mark the assembly by placing a heavy reference start line on the face plate of the bolt tension measuring device which aligns with (1) a mark placed on one corner of the nut and (2) a radial line placed across the flat on the end of the bolt or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make an additional mark on the face

plate, either 2/3 of a turn, one turn, or 1-1/3 turn clockwise from the heavy reference start line, depending on the bolt length being tested as shown in Table B.

Table B

Required Nut Rotation for Rotational Capacity Tests[(a) (b)]	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3
Greater than 4 bolt diameters but no more than 8 bolt diameters	1
Greater than 8 bolt diameters, but no more than 12 bolt diameters[(c)]	1-1/3

(a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees; for bolts installed by 2/3 turn and more, the tolerance shall be plus or minus 45 degrees.
(b) Applicable only to connections in which all material within grip of the bolt is steel.
(c) When bolt length exceeds 12 diameters, the required rotation shall be determined by actual tests in a suitable tension device simulating the actual conditions.

6. Turn the nut to achieve the applicable minimum bolt tension value listed in Table C. After reaching this tension, record the moving torque, in foot-pounds, required to turn the nut, and also record the corresponding bolt tension value in pounds. Torque shall be measured with the nut in motion. Calculate the value, T, where T = [(the measured tension in pounds) x (the bolt diameter in inches) / 48].

Table C

Minimum Tension Values for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Minimum Tension (kips)
1/2	12
5/8	19
3/4	28
7/8	39
1	51
1-1/8	56
1-1/4	71
1-3/8	85
1-1/2	103

7. Turn the nut further to increase bolt tension until the rotation listed in Table B is reached. The rotation is measured from the heavy reference line made on the face plate after the bolt was snug-tight. Record this bolt tension.
8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Long Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: (1) the measured moving torque (Step 6) shall be less than or equal to the calculated value, T (Step 6), (2) the bolt tension measured in Step 7 shall be greater than or equal to the applicable turn test tension value listed in Table D, (3) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, (4) the bolt does not shear from torsion or fail

during the test, and (5) the assembly does not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head is expected and will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

Table D

Turn Test Tension Values	
Bolt Diameter (inches)	Turn Test Tension (kips)
1/2	14
5/8	22
3/4	32
7/8	45
1	59
1-1/8	64
1-1/4	82
1-3/8	98
1-1/2	118

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of ASTM A 325 short bolts. Fasteners are considered to be short bolts when full nut thread engagement cannot be achieved when installed in a bolt tension measuring device:

A. Short Bolt Test Equipment:

1. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Short Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
2. Spud wrench or equivalent.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F 436.
4. Steel plate or girder with a hole to install bolt. The hole size shall be 1/16 inch greater than the nominal diameter of the bolt to be tested. The grip length, including any plates, washers, and additional spacers as needed, shall provide the proper number of threads within the grip, as required in Step 2 of the Short Bolt Test Procedure.

B. Short Bolt Test Procedure:

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.
2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record

the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.

3. Install the bolt into a hole on the plate or girder and install the required number of washers and additional spacers as needed between the bearing face of the nut and the underside of the bolt head to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug condition shall be the full manual effort applied to the end of a 12-inch long wrench. This applied torque shall not exceed 20 percent of the maximum allowable torque in Table E.

Table E

Maximum Allowable Torque for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Torque (ft-lb)
1/2	145
5/8	285
3/4	500
7/8	820
1	1220
1-1/8	1500
1-1/4	2130
1-3/8	2800
1-1/2	3700

5. Match-mark the assembly by placing a heavy reference start line on the steel plate or girder which aligns with (1) a mark placed on one corner of the nut and (2) a radial line placed across the flat on the end of the bolt or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make 2 additional small marks on the steel plate or girder, one 1/3 of a turn and one 2/3 of a turn clockwise from the heavy reference start line on the steel plate or girder.
6. Using the torque wrench, tighten the nut to the rotation value listed in Table F. The rotation is measured from the heavy reference line described in Step 5 made after the bolt was snug-tight. A second wrench shall be used to prevent rotation of the bolt head during tightening. Measure and record the moving torque after this rotation has been reached. The torque shall be measured with the nut in motion.

Table F

Nut Rotation Required for Turn-of-Nut Installation[(a) (,b)]	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	1/3

(a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees.
(b) Applicable only to connections in which all material within grip of the bolt is steel.

7. Tighten the nut further to the 2/3-turn mark as indicated in Table G. The rotation is measured from the heavy reference start line made on the plate or girder when the bolt was snug-tight. Verify that the radial line on the bolt end or on the exposed portions of the threads of tension control bolts is still in alignment with the start line.

Table G

Required Nut Rotation for Rotational Capacity Test	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3

8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Short Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: (1) the measured moving torque from Step 6 shall be less than or equal to the maximum allowable torque from Table E, (2) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, (3) the bolt does not shear from torsion or fail during the test, and (4) the assembly shall not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

INSTALLATION TENSION TESTING AND ROTATIONAL CAPACITY TESTING AFTER ARRIVAL ON THE JOB SITE

Installation tension tests and rotational capacity tests on high-strength fastener assemblies shall be performed by the Contractor prior to acceptance or installation and after arrival of the fastener assemblies on the project site. Installation tension tests and rotational capacity tests shall be performed at the job site, in the presence of the Engineer, on each rotational capacity lot of fastener assemblies.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Installation tension tests shall be performed on 3 representative fastener assemblies in conformance with the provisions in Section 8, "Installation," of the RCSC Specification. For short bolts, Section 8.2, "Pretensioned Joints," of the RCSC Specification shall be replaced by the "Pre-Installation Testing Procedures," of the "Structural Bolting Handbook," published by the Steel Structures Technology Center, Incorporated.

The rotational capacity tests shall be performed in conformance with the requirements for rotational capacity tests in "Rotational Capacity Testing Prior to Shipment to Job Site" of these special provisions.

At the Contractor's expense, additional installation tension tests, tests required to determine job inspecting torque, and rotational capacity tests shall be performed by the Contractor on each rotational capacity lot, in the presence of the Engineer, if:

1. Any fastener is not used within 3 months after arrival on the job site,
2. Fasteners are improperly handled, stored, or subjected to inclement weather prior to final tightening,
3. Significant changes are noted in original surface condition of threads, washers, or nut lubricant, or
4. The Contractor's required inspection is not performed within 48 hours after all fasteners in a joint have been tensioned.

Failure of a job-site installation tension test or a rotational capacity test will be cause for rejection of unused fasteners that are part of the rotational capacity lot.

When direct tension indicators are used, installation verification tests shall be performed in conformance with Appendix Section X1.4 of ASTM Designation: F 959, except that bolts shall be initially tensioned to a value 5 percent greater than the minimum required bolt tension.

WELDING

Table 2.2 of AWS D1.5 is superseded by the following table:

Base Metal Thickness of the Thicker Part Joined, inches	Minimum Effective Partial Joint Penetration Groove Weld Size*, inches
Over 1/4 to 1/2 inclusive	3/16
Over 1/2 to 3/4 inclusive	1/4
Over 3/4 to 1-1/2 inclusive	5/16
Over 1-1/2 to 2-1/4 inclusive	3/8
Over 2-1/4 to 6 inclusive	1/2
Over 6	5/8

* Except the weld size need not exceed the thickness of the thinner part

The requirement of conformance with AWS D1.5 shall not apply to work conforming to Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

B. MEASUREMENT AND PAYMENT

Full compensation for Steel Structures is included in the contract lump sum price paid for Modify Signal and Lighting, and no separate payment will be made therefor.

81. ROADSIDE SIGNS

A. DESCRIPTION OF WORK

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-2, "Roadside Signs," of the Standard Specifications and these special provisions.

The Contractor shall furnish roadside sign panels in conformance with the provisions in "Furnish Sign" of these special provisions.

Wood posts shall be pressure treated after fabrication in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and AWPA Use Category System: UC4A, Commodity Specification A or B.

B. MEASUREMENT

Roadside Sign (One Post), Roadside Sign (Two Post), and Install Sign (Strap and Saddle Bracket Method) shall be measured as each.

C. PAYMENT

The contract price paid per each Roadside Sign (One Post), Roadside Sign (Two Post), and Install Sign (Strap and Saddle Bracket Method) shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in roadside signs of all types, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

82. FURNISH SIGN

A. DESCRIPTION OF WORK

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these special provisions.

Traffic Sign Specifications for California sign codes are available for review at:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Traffic Sign Specifications for signs referenced with Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at:

http://mutcd.fhwa.dot.gov/ser-shs_millennium.htm

Information on cross-referencing California sign codes with the Federal MUTCD sign codes is available at:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 25 feet. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

QUALITY CONTROL FOR SIGNS

The requirements of "Quality Control for Signs" in this section shall not apply to construction area signs.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Engineer for review. The Engineer will have 10 days to review the quality control plan. Sign fabrication shall not begin until the Engineer approves the Contractor's quality control plan in writing. The Contractor shall submit to the Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

A. Identification of the party responsible for quality control of signs,
B. Basis of acceptance for incoming raw materials at the fabrication facility,
C. Type, method and frequency of quality control testing at the fabrication facility,
D. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film,
E. Recommended cleaning procedure for each product, and
F. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

The following notation shall be placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

A. PROPERTY OF STATE OF CALIFORNIA,

B. Name of the sign manufacturer,
C. Month and year of fabrication,
D. Type of retroreflective sheeting, and
E. Manufacturer's identification and lot number of retroreflective sheeting.

The above notation shall be applied directly to the aluminum sign panels in 1/4-inch upper case letters and numerals by die-stamp and applied by similar method to the fiberglass reinforced plastic signs. Painting, screening, or engraving the notation will not be allowed. The notation shall be applied without damaging the finish of the sign.

Signs with a protective overlay film shall be marked with a dot of 3/8 inch in diameter. The dot placed on white border shall be black, while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 48 inches or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 48 inches, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of one inch. Splices shall not be placed within 2 inches from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light.

Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately.

Repairing sign panels will not be allowed except when approved by the Engineer.

The Department will inspect signs at the Contractor's facility and delivery location, and in accordance with Section 6, "Control of Materials," of the Standard Specifications. The Engineer will inspect signs for damage and defects before and after installation.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on palettes, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs.

Signs shall be stored in dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be free

standing. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days.

Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 12" x 12" in size with applied background, letter or numeral, and border strip.

The Contractor shall assume the costs and responsibilities resulting from the use of patented materials, equipment, devices, and processes for the Contractor's work.

SHEET ALUMINUM

Alloy and temper designations for sheet aluminum shall be in accordance with ASTM Designation: B 209.

The Contractor shall furnish the Engineer a Certificate of Compliance in conformance with Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the sheet aluminum.

Sheet aluminum shall be pretreated in accordance to ASTM Designation: B 449. Surface of the sheet aluminum shall be cleaned, deoxidized, and coated with a light and tightly adherent chromate conversion coating free of powdery residue. The conversion coating shall be Class 2 with a weight between 10 milligrams per square foot and 35 milligrams per square foot, and an average weight of 25 milligrams per square foot. Following the cleaning and coating process, the sheet aluminum shall be protected from exposure to grease, oils, dust, and contaminants.

Sheet aluminum shall be free of buckles, warps, dents, cockles, burrs, and defects resulting from fabrication.

Base plate for standard route marker shall be die cut.

RETROREFLECTIVE SHEETING

The Contractor shall furnish retroreflective sheeting for sign background and legend in conformance with ASTM Designation: D 4956 and "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Retroreflective sheeting shall be applied to sign panels as recommended by the retroreflective sheeting manufacturer without stretching, tearing, and damage.

Class 1, 3, or 4 adhesive backing shall be used for Type II, III, IV, VII, VIII, and IX retroreflective sheeting. Class 2 adhesive backing may also be used for Type II retroreflective sheeting. The adhesive backing shall be pressure sensitive and fungus resistant.

When the color of the retroreflective sheeting determined from instrumental testing is in dispute, the Engineer's visual test will govern.

PROCESS COLOR AND FILM

The Contractor shall furnish and apply screened process color, non-reflective opaque black film, and protective overlay film of the type, kind, and product that are approved by the manufacturer of the retroreflective sheeting.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the screened process color, non-reflective opaque black film, and protective overlay film.

The surface of the screened process color shall be flat and smooth. When the screened process colors determined from the instrumental testing in accordance to ASTM Designation: D 4956 are in dispute, the Engineer's visual test will govern.

The Contractor shall provide patterns, layouts, and set-ups necessary for the screened process.

The Contractor may use green, red, blue, and brown reverse-screened process colors for background and non-reflective opaque black film or black screened process color for legend. The coefficient of retroreflection for reverse-screened process colors on white retroreflective sheeting shall not be less than 70 percent of the coefficient of retroreflection specified in ASTM Designation: D 4956.

The screened process colors and non-reflective opaque black film shall have the same outdoor weatherability as that of the retroreflective sheeting.

After curing, screened process colors shall withstand removal when tested by applying 3M Company Scotch Brand Cellophane Tape No. 600 or equivalent tape over the color and removing with one quick motion at 90° angle.

SINGLE SHEET ALUMINUM SIGN

Single sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these special provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single Sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 48 inches, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum signs shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of ±1/8 inch. The face sheet shall

be affixed to the frame with rivets of 3/16-inch diameter. Rivets shall be placed within the web of channels and shall not be placed less than 1/2 inch from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of ±1/32 inch per linear foot when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within ±1/8 inch of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

FIBERGLASS REINFORCED PLASTIC PANEL SIGN

The Contractor shall furnish fiberglass reinforced plastic panel sign in accordance with ASTM Designation: D 3841 and "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Fiberglass reinforced plastic shall be acrylic modified and ultraviolet stabilized for outdoor weatherability. The plastic shall contain additives designed to suppress fire ignition and flame propagation. When tested in accordance with the requirements in the ASTM Designation: D 635, the extent of burning shall not exceed one inch.

Fiberglass reinforced plastic shall be stabilized to prevent the release solvents and monomers. The front and back surfaces of the laminate shall be clean and free of constituents and releasing agents that can interfere with the bonding of retroreflective sheeting.

The fiberglass reinforced plastic panel sign shall be weather resistant Grade II thermoset polyester laminate.

The fiberglass reinforced plastic panels shall be minimum 0.135-inch thick. Finished fiberglass reinforced plastic panel signs shall be flat within a tolerance of ±1/32 inch per linear foot when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within ±1/8 inch of the specified dimensions.

Color of fiberglass reinforced plastic panels shall be uniform gray within Munsel color range of N7.5 to N8.5.

Fiberglass reinforced plastic panels shall be cut from a single piece of laminate. Bolt holes shall be predrilled. The predrilled bolt holes, panel edges, and the front and back surfaces of the panels shall be true and smooth. The panel surfaces shall be free of visible cracks, pinholes, foreign inclusions, warping and wrinkles that can affect performance and serviceability.

Attention is directed to Construction Area signs of these special provisions. Fiberglass reinforced plastic sign panels shall not be used for Roadside Signs.

B. MEASUREMENT AND PAYMENT

Furnishing signs (except for construction area signs) will be measured by the square foot and the quantity to be paid for will be the total area, in square feet, of the sign panel types installed in place.

The contract price paid per square foot for furnish sign of the types specified in the Engineer's estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in fabricating and furnishing the signs, including fastening hardware, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing and installing protective overlay on signs shall be considered as included in the contract price paid per square foot for furnish sign of the various types and no separate payment will be made therefor.

83. ALTERNATIVE PIPE

A. DESCRIPTION OF WORK

Alternative pipe culverts must comply with Section 62, "Alternative Culverts," of the Standard Specifications.

Concrete backfill for alternative culverts shall be constructed in conformance with the provisions in Section 66-1.045, "Concrete Backfill," of the Standard Specifications and will be measured and paid for in conformance with the provisions in Section 66-4, "Measurement and Payment," of the Standard Specifications and the following:

A. The quantity of concrete backfill to be paid for, regardless of the kind of culvert and wall thickness of the culvert installed, will be based on the dimensions shown on the plans and the installation of corrugated steel pipe.

B. MEASUREMENT

Quantities of 18 inch and 24 inch Alternative Pipe Culverts shall be measured by the linear foot.

C. PAYMENT

The contract price paid per linear foot for 18 inch and 24 inch Alternative Pipe Culvert shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing or constructing Alternative Pipe Culverts , complete in place, including Structure Excavation and Structure Backfill, including sawcutting and removal of existing pavement surfacing, and connecting new pipe to existing or new facilities, including concrete collars or concrete tees and reinforcement, as shown on the plans, and as specified in the Standard Specifications and these Special Provisions, and as and as directed by the Engineer.

84. MISCELLANEOUS FACILITIES

A. DESCRIPTION OF WORK

18” and 24” Alternative Flared End Sections shall conform to the provisions in Section 70, "Miscellaneous Facilities," of the Standard Specifications and these special provisions.

B. MEASUREMENT

Alternative Flared End Sections shall be measured per each.

C. PAYMENT

The contract unit price paid per 18” and 24” Alternative Flared End Section shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Alternative Flared End Section, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

85. DRAINAGE INLET MARKER

A. DESCRIPTION OF WORK

GENERAL

Summary

This work includes installing drainage inlet markers.

Use only the type of drainage inlet marker shown on the project plans. If the project plans do not show a specific type, choose one type from the following list:

1. Thermoplastic
2. Metal medallion
3. Plastic medallion
4. Stamped concrete

Submittals

If you are using a prefabricated drainage inlet marker such as thermoplastic, metal medallion, or plastic medallion, submit a sample of marker at least 5 business days before installation.

If you are using a concrete stamp for the drainage inlet marker, submit a sample of the stamp at least 5 business days before concrete activities start.

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for prefabricated drainage inlet marker.

MATERIALS

Thermoplastic drainage inlet marker must:

1. Be free of lead and chromium
2. Comply with the following:

Property	Specifications	Requirements
Thickness, inches	Measured	0.080-0.160
Legend color (non-reflective)	Observed	Blue or Green
Background color (non-reflective)	AASHTO M 249	White
Skid Resistance	ASTM E 303	60 BPN

Metal drainage inlet marker must:

1. Be commercial grade stainless steel, aluminum, brass, or bronze
2. Be stamped from sheet metal or cast
3. Comply with the following:

Property	Specifications	Requirements
Thickness of metal, inches	Measured	0.055-0.138
Height of marker, inches	Measured	0.055-0.138
Skid Resistance	ASTM E 303	60 BPN

4. If metal marker is colored, it must comply with the following:

Property	Specifications	Requirements
Legend color (non-reflective)	Observed	Blue or Green
Background color (non-reflective)	Observed	White or bare metal

Plastic drainage inlet marker must:

1. Contain ultraviolet inhibitors
2. Comply with the following:

Property	Specifications	Requirements
Thickness, inches	Measured	0.025-0.060
Thickness (with dome), inches	Measured	0.055-0.120
Legend color (non-reflective)	Observed	Blue or Green
Background color (non-reflective)	Observed	White
Weathering Resistance	ASTM D1435	1 year without yellowing, fogging, or pitting

CONSTRUCTION

Install prefabricated drainage inlet markers by:

1. Mechanically cleaning and preparing the surface
2. Attaching the prefabricated drainage inlet markers to the surface with adhesives, fasteners, or heat as recommended by the manufacturer

Install stamped concrete drainage inlet markers by:

1. Imprinting uncured concrete with an approved drainage inlet marker concrete stamp
2. Producing stamped concrete surfaces that are free from blemishes

B. MEASUREMENT AND PAYMENT

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing drainage inlet markers, shall be considered as included in the contract unit price paid for Drainage Inlet and no additional compensation will be allowed therefore.

86. SLOPE PROTECTION

A. DESCRIPTION OF WORK

Slope protection shall be placed or constructed in conformance with the provisions in Section 72, "Slope Protection," of the Standard Specifications.

Rock slope protection fabric must be Class 8.

B. MEASUREMENT

Rock Slope Protection (Backing No. 2, Method B) and Rock Slope Protection (Light, Method B) shall be measured by the cubic yard.

Rock Slope Protection Fabric shall be measured by the square yard.

C. PAYMENT

The contract price paid per cubic yard for Rock Slope Protection (Backing No. 2, Method B) and Rock Slope Protection (Light, Method B) and per square foot for Rock Slope Protection Fabric shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in Rock Slope Protection and Rock Slope Protection Fabric, including excavation and backfill of areas to receive Rock Slope Protection and Rock Slope Protection Fabric, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

87. MISCELLANEOUS CONCRETE CONSTRUCTION

A. DESCRIPTION OF WORK

Minor Concrete (Curb and Gutter), Minor Concrete (Median Curb), Minor Concrete (Retaining Curb), Minor Concrete (Sidewalk), Minor Concrete (Curb Ramp), Minor Concrete (Textured Paving), shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalks," of the Standard Specifications and these special provisions.

Curb ramp detectable warning surface shall consist of raised truncated domes constructed or installed on curb ramps in conformance with the details shown on the plans and these special provisions. At the option of the Contractor, the detectable warning surface shall be prefabricated, cast-in-place, or stamped into the surface of the curb ramp. The color of the

detectable warning surface shall be yellow conforming to Federal Standard 595B, Color No. 33538.

Prefabricated detectable warning surface shall be in conformance with the requirements established by the Department of General Services, Division of State Architect and be attached in conformance with the manufacturer's recommendations.

Cast-in-place and stamped detectable warning surfaces shall be painted in conformance with the provisions in Section 59-6, "Painting Concrete," of the Standard Specifications.

The finished surfaces of the detectable warning surface shall be free from blemishes.

Prior to constructing the cast-in-place or stamping the detectable warning surface, the Contractor shall demonstrate the ability to produce a detectable warning surface conforming to the details shown on the plans and these special provisions by constructing a 24" x 24" test panel.

The manufacturer shall provide a written 5-year warranty for prefabricated detectable warning surfaces, guaranteeing replacement when there is defect in the dome shape, color fastness, sound-on-cane acoustic quality, resilience, or attachment. The warranty period shall begin upon acceptance of the contract.

Full compensation for constructing or furnishing and installing curb ramp detectable warning surfaces shall be considered as included in the contract price paid per cubic yard for minor concrete (curb ramp) and no separate payment will be made therefor.

Aggregate for minor concrete (textured paving) shall conform to the grading specified for fine aggregate in Section 90-3.03, "Fine Aggregate Grading," of the Standard Specifications. Aggregate for grout shall conform to the following grading:

Sieve Sizes	Percentage Passing
No. 4	100
No. 8	90 - 100
No. 16	60 - 100
No. 30	35 - 70
No. 50	15 - 35
No. 100	2 - 15

A sample of sufficient size, of each type and color of the textured paving, to demonstrate the textured paving, including color hardener, curing and finishing compounds, for both grouted and ungrouted finishes, shall be submitted to the Engineer for written approval.

Textured paving shall not be placed on the project prior to approval by the Engineer of the samples prepared and submitted by the Contractor.Welded wire fabric, of the size and type shown on the plans and conforming to the provisions in Section 52, "Reinforcement," of the Standard Specifications, shall be placed in the textured paving areas as shown on the plans.

Aggregate base shall be Class 2 and shall conform to the provisions in Section 26, "Aggregate Bases," of the Standard Specifications.

The respective pattern types and colors of concrete for textured paving shall be placed at the locations shown on the plans, struck off and compacted until a layer of mortar is brought to the surface. The concrete shall be screeded to the required grade and cross section and floated to a uniform surface.

Floor color hardener shall be applied to the plastic surface of the concrete by the "dry-shake" method using a minimum of 60 pounds of hardener per 100 square feet. Hardener shall be applied in 2 applications, shall be wood-floated after each application, and shall be trowelled only after the final floating. The resultant color of the floor hardener shall closely conform to the colors specified on the plans for the respective areas.

The forming tools for the textured paving shall be applied to form the patterned surfaces while the concrete is still in the plastic stage of set.

Textured paving areas shall be cured by the curing compound method. The curing compound shall be curing compound (6) conforming to the provisions in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

The textured paving shall be grouted in the minor concrete areas shown on the plans. The grout shall be placed after initial curing of that portion of the textured paving. The grout shall be spread over the textured concrete surface and consolidated by methods recommended by the grout manufacturer and approved by the Engineer. Surplus grout shall be removed by a squeegee and damp burlap rag or by other approved methods before the curing seal is applied to the grouted areas.

Curing seal and other deleterious substances shall be removed from the impressions in the textured areas, to receive the grout, before the grout is placed. Cleaning and removal methods shall not stain or discolor those portions of the textured paving to remain exposed after grouting. Methods of cleaning the impressions in textured areas to be grouted shall be approved by the Engineer.

B. MEASUREMENT

Minor Concrete (Curb and Gutter), Minor Concrete (Median Curb), Minor Concrete (Retaining Curb), Minor Concrete (Sidewalk), Minor Concrete (Textured Paving), and Minor Concrete (Curb Ramp) shall be measured by the cubic yard.

C. PAYMENT

The contract price paid per cubic yard for minor concrete (textured paving) shall include full compensation for furnishing all labor, materials (including welded wire fabric, where required, and aggregate base), tools, equipment, and incidentals, and for doing all the work involved in constructing textured paving, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per cubic yard for Minor Concrete (Curb and Gutter), Minor Concrete (Median Curb), Minor Concrete (Retaining Curb), Minor Concrete (Sidewalk), and

Minor Concrete (Curb Ramp) shall include full compensation for furnishing all labor, materials including dowel and welded wire mesh, tools, equipment, and incidentals, and for doing all the work in constructing Minor Concrete (Curb and Gutter), Minor Concrete (Median Curb), Minor Concrete (Retaining Curb), Minor Concrete (Sidewalk), and Minor Concrete (Curb Ramp) complete in place, as shown on the plans, and as specified in standard specifications and these special provisions, and as directed by the Engineer.

88. MISCELLANEOUS IRON AND STEEL

A. DESCRIPTION OF WORK

Miscellaneous iron and steel shall conform to the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications .

B. MEASUREMENT

Miscellaneous Iron and Steel shall be measured by the pound.

C. PAYMENT

The contract price paid per pound for Miscellaneous Iron and Steel shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Miscellaneous Iron and Steel, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

89. MARKERS AND DELINEATORS

A. DESCRIPTION OF WORK

Markers and delineators shall conform to the provisions in Section 82, "Markers and Delineators," of the Standard Specifications and these special provisions.

Markers and delineators on flexible posts shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Flexible posts shall be made from a flexible white plastic which shall be resistant to impact, ultraviolet light, ozone, and hydrocarbons. Flexible posts shall resist stiffening with age and shall be free of burns, discoloration, contamination, and other objectionable marks or defects which affect appearance or serviceability.

Retroreflective sheeting for metal and flexible target plates shall be the retroreflective sheeting designated for channelizers, markers, and delineators conforming to the requirements in ASTM Designation: D 4956-95 and in conformance with the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

B. MEASUREMENT

Object Markers (Type L-1 and Type K-1), Highway Post Markers, and Delineators (Class 1) shall be measured per each.

C. MEASUREMENT

The contract unit price paid per each Object Marker (Type L-1 and Type K-1), Highway Post Markers, and Delineator (Class 1) shall include full compensation for furnishing all labor,

materials, tools, equipment, and incidentals, and for doing all the work involved in Delineators and Object Markers, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

90. METAL BEAM GUARD RAILING

A. DESCRIPTION OF WORK

Metal beam guard railing shall be constructed in conformance with the provisions in Section 83-1, "Railings," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

Line posts shall be wood. Blocks shall be wood.

Metal beam guard railing adjacent to Steel-Backed Timber Guardrailing shall be powder coated. Powder coating color shall be RAL8014, RAL8016, or RAL8028 and closely match the timber of the Steel-Backed Timber Guardrailing. The contractor shall submit a sample to the engineer for approval prior to powder coating the Metal Beam Guard Railing.

B. MEASUREMENT

Metal Beam Guard Railing (Wood Post) and Double Metal Beam Guard Railing (Wood Post) shall be measured by the linear foot.

C. PAYMENT

The contract price paid per linear foot for Metal Beam Guard Railing (Wood Post) and Double Metal Beam Guard Railing (Wood Post) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Metal Beam Guard Railing (Wood Post), as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

Full compensation for powder coating the metal beam guard railing, as shown on the plans and specified in these special provisions shall be considered as included in the contract unit price paid for metal beam guard railing and no additional payment will be allowed therefor.

91. TERMINAL SYSTEM (TYPE CAT)

A. DESCRIPTION OF WORK

Terminal system (Type CAT) and terminal system (Type CAT) backup shall be furnished and installed as shown on the plans and in conformance with these special provisions.

Terminal system (Type CAT) shall be a CAT-350 Crash Cushion Attenuating Terminal as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type CAT) shown on the plans.

Terminal system (Type CAT) backup shall consist of items detailed for terminal system (Type CAT) backup shown on the plans, and shall conform to the provisions in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications.

Excluding the terminal system (Type CAT) backup, arrangements have been made to ensure that any successful bidder can obtain the CAT-350 Crash Cushion Attenuating Terminal from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, telephone (800) 772-7976. The price quoted by the manufacturer for the CAT-350 Crash Cushion Attenuating Terminal, FOB Centerville, Utah is $3,500, not including sales tax or shipping.

The above price will be firm for orders placed on or before December 12th, 2011, provided delivery is accepted within 90 days after the order is placed.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal system (Type CAT) conforms with the contract plans and specifications, conforms to the prequalified design and material requirements, and was manufactured in conformance with the approved quality control program.

The terminal system (Type CAT) shall be installed in conformance with the manufacturer's installation instructions and these requirements. The steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149 °F or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system (Type CAT) and backup have been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

Terminal System (Type CAT) and Terminal System (Type CAT) backup shall be powder coated. Powder coating color shall be RAL8014, RAL8016, or RAL8028 and closely match the timber of the Steel-Backed Timber Guardrailing. The contractor shall submit a sample to the engineer for approval prior to powder coating the Terminal System.

B. MEASUREMENT

Terminal System (Type CAT) and Terminal System (Type CAT) Backup shall be measured per each.

C. PAYMENT

The contract unit price paid for terminal system (Type CAT) Backup shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing terminal system (Type CAT) backup, complete in place, including excavation, backfill, and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for powder coating the Terminal System (Type CAT) and Terminal System (Type CAT) Backup, as shown on the plans and specified in these special provisions shall be considered as included in the contract unit price paid for Terminal System (type CAT) and Terminal System (Type CAT) Backup and no additional payment will be allowed therefor.

92. ALTERNATIVE FLARED TERMINAL SYSTEM

A. DESCRIPTION OF WORK

Alternative flared terminal system shall be furnished and installed as shown on the plans and in conformance with these special provisions.

The allowable alternatives for a flared terminal system shall consist of one of the following or a Department approved equal.

A. TERMINAL SYSTEM (TYPE FLEAT) - Terminal system (Type FLEAT) shall be a Flared Energy Absorbing Terminal 350 manufactured by Road Systems, Inc., located in Big Spring, Texas, and shall include items detailed for terminal system (Type FLEAT) shown on the plans. The Flared Energy Absorbing Terminal 350 can be obtained from the distributor, Universal Industrial Sales, P.O. Box 699, Pleasant Grove, UT 84062, telephone (801) 785-0505 or from the distributor, Gregory Highway Products, 4100 13th Street, S.W., Canton, OH 44708, telephone (330) 477-4800.

B. TERMINAL SYSTEM (TYPE SRT) - Terminal system (Type SRT) shall be an SRT-350 Slotted Rail Terminal (8-post system) as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type SRT) shown on the plans. The SRT-350 Slotted Rail Terminal (8-post system) can be obtained from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, telephone (800) 772-7976.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal systems furnished conform to the contract plans and specifications, conform to the prequalified design and material requirements, and were manufactured in conformance with the approved quality control program.

Terminal systems shall be installed in conformance with the manufacturer's installation instructions and these requirements. Each terminal system installed shall be identified by

painting the type of terminal system in neat black letters and figures 2 inches high on the backside of the rail element between system posts numbers 4 and 5.

For terminal system (Type SRT), the steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. The wood terminal posts shall be inserted into the steel foundation tubes by hand and shall not be driven. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149° F or less. The edges of the wood terminal posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

For terminal system (Type FLEAT), the soil tubes shall be, at the Contractor's option, driven with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149° F or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system has been installed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

B. MEASUREMENT

Alternative Flared Terminal System shall be measured per each.

C. PAYMENT

The contract unit price paid for alternative flared terminal system shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing alternative flared terminal system, complete in place, including excavation, backfill and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

93. STEEL-BACKED TIMBER GUARDRAIL

A. DESCRIPTION OF WORK

Steel-Backed Timber Guardrail shall be constructed in conformance with the contract plans and these special provisions.

Furnish timber conforming to AASHTO M 168. Fabricate the 6” by 10” timber rail, the 4” by 9” blockouts, and 10” by 12” timber post from dry, well seasoned, and dressed rough sawn Douglas fir, southern pine, or other species having a stress grade of at least 1450 pounds per square inch.

Treat the timber rail and blockout elements with CCA, ACZA, or ACA preservative treatment conforming to AWPA C14 except the minimum retention shall be 0.6 pound per cubic feet.

Fabricate the steel backing elements from 3/8 inch structural steel conforming to AASHTO M 222M. For fastener hardware, conform to AASHTO M 222M.

CONSTRUCTION REQUIREMENTS

Posts.

When pavement is within 3 feet of the guardrail, set posts before placing the pavement.

Do not shorten guardrail posts unless the cut end is set in concrete. Do not shorten posts in terminal sections.

If an impenetrable object is encountered while placing posts, enlarge the hole to provide not less than 6 inches clearance on all sides, and to a minimum depth of $2^1/_2$ feet. Set the post in concrete to within 6 inches of the top of the hole. Backfill and compact the remaining 6 inches with acceptable material.

Drive posts into pilot holes that are punched or drilled. The dimensions of the pilot hole shall not exceed the dimensions of the post by more than 3/5 inch. Set posts plumb, backfill, and compact.

When longer posts are specified, do not use them in the terminal sections.

Stamp the post length on the top of all wood posts. Restamp numbers disturbed during installation. Stamp post length on all metal posts. Galvanize after stamping.

Alternate hole arrangements do not apply to posts in the anchorage assembly.

Rail Elements.

Install the rail elements after the pavement adjacent to the guardrail is complete. Do not modify specified hole diameters or slot dimensions.

(a) Steel rail.

Shop bend all curved guardrail with a radius of 150 feet or less.

Erect rail elements in a smooth continuous line with the laps in the direction of traffic flow. Use bolts that extend at least ¼ inch but not more than 1 inch beyond the nuts. Tighten all bolts.

Paint all scrapes on galvanized surfaces that are through to the base metal with 2 coats of zinc-oxide paint.

(b) Timber rail.

Equally space bolts along the front face of the timber rail to match the holes in the steel backing. Align timber guardrail along the top and front edges of the rail.

Field cut timber rails to produce a close fit at joints. Treat field cuts with 2 coats of chromated copper arsenate.

Terminal Sections.

Construct terminal sections at the locations shown. Terminal sections consist of posts, railing, hardware, and anchorage assembly necessary to construct the type of terminal section specified.

Where concrete anchors are installed, construct either cast-in-place or precast units. Do not connect the guardrail to cast-in-place anchors until the concrete has cured 7 days. Install end anchor cables tightly without slack.

Use concrete anchor in the construction of the anchorage assembly for the type SBT-FAT terminal section.

B. MEASUREMENT

Steel-Backed Timber Guardrail and Steel-Backed Timber Guardrail (Double Sided) will be measured by the linear foot along the face of the rail including terminal sections.

C. PAYMENT

The contract prices paid per linear foot for Steel-Backed Timber Guardrail and Steel-Backed Timber Guardrail (Double Sided) of the types shown in the plans and Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the steel-backed timber guardrail, complete in place, including, but not limited to, anchor terminal section, grading and material for earth berm for anchor terminal section, excavation, backfill and disposal of surplus material, as shown on he plans, as specified in these special provisions, and as directed by the Engineer.

94. VEGETATION CONTROL (MINOR CONCRETE)

A. DESCRIPTION OF WORK

This work shall consist of furnishing and constructing vegetation control as specified in these special provisions, as shown on the plans and as directed by the Engineer.

MATERIALS

Minor Concrete

Concrete for vegetation control shall consist of a mixture of portland cement concrete and concrete reinforcing fibers. Concrete shall conform to the provisions for minor concrete in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions. Components of the concrete for vegetation control shall be incorporated homogeneously at the concrete plant before delivery to the work site.

Reinforcing fibers for minor concrete shall consist of polypropylene fibers with an engineered sinusoidal contoured profile, manufactured specifically for use as concrete reinforcement. Reinforcing fiber shall consist of a blended ratio of 4 parts of coarse monofilament fibers with maximum individual fiber lengths of 2-inch ± 1/2-inch and 1 part of fine fibrillated polypropylene fibers of various lengths and thickness. Reinforcing fibers shall be of a commercial source, combined with the concrete in proportions as recommended by the manufacturer.

Grout

Grout for vegetation control shall conform to the provisions in Section 19-3.062, "Slurry Cement Backfill," of the Standard Specifications and these special provisions.

Not more than 188 pounds of cement shall be used for each cubic yard of material produced.

Aggregate for grout shall be commercial quality concrete sand.

Landscape Fabric

Landscape fabric shall be manufactured from thermally spun bonded polypropylene fabric and shall conform to the following:

Specification	Minimum Requirement
Grab Tensile Strength	135 lbs
Grab Elongation	70%
UV Resistance	70% @ 150 hours
Weight	3 ounces per square yard

Staples for landscape fabric shall be 2 inches in width, 6 inches in length and 11-gauge wire.

A copy of the manufacturer's product sheet, together with instructions for installation, shall be furnished to the Engineer 5 business days before installation.

A Certificate of Compliance for the landscape fabric shall be furnished to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

SITE PREPARATION

Clearing

Areas to receive vegetation control shall be cleared of trash and debris in conformance with Section 16, "Clearing and Grubbing," of the Standard Specifications and these special provisions.

Vegetation shall be removed to the ground. Cleared trash, debris and removed vegetation shall be disposed of outside the highway right of way in conformance with Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Earthwork

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

After clearing, areas to receive vegetation control shall be excavated. Where vegetation control abuts the existing surfacing, the edge of the existing surfacing shall be on a neat line or shall be cut on a neat line to a minimum depth of 0.17-foot before removing the surfacing. The area to receive vegetation control shall be excavated to maintain planned flow lines, slope gradient and contours of the project site.

After excavation, areas to receive vegetation control shall be graded to a smooth, uniform surface and compacted to a relative compaction of not less than 90 percent.

Surplus excavated material shall become the property of the Contractor and shall be disposed of outside the highway right of way in conformance with Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

PLACEMENT

Landscape fabric shall be stapled to prevent shifting during concrete placement. Fabric shall lie flat, smooth, without bulges or wrinkles, and maintain uniform contact with the soil surface.

Grout shall be spread to completely fill voids as shown on the plans.

Minor concrete shall be struck off and compacted until a layer of mortar has been brought to the surface. Minor concrete shall receive a broom finish.

Two weakened plane joints shall be constructed in the minor concrete at each post location, perpendicular to the rail and in line with the edge of the grout. The joints shall be constructed to a minimum depth of 1/4 inch by scoring with a tool that will leave the corners rounded and ensure free movement of concrete at the joint.

The finished grade of vegetation control shall be uniform; maintaining planned flow lines, slope gradient and contours of the project site.

B. MEASUREMENT

Quantities of vegetation control (minor concrete) will be measured by the cubic yard. Vegetation control (minor concrete) placed outside the dimensions shown on the plans will not be paid for.

C. PAYMENT

The contract price paid per cubic yard for vegetation control (minor concrete) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing vegetation control (minor concrete), including installation of landscape fabric, clearing trash, debris and vegetation and excavation, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

95. METAL BRIDGE RAILING

A. DESCRIPTION OF WORK

Tubular bicycle railing shall conform to the provisions in Section 83-1, "Railings," of the Standard Specifications.

B. MEASUREMENT

Tubular Bicycle Railing shall be measured by the linear foot as specified in Section 83-1.03 “Measurement” of the Standard Specifications.

C. PAYMENT

Tubular Bicycle Railing shall be paid for in the same manner as specified in Section 83-1.04 “Payment” of the Standard Specifications.

96. CONCRETE BARRIER

A. DESCRIPTION OF WORK

Concrete barriers shall conform to the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

If reinforcement is encountered during drilling before the specified depth is attained, the Engineer shall be notified. Unless the Engineer approves coring through the reinforcement, the hole will be rejected and the Contractor shall drill a new hole adjacent to the rejected hole to the depth shown on the plans.

B. MEASUREMENT

Concrete barrier (Type 732A) will be measured and paid for as concrete barrier (Type 732).

C. PAYMENT

Full compensation for installing one – 3 inch PVC conduit, one – 2 inch PVC conduit, one- 1 inch galvinized steel pipe, and one-4 inch galvanized steel pipe and the associated connections

for the galvanized steel pipes to the concrete barrier as shown on the plans, shall be considered as included in the contract price paid per foot for concrete barrier (Type 732) and no separate payment will be allowed therefor.

Full compensation for drilling and bonding reinforcement into the existing bridge deck including the dowels themselves shall be considered as included in the contract price paid per linear foot for concrete barrier (Type 732R) and no separate payment will be allowed therefor.

97. TRANSITION RAILING (TYPE WB)

A. DESCRIPTION OF WORK

Transition railing (Type WB) shall be furnished and installed in conformance with details shown on the plans, the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

The 10-gage rail elements shall conform to the requirements of Class B, Type 1 thrie beam guard railing as shown in AASHTO Designation: M 180. End caps shall conform to the requirements of Class A, Type 1 thrie beam guard railing as shown in AASHTO Designation: M 180.

Surplus excavated material remaining after the transitional railing (Type WB) has been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

B. MEASUREMENT

Transition Railing (Type WB) shall be measured per each.

C. PAYMENT

The contract unit price paid for transition railing (Type WB) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing transition railing (Type WB), complete in place, including drilling holes for wood posts, driving posts, backfill, and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

98. THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING

A. DESCRIPTION OF WORK

Thermoplastic traffic stripes (traffic lines) and pavement markings shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

For each batch of thermoplastic material for traffic stripes and pavement markings, the Contractor shall submit to the Engineer:

1. Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications
2. Department's Materials Engineering and Testing Services notification letter stating that the material is approved for use
3. Material Safety Data Sheet

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Within 14 days of applying a thermoplastic traffic stripe or pavement marking, the retroreflectivity of the traffic stripe or pavement marking shall be a minimum of 250 millicandelas per square meter per lux for white, and 150 millicandelas per square meter per lux for yellow. The Contractor shall test the retroreflectivity under ASTM E 1710.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic traffic stripes shall be applied at the minimum thickness and application rate as specified below. The minimum application rate is based on a solid stripe of 4 inches in width.

Minimum Stripe Thickness (inch)	Minimum Application Rate (lb/ft)
0.098	0.34

Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

At the option of the Contractor, permanent traffic striping and pavement marking tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be placed instead of the thermoplastic traffic stripes and pavement markings specified herein. Permanent tape, if used, shall be installed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of thermoplastic traffic stripes and pavement markings, the tape will be measured and paid for by the linear foot as thermoplastic traffic stripe and by the square foot as thermoplastic pavement marking.

B. MEASUREMENT

Thermoplastic Traffic Stripes and Pavement Markings shall be measured in the same manner specified for traffic stripes and pavement markings in Section 84-3.06, “Measurement,” of the Standard Specifications.

C. PAYMENT

The contract price paid per linear foot for Thermoplastic Traffic Stripe shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Thermoplastic Traffic Stripe, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

The contract price paid per square foot for Thermoplastic Pavement Marking shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Thermoplastic Pavement Marking, as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

99. PAVEMENT MARKERS

A. DESCRIPTION OF WORK

Pavement markers shall be placed in conformance with the provisions in Section 85, "Pavement Markers," of the Standard Specifications and these special provisions.

Attention is directed to "Traffic Control System For Lane Closure" of these special provisions regarding the use of moving lane closures during placement of pavement markers with bituminous adhesive.

The Contractor shall furnish the Engineer certificates of compliance for the pavement markers in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Retroreflective pavement markers shall be marked as abrasion resistant on the body of the markers.

B. MEASUREMENT

Pavement Markers (Retro-Reflective) shall be measured per each.

C. PAYMENT

The contract price paid for Pavement Markers (Retro-Reflective) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Pavement Markers (Retro-Reflective), as shown on the plans, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.

100. HIGHWAY LANDSCAPING AND DECORATIVE FEATURES

100-1.01. LANDSCAPE PLANTING

A. DESCRIPTION OF WORK

PART I - GENERAL

WORK INCLUDED

A. Furnish all labor, material, equipment and services necessary to provide all landscape work, complete in place, as indicated on Drawings and specified herein.

Work specified in this Section, but is not limited to the following:

1. Import Topsoil and Placement
2. Raised Planter Backfill
3. Tree Planting (15 gallon size, staked)
4. Tree Planting (15 gallon size, un -staked)
5. Shrub Planting (5 gallon size)
6. Shrub Planting (1 gallon size)
7. Vines (1 gallon size)
8. Weed Control
9. Root Barrier
10. Wood Chip Mulch

QUALITY ASSURANCE

A. Source Quality Control

1. Submit documentation to the City Inspector at least sixty (60) days prior to start of planting that all plant material has been ordered. Arrange procedure for observation of plant material with the Urban Forrester and Project Landscape Architect at time of submission. Plant material is predominately California natives in large quantities. The contractor may have to use multiple nursery sources to obtain project quantities.

2. Plants shall be subject to observation and approval of the Urban Forrester and Landscape Architect upon delivery for conformity to specifications. Such approval shall not impair the right of observation and rejection during progress of the work.

PRODUCT DELIVERY, STORAGE AND HANDLING

A. Delivery

1. The Contractor, upon request by the inspector, shall provide receipts, delivery tickets, load tickets, etc. of all items delivered to the job site to verify products and total quantities.

2. Deliver fertilizer to site in original unopened containers bearing manufacturer's guaranteed chemical analysis, name trademark, and conformance to State Law.

3. Deliver plants with legible identification labels.
   a. Label trees, evergreens, bundles of containers of like shrubs, or ground cover plants.
   b. State correct plant name and size indicated on plant list.
   c. Use durable waterproof labels with water-resistant ink which will remain legible for at least sixty (60) days.

4. Protect plant material during delivery to prevent damage to root ball or desiccation of leaves.

5. The Contractor shall notify the City Inspector, Urban Forester and project Landscape Architect forty-eight (48) hours in advance of delivery of all plant materials for observation.

B. Storage

1. Store plant material in shade and protect from weather.

2. Trees shall not be stored in a container for more than 1 growing season.

3. Maintain and protect plant material.

C. Handling

1. Do not drop plant materials.

2. Do not pick up container plant material by stems or trunks.

JOB CONDITIONS

A. Planting: Perform actual planting only when weather and soil conditions are suitable in accordance with locally accepted practice.

B. Scheduling: Install tree and shrub plant material after irrigation system is operable.

C. Protect work and materials from damage due to construction operations by other contractors and trades and by vandalism. Maintain protection during installation and maintenance period.

SAMPLES AND TESTS

A. The City Inspector reserves the right to take and analyze samples of materials for conformity to specifications at any time; the Contractor shall furnish samples upon request by City Inspector . Rejected materials shall be immediately removed from the site at the Contractor's expense. Cost of testing of materials not meeting specifications shall be paid by the Contractor.

GUARANTEE AND REPLACEMENT

A. Guarantee: All plant material and other materials installed under the Contract shall be guaranteed against any and all poor, inadequate or inferior materials and/or workmanship for a period of one (1) year. Any plant found to be dead or not in a satisfactory or healthy condition due to faulty materials, workmanship, or improper maintenance as determined by the City Inspector, shall be replaced by the Contractor at his expense.

B. Replacement: Any materials found to be dead, missing or not in a satisfactory or healthy condition during the maintenance period shall be replaced immediately. The Engineer shall be the sole judge as to the condition of material. Material to be replaced within the guarantee period shall be replaced by the Contractor within fifteen (15) days of written notification by the City Inspector. All replacement materials and installation shall comply to the Drawings and the Specifications.

REDUCTION CLAUSE

A. Section 4-1.03B of the Standard Specifications shall not apply to Masonry measurement and bid items. The City reserves the right to increase or decrease the quantities in excess of 25% and no additional compensation will be allowed therefor.

PROPRIETARY CLAUSE

A. Proprietary brand names are shown for illustrative purposes only. Equal products will be considered by the City and may be used by the contractor upon approval by the City.

PART 2 - PRODUCTS

GENERAL

A. All materials shall be of standard, approved and first-grade quality and shall be in prime condition when installed and accepted. Any commercially processed or packaged material shall be delivered to the site in the original unopened container bearing the manufacturer's guaranteed analysis. The Contractor shall supply the Engineer with a sample of all supplied materials accompanied by analytical data from an approved laboratory source illustrating compliance of bearing the manufacturer's guaranteed analysis.

PRODUCTS

A. Soil Amendment

1. Nitrogen Stabilized Shavings: 0.56 to 0.84% N based on dry weight for fir bark mulch, treated with relative form of nitrogen (NH3).
   a. Particle Size: 95% - 100% passing 6.35 mm standard sieve.
      80% - 100% passing 2.33 mm standard sieve.
   b. Salinity: The saturation extract conductivity shall not exceed 3.5 millimeters/centimeter at 25 degrees (25°) centigrade as determined by saturation extract method.
   c. Iron Content: Minimum 0.08% dilute acid soluble Fe on dry weight basis.
   d. Ash: 0 - 6.0% (dry weight)

B. Fertilizer

1. Planting Pit Fertilizer: Shall be Gro-Power Plus (bacteria included) with soil penetrant and shall consist of the following percents by weight:

5%	nitrogen
3%	phosphoric acid
1%	potash
50%	humus
15%	humic acid

2. Planting Tablets: Slow-release 21 gram tablets as manufactured by Agriform or approved equal, containing the following percentages of nutrients by weight:

20%	nitrogen
10%	phosphoric acid
5%	potash

C. Plant Material

1. The plant material indicated on the Drawings by the listed names shall conform to "Standard Plant Names", second edition, except for names not covered therein, the established customs of the nursery trade is followed. All plants shall be true to name, above one of each bundle or lot shall be tagged with the name and size of the plant, in accordance with the standards of practice recommended by the American Association of Nurserymen. All plant materials shall meet the specifications of Federal, State and County laws, requiring observation for plant diseases and insect infestations. Plants shall be symmetrical, typical for variety and species, sound, healthy, vigorous, free from plant diseases, insect pests or other eggs, and shall have healthy, normal root systems, while filling their containers, but not to the point of being root bound. Use only plant materials that are first class representative of the species and cultivars specifies and that conform to all State and local laws governing the sale, transportation and observation of plant materials. Plants shall have straight, single trunks, unless otherwise specified on the plans. Those specified to be multi-trunk shall have at least three (3) main leaders from the base. Any and all plants that have any encircling roots (not root bound) shall have root balls lightly slashed on a minimum of three (3) sides to stop encircling root growth. The height and spread of all plant materials shall be measured with branches in their normal position. Sizes of plants shall be as stated on the plant list, five and fifteen (5 & 15) gallon can container stock shall have been grown in that container not less than six (6) months, but shall not have been overgrown in the containers so as to have become root bound.

2. The size of the plants will correspond with that normally expected for species and variety of commercially available nursery stock or as specified in the Special Conditions or Drawings. The minimum acceptable size of all plants, measured before pruning with the branches in normal position, shall conform with the measurements, if any, specified on the Drawings in the list of plants to be furnished. Plants larger in size than specified may be used with the approval of the Engineer, but if the use of larger plants is approved, the ball of earth or spread of roots for each plant will be increased proportionally. Plant material shall conform to the following Specifications for container stock:

Refer to Plant Legend for species-(Plant symbol shown)

TREES

SIZE	TYPE	SPECIES	HEIGHT	SPREAD	CALIPER
15 Gal.	slow growing	T-1,T-2T-3,T-6.	7-8’	24-30"	¾-1”
15 Gal.	tall growing	T-5	8-10’	30-36	1-1 ¼”

SHRUBS

SIZE	TYPE	SPECIES	HEIGHT	SPREAD

1 Gal.	low growing	S-12,S-17,S-18	8-10"	6-8"
5 Gal.	low growing	S-2,5,8,9,10,11,13,14,16	15-18"	15-18"
5 Gal.	tall growing	S-1,3,4,6,7,15,	24-30"	15-18

3. All plants not conforming to the requirements herein specified, shall be considered defective and such plants, whether in place or not, shall be marked as rejected and immediately removed from the site of the work and replaced with new plants at the Contractor's expense. The plants shall be of the species, variety, size and condition specified herein or as shown on the Drawings. Under no conditions will there be any substitution of plants or sizes listed on the plans, except with the expressed written approval of the Engineer.

4. At no time shall trees or plant materials be pruned, trimmed or topped prior to delivery and any alteration of their shape shall be conducted only with the approval and when in the presence of the Engineer and/or as noted on the Planting Specifications.

5. Nursery Grown and Collected Stock
   a. Plant materials shall conform with the best edition of ANSI Z60.1- American Standard for Nursery Stock.
   b. Grown under climatic conditions similar to those in locality of project.
   c. Container-grown stock in vigorous, healthy condition, not root bound or with root system hardened off.
   d. Use only liner stock plant material which is well established in removable containers or formed homogeneous soil sections.

D. Mulch

1. Wood chip mulch shall be chipped tree branches and tree trunks, particle range of between ¾ inches to 2 inches, free of chipped diseased trees. Shredded redwood bark is not acceptable. Colored or dyed wood products are not acceptable.

E. Weed Control

1. Pre-planting: Use State of California allowed herbicides Enide (Upjohn), Dymid (Elanco Products Co.), Treflan, Eptan, Surflan or approved equal.
2. Pre-Emergent: Use State of California allowed herbicides Ronstar or approved equal.

F. Imported Top Soil
1. Imported topsoil material shall be of friable sandy-loam texture free of refuse, roots, heavy or stiff clays, rocks over 1” in diameter , 15% by volume rock between 1/8” and 1”, sticks, other deleterious matter.

2. Imported topsoil acidity range (Ph) shall be between 6.5 to 7.5, containing a minimum of 5% and a maximum of 20% organic matter.

3. Imported topsoil shall be free of all noxious weeds and other seeds.

4. Provide one (1) cubic foot sample of import topsoil material for the City's approval prior to delivery to the site, but in any case, prior to placement.

5. Provide horticultural soils report of submitted topsoil including information on soil texture, filtration rate, nutrient levels and organic matter. Include recommendation for amendment to be added to topsoil to mitigate any deficiencies and to meet above requirements. Recommendations shall be expressed in amount of readily available commercial fertilizers and not in elemental form.

6. Imported topsoil shall be amended as per soils report, if required, at no additional cost to City.

7. Topsoil shall be stock piled on site in an area free of rock and other deleterious materials. City reserves the right to reject topsoil once placed in proper location per Part 3 if deleterious materials mixed in to topsoil.

G. Tree stakes
   1. Shall be as indicated on the plans

H. Root barrier
   1. By Deep Root Corp model numbers LB-12-2 or approved equal

I. Raised Planter Backfill
   1. Raised planter backfill mix shall be composed of the following:
      a. 1 part clean washed sand
      b. 2 parts imported topsoil composed of friable sandy-loam texture free of refuse, rocks over ½ inch in diameter, an acidity range of between 6.5 to 7.5 containing a minimum 4% and a maximum of 25 % organic mater
      c. 3 parts valley gold compost grade 'B' contact Dan Weston (530) 865-1320, or approved equal.
   2. Submit (1)1/2 gallon sample of raised planter backfill for approval by City of Chico.

PART 3 - EXECUTION

OBSERVATION

A. City Inspector to verify that final grades have been established prior to beginning planting operations. City of Chico Urban Forester to observe plant material for injury, insect infestation and trees and shrubs for improper pruning. Do not begin planting of plant material until deficiencies are corrected or plants replaced.

LAYOUT OF PLANTING AREAS

A. Stake or mark with lime locations for plants and outline of planting beds on ground. Do not begin excavation until plant locations and plant beds are acceptable to the Project Landscape Architect. The irrigation system shall be operational and approved prior to planting.

B. Locations for plants and outlines of areas to be planted shall be marked on the ground by the Contractor before any plant pits are dug. All such locations shall be approved by the Engineer. If an underground construction or utility line is discovered prior to work, other locations for planting may be selected by the Engineer.

PLANT INSTALLATION

A. General

1. Actual planting shall be performed during those periods when weather and soil conditions are suitable and in accordance with locally accepted practice, as approved by the City of Chico.

2. Only as many plants as can be planted and watered on that same day shall be distributed in a planting area.

3. Excess soil generated from the planting holes, not used as backfill or in establishing the final grades shall be removed and disposed of off site.

B. Planting of trees and Shrubs

1. Excavating for Planting

   a. Shape
      1. Vertical sides and flat bottom.
      2. Plant pits to be square for box material, circular for canned material.
      3. Scarify sides and bottom of each pit.

   b. Size
      1. All trees and shrubs shall have planting pits dug twice the diameter of the root ball. Backfill around the root ball with prepared backfill mix.

2. Protect all areas from excessive compaction when trucking plants or other materials to planting site.

4. Planting
   a Remove root ball from container
   b. For trees, break up sides of root ball and spread out roots
   c. Center plant in pit.

d. Face plants with fullest growth into prevailing wind.

e Set plant plumb and hold rigidly in position until soil has been tamped firmly around ball roots.

f. Planting pit shall be backfilled with the following prepared backfill mix:
   1. One (1) parts rock-free native soil.
   2. One (1) parts nitrogen stabilized shavings.
   3. Eighteen (18) pounds Gro-Power Plus planting pit fertilizer per cubic yard of mix.
   4. Specified type and quantity of planting tablets

g All plants which settle shall be raised to the correct level as indicated on plans. After the plant has been placed, additional backfill shall be added to the hole to cover approximately one-half (1/2) of the height of the root ball. Water shall be added to the top of the partly filled hole to thoroughly saturate the root ball and adjacent soil.

h. After the water has completely drained, planting tablets shall be placed adjacent to but not in contact with root ball.

   One (1) tablet per 1-gallon container
   Two (2) tablets per 5-gallon container
   Three (3) tablets per 15-gallon container

i. The remainder of the hole shall be backfilled.

j. After backfilling, an earthen basin shall be constructed around each plant. Each basin shall be of a depth sufficient to hold at least two (2) inches of water. Basin shall be of a size suitable for the individual plant. In no case shall the basin for fifteen (15) gallon plant be less than six (6) feet in diameter; and twice the diameter of the root ball for five (5) and one (10 gallon plant material The basins shall be constructed of amended backfill materials, and shall not be constructed for trees in turf areas.

k. Pruning

   Prune as per specifications SECTION 20-4 – HIGHWAY PLANTING and upon approval of the city of Chico Urban Forester.

l. Staking of Trees
   1. Staking of trees shall conform to tree staking detail. Staking shall only occur on those trees as indicated on the plans.

   2. One (1) tree shall be staked and approved by the project Landscape Architect and City of Chico Urban Forester. Once approved, the City of Chico Inspector shall use this example to inspect remaining staked trees and tree planting methods.

B. Mulch Cover

1. All planting areas, with the exception of erosion control and bio filtration swale areas shall be top dressed with a 3 inch layer of mulch as indicated on the plans.

C. Raised planter backfill
1. All raised planters, shall be backfilled per plans.
2. Allow for settling.
3. Establish grade with no localized low spots.

D. Top soil Placement.
1. Place approved topsoil as indicated on plans
2. Compacted to 85% relative density
3. Allow for any additional settling
4. Establish grades as indicated on Engineering plans

E. Weed control
1. Weed Control- pre-planting
   a. Apply pre-planting weed control to all weed Growth prior to any planting operations. This area is known to have Himalayan blackberry.
   b. Apply as per manufacturer's specifications.
   c. Apply with sufficient lead time to allow for plant death and removal by mowing.

2. Weed Control-pre-emergent
   a. Apply pre-emergent weed control to all landscape areas with the exception of erosion control and biofiltration-swale areas.
   b. Apply after completion of all planting and prior to mulch application.
   c. Apply one (1) complete watering (to allow herbicide to dissolve). Water to be applied by hand using hoses attached at quick coupler valves.
   d. Apply as per manufacturer's specifications.

OBSERVATION SCHEDULE

A. The Contractor shall be responsible for notifying the City of Chico in advance for the following observations:

1. Plant material inspection prior to planting
2. Tree staking
3. End of landscape installation, start of maintenance period
4. End of landscape maintenance/final acceptance - 48 hours.

B. No site visits shall commence without all items noted in previous Observation Reports, either completed or remedied, unless such compliance has been waived. Failure to accomplish punch list tasks or prepare adequately for desired observations

shall make the Contractor responsible for reimbursing the City's Representative or Engineer at his current billing rates per hour, plus transportation costs.

CLEAN UP

After all planting operations have been completed, remove all trash, excess soil, empty plant containers or rubbish from the project site. All scars, ruts or other marks in the ground caused by this work shall be repaired and the ground left in a neat and orderly condition throughout the site. The Contractor shall pick-up all trash resulting from this work each day before leaving the site. All trash shall be removed completely from the site. The Contractor shall leave the site in a clean condition acceptable to the City of Chico.

LANDSCAPE MAINTENANCE

Provide Plant Establishment period per SECTION 20-4 – HIGHWAY PLANTING

B. MEASUREMENT AND PAYMENT

MEASUREMENT

Landscape Installation shall be measured as follows:

1. Import Topsoil and Placement- per Cubic Yard
2. Raised Planter Backfill-per Cubic Yard
3. Tree Planting (15 Gallon Size-Staked)- Each
4. Tree Planting (15 Gallon Size-Un-staked)-Each
5. Shrub Planting (5 Gallon)-Each
6. Shrub Planting(1 Gallon)-Each
7. Vines (1 Gallon)-Each
8. Weed Control- per Square Foot
9. Root Barrier- per Lineal Foot
10. Wood Chip Mulch-Cubic Yard

PAYMENT

The contract prices paid for the following shall include full compensation for all labor, materials, tools, equipment, incidentals and for doing all the work involved in the following complete, in place as shown on the plans as specified in the Standard Specifications and these special provisions, and as directed by the Engineer and as follows:

1. Import Topsoil and Placement- Cubic Yard
2. Raised Planter Backfill-Cubic Yard
3. Tree Planting (15 Gallon Size-Staked)- Each
4. Tree Planting (15 Gallon Size-Un-staked)-Each
5. Shrub Planting (5 Gallon)-Each

6. Shrub Planting(1 Gallon)-Each
7. Vines (1 Gallon)-Each
8. Weed Control- Square Foot
9. Root Barrier- Lineal Feet
10. Wood Chip Mulch-Cubic Yard

100-1.02 LANDSCAPE IRRIGATION

A. DESCRIPTION OF WORK

PART 1 - GENERAL

CONDITIONS

A. The general provisions of the Contract, including General and Supplementary Conditions and Special Provisions (if any) apply to the work specified in this Section.

SCOPE OF WORK

A. Furnish all labor, materials, processes, and equipment necessary to complete the irrigation system repair or replacement work as indicated on the Drawings and specified herein.

B. Test the each affected irrigation system to assure proper operation.

C. Furnish all labor, materials, and equipment necessary to restore all disturbed areas resulting from the work as indicated on the Drawings and specified herein.

D. All incidental parts, which are not shown on the plans or specified herein and are necessary to complete or modify the existing system shall be furnished and installed as though such parts were shown on plans or specifications. All systems shall be in satisfactory operation at the time of completion.

QUALITY ASSURANCE & REQUIREMENTS

A. Permits and Fees: The Contractor shall obtain and pay for all permits and all observations as required.

B. Performance Qualifications:

1. The Landscape Contractor shall have a minimum of three (3) equivalent jobs of similar complexity completed in the last five (5) years.

2. The Landscape Contractor shall furnish qualifications to the General Contractor to be included in the proposal form due at bid opening date. Burden of proof as to

qualifications of the Landscape Contractor shall be on the Contractor; the City of Chico's decision is final.

C. Manufacturer's Directions: Manufacturer's directions and detailed Drawings shall be followed in all cases where the manufacturers of articles used in this Contract furnish directions covering points not shown in the Drawings and Specifications

D Ordinances and Regulations

1. All local, municipal and state laws, rules and regulations governing or relating to any portion of this work are hereby incorporated into and made a part of these Specifications and their provisions shall be carried out by the Contractor. Anything contained in these Specifications shall not be construed to conflict with any of the above rules and regulations or requirements of the same. However, when these Specifications and Drawings call for or describe materials, workmanship, or construction of a better quality, higher standard, or larger size than is required by the above rules and regulations, the provisions of the Specifications and Drawings shall take precedence.

2. The materials and work of this section shall conform to all applicable provisions of the latest editions of the Uniform Plumbing Code, the National Electrical Code, and all codes properly governing the materials and work at the project site.

3. All electrical materials and work shall conform to California Administrative Code, Title 23, Part 3, Basic Electrical Regulations, and Article 18 E 110-16.

E. Explanation of Drawings

1. Not all offsets, fittings, sleeves, main line, lateral, etc., which may be required are shown on plans. Carefully investigate the structural and finish conditions affecting all of the work and plan the work accordingly furnishing such fittings; etc., as may be required to meet such conditions. Drawings are generally diagrammatic and indicative of the work to be installed. Due to the scale of the Drawings, it is not possible to indicate all offsets, fittings, sleeves, etc., which may be required to complete the irrigation system.

2. Before proceeding with any work, the Contractor shall check and verify all dimensions, quantities, pressures and flows and shall immediately inform the City of Chico of any discrepancy between the drawing and/or the Specifications and actual conditions. No work shall be done in any area where there is such a discrepancy until the City of Chico has given written approval for the same. The Contractor shall assume full responsibility for work installed without approval.

3. The materials and work shall be installed in such a manner as to avoid conflicts between irrigation system and planting, existing or proposed utilities, and all other construction features.

4. Contractor shall verify prior to and during construction, that his contract documents reflect the latest revisions and change orders. Contractor shall be able to produce such documents at the request of the City of Chico.

5. Pipe sizes indicated on the Drawings are minimum allowable.

EXISTING CONDITIONS

A. The Contractor shall notify members of U.S.A. two (2) working days in advance of performing any excavation work by calling the toll-free number 800-542-2444. The contractor shall verify the locations of existing utilities identified by U.S.A. with the as-built plans for the project area. The Contractor shall inform the City of Chico of any discrepancies before construction begins.

B. Information on the Drawings, relative to existing conditions, is approximate only. Deviations found necessary during construction to conform to actual conditions, as approved by the City of Chico, shall be made without additional cost.

C. Where it is necessary to excavate in areas of existing utilities, the contractor shall pothole to confirm exact locations of existing utilities. Exercise extreme care in excavating and working near existing utilities. The Contractor shall be responsible for all damages to existing utilities that are caused by his operation or neglect**.** In case of interruption of utilities caused by the contractors operations or neglect, the contractor shall be responsible to have the utilities in service as soon as possible and in no case shall the interruption be longer than a twenty-four (24) hour period. In such case that the contractor needs more than a twenty-four (24) hour period, prior approval shall be acquired from the City of Chico in writing.

D. Excavation in proximity to existing trees shall conform to the Tree Protection Measures outlined in “Maintenance of Trees” of these special provisions.

SUBMITTALS

A. Material List

1. Contractor shall furnish the articles, equipment, materials, or processes specified by name in the Drawings and Specifications. Product names are used as standards only; other materials or methods shall not be used unless approved in writing by the City of Chico. Burden of proof as to equality of proposed material shall be on the Contractor; the City of Chico's decision is final. Only one request for substitution shall be considered for each item. Equipment capacities specified are minimum acceptable.

2. A complete material list (6 copies) shall be submitted to the City of Chico for approval prior to performing any work. The materials shall clearly identify on the

submittal by a color highlight, the manufacturer, model number and description of materials and equipment to be used, including but not limited to the following:

a. Backflow Preventer
b. Satellite Controller
c. Flow Sensing Assembly
d. Isolation Valves
e. Remote Control Valves (Spray)
f. Remote Control Valves (Drip)
g. 2 Wire Decoders
h. Quick Coupler Valves
i. PVC Main Line
j. PVC Lateral Pipe
k. Conduit
l. PVC and HDPE Sleeves
m. PVC Solvent Cement and Primer
n. Hand Held Remotes
o. Lightning Arrestor
p. Pull Boxes
q. Swing Pipe Assembly
r. Emitters
s. Irrigation Head
t. 2 Wire Decoder Wire
u. Water Proof Wire Connectors
v. Valve Boxes

3. The contractor shall provide additional submittals as required for products not listed above but which are used on site. Approval of submittals is required before installation.

4. Equipment or materials installed or furnished without prior approval of the City of Chico shall be rejected and the Contractor shall be required to remove such materials from the site at his own expense.

5. Approval of any item, alternate or substitute indicates only that the product or products apparently meet the requirements of the Drawings and Specifications based on the information or samples submitted.

B. Record Drawings

1. Maintain on site, separate from documents used for construction, one complete set of Contract Documents as Record Documents or As Built Drawings. Keep documents current. Do not permanently cover work until information is recorded. These record drawing must be kept for all portions of the project that may be built differently that the plans define.

2. Include all Change Orders.

3. Where reference dimensions are required in the individual specification section, measure reference dimensions from at least two (2) reference points that will be easily identifiable in the finished work.

4. Prior to Contract Closeout, obtain from the City of Chico Project Manager a reproducible copy of the drawings. Using technical drafting pen, duplicate information contained on the Record Drawings maintained on site.

5. Label each sheet "Record Drawing". On the first sheet, the Contractor or resident superintendent shall execute the following statement:

   Having reviewed this document and all attachments, I affirm that, to the best of my knowledge, the information presented here is true and accurate.

   Signed _____ Date _____
   Position _____

6. The Contractor shall dimension from two (2) permanent points of reference, building corners, sidewalks, or road intersections, etc., the location of the following items:

   a. Satellite Controller Assembly
   b. Isolation Valves
   c. Quick Coupler Valves
   d. Remote Control Valves
   e. Routing of irrigation pressure lines; dimension maximum 100' along routing and at turns in direction (Note Depth)
   f. Routing of remote control wires
   g. Main Line, Lateral and Electrical Sleeves at both ends (Note Depth)
   h. Other related equipment as directed by the City of Chico.

7. On or before the date of the final observation, the Contractor shall deliver the corrected and completed reproducible as-built plan and digital media to the City of Chico. Delivery of these shall not relieve the Contractor of the responsibility of furnishing required information that may be omitted from the plans or digital media. Reproducible plans or digital media may be obtained for said use from the Engineer.

OBSERVATION SCHEDULE

Normal progress observations shall be requested by the Contractor from the City as per observations listed in specifications SECTION 20 – EROSION CONROL AND HIGHWAY PLANTING.

PRODUCT DELIVERY, STORAGE AND HANDLING

Handling of PVC Pipe and Fittings: The Contractor is cautioned to exercise care in handling, loading, unloading, and storing of PVC pipe and fittings. All PVC pipe shall be transported in a vehicle that allows the length of pipe to lie flat so as not to subject it to undue bending or concentrated external load at any point. Any section of pipe that has been dented or damaged will be discarded and if installed replaced with new.

GUARANTEE

The guarantee for the replacement/ repair of existing irrigation systems shall be made in accordance with the form shown on the following page. A copy of the guarantee form shall be provided to the City and to each affected, adjacent property owner. The guarantee form shall be re-typed onto the Contractor's letterhead and contain the following information:

GUARANTEE FOR IRRIGATION SYSTEM

We hereby guarantee that the portions of the sites irrigation systems that we have furnished and installed is free from defects in materials and workmanship, and the work has been completed in accordance with the Drawings and Specifications, ordinary wear and tear and unusual abuse or neglect excepted. We agree to repair or replace any defects in material or workmanship, which may develop during the period of one (1) year from date of final acceptance and also to repair or replace with originally specified materials. Any damage resulting from the repairing or replacing of such defects shall be replaced and repaired by the contractor at no additional cost to the City of Chico. We shall make such repairs or replacements within a 48-hour period, after receipt of written notice. In the event of our failure to make such repairs or replacements within said period after receipt of written notice from the City of Chico, we authorize the City of Chico to proceed to have said repairs or replacements made at our expense and we will pay the costs and charges therefore upon demand.

PROJECT:_____

LOCATION:_____

SIGNED:_____

ADDRESS:_____

PHONE:_____

DATE OF ACCEPTANCE:_____

PART 2 - PRODUCTS

MATERIALS

General: Use only new materials of brands and types noted on the Drawings specified herein or approved equals.

A. Backfill Material

1. Existing site material, if approved by the City of Chico, shall be used for backfill material. Backfill material shall be free from organic materials, large clods of earth or rocks larger than one (1) inch diameter, trash, debris, rubbish, broken cement, asphalt material or other objectionable substances.

2. Imported backfill material, if required, shall be clean Vina Loam or other approved materials, with no large clods of earth or rocks larger than one (1) inch diameter.

3. Sand backfill shall be a fine, granular sand material backfill containing no foreign matter larger than one-half (1/2) inch in size.

B. Drainage Fill Material

1. Drainage fill material shall be three-quarter (3/4) inch washed, hard and durable, fragments of screened or broken stone or gravel.

C. Sleeving

1. Irrigation Sleeve 6” and smaller shall be PVC Schedule 40 with solvent-weld joints.

   a. Pipe shall be made from NSF approved Type I, Grade I, PVC compound conforming to ASTM resin specification D1785. All pipes shall meet requirements set forth in Federal Specification PS-21-70. (Solvent-weld Pipe)

2. Irrigation Sleeve 8” and larger shall be corrugated HDPE with smooth interior wall.

   a. HDPE shall be made from high-density polyethylene with an integrally formed smooth interior conforming to AASHTO M252, AASHTO M294, Type S.

D. PVC Pressure Main Line Pipe and Fittings.

1. Pressure main line piping for sizes two and one half (2-1/2) inches and larger shall be PVC Class 315. Pipe shall be made from an NSF (National Sanitation Foundation) approved Type I, Grade I, PVC compound conforming to ASTM resin specification D2241.

2. Pressure main line piping for sizes two (2) inch and smaller shall be PVC Schedule 40 with solvent-weld joints. Pipe shall be made from NSF approved Type I, Grade I, PVC compound conforming to ASTM resin specification D1785. All pipes shall meet requirements set forth in Federal Specification PS-21-70. (Solvent-Weld Pipe).

3. Main line fittings shall be PVC Schedule 40 solvent-weld fittings, 1-2; II-I NSF approved conforming to ASTM D2466.

4. All PVC pipe shall be marked continuously and permanently with the following information: Manufacturer's name, nominal pipe size, schedule or class of pipe, pressure rating in P.S.I. extrusion, NSF approval and date of extrusion.

5. All fittings shall bear the manufacturer's name or trademark, material designation, size, applicable I.P.S. schedule and NSF seal of approval.

E. Underground Detectable Tape
   1. 48 MM. Wide Underground detectable tape

F. Non-Pressure Lateral Line

   1. Non-pressure buried lateral line piping shall be PVC Schedule 40 with solvent-weld joints.

      a. Pipe shall be made from NSF approved, Type I, Grade II, PVC compound conforming to ASTM resin specification D1785. All pipes shall meet requirements set forth in Federal Specification PS-21-70.

   2. PVC solvent-weld fittings shall be Schedule 40, 1-2; II-I NSF approved conforming to ASTM D2466.

   3. Solvent cement and primer for PVC solvent-weld pipe and fittings shall be of the type and installed by the method specified by the manufacturers for each type of pipe.

   4. All offsets shall be a minimum three-quarter (3/4) inch unless otherwise noted or contractor receives written approval from the City of Chico.

G. PVC Threaded Nipples:

1. PVC Schedule 80 nipples shall be produced from extruded stock grade PVC compounds. No molded nipples shall be used.

   a. PVC Schedule 80 nipples shall be made from NSF approved PVC compound conforming to ASTM D1784, Cell Classification 12454B

H. Remote Control Valves

1. Remote control valves shall be of the same type, manufacturer and sizes as indicated on the Drawings and/or as specified herein or approved by the Engineer.

2. Remote control valves shall have a glass-filled nylon construction with a flow control and manual bleed capability

3. Remote control valves shall be in the normally closed position unless otherwise noted.

I. Identification Tags

1. Backflow history tags shall be manufactured of a .010" tear-resistant polyester base with a write-on coating and will be 2-1/2" x 2-3/4 inch in size. Backflow history tags shall be white with black, fade-resistant printing.

2. Remote control valve tags shall be Christy Model ID-STD-Y 2, manufactured from polyurethane Behr Desopan, with a reinforced attachment hole and will be 2-1/4" x 2.3/4" in size. Valve identification tags shall be yellow in color with double sided stamped Satellite Controller Assembly designation and valve designation.

J. Irrigation Heads

1. All irrigation heads shall be of the same size, type and deliver the same rate of precipitation with the diameter (or radius) of throw, pressure, and discharge as shown on the plans and/or specified herein, or approved by the City of Chico.

2. Bubblers shall be pressure compensating.

3. All irrigation heads of similar functions shall be of common manufacture and shall be marked with the manufacturer's name and model identification in a position where they may be identified without being removed from the system.

K. Valve Boxes

1. Remote Control Valve Boxes for valve sizes 1-1/2" and 2" shall be green rectangular valve boxes 17-3/8" x 23-7/8" x 12", Carson model 1220-4 with a T-cover and Bolt-Down Loc Kit or approved equal.

2. Remote Control Valves Boxes for valve sizes 1" shall be green rectangular valve boxes 17-3/8" x 23-7/8" x 12" Carson model 1220-4 with a T-cover and Bolt-Down Loc Kit or approved equal.

3. Remote Control Valve Box Extensions shall be of the same manufacturer of the valve box or approved equal.

4. Electrical Pull Boxes and Wire Splice Boxes shall be gray rectangular 14-1/2" x 19-1/2" x 12-1/4", Carson model 1419-4 with a gray T-cover and Bolt-Down Loc Kit (with bolt) or approved equal.

5. All remote control valve boxes, quick coupler valve boxes, electrical pull boxes and wire splice boxes shall be located in shrub planters unless otherwise shown on the Drawings or specified by the City of Chico.

L. 2 Wire Decoder Cable
   1. 2 wire decoder cable to be Rainmaster TW-CAB-14.

M. Flow Sensor Communication Wire
   1. Flow Sensor Communication wire shall be Rainmaster EV-CAB-SEN

N. Control Wire Conduit

   1. Conduit shall be gray PVC Schedule 40

   2. Conduit pull tape shall be woven polyester flat tape with lubrication.

O. Emitter
   1. SALCO PRO-SPEC EMITTER: SLV-PST-2

P. Swingpipe
   1. Rainbird SWING PIPE: SPX-100 with Rainbird FITTINGS: SBE-050/ SBA-050/ SB-TEE (AS REQUIRED)

Q. Lightning Arrestor
   1. Rainmaster model TW-LA-1

PART 3 - EXECUTION

INSPECTION OF SITE

A. Site Conditions

1. All scaled dimensions are approximate. Prior to the start of work the Contractor shall meet with the Site Contractor to review and approve "turn over conditions" of the project area.

    a. The Contractor shall be responsible to report discrepancies between Contract Documents and "take over conditions" to the City of Chico prior to start of work.

    b. Discrepancies not reported shall become the Contractor's responsibility.

2. The Contractor shall check and verify all site water and electrical services and notify the City of Chico if site conditions have changed from those specified in the drawings.

3. The Contractor shall carefully check all grades to satisfy him that he may safely proceed before starting work on the irrigation system.

4. The contractor shall obtain permits and call for inspections as required by local codes and regulation. All installations shall conform to local codes and accepted construction practices.

PREPARATION

A. Physical Layout

1. Locations on Drawings are diagrammatic and approximate only and shall be changed and adjusted as necessary and as directed by City of Chico to meet existing conditions and obtain complete water coverage.

2. The Contractor shall install, repair, and/or extend the system as shown on the Drawings, and as necessary to carry out the intent of the Drawings and Specifications.

INSTALLATION

A. Trenching

1. Dig trenches straight and support pipe continuously on bottom of trench. Lay pipe to an even grade. Trenching excavation shall follow layout indicated on the Drawings and as noted.

2. Provide for a minimum of eighteen (18) inches cover for all pressure lines.

3. Provide for a minimum of twelve (12) inches cover for all non-pressure lines.

4. Provide for a minimum of eighteen (18) inches cover for all control wiring.

5. For all pressure lines, non-pressure lines and control wiring under auto traffic areas, refer to Engineer's plans.

6. Trench width shall be as needed to provide a minimum horizontal clearance between pipes and edges of trench.

7. No pipe shall be laid directly over another pipe.

8. See contract documents for vertical and horizontal pipe separation requirements.

B. Backfilling

1. The trenches shall not be backfilled, except for center loading, until all required tests are performed. All debris shall be removed prior to placement of backfill. Trenches shall be carefully backfilled with the materials approved for backfilling. Backfill shall be mechanically compacted in six (6) inch lifts to a dry density equal to adjacent undisturbed soil in landscaped areas. Backfill shall conform to adjacent grades without dips, sunken areas, humps or other surface irregularities.

2. Backfill main lines with a minimum of 6" of sand below piping and 6" of sand above the piping.

3. Backfill lateral lines with approved backfill material or approved imported soil. Backfill material shall be free from organic materials, large clods of earth or rocks larger than one (1) inch diameter, trash, debris, rubbish, broken cement, asphalt material or other objectionable substances.

4. If settlement occurs and subsequent adjustments in pipe, valves, sprinklers heads, lawn or planting, or other construction are necessary, the Contractor will make all the required adjustments without cost to the City of Chico.

C. Trenching and Backfilling Under Paving

1. Trenches located under areas where paving, asphaltic concrete or concrete shall be installed, shall be backfilled with sand, a layer six (6) inches below the pipe and six (6) inches above the pipe and compacted in layers to 95% compaction, using manual or mechanical tamping devices. All trenches shall be left flush with the adjoining grade.

2. Generally piping under existing walks is done by jacking, boring or hydraulic driving, but where any cutting or breaking of sidewalks and/or concrete is necessary, it shall be done and replaced by the Contractor as part of the Contract cost. Permission to cut or break sidewalks and/or concrete shall be obtained from the City of Chico in writing. No hydraulic driving shall be permitted under concrete paving.

D. Sleeving

1. Sleeving, where indicated on plans shall be installed for irrigation pressure main line pipe, non-pressure lateral pipe and electrical wiring that crosses pavement, walkways, paths, concrete, and other hardscape elements as needed whether shown on drawing or not.

2. Install irrigation and electrical sleeving as needed whether or not indicated on the Drawings. Contractor shall coordinate the installation of sleeving with the work of other trades. Sleeving shall extend a minimum of six (6) inches past hardscape.

3. Irrigation sleeving shall be placed on the Dead Horse Slough Bridge. Sleeving shall extend a minimum of twelve (12) inches below finished grade.

4. Sleeves shall be at least the minimum size depicted on but in all cases shall be sized so as to easily accommodate piping and/or control wiring as called for in the drawings leaving a minimum of 25% void space inside sleeve.

    a. The contractor shall be responsible to verify sleeving sizes based on field verification of pipe and wire crossings.

5. Separate sleeves shall be provided for main line and lateral piping, 120V wiring, 24V wiring, telephone cable, communication cable, sensor cable and grounding wire.

6. Sleeves shall have both ends capped during installation to prevent dirt and debris from entering the sleeve.

7. Identify location of sleeve ends from two permanent points of reference and show on as-built plans.

E. PVC Pipe

1. Routing of irrigation pipe as indicated on the Drawings is diagrammatic. Install lines and various assemblies to conform to the details shown on the drawings.

2. Install irrigation main line a minimum of five (5) feet from tree locations to avoid conflict with mature rooting systems.

3. Install no multiple assemblies on plastic lines. Provide each assembly with its own outlet.

4. Install all assemblies specified herein in accordance with respective detail. In absence of detail Drawings or specifications pertaining to specific items required to complete work, perform such work in accordance with best standard practice with prior approval of the City of Chico.

5. PVC pipe and fittings shall be thoroughly cleaned of dirt, dust and moisture before installation. Installation shall be as recommended by the pipe and fitting manufacturer.

6. PVC pipe shall be installed so that there will be a small amount of excess length in the pipe to compensate for contraction and expansion of the pipe. This shall be accomplished by "snaking" the pipe in the trench during installation.

7. Center load pipe with small amounts of backfill to prevent arching and slopping under pressure. Leave joints exposed for inspection during testing.

8. No water shall be permitted in the pipe until inspections have been completed and a period of at least 24 hours has elapsed for solvent weld setting and curing.

9. Plastic to metal connections shall be made with plastic male adapters and female metal adapter, hand tightened, plus one turn with a strap wrench. Teflon tape or approved equal shall be used on all threaded PVC to metal joints.

10. Solvent Weld Joint: Solvent weld pipe ends using solvent recommended by pipe manufacturer only.

11. Threaded joints shall be wrapped with Teflon tape as per manufacturer's instructions.

12. Flush all debris out of pipe prior to installing valves and heads.

13. In changing main line and lateral pipe depth, 45° elbows shall be used.

14. Install a tracer wire twelve (12) inches below finish grade along the entire length of the main line run, including main line branches.

15. Trenching under and around existing trees shall be in accordance with the Tree Protection measures outlined in "Maintenance of Trees" of these special provisions.

F. Line Clearance

1. Irrigation lines shall have a minimum horizontal and vertical clearance of four (4) inches from each other. Parallel lines shall not be installed directly over one another.

2. Horizontal and vertical clearance of irrigation lines from lines from other trades shall be as per local codes and regulations.

3. Line clearances shall be inspected and approved by the City of Chico prior to backfilling trenches.

G. Connection to Telecommunications

1. Communication wire from controller to ATT box Point of Connection is to be POTS wiring. Communication is to be installed within conduit and is recommended to be installed by an electrical contractor.
2. Contractor is responsible to coordinate with the City of Chico to involve City of Chico IT Department to obtain a telecommunication point of connection and for the connection of the controllers to phone. Contact Earl Keene, Information Systems Analyst: 500 896-8400
3. Coordination of stubout from ATT and subsequent establishment of service to be done by the City of Chico. Contact Earl Keene, Information Systems Analyst: 896-8400 for coordination.

H. Electric Remote Control Valves

1. Install as per details and manufacturer's specifications.

2. Install where shown on Drawings. Locate valve boxes twelve (12) inches from, and perpendicular to walk, curb, header board, etc., for easy access.

3. Install one (1) remote control valve per valve box. Provide extension units as required so as valve is protected by adjacent native soil. Install valve boxes in shrub planting areas whenever possible.

4. Provide eighteen (18) inch expansion loop at all electrical connections within control valve boxes.

5. Install a T.Christy I.D. tag on all valves identifying the Satellite Controller Assembly and station number of the valve. Attach the identification tag to the valve stem using a nylon cable tie.

I. Two Wire Decoder Cable
   1. Install control wiring in the same trench and along the same route as the pressure supply line whenever possible.
   2. Decoder Cable shall be installed in PVC Schedule 40 conduit.
   3. Provide an eighteen (18) inch expansion curl in valve boxes, pull boxes and splice boxes.
   4. Decoder Cable shall be field tested to verify continuity.
   5. Two Wire Decoder Cable Splices allowed only on runs of more than 500 feet except where otherwise indicated on the drawings.
   6. An expansion curl shall be provided within three (3) feet of each wire connection. Expansion curl shall be of eighteen (18) inches in length at each splice connection and at each remote control valve, so that in case of repair, the valve bonnet or splice may be brought to the surface without disconnection of the control wires.
   7. All splices shall be made in either a valve box or a splice box.
   8. All control wire splices shall be made with waterproof connectors that use a mechanical clamp.
   9. Use one waterproof connector per splice.

J. Conduit

   1. Install remote control wire in PVC Schedule 40 conduit.

   2. The ends of the conduits, whether shop or field cut, shall be reamed to removed burrs and rough edges. Cuts shall be made square and true.

   3. Install conduit couplers on pipe ends when in direct contact with remote control wires.

   4. The ends of the conduit shall be capped until the pulling of wiring is started. Conduit shall be free of soil and debris.

   5. Conduit bends, except factory bends, shall have a radii of not less than six times the inside diameter of the conduit.

   6. Install pull boxes at changes in direction.

   7. Install pull boxes every 150’ along the conduit route. Remote control valve boxes, pull boxes used for changes in direction and splice boxes may be used to satisfy this requirement.

   8. Install pull tape in conduit for use in pulling subsequent wires..

K. Valve Boxes

1. Install valve boxes in shrub planter areas as indicated.

2. Install valve boxes as per details unless otherwise noted on plans.

3. Do not install more than three (3) valve boxes in any one single group.

L. Electrical Pull Boxes

1. Install electrical pull boxes at wire splice locations and as per details.

2. Install pull boxes at changes in direction and depth.

3. Install pull boxes every 150' along the conduit route.

M. Irrigation Heads

1. Install irrigation heads as detailed on the Drawings. Irrigation heads to be installed in this work shall be as per approved submittals.

2. Irrigation heads shall be installed plumb and vertical to finish grade unless otherwise noted on plan.

3. Replace all clogged nozzles with new nozzles.

4. Spacing of heads shall not exceed the maximum indicated on the Drawings. In no case shall the spacing exceed 95% of the maximum radius stated by the manufacturer.

5. Adjust radii and arch to obtain head to head coverage and to prevent over spray onto hardscape, buildings, signs, etc.

6. Swing joints shall be in accordance with the details and approved submittals.

7. Swing joints for heads shall be the same size as the inlet opening of the sprinkler body.

8. Add additional heads as needed to provide head to head coverage with no additional cost to the Engineer.

N. Emitters

1. Install per plans

O. Swing pipe

1. Install per plans

P. Lightning Arrestor
   1. Install per plans

SYSTEM ADJUSTMENT

A. The Contractor shall flush and adjust all irrigation heads for optimum performance and to prevent over-spray onto walks, windows, roadways, and buildings.

B. If it is determined that adjustments in the irrigation equipment shall provide proper and more adequate coverage, the Contractor shall make such adjustments after written approval by the City of Chico. Adjustments shall include changes in head locations, nozzle size and degrees of arc as required without additional contract costs.

C. If it is determined that any irrigation equipment is improperly installed, the contractor shall reinstall the equipment to conform to contract documents.

D. All irrigation heads shall be set perpendicular to finished grades unless otherwise designated on the Drawings.

TESTING OF THE IRRIGATION SYSTEM

A. The Contractor shall request the presence of the City of Chico at least two (2) working days in advance of observation.

B. Open Trench pipe observation.

C. Emitter Test

1. The initial emitter function test shall be performed prior to plant material installation.

2. Perform a emitter function test in the presence of the City of Chico to determine if the water coverage for plant materials is complete and adequate.

3. Furnish all materials and perform all work required to correct any inadequacies of coverage due to deviations from the Drawings or where the system has been willfully installed as indicated on the Drawings, when it is obviously inadequate without bringing this to the attention of the City of Chico.

WATER AUDIT

1. An audit will be performed per AB 1881 the State water conservation ordinance.

2. A emitter function test shall be performed as a part of an irrigation water audit and recommended adjustments to the irrigation system shall be made as a result of the findings of the water audit.

FINAL ACCEPTANCE

1. Upon completion of all project work, including maintenance period and warranty period, and water audit the City will, upon proper request, make an observation to determine final project acceptability.

2. Where observed work does not comply with the Plans and Specifications, replace rejected work and continue specified maintenance period until re-inspected by the City and determined to be acceptable. All replacement materials and installations shall be in accordance with the Plans and Specifications. Remove rejected work and materials immediately from project.

TEMPORARY REPAIRS

City of Chico reserves the right to make temporary repairs as necessary to keep the irrigation system in operating condition. The exercise of this right shall not relieve the Contractor of his responsibilities under the terms of the guarantee as herein specified.

MAINTENANCE

A. Provide maintenance as per SECTION 20 – EROSION CONTROL AND HIGHWAY PLANTING.

CLEAN-UP

Clean up shall be made as each portion of work progresses. Refuse and excess dirt shall be removed from site. All walks and paving shall be broomed or washed down, and any damage sustained to the work of others shall be repaired to original conditions acceptable to the City of Chico.

INSPECTION SCHEDULE

A. The Contractor shall be responsible for notifying the Engineer in advance for the following observations according to the time indicated:

1. Location of irrigation main lines, remote control valves– two (2) working days

2. Open trench observation - two (2) working days

3. Sprinkler head coverage test (after finish grade approval and prior to planting) - two (2) working days

4. End of Installation/Start of Plant Establishment - two (2) working days

5. Final Acceptance - two (2) working days

B. No site visits shall commence without all items noted in previous Observation Reports, either completed or remedied, unless such compliance has been waived. Failure to accomplish punch list tasks or prepare adequately for desired observations shall make the Contractor responsible for reimbursing the Engineer at his current billing rates per hour, plus transportation costs.

C. Normal progress observations shall be requested by the Contractor from the Engineer as per observations listed in specifications SECTION 20 – EROSON CONTROL AND HIGHWAY PLANTING

D. No final observation shall commence without Record Drawings. In the event the Contractor calls for an observation without Record Drawings, without completing previously noted corrections or without preparing the system for observations, he shall be responsible for reimbursing the City of Chico or Engineer at the hourly rate in effect at the time of the observation (plus transportation costs) for the inconvenience. No further observations will be scheduled until this charge has been paid.

B. MEASUREMENT AND PAYMENT

MEASUREMENT

Landscape Irrigation shall be measured as follows:

1. Water Point of Connection-Each
2. Backflow Preventer Assembly-Each
3. Controller-Each
4. Flow Sensing Assembly-Each
5. Isolation Valves-Each
6. Remote Control Valves (spray)-Each
7. Remote Control Valves (drip)-Each
8. 2-Wire Decoders-Each
9. Quick Coupler Valves-Each
10. PVC Mainline-Lineal Foot
11. PVC Lateral Lines- Lineal Foot
12. Conduit-Lineal Foot
13. Sleeving-Lineal Foot
14. Lightning Arrestor-Each
15. Pull Boxes-Each

16. Swing Pipe-Lineal Foot
17. Emitters-Each
18. Irrigation Head-Each
19. 2 Wire Decoder Cable-Lineal Foot
20. Water Audit-per Each

PAYMENT

The contract prices paid for the following shall include full compensation for all labor, materials, tools, equipment, incidentals, including Clean-up, and for doing all the work involved in the following, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer. Payment shall be on the following basis:

1. Water Point of Connection-per Each
2. Backflow preventer Assembly- per Each
3. Controller- per Each
4. Flow Sensing Assembly-Each
5. Isolation Valves- per Each
6. Remote Control Valves (spray)- per Each
7. Remote Control Valves (drip)- per Each
8. 2-Wire Decoders-Each
9. Quick Coupler Valves- per Each
10. PVC Mainline- per Lineal Foot
11. PVC Lateral Lines- per Lineal Foot
12. Conduit- per Lineal Foot
13. Sleeving- per Lineal Foot
14. Lightning Arrestor- per Each
15. Pull Boxes-Each
16. Swing Pipe - per Lineal Foot
17. Emitters- per Each
18. Irrigation Head- per Each
19. 2 Wire Decoder Cable-Lineal per Foot
20. Water Audit- per Each

Payment shall not relieve the Contractor from its obligations under the Contract; nor shall such payment be construed to be acceptance of any of the Work. Payment shall not be construed as the transfer of ownership of any equipment or material to the City. Responsibility of ownership shall remain with the Contractor who shall be obligated to store any fully or partially completed work or structure for which payment has been made; or replace any materials or equipment required to be provided under the Contract which may be damaged, lost, stolen or otherwise degraded in any way prior to acceptance of the Work.

Guarantee periods shall not be affected by any payment

Full compensation for installing one – 3 inch PVC conduit, one – 2 inch PVC conduit, one- 1 inch galvinized steel pipe, and one-4 inch galvanized steel pipe and the associated connections for the galvanized steel pipes to the concrete barrier as shown on the plans, shall be considered as included in the contract price paid per foot for concrete barrier (Type 732) and no separate compesation will be allowed therefor.

Full compensation for installing irrigation crossovers as shown on the plans, shall be considered as included in the contract price paid per foot for 6" conduit, 3" conduit, and 2" conduit, and no additional compensation will be allowed therefor.

100-1.03 PLANT ESTABLISMENT PERIOD

A. DESCRIPTION OF WORK

PART 1 - GENERAL

CONDITIONS

A. The general provisions of the Contract, including General and Supplementary Conditions and General Requirements (if any) apply to the work specified in this Section.

SCOPE OF WORK

A. Furnish all labor, material, equipment and services required to maintain landscape in a healthy growing condition and in a neat and attractive appearance throughout the maintenance period. Work specified in this section but is not limited to the following

QUALITY ASSURANCE

The Maintenance Contractor shall be experienced in horticulture and landscape maintenance, practices and techniques, and shall provide sufficient number of workers with adequate equipment to perform the work during the maintenance period.

MAINTENANCE PERIOD

A. Continuously maintain the entire project area during the progress of the work and during the ninety (90) calendar-day, maintenance period or until final acceptance of the project by the City.

B. Maintenance period shall not start until all elements of construction, planting and irrigation for the entire project are in accordance with Plans and Specifications. A prime requirement is that all sod and landscape areas shall be planted and that all sod areas shall show an even, healthy stand of sod. If such criteria is met to the

satisfaction of the City, a written notification shall be issued to establish the effective beginning date of maintenance period.

C. Any day of improper maintenance, as determined by the City, shall not be credited as an acceptable maintenance period day. The maintenance period shall be extended on a daily basis if the work is not in accordance to the Plans and Specifications. Project shall not be segmented into maintenance areas or phases, unless authorization of the City is obtained.

D. Maintenance shall continue beyond the ninety (90) day maintenance period, as required, until final acceptance is given by the City.

WARRANTY PERIOD

A. Replacement: Any materials found to be dead, missing, or not in a satisfactory or healthy condition during the maintenance period shall be replaced immediately. The Owner shall be sole judge as to the condition of material. Material to be replaced within the guarantee period shall be replaced by the Contractor within five (5) days of written notification by the Owner. All replacement materials and installations shall comply to the Plans and Specifications. Any plant missing due to suspected theft shall be replaced by the Contractor. If the Contractor suspects that theft may be a problem, the Contractor shall provide written documentation to the Owner that security on this site needs to be intensified. The Contractor may relieve himself of theft responsibility if after the security notice, with no result, a written notice to the Owner shall be given that plant material will not be replaced for theft or vandalism due to lack of site security being maintained. This procedure may take place only during the Landscape Maintenance Period.

.

B. Warranty: All plant material and other materials installed under the Contract shall be guaranteed against any and all poor, inadequate or inferior materials and/or workmanship for a period of one (1) year from the time of the end of maintenance. Any plant found to be dead or not in a satisfactory or healthy condition due to faulty materials, workmanship, or improper maintenance as determined by the, shall be replaced by the Contractor at his expense. Warranty period begins at the end of the Maintenance Period. Refer to Maintenance Specification, Section 20 – Erosion Control and Highway Landscaping.

OBSERVATION SCHEDULE

Normal progress observations shall be requested by the Contractor from the City as per observations listed in specifications SECTION 20 – EROSION CONTROL AND HIGHWAY LANDSCAPING

FINAL ACCEPTANCE OF THE PROJECT

A. Upon completion of all project work, including maintenance period and warranty period, the City will, upon proper request, make an observation to determine final project acceptability.

B. Where observed work does not comply with the Plans and Specifications, replace rejected work and continue specified maintenance period until re-inspected by the City and determined to be acceptable. All replacement materials and installations shall be in accordance with the Plans and Specifications. Remove rejected work and materials immediately from project. Prior to the date of final observation, Contractor shall provide the City with all Record Drawings and written Guarantee Statement in accordance with the Plans and Specifications.

PART 2 - PRODUCTS

MATERIALS

A. All materials used shall either conform to Specifications in other sections or shall otherwise be acceptable to the City. The City shall be given a monthly record of all herbicides, insecticides and disease control chemicals used.

PART 3 - EXECUTION

MAINTENANCE

A. General: Proper maintenance, including watering, weeding, , repairing and protection shall be required until entire project is finally accepted, but in any event for a period of not less than the specified maintenance period after planting.

B. Watering: Thoroughly water to insure vigorous and healthy growth until work is accepted. Water in a manner to prevent erosion due to application of excessive quantities of water. When hand watering use a water wand to break the water force.

C. Weeding: Keep plant basins and areas between plants free of weeds. Control weeds with pre-emergent herbicides. If weeds develop, use legally approved herbicides. Avoid frequent soil cultivation that destroys shallow roots. Weeding also shall be included in all paved areas including public sidewalks.

D. Pruning of new plant material

1. Prune only as directed by the City Urban Forester.

E. Staking: Stakes shall remain in place through
the maintenance period (90 days) and shall be inspected and adjusted to prevent rubbing that causes bark wounds.

F. Insect, Animal, Rodent and Disease Control: Maintain proper control with legally approved materials as required as part of the Contract.

G. Protection: The Contractor shall maintain protection of the planted areas. Damaged areas shall be repaired or replaced at the Contractor's expense.

H. Trash: Remove trash weekly in all planted areas, pedestrian walkways and plazas.

I. Replacement: As per Guarantee and Replacement Specifications of this Section.

IRRIGATION SYSTEM

A. System Observation: The Contractor shall check all systems for proper operation. Lateral lines shall be flushed out after removing the last sprinkler head or two at each end of the lateral. All heads are to be adjusted as necessary for unimpeded coverage.

B. Controllers: Set and program automatic controllers per plans. Give the City instructions on how to turn off system in case of emergency.

C. Repairs: Repair all damages to irrigation system at the Contractor's expense. Repairs shall be made within twenty-four (24) hours.

B. MEASUREMENT AND PAYMENT

MEASUREMENT

A. Plant Establishment Period shall be measured per square foot.

PAYMENT

A. The contract price paid per Square Foot for the plant establishment period shall include full compensation for all labor, materials, tools, equipment, and incidentals, clean up and for doing all the work involved in Plant Establishment Period and as shown on the plans, as specified in the Standard Specifications, and these Special Provisions, and as Directed by the Engineer.

100-1.04 RAISED PLANTER WALLCAP

A. DESCRIPTION OF WORK

SCOPE OF WORK

A. Provide all labor, materials, and equipment required to complete the unit masonry work as indicated on the Drawings and/or specified herein.

B. Work includes, but is not limited to the following:

1. Installation of mortared in place raised planter wall caps

2. Installation of all required fasteners, anchors and accessories.

3. Cleaning of raised planter wall caps.

C. Related work specified in other sections:

1. Section 90 – Portland Cement Concrete of the Standard Specifications and these Special Provisions

QUALITY ASSURANCE

A. Material and installation standards: Comply with recommendations of the Brick Institute of America (BIA) standards; National Concrete Masonry Association standards; and ASTM standards.

B. Verify all measurements indicated on Drawings by taking field measurements; proper fit and attachment of all units is required.

C. Accurately fit, cut, and securely mortar together all units to produce a rigid installation.

D. All work and materials shall comply with Uniform National Building Codes (latest edition), and all other applicable codes and ordinances that govern the work of this Section.

QUALIFICATION OF INSTALLERS

Installers shall be trained and experienced in the skills required and shall be completely familiar with the materials and their installation. Qualified installers shall be present at all times during the progress of work.

COORDINATION

Coordinate with all other trades whose work relates to unit masonry installation for placing all required reinforcements, fasteners, anchor, accessories, etc.

SUBMITTALS

A. Submit for Engineer's written approval two (2) representative samples of each unit specified.

B. Submit manufacturer's certificate that units meet or exceed material specifications.

C. Submit 6 (six) copies of Manufacturer's Specifications for each unit specified.

REDUCTION CLAUSE

B. Section 4-1.03B of the Standard Specifications shall not apply to Masonry measurement and bid items. The City reserves the right to increase or decrease the quantities in excess of 25% and no additional compensation will be allowed therefor.

PROPRIETARY CLAUSE

A. Proprietary brand names are shown for illustrative purposes only. Equal products will be considered by the City and may be used by the contractor upon approval by the City.

PRODUCTS

MASONRY MORTAR

A. ASTM C-270, Type M, consisting of one (1) part cement and three (3) parts sand with quarter (1/4) part lime.

B. LATICRETE 3701 Grout and Mortar Admix.

C. Mortar compressive strength at 28 days shall be 3000 PSI.

RAISED PLANTER WALL CAPS

A. Per plans and manufacturer's specifications

B. LATICRETE 3701 Grout and Mortar Admix.

C. Grout compressive strength at 28 days shall be 3000 PSI.

CONCRETE:

1. Section 90 – Portland Cement Concrete of the Standard Specifications and these Special Provisions

PART 3 - EXECUTION

GENERAL

A. Supply anchor devices as indicated on the Drawings and as required to install materials as specified in other sections of work.

B. Cut units where required with a power saw or order units pre-cut from manufacturer.

C. Construct masonry construction to the full thickness indicated on the Drawings, using unit sizes as indicated.

D. Establish lines, levels, and coursing. Protect from disturbances.

COURSING

A. Install units in pattern as indicated on the Drawings.

C. Maintain unit courses to uniform width. Make vertical and horizontal joints equal and of uniform thickness.

PLACING AND BONDING

A. Lay units in full bed of mortar properly jointed with other work.

B. Install full mortar coverage of vertical and horizontal face of joints. Maintain uniform joint width of 3/8" - 1/2", depending on nominal unit sizes. Cut joints flush and tool slightly concave.

C. Fully bond intersections and external and internal corners.

D. Do not shift or tap units after mortar has taken initial set. Where adjustment must be made remove mortar and replace.

E. Remove excess mortar.

RAISED PLANTER WALL CAPS

A. Install raised planter wall Caps, or approved equal as per Manufacturer's Specifications.

CURING AND PROTECTION

A. Provide thorough curing of joints.

B. Protect newly laid masonry from exposure to precipitation, excessive drying, freezing, soiling, backfill and other harmful elements.

CLEANING

A. Brush off excess mortar as work progresses. Dry-brush masonry at end of each day's work.

B. Clean masonry with cleaners and methods approved by masonry units manufacturer.

C. Rinse walls by washing off cleaning solution, dirt and mortar using clean, pressurized water.

D. Repair damage to adjacent materials that occurs during cleaning operation at no additional cost to the Owner.

B. <u>MEASUREMENT AND PAYMENT</u>

MEASUREMENT

Raised planter wall cap shall be measured per linear foot of cap, as measured in the center of the cap.

PAYMENT

The contract price paid per Lineal Foot for raised planter wall cap shall include full compensation for furnishing all labor, materials, tools, equipment, incidentals, clean up and for doing all the work involved in raised planter wall cap, complete and in place and as shown on the plans, as specified in the standard Specifications and as directed by the Engineer.

100-1.05 RAISED PLANTER WALLS

A. DESCRIPTION OF WORK

PART 1 - GENERAL

SCOPE OF WORK

A. Provide all labor, materials, and equipment required to complete the construction of cast-in-place concrete raised planter walls including forming, reinforcement and all other work required to produce a finished project in accordance with the Drawings and Standard Specifications and as specified in these special provisions.

B. Work includes, but is not limited to the following:

1. Construction of forms

2. Installation of reinforcement.

3. Placement of poured in place concrete raised planter walls

4. Application of waterproofing.

C. Related work specified in other sections:

1. Section 90 – Portland Cement Concrete of the Standard Specifications and these Special Provisions

2. Section 52 – Reinforcement of the Standard Specifications and these Special Provisions.

QUALITY ASSURANCE

A. Comply with ASTM A-615 "Standard Specifications for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement," and "Manual of Standard Practice for Detailing Reinforced Concrete Structures," publication ACI 315-65 of the American Concrete Institute.

B. Comply with all pertinent recommendations contained in American Concrete Institute (ACI), "Recommended Practice of Concrete Formwork, ACI-347."

C. Construct forms to sizes, shapes, lines and dimensions indicated on Drawings, and to obtain accurate alignment, location, grades, level and plumb work in finished structures.

B. Provide complete forms of such strength and construction as to prevent any spread, shifting, or settling when concrete is deposited, and tight enough to avoid any leakage or washing out of cement mortar.

F. Submit to project Landscape Architect a 24 inch square mock up of raised planter wall with colored concrete and form liner finish for approval. Additional samples may be required if sample does not adequately conform to requirements

JOB CONDITIONS

A. Temperature: All concrete design mixes and methods of protecting concrete shall be resubmitted to the City of Chico for review when the following temperatures are anticipated:

1. The temperature is below 40° F, or when conditions indicate that the temperature will fall below 40° F within seventy-two (72) hours.

2. The placing temperature of the concrete is, or anticipated to be, above 80° F.

COORDINATION

A. Secure all pipe sleeves, anchors and bolts, including those for angle frames, inserts, ties and other materials in connection with concrete construction, in position before concrete is placed.
B. Make cutting and/or patching made necessary by failure or delay in complying with these requirements at no cost to the Owner.

FORM CONSTRUCTION TOLERANCES

A. Set form to required grades and lines, rigidly braced and secured. Install sufficient quantity of forms to allow continuous progress of work so that forms can remain in place at least twenty-four (24) hours after concrete placement.

B. Check completed form work for grade and alignment to following tolerances:

1. Top of forms not more than one-eighth (1/8) inch in ten (10) feet vertical elevation.

2. Vertical face on longitudinal axis not more than one-fourth (1/4) inch in ten (10) feet horizontal width.

REDUCTION CLAUSE

C. Section 4-1.03B of the Standard Specifications shall not apply to Masonry measurement and bid items. The City reserves the right to increase or decrease the quantities in excess of 25% and no additional compensation will be allowed therefor.

PROPRIETARY CLAUSE

A. Proprietary brand names are shown for illustrative purposes only. Equal products will be considered by the City and may be used by the contractor upon approval by the City.

PART 2 PRODUCTS

CONCRETE REINFORCEMENT

1. Section 52 – Reinforcement of the Standard Specifications and these Special Provisions.
2. Reinforcing Bars: Deformed billeted steel bars, ASTM A-615, grade 40 or grade 60.

B. Tie Wires: Black annealed, ASTM A-82 minimum 16 gauge.

CONCRETE FORM MATERIALS

A. Forms for exposed Finish Concrete: Form concrete surfaces which will be unexposed with plywood, lumber, metal or other acceptable material. Provide lumber dressed on at least two (2) edges and on one side for tight fit that is fir or pine, No. 2 common or better.

B. Chamfer Exposed Corners and Edges: Chamfer exposed corners and edges as indicated on Drawings using wood chamfer strips fabricated to produce uniform smooth lines and tight edge joints.

C. Radius Exposed Corners: Apply concrete radius tooled edges to exposed concrete corners as dimensioned and sized on Drawings.

D. Rough Hardware: Pipe, conduit, bolts, anchors, etc., as indicated on Drawings or needed shall be furnished and set.

E. Chamfer Horizontal Reveal: Chamfer concrete wall horizontal reveals, as indicated on Drawings, using wood chamfer strips fabricated to produce uniform smooth lines and tight edge joints.

F. Form liners: as indicated on plans

CONCRETE

1. Section 90 – Portland Cement Concrete of the Standard Specifications and these Special Provisions

A. Concrete Mix:

1. Mix concrete in accordance with ASTM C-94 and with aggregates complying with ASTM C-33 and Portland Cement ASTM C-150, Type II.

2. All concrete mixes shall be designed by a testing laboratory approved by the City of Chico. All mixes shall conform to applicable building code requirements listed herein or on the Drawings.

3. Concrete shall be as specified:

Item	Lbs Portland Cement per cu.yd Concrete	28-Day Max. Minimum Strength	Agg Size
Footings and Walls	564 lb/cu. yd.	3,000 PSI	3/4 in.

4. Consistency of Concrete: Concrete slump shall fall within the following limits:

   a. Four inches plus or minus one inch

5. Integral colored concrete, rate, type and manufacturer as per plans

WATERPROOFING

A. All walls below grade shall be waterproofed on the inside extending from the foundation to finish grade prior to placement of bark.

B. Install in conformance with manufacturer's specifications.

PART 3 - EXECUTION

CONCRETE REINFORCEMENT PLACEMENT

A. Fabricate reinforcement in accordance with ACI-315, providing a minimum concrete cover of two (2) inches.

B. Place all reinforcement in the exact position shown on the Drawings and secure in position during the placing and compacting of concrete. Wire bars together with No.16 gauge wire with ties at all intersections except where spacing is less than twelve (24) inches in each direction, in which case tie alternate intersections.

C. Overlap rebar a total of 24” and tie

CONCRETE FORMWORK CONSTRUCTION

A. Construct support, brace and maintain formwork to support vertical and lateral loads that might be applied until such loads can be supported by concrete.

B. Contractor assumes full responsibility in the removal of forms. The length of time forms must remain in place depends on the rate of time required for concrete to obtain a proper strength. Remove forms after the concrete is sufficiently hard to prevent damage to concrete.

C. Reuse of Forms:

1. Do not reuse forms if there is any evidence of surface wear or defect which would impair quality of surface.

2. Thoroughly clean and properly coat forms before reuse.

D. Form liners: attach to the inside of forms per manufacturer's specifications producing the effect as shown and located on the plans

E. Field Quality Control:

1. Observe formwork continuously while concrete is being placed to see that there are no deviations from desired elevation, alignment, plumbness or camber.

CONCRETE PLACEMENT AND FINISHES

A. Placing Concrete:

1. Place concrete in accordance with ACI-304 and Section 2605 of the Uniform Building Code. Immediately after depositing, compact concrete thoroughly by mechanical vibration. No vibrating of form is allowed. Mixing shall be continuous, with no interruptions from the time the truck is filled until the time it is emptied. Concrete shall be placed within one hour of the time water is first added.

2. Insure anchors, seats, plates, and other items to be cast into concrete are placed, held securely and will not cause hardship in placing concrete.

3. Insure reinforcement, inserts, embedded parts, etc. are not disturbed during concrete placement.

4. Pour concrete continuously between predetermined construction and control joints. Do not break or interrupt successive pours such that cold joints occur, unless otherwise indicated on the Drawings.

5. Lines and Grades: Elevations requiring accurate placement shall be set by a competent instrument man, using a professional type instrument.

6. Sand or aggregate shall be wet and compacted prior to placing.

7. Before placing concrete mixing, conveying and finishing equipment, forms and reinforcing shall be well-cleaned. Wet form before placing concrete,.
8. Install integral concrete color per manufacturer's specifications and as indicated on the plans

B. Concrete Finishing

1. Walls: After concrete has been placed, consolidate, strike off and screed uniformly to the required grades. Walls shall have form finish or form liner finish as shown on plans. Remove forms at the time recommended by manufacturer's recommendations

C. Curing and Protection

1. Beginning immediately after placement, protect concrete from premature drying, from excessively hot or cold temperatures, and from mechanical injury. Maintain concrete with minimal moisture loss at relatively constant temperature for a period necessary for hydration of cement and hardening of concrete. Hairline fissures and cracks developed in first ninety (90) days shall result in replacement of concrete.

D. Water Proofing
1. Place waterproofing where raised planter backfill will be in contact with the raised planter wall and as shown on the plans

OBSERVATION SCHEDULE

A. Normal progress observations shall be requested by the Contractor from the City of Chico. Contractor to request the followings observations:

1. Observation of chalked layout prior to constructing forms.
2. Observation of forms prior to placing of concrete
3. Observation of concrete for, at a minimum conformance to approved sample and for structural and aesthetic defects.

B. MEASUREMENT AND PAYMENT

MEASUREMENT

1. Raised planter wall footing shall be measured per linear foot of footing.

2. Front Raised Planter wall shall be measured per square foot of wall surface.

3. Back Raised Planter wall shall be measured per square foot of wall surface.

PAYMENT

1. The contract price paid per Lineal Foot for raised planter wall footings shall include full compensation for furnishing all labor, materials, tools, equipment, incidentals, clean up and for doing all the work involved in raised planter wall footings, complete and in place and as shown on the plans, as specified in the standard Specifications and as directed by the Engineer.

2. The contract price paid per square foot for front raised planter wall shall include full compensation for furnishing all labor, materials, tools, equipment, incidentals, clean up and for doing all the work involved in front raised planter wall, complete and in place and as shown on the plans, as specified in the standard Specifications and as directed by the Engineer

3. The contract price paid per square foot for back raised planter wall shall include full compensation for furnishing all labor, materials, tools, equipment, incidentals, clean up and for doing all the work involved in front raised planter wall, complete and in place and as shown on the plans, as specified in the standard Specifications and as directed by the Engineer

-END OF SECTION-

101. ELECTRICAL SYSTEMS

101-1.01 DESCRIPTION

Modify signal and lighting (Location 1), (Location 2), interconnection conduit and cable, signal and lighting (temporary), and maintaining existing traffic management system elements during construction shall conform to the provisions in Section 86, "Electrical Systems," of the Standard Specifications and these special provisions.

Traffic signal work shall be performed at the following locations:

A. SR32/Forest Avenue (Location 1)
B. SR32/El Monte Avenue (Location 2)

101-1.02 COST BREAK-DOWN

Cost break-downs shall conform to the provisions in Section 86-1.03, "Cost Break-Down," of the Standard Specifications and these special provisions.

The Engineer shall be furnished a cost break-down for each contract lump sum item of work described in this Section 10-3.

The cost break-down shall be submitted to the Engineer for approval within 15 days after the contract has been approved. The cost break-down shall be approved, in writing, by the Engineer before any partial payment for the items of electrical work will be made.

The cost break-down shall include the following items in addition to those listed in the Standard Specifications:

A. Countdown pedestrian signals

101-1.03 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS

It is the contractor's responsibility to ensure that existing intersection lighting and other electrical systems to remain shall remain operational during the construction and upon the completion of the project. This includes replacing lamps as necessary on new or existing systems and immediate repair of any system damaged during construction.

Shut down of existing signals must take place within the work windows provided on the lane closure charts (PM 10.66 to 11.3). Existing, new or temporary signals must be in operation outside of the designated work windows.

At least three working days prior to performing any work on each existing system, the Contractor shall notify the Department of Transportation, Electrical and Signal Maintenance Superintendent.

101-1.04 MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION

Traffic Management System (TMS) elements include, but are not limited to ramp metering (RM) system, communication system, traffic monitoring stations, video image vehicle detection system (VIVDS), microwave vehicle detection system (MVDS), loop detection system, changeable message sign (CMS) system, extinguishable message sign (EMS) system, highway advisory radio (HAR) system, closed circuit television (CCTV) camera system, roadway weather information system (RWIS), visibility sensor, and fiber optic system.

Existing TMS elements, including detection systems, identified on the plans and located within the project limits shall remain in place and be protected from damage. If the construction activities require existing TMS elements to be nonoperational or off line, and if temporary or portable TMS elements are not shown on the plans, the Contractor shall provide for temporary or portable TMS elements. The Contractor shall receive the Engineer's approval on the type of temporary or portable TMS elements and installation method.

Before work is performed, the Engineer, the Contractor, and the Department's Traffic Operations Electrical representatives shall jointly conduct a pre-construction operational status check of all existing TMS elements and each element's communication status with the Traffic Management Center (TMC), including existing TMS elements that are not shown on the plans and elements that may not be impacted by the Contractor's activities. The Department's Traffic Operations Electrical representatives will certify the TMS elements' location and status, and provide a copy of the certified list of the existing TMS elements within the project limits to the Contractor. The status list will include the operational, defined as having full functionality, and the nonoperational components.

The Contractor shall obtain written approval from the Engineer at least 72 hours before interrupting existing TMS elements' communication with the TMC that will result in the elements being nonoperational or off line. The Contractor shall notify the Engineer at least 72 hours before starting excavation activities.

Traffic monitoring stations and their associated communication systems, which were verified to be operational during the pre-construction operational status check, shall remain operational on freeway/highway mainline at all times, except:

1. For a duration of up to 60 days on any continuous segment of the freeway/highway shorter than 3 miles

If the construction activities require existing detection systems to be nonoperational or off line for a longer time period or the spacing between traffic monitoring stations is more than the specified criteria above, and temporary or portable detection operations are not shown on the plans, the Contractor shall provide provisions for temporary or portable detection operations. The Contractor shall receive the Engineer's approval on the type of detection and installation before installing the temporary or portable detection.

If existing TMS elements shown on the plans or identified during the pre-construction operational status check, except traffic monitoring stations, are damaged or fail due to the Contractor's activity, where the elements are not fully functional, the Engineer shall be notified immediately. If the Contractor is notified by the Engineer that existing TMS elements have been damaged, have failed or are not fully functional due to the Contractor's activity, the damaged or failed TMS elements, excluding structure-related elements, shall be repaired or replaced, at the Contractor's expense, within 24 hours. For a structure-related elements, the Contractor shall install temporary or portable TMS elements within 24 hours. For nonstructure-related TMS elements, the Engineer may approve temporary or portable TMS elements for use during the construction activities.

The Contractor shall demonstrate that repaired or replaced elements operate in a manner equal to or better than the replaced equipment or as directed by the Engineer. If the Contractor fails to perform required repairs or replacement work, as determined by the Engineer, the State may perform the repair or replacement work and the cost will be deducted from monies due to the Contractor.

A TMS element shall be considered nonoperational or off line for the duration of time that active communications with the TMC is disrupted, resulting in messages and commands not transmitted from or to the TMS element.

The Contractor shall provide provisions for replacing existing TMS elements within the project limits, including detection systems, that were not identified on the plans or during the pre-construction operational status check that became damaged due to the Contractor's activities.

If the pre-construction operational status check identified existing TMS elements, then the Contractor, the Engineer, and the Department's Traffic Operations Electrical representatives shall jointly conduct a post construction operational status check of all existing TMS elements and each element's communication status with the TMC. The Department's Traffic Operations Electrical representatives will certify the TMS elements' status and provide a copy of the certified list of the existing TMS elements within the project limits to the Contractor. The status list will include the operational, defined as having full functionality, and the nonoperational components. TMS elements that cease to be functional between pre and post construction status checks shall be repaired at the Contractor's expense and as directed by the Engineer.

The Engineer will approve, in writing, the schedule for final replacement, the replacement methods and the replacement elements, including element types and installation methods before repair or replacement work is performed. The final TMS elements shall be new and of equal or better quality than the existing TMS elements.

PAYMENT

The contract lump sum price paid for maintaining existing traffic management system elements during construction shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in maintaining existing traffic management system elements as shown on the plans, specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

If no electrical work exists on the project and no TMS elements are identified within the project limits, the pre-construction operational status check will be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

Furnishing and installing temporary or portable TMS elements that are not shown on the plans, but are required when an existing TMS element becomes nonoperational or off line due to construction activities, will be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

Furnishing and installing temporary or portable TMS elements and replacing TMS elements that are not shown on the plans nor identified during the pre-construction operational status check and were damaged by construction activities will be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

If the Contractor is required to submit provisions for the replacement of TMS elements that were not identified, the provisions will be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

101-1.05 CAST-IN-DRILLED-HOLE CONCRETE PILE FOUNDATIONS

GENERAL

Summary

This work includes constructing cast-in-drilled-hole concrete pile foundations for traffic signal and lighting standards.

Comply with Section 86-2.03, "Foundations," of the Standard Specifications and “Piling” of these special provisions.

MATERIALS

Concrete must contain not less than 590 pounds of cementitious material per cubic yard.

CONSTRUCTION

For standards located in sidewalk areas, the pile foundation must be:

1. Placed to final sidewalk grade before the sidewalk is placed
2. Square for the top 4 inches

PAYMENT

Payment for cast-in-drilled-hole concrete pile foundations shall conform to the provisions in Section 86-8, "Payment," of the Standard Specifications.

101-1.06 STANDARDS, STEEL PEDESTALS, AND POSTS

Standards, steel pedestals, and posts for traffic signal and lighting standards shall conform to the provisions in Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Steel bolts not designated on the plans as high-strength (HS) or stainless steel shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

Anchor bolts shall conform to the requirements in ASTM Designation: F 1554, Grade 36. High-strength (HS) anchor bolts shall conform to the requirements in ASTM Designation: F 1554, Grade 105.

Where the plans refer to the side tenon detail at the end of the signal mast arm, the applicable tip tenon detail may be substituted.

The sign mounting hardware shall be installed at the locations shown on the plans.

Street name signs shall be installed on signal poles directly above the mast arm connection. The sign panel shall be leveled and hardware securely tightened.

Handhole reinforcement rings for standards, steel pedestals, and posts shall be continuous around the handholes except 1-B poles.

PAYMENT

Full compensation for Standards, Steel Pedestals, and Post is included in the contract lump sum price paid for signal and lighting, and no separate payment will be made therefor.

101-1.07 CONDUIT

Conduit to be installed underground shall be Type 3 unless otherwise specified.

The conduit in a foundation and between a foundation and the nearest pull box shall be Type 3.

When a standard coupling cannot be used for joining Type 1 conduit, a UL-listed threaded union coupling conforming to the provisions in Section 86-2.05C, "Installation," of the Standard Specifications, or a concrete-tight split coupling, or concrete-tight set screw coupling shall be used.

When Type 3 conduit is placed in a trench (not in pavement or under portland cement concrete sidewalk), after the bedding material is placed and the conduit is installed, the trench shall be backfilled to not less than 4 inches above the conduit with minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," of the Standard Specifications, except the concrete shall contain not less than 421 pounds of cementitious material per cubic yard. The remaining trench shall be backfilled to finished grade with backfill material.

Conduit runs shown on the plans to be located behind curbs may be installed in the street, within 3 feet of, and parallel with the face of the curb, by the trenching in pavement method in conformance with the provisions in Section 86-2.05C, "Installation," of the Standard Specifications. Pull boxes shall be located behind the curb or at the locations shown on the plans.

After conductors have been installed, the ends of conduits terminating in pull boxes, service equipment enclosures, and controller cabinets shall be sealed with an approved type of sealing compound.

At those locations where conduit is required to be installed under pavement and underground facilities designated as high priority subsurface installation under Govt Code § 4216 et seq. exist, conduit shall be placed by the trenching in pavement method in conformance with the provisions in Section 86-2.05C, "Installation," of the Standard Specifications.

At other locations where conduit is required to be installed under pavement and if a delay to vehicles will not exceed 5 minutes, conduit may be installed by the "Trenching in Pavement Method."

101-1.08 CONDUCTORS, CABLES, AND WIRING

Splices shall be insulated by "Method B" .

Conductors shall be wrapped around projecting end of conduit in pull boxes, as shown on the plans. Cables shall be secured to the projecting end of conduit in pull boxes to prevent pulling of cables without removing the securing device.

Signal Interconnect Cable (SIC) shall be the 6-pair type.

101-1.09 PULL BOXES

Pull boxes shall be the non-PCC type when located in unpaved areas except adjacent to a standard.

A pull box marker shall be placed at each pull box located in unpaved areas except adjacent to a standard. Markers shall comply with Type K-2 as shown on Standard Plan Sheet A73A except no retroreflective sheeting will be required. A State-furnished non-reflective green identification strip shall be applied to each marker.

Full compensation for furnishing and installing pull box markers and applying_State-furnished non-reflective green identification strips shall be considered as included in the contract lump sum price paid for the electrical work requiring the pull box marker and no additional compensation will be allowed therefor.

101-1.10 SERVICE

Circuit breakers shall be the cable-in/cable-out type, mounted on non-energized clips. All circuit breakers shall be mounted vertically with the up position of the handle being the "ON" position.

Each service shall be provided with up to 2 main circuit breakers which shall disconnect ungrounded service entrance conductors. Where the "Main" circuit breaker consists of 2 circuit breakers as shown on the plans or required in the special provisions, each of the circuit breakers shall have a minimum interrupting capacity of 10,000 A, rms.

101-1.11 NUMBERING ELECTRICAL EQUIPMENT

Self-adhesive reflective numbers shall be Contractor-furnished.

The numbers shall be placed on the equipment where designated by the Engineer.

Reflective numbers shall be applied to a clean surface. Where shown on the plans, self-adhesive equipment numbers shall be placed for all electroliers,sign lighting, and service pedestals. On service pedestals, the numbers shall be placed on the front door. On electroliers, the numbers shall be placed as shown on the plans.

101-1.12 STATE-FURNISHED CONTROLLER ASSEMBLIES

The Model 2070 controller assemblies, excluding anchor bolts, will be State-furnished as provided under "Materials" of these special provisions.

The Contractor shall construct each controller cabinet foundation as shown on the plans for Model 332L cabinets (including furnishing and installing anchor bolts), shall install the controller cabinet on the foundation, and shall make field wiring connections to the terminal blocks in the controller cabinet.

A listing of field conductor terminations, in each State-furnished controller cabinet, will be furnished free of charge to the Contractor at the site of the work.

State forces will maintain controller assemblies. The Contractor's responsibility for controller assemblies shall be limited to conforming to the provisions in Section 6-1.02, "State-Furnished Materials," of the Standard Specifications.

101-1.13 332L CABINET DRAWER SHELF ASSEMBLY

Contractor shall supply a drawer shelf assembly to fit Caltrans 332L cabinets. The drawer shelf assembly shall be equivalent to Safetran Traffic Systems Part Number 083266M332L-00 or as shown in TEES dated November 19, 1999.

The drawer shelf assembly shall fit in a standard 19-inch rack and be a standard 1 ¾ inch high assembly. Two slide rails shall mount to right angle brackets on each side extending four inches from each rail to provide support for a controller. The right angle bracket shall be of such a length that each side mounts between the front and rear rails of the 332L cabinet. The drawer shelf unit shall be mounted on the two rail slides extending a minimum of 14 inches beyond the front mounting rail. The drawer dimensions shall be a minimum 13 inches deep, 17/16 inches thick, and the width is such that the sides are attached to the two rail slides. A top cover shall be provided which shall swivel or be hinged at the back. A means to easily grasp and lift the cover shall be provided. A mat of at least 1/16” thickness foam plastic material shall cover the outside top portion of the lid where objects such as a notebook computer may be placed. The material of the drawer assembly shall be comparable to other components in the 332L cabinet.

101-1.14 LIGHT EMITTING DIODE SIGNAL MODULE

GENERAL

Summary

This work includes installing LED signal module. Comply with Section 86, "Electrical Systems," of the Standard Specifications.

Use LED signal module as the light source for the following traffic signal faces:

1. 12-inch section
2. 12-inch arrow section

Submittals

Before shipping LED signal modules to job site, submit the following to the Transportation Laboratory:

1. Delivery form including district number, EA, and contact information
2. List containing all LED signal module serial numbers anticipated for use
3. LED signal modules

Quality Control and Assurance

Module must be one listed on the Pre-Qualified Products List for LED traffic signals at:

http://www.dot.ca.gov/hq/esc/approved_products_list

The State will test LED signal module shipments as specified in ANSI/ASQ Z1.4.. Testing will be completed within 30 days of delivery to the Transportation Laboratory. LED signal modules tested or submitted for testing must be representative of typical production units. LED and circular LED signal modules will be tested as specified in California Test 604. Arrow LED signal modules will be tested as specified in California Test 3001. All parameters of the specification may be tested on the modules. LEDs must be spread evenly across the module. LED arrow indication must provide the minimum initial luminous intensity listed. Measurements will be performed at the rated operating voltage of 120 V(ac).

Delays resulting from submittal of non-compliant materials do not relieve you from executing the contract within the allotted time. Non-compliant materials will be rejected. You must resubmit new LED for retesting and pick up the failed units within 7 days of notification. You must provide new LED signal modules and allow a minimum of 30 days for the retest. You must pay for all shipping and handling costs related to testing and retesting. Delays resulting from resubmittal and retesting are your responsibility and no extra time will be allowed.

After testing, you must pick up the tested LED signal modules from the Transportation Laboratory and deliver to the job site.

Warranty

The manufacturer must provide a written warranty against defects in materials and workmanship for LED signal modules for a minimum period of 48 months after installation of LED signal modules. Replacement LED signal modules must be provided within 15 days after receipt of failed LED modules at your expense. The State pays for shipping the failed modules to you. All warranty documentation must be submitted to the Engineer before installation. Replacement LED signal modules must be delivered to State Maintenance Electrical Shop at 11325 Sanders Dr., Rancho Cordova 95742.

MATERIALS

Minimum power consumption for LED signal module must be 5 W.

LED signal module must have an operational lifecycle rating of 48 months. During the operational lifecycle, LED signal module must meet all parameters of this specification.

LED signal module must be designed for installation in the door frame of standard traffic signal housing.

LED signal module must:

1. Be 4 pounds maximum weight
2. Be manufactured for 12-inch circular and arrow section
3. Be from the same manufacturer
4. Be the same model for each size
5. Be sealed units with:

    5.1. 2 color-coded conductors for power connection, except for lane control LED signal modules use 3 color-coded conductors.
    5.2. Printed circuit board and power supply contained inside and complying with Chapter 1, Section 6 of TEES published by the Department.
    5.3. Lens that is:

        5.3.1. Integral to the units
        5.3.2. Convex or flat with a smooth outer surface
        5.3.3. Made of UV stabilized plastic or glass, and withstands UV exposure from direct sunlight for 48 months without exhibiting evidence of deterioration

    5.4. 1-piece EPDM gasket

6. Include 3-foot long conductors with quick disconnect terminals attached
7. Be sealed in door frames
8. Fit into existing traffic signal section housing and comply with ITE publication, Equipment and Material Standards, Chapter 2, "Vehicle Traffic Control Signal Heads"

Individual LEDs must be wired so catastrophic loss or failure of 1 LED will not result in loss of more than 5 percent of the signal module light output. Failure of an individual LED in a string must not result in loss of entire string or other indication.

No special tools for installation are allowed.

12-inch Arrow

Comply with Section 9.01 of ITE publication, Equipment and Material Standards, Chapter 2, "Vehicle Traffic Control Signal Heads" for arrow indications.

LED signal module must:

1. Be weather tight and connect directly to electrical wiring.
2. Be capable of optical unit replacement.
3. Be a single, self-contained device, ready for installation into traffic signal housing.
4. Have manufacturer's name, trademark, model number, serial number, lot number, month and year of manufacture, and required operating characteristics, including rated voltage, power consumption, and volt-ampere, permanently marked on the back of the module.
5. Have a symbol of module type and color. Symbol must be an inch in diameter. Color must be written out in 0.50 inch high letters next to the symbol.
6. Be AlInGaP technology for red and yellow indications and gallium nitride technology for green indications.
7. Be ultra bright type rated for 100,000 hours of continuous operation from -40 °C to +74 °C.
8. Have a maximum power consumption as follows:

Power Consumption Requirements

LED Signal Module Type	Power Consumption (Watts)					
	Red		Yellow		Green	
	25 °C	74 °C	25 °C	74 °C	25 °C	74 °C
12-inch circular	11	17	22	25	15	15
12-inch arrow	9	12	10	12	11	11

Lens may be tinted, or may use transparent film or materials with similar characteristics to enhance "ON/OFF" contrasts. Tinting or other materials to enhance "ON/OFF" contrast must not affect chromaticity and must be uniform across the face of the lens.

If polymeric lens is used, surface coating or chemical surface treatment must be applied for front surface abrasion resistance.

Power supply must be integral to the module.

Internal components must be adequately supported to withstand mechanical shock and vibration from high winds and other sources.

Lens and LED signal module material must comply with the ASTM specifications for that material.

Enclosures containing either the power supply or electronic components of LED signal module, except lenses, must be made of UL94VO flame-retardant material.

If a specific mounting orientation is required, the LED signal module must have prominent and permanent vertical markings for accurate indexing and orientation within the signal housing. Markings must include an up arrow, or the word "UP" or "TOP."

LED signal module must meet or exceed the following values when operating at 25 °C:

Minimum Initial Intensities for Circular Indications (cd)

				12-inch		
Angle (v,h)				Red	Yellow	Green
2.5, ±2.5				399	798	798
2.5, ±7.5				295	589	589
2.5, ±12.5				166	333	333
2.5, ±17.5				90	181	181
7.5, ±2.5				266	532	532
7.5, ±7.5				238	475	475
7.5, ±12.5				171	342	342
7.5, ±17.5				105	209	209
7.5, ±22.5				45	90	90
7.5, ±27.5				19	38	38
12.5, ±2.5				59	119	119
12.5, ±7.5				57	114	114
12.5, ±12.5				52	105	105
12.5, ±17.5				40	81	81
12.5, ±22.5				26	52	52
12.5, ±27.5				19	38	38
17.5, ±2.5				26	52	52
17.5, ±7.5				26	52	52
17.5, ±12.5				26	52	52
17.5, ±17.5				26	52	52
17.5, ±22.5				24	48	48
17.5, ±27.5				19	38	38

Minimum Luminance for ArrowIndications (FL)

	Red	Yellow	Green
Arrow Indication	1,605	3,210	3,210

LED signal module must meet or exceed the following illumination values for 48 months when operating over a temperature range of -40 °C to + 74 °C. Yellow LED signal module must meet or exceed the following illumination values for 48 months, when operating at 25 °C:

Minimum Maintained Intensities for Circular Indications (cd)

Angle (v,h)				12-inch Red	12-inch Yellow	12-inch Green
2.5, ±2.5				339	678	678
2.5, ±7.5				251	501	501
2.5, ±12.5				141	283	283
2.5, ±17.5				77	154	154
7.5, ±2.5				226	452	452
7.5, ±7.5				202	404	404
7.5, ±12.5				145	291	291
7.5, ±17.5				89	178	178
7.5, ±22.5				38	77	77
7.5, ±27.5				16	32	32
12.5, ±2.5				50	101	101
12.5, ±7.5				48	97	97
12.5, ±12.5				44	89	89
12.5, ±17.5				34	69	69
12.5, ±22.5				22	44	44
12.5, ±27.5				16	32	32
17.5, ±2.5				22	44	44
17.5, ±7.5				22	44	44
17.5, ±12.5				22	44	44
17.5, ±17.5				22	44	44
17.5, ±22.5				20	41	41
17.5, ±27.5				16	32	32

Minimum Maintained Luminance for ArrowIndications (FL)

	Red	Yellow	Green
Arrow Indication	1,610	3,210	3,210

LED signal module must comply with the following chromaticity requirements for 48 months when operating over a temperature range of -40 °C to +74 °C.

Chromaticity Standards (CIE Chart)

Red	Y: not greater than 0.308, or less than 0.998 -x
Yellow	Y: not less than 0.411, nor less than 0.995 - x, nor greater than 0.452
Green	Y: not less than 0.506 - 0.519x, nor less than 0.150 + 1.068x, nor more than 0.730 - x

LED signal module must operate:

1. At a frequency of 60 Hz ± 3 Hz, over a voltage range from 95 V(ac) to 135 V(ac), without perceptible flicker to the unaided eye. Fluctuations of line voltage must have no visible effect on luminous intensity of the indications. Rated voltage for measurements must be 120 V(ac).
2. Compatible with currently used controller assemblies, including solid state load switches, flashers, and conflict monitors. Comply with TEES Chapters 3 and 6. If a 20 mA

alternating current or less is applied to the unit, the voltage read across the 2 leads must be 15 V(ac) or less.

Wiring and terminal block must comply with Section 13.02 of ITE publication, Equipment and Material Standards, Chapter 2, "Vehicle Traffic Control Signal Heads." Electrical connection for each Type 1 LED signal module must be 2 secured, color-coded, 3-foot long, 600 V(ac), 20 AWG minimum stranded jacketed copper wires. Wires must comply with NEC, rated for service at +105 °C.

LED signal module on-board circuitry must:

1. Include voltage surge protection to withstand high-repetition noise transients. The voltage surge protection must comply with NEMA Standard TS2, Section 2.1.6.
2. Comply with FCC, Title 47, SubPart B, Section 15 regulations for Class A emission limits for electronic noise.

LED signal module must provide a power factor of 0.90 or greater.

Total harmonic distortion from current and voltage induced into an alternating current power line by LED signal module must not exceed 20 percent at an operating temperature of 25 °C.

When power is applied to LED signal module, light emission must occur within 90 ms.

101-1.15 BATTERY BACKUP SYSTEM

GENERAL

Summary

This work includes installing battery backup system (BBS). Comply with Section 86, "Signals, Lighting and Electrical Systems," of the Standard Specifications and TEES.

The State will furnish BBS components as listed in "Materials" of these special provisions.

You must furnish the batteries.

Submittals

Before shipping external cabinets to the jobsite, submit material list including contract number, cabinet serial numbers, and contact information to the Transportation Laboratory.

Submit a Certificate of Compliance for each external cabinet and batteries to the Engineer under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Quality Control and Assurance

The State may test the cabinets.

Functional Testing

After complete installation, BBS functional test must be performed. Test for 30 minutes of continuous, satisfactory operation with utility power turned off. Perform test in the presence of the Engineer.

Warranty

Batteries must be warranted by the manufacturer to operate within a temperature range of -25 °C to +60 °C for 2 years.

Batteries must have a written warranty against defects in materials and workmanship from the manufacturer prorated for a period of 60 months after installation. You must provide the Engineer with all warranty documentation before installation. Replacement batteries must be available within 5 business days after receipt of failed batteries at no cost to the State except the cost of shipping the failed batteries. Replacement batteries must be delivered to Caltrans Maintenance Electrical Shop at 11325 Sanders Dr., Rancho Cordova 95742.

MATERIALS

Batteries must:

1. Be deep cycle, sealed prismatic, lead-calcium-based, absorbed-glass mat and valve-regulated lead acid (AGM/VRLA) type
2. Have voltage rating of 12 V
3. Be group size 24
4. Be commercially available and stocked locally
5. Have a carrying handle
6. Be marked with date code, maximum recharge data, and recharge cycles
7. Have 2 top-mounted, threaded, stud posts that include all washers and nuts required for attaching 3/8-inch ring lugs of a State-furnished BBS battery harness
8. Include rubber insulating protective covers for protecting the lugs, posts, and wiring - red for positive terminal and black for negative terminal
9. Be new and fully-charged when furnished
10. Be free from damage or deformities

External cabinet must be capable of housing:

1. 4 batteries
2. Inverter/charger unit
3. Power transfer relay
4. Manually-operated bypass switch
5. Required control panels
6. Wiring and harnesses

MEASUREMENT AND PAYMENT

Full compensation for assembling and installing battery backup system is included in the contract lump sum price paid for modify signal and lighting, and no separate payment will be made therefor.

101-1.16 LIGHT EMITTING DIODE COUNTDOWN PEDESTRIAN SIGNAL MODULE

GENERAL

The purpose of these specifications is to describe minimum acceptable requirements for the Light Emitting Diode (LED) Countdown Pedestrian Signal Module.

The pedestrian signal indication of the module must be supplied with a combination message "UPRAISED HAND" and "WALKING PERSON" symbol that complies with pedestrian traffic control signal indications (PTCSI) standard for these symbols for a message-bearing surface of the size specified. Signal indications must also include numerical countdown display numbers 00 to 99. The numerical countdown display must have 2 columns of LED's and a minimum height of 7 inches. The LED countdown pedestrian signal module must display a solid Portland orange hand and lunar white person. The countdown pedestrian signal must be located adjacent to the associated "UPRAISED HAND" pedestrian signal head indication. The numerical countdown display must have 2 digital rows of LED's and a minimum height of 7 inches. The digital illuminated timer will count down the time starting with the beginning of flashing don't walk interval. The timer will go to zero at the beginning of the yellow phase, and must be dark during the walk and additional clearance intervals prior to the conflicting vehicular phase and during any other phase sequence. If the pedestrian change interval is interrupted or shortened as part of transition into pre-emption sequence, the countdown pedestrian signal display must be discontinued and go dark immediately upon activation of the pre-emption transition. The modules must use light emitting diodes as the light source as in conformance with the State requirements and specifications for LED pedestrian signal modules (combination pedestrian signal) and these specifications. Outlined shapes must not be accepted. Circuit boards and power supplies must be contained inside the modules. Circuit boards must conform to the requirements in Chapter 1, Section 6 of the Transportation Electrical Equipment Specifications (TEES).

LED countdown pedestrian signal module must conform to the following:

1. Manual on Uniform Traffic Control Devices (MUTCD).
2. Applicable provisions of the current specification of the Institute of Transportation Engineering (ITE) standard titled Vehicle Traffic Control Signal Heads, Chapter 2: Light Emitting Diode (LED) Vehicle Traffic Signals Modules (VTCSH Part 2).
3. Current specification of the Institute of Transportation Engineering (ITE) Standard titled Pedestrian Traffic Control Signal Indications (PTCSI).

CONSTRUCTION

The LED countdown combination pedestrian signal face module must be designed to mount behind or replace the existing face plate of existing Type A housing as specified by the

requirements in the ITE Publication: Equipment and Material Standards, Chapter 3 (Pedestrian Traffic Control Signal Indications).

The LED countdown pedestrian signal module must be a single, self-contained device, not requiring on-site assembly for installation into Type A housing. The power supply for the module must be integral to the unit.

The circuit board and power supply must be contained inside the module. Circuit boards must conform to Chapter 1, Section 6 of the Transportation Electrical Equipment Specifications.

The assembly and manufacturing process for the LED signal assembly must be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources.

MATERIALS

Material used for the lens and signal module construction must conform to ASTM. specifications for the materials.

Enclosures containing either the power supply or electronic components of the signal module must be made of UL94VO flame retardant materials. The lens of the signal module is excluded from this requirement.

MODULE IDENTIFICATION

Each module must have the manufacturer's name, trademark, model number, serial number, date of manufacture (month-year), and lot number as identification permanently marked on the back of the module.

The following operating characteristics must be permanently marked on the back of the module: rated voltage and rated power in Watts and Volt-ampere.

If a specific mounting orientation is required, each module must have prominent and permanent marking(s) for correct indexing and orientation within a signal housing. The markings must consist of an up arrow, or the word "UP" or "TOP".

ELECTRICAL

Maximum power consumption requirements for the modules are as follows:

Power Consumption in Watts					
Hand		Walking Person		Count-Down Display	
25°C	74°C	25°C	74°C	25°C	74°C
10	12	9	12	6	8

LED countdown pedestrian signal modules will have Environmental Protection Agency (EPA) Energy Star compliance ratings, if applicable to that shape, size and color.

The modules must operate at frequency of 60 Hz ±3 Hz over a voltage range from 95 V(ac) to 135 V(ac). The fluctuations of line voltage must have no visible effect on the luminous intensity of the indications.

Operating voltage of the modules must be 120 V(ac). All parameters must be measured at this voltage.

The LED countdown pedestrian signal module must have a power factor of 0.90 or greater.

Total harmonic distortion (current and voltage) induced into an AC power line by a LED signal module must not exceed 20 percent.

The countdown pedestrian signal module on-board circuitry must include voltage surge protection to withstand high-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2, 1992.

The LED circuitry must prevent perceptible flicker to the unaided eye over the voltage range specified above.

All wiring and terminal blocks must meet the requirements of Section 13.02 of ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads).

The modules must be operationally compatible with currently used controller assemblies (solid state load switches, flashers, and conflict monitors). Review TEES Chapters 3 and 6 for specifications on these devices.

When an AC current of 20 mA (or less) is applied to the unit, the voltage read across the two leads must be 15 V(ac) or less.

The modules and associated on-board circuitry must meet Class A emission limits referred in Federal Communications Commission (FCC) Title 47, Subpart B, Section 15 regulations concerning the emission of electronic noise.

The LEDs must be wired in series parallel strings. The failure of any one LED, and its associated string of LEDs, must not cause the loss of more than 5 percent of the light output of the complete LED module.

Transient voltage suppression/protection must be provided internal to the LED module to minimize the possibility of damage due to extreme over voltage.

The LED countdown combination pedestrian signal module must be operationally compatible with current 170/2070 type controllers.

The LED module must be supplied with three conductors 3.3 feet in length for each connection to the terminal board of the traffic signal indication. Each conductor must be

600 Volt, stranded No. 20 AWG minimum copper wire, rated for service at +105°C, capable of withstanding all adverse effects of moisture, corrosive atmosphere and temperatures associated with the operation of the signal head. Spade lugs must be on the ends of each conductor.

The LED module must be capable of automatically setting the countdown timer by summing flashing don't walk time received from the controller and the load switches.

The height of each symbol on the module must be not less than 10 inches and the width of each symbol on the module must not be less than 6.5 inches.

ENVIRONMENTAL REQUIREMENTS

LEDs must utilize appropriate technology to achieve the required color and must be the ultra bright type rated for 100,000 hours of continuous operation from –40°C to +74°C

AlInGaP (Aluminum Indium Gallium Phosphorus), Portland Orange (amber hand and countdown numbers) LEDs must be utilized. The substrate material may be transparent. The lunar white LEDs (walking person) must be InGaN (Indium Gallium Nitride) UV Stabilized polycarbonate outer shell. The LED pedestrian countdown signal modules, when properly installed with gasket, must be protected against dust and moisture intrusion per requirements of NEMA Standard 250-1991, sections 4.7.2.1 and 4.7.3.2, for Type 4 enclosures to protect all internal LED, electronic, and electrical components.

LUMINOUS INTENSITY

Pedestrian countdown LED signal modules must be designed to operate over the specified ambient temperature and voltage range, attract the attention of, and be readable by, a viewer (both day and night) at all distances from 9.8 feet to the full width of the area to be crossed.

The luminous intensity of the LED pedestrian countdown signal module must not vary more than ±10 percent for voltage range of 95 V(ac) to 135 V(ac).

PHOTOMETIC REQUIREMENTS

Each module must provide an average luminous intensity of at least 348 candela/ft² for "Hand", 492 candela/ft² for "Walking Person" symbol. The "Countdown" symbol should be 2-rowed LED's. All symbols must maintain its intensity throughout the useful life over the operating temperature range.

The uniformity ratio of an illuminated symbol must not exceed 4 to 1, between the highest luminance area and the lowest luminance area in the module.

The color output of the module must conform to the requirements of Section 5.3 in the ITE Publication: Equipment and Material Standards, Chapter 3 (Pedestrian Traffic Control Signal Indications):

1. "Hand" must be Portland orange not greater than 0.390, nor less than 0.331, nor less than 0.997 - x

2. "Walking person" must be lunar white. X: not less than 0.290, nor greater than 0.330. Y: not less than 1.5x - 0.175, nor greater than 1.5x - 0.130
3. "Countdown" display must be Portland orange

FUNCTIONS

Basic Operation

The control and regulation module must be of the "smart" type in order for the countdown displays to be automatically adjusted with the programmed intervals of the traffic controller.

Operating Mode

Clearance Cycle Countdown Mode- The display of the number of remaining seconds must begin only at the beginning of the pedestrian change interval. The module will start counting when the flashing clearance signal turns on and will countdown to "0" and turn off when the steady "Don't Walk" signal turns on.

INSTRUCTION AND GUARANTEES

Upon request, one schematic wiring diagram and installation manual must be provided with each LED countdown pedestrian signal module.

No changes or substitutions in these requirements will be accepted unless authorized in writing.

LED countdown pedestrian signal module must be replaced if it fails to function as intended due to workmanship material defects within the first 60 months from the date of installation.

The Contractor must present the device to the "Material Engineering and Testing Services Branch - Electrical Testing Services Branch" for testing, all LED module to be supplied in compliance with these specifications for test before acceptance. After completion of the test the Contractor must ship the LED modules and a list of all LED module serial numbers intended for this job, at the Contractor's expense, to the Transportation Laboratory for testing. Delays resulting from submittal of non-compliant materials must not relieve the Contractor from executing the contract within the allotted time. In the event of LED module failures and when re-testing is required, the Contractor must be responsible for providing new LED modules and allowing a minimum of 30 days to retest them. The Contractor must pay all shipping and handling costs related to re-testing. Delay generated due to re-submittal and re-testing must be the responsibility of the Contractor and no extra time will be granted to the Contractor.

LED pedestrian signal modules must be manufactured in conformance with a vendor quality assurance (QA) program. The QA program must include design and production. Production quality assurance must include statistically controlled routine tests to ensure minimum performance levels of PSM LED signal modules built to meet these specifications.

The manufacturer must have a documented problem resolutions process. Documentation of the QA process test results and problem resolution records must be kept on file for a minimum period of five years.

PSM LED signal module components and subassemblies, that may affect reliability or performance, must be traceable to the original manufacturers.

PRODUCTION QUALITY ASSURANCE TESTING

Production quality assurance testing must be performed on PSM LED signal module. Failure to conform to the requirements of a production quality test must be cause for rejection. The manufacturer must retain test results for five years for warranty purposes.

Specified parameters may be measured and used for quality comparison of production modules (rated power, etc.).

PSM LED signal modules must be tested for specified initial intensity after burn-in. The burn-in period must consist of signal modules being energized at rated voltage for a 30 minutes stabilization period before the measurements are made. A single point measurement with a correlation to the minimum initial luminous intensity requirements in "Photometric Requirements" of these special provisions for circular modules may be used. The ambient temperature for this measurement must be +25°C.

PSM LED signal modules must be tested for luminous intensity requirements in "Photometric Requirements" of these special provisions.

PSM LED signal modules must be tested for required power factor after burn-in.

PSM LED signal modules must be tested by measuring current flow in amperes after burn-in. The measured current values must be compared against current values resulting from design qualification measurements. The current flow must not exceed the specified value. The measured ampere values with rated voltage must be recorded as volt-ampere on the product labels.

PSM LED signal modules must be visually inspected for exterior physical damage or assembly anomalies. The surface of the lens must be free of scratches, abrasions, cracks, chips, discoloration, or other defects. Defects must be cause for rejection.

CERTIFICATE OF COMPLIANCE

The Contractor must provide the Engineer a Certificate of Compliance from the manufacturer, in conformance with the provisions of Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The certificate must certify that the PSM LED signal modules comply with the requirements of these specifications. The certificate must also include a copy of applicable test reports on PSM LED signal modules.

QUALITY ASSURANCE TESTING

PSM LED signal modules must be tested in conformance with California Test 610 bulk. Optical testing will be performed with the module mounted in Type A housing. All parameters of the specification may be tested.

WARRANTY

The manufacturer must provide a written warranty against defects in materials and workmanship for PSM LED signal modules for a period of 60 months after installation of the PSM LED signal modules. Replacement PSM LED signal modules must be provided within 5 days after receipt of failed PSM LED signal modules at no cost to the State. All warranty documentation must be given to the Engineer prior to installation. Replacement PSM LED signal modules must be delivered to Caltrans Maintenance Electrical Shop at Sacramento Electric Specialty Dept. at 11325 Sanders Dr., Rancho Cordova 95742. Contractor shall notify District Maintenance Manager, telephone 916-859-7803 and the Engineer not less than 24 hours prior to delivery.

101-1.17 DETECTORS

Loop detector sensor units will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

Loop wire shall be Type 2.

Loop detector lead-in cable shall be Type B.

Slots shall be filled with elastomeric sealant or hot-melt rubberized asphalt sealant.

At the Contractor's option, where a Type A loop is designated on the plans, a Type E loop may be substituted.

For Type E detector loops, sides of the slot shall be vertical and the minimum radius of the slot entering and leaving the circular part of the loop shall be 1-1/2 inches. Slot width shall be a maximum of 5/8 inch. Loop wire for circular loops shall be Type 2. Slots of circular loops shall be filled with elastomeric sealant or hot melt rubberized asphalt sealant.

The depth of loop sealant above the top of the uppermost loop wire in the sawed slots shall be 2 inches, minimum.

Detector loops shall be spliced in the adjacent pull box and as indicated on the plans.

101-1.18 EMERGENCY VEHICLE DETECTOR SYSTEM

Each traffic signal shall have an emergency vehicle detector system which shall conform to the details shown on the plans and these special provisions.

GENERAL

Each emergency vehicle detector system shall consist of an optical emitter assembly or assemblies located on the appropriate vehicle and an optical detector/discriminator assembly or assemblies located at the traffic signal.

Emitter assemblies are not required for this project except units for testing purposes to demonstrate that the systems perform as specified. Tests shall be conducted in the presence of

the Engineer as described below under "System Operation" during the signal test period. The Engineer shall be given a minimum of 2 working days notice prior to performing the tests.

Each system shall permit detection of 2 classes of authorized vehicles. Class I (mass transit) vehicles shall be detected at ranges of up to 1,000 feet from the optical detector. Class II (emergency) vehicles shall be detected at ranges up to 1,800 feet from the optical detector.

Class I signals (those emitted by Class I vehicles) shall be distinguished from Class II signals (those emitted by Class II vehicles) on the basis of the modulation frequency of the light from the respective emitter. The modulation frequency for Class I signal emitters shall be 9.639 Hz ±0.110 Hz. The modulation frequency for Class II signal emitters shall be 14.035 Hz ±0.250 Hz.

A system shall establish a priority of Class II vehicle signals over Class I vehicle signals and shall conform to the requirements in Section 25352 of the California Vehicle Code.

EMITTER ASSEMBLY

Each emitter assembly, provided for testing purposes, shall consist of an emitter unit, an emitter control unit, and connecting cables.

General

Each emitter assembly, including lamp, shall operate over an ambient temperature range of -34°C to +60°C at both modulation frequencies and operate continuously at the higher frequency for a minimum of 3,000 hours at 25°C ambient before failure of the lamp or other components.

Each emitter unit shall be controlled by a single, maintained-contact switch on the respective emitter control unit. The switch shall be located to be readily accessible to the vehicle driver. The control unit shall contain a pilot light to indicate that the emitter power circuit is energized and shall generate only one modulating code, either that for Class I vehicles or that for Class II vehicles.

Functional

Each emitter unit shall transmit optical energy in one direction only.

The signal from each Class I signal emitter unit shall be detectable at a distance of 1,000 feet when used with a standard optical detection/discriminator assembly and filter to eliminate visible light. Visible light shall be considered eliminated when the output of the emitter unit with the filter is less than an average of 0.0003-candela per energy pulse in the wavelength range of 380 nm to 750 nm when measured at a distance of 10 feet. A Certificate of Compliance, conforming to the requirements in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be submitted to the Engineer with each Class I emitter unit.

The signal from each Class II signal emitter unit shall be detectable at a distance of 1,800 feet when used with a standard optical detection/discriminator assembly.

The standard optical detection/discriminator assembly to be used in making the range tests shall be available from the manufacturer of the system. A certified performance report shall be furnished with each assembly.

Electrical

Each emitter assembly shall provide full light output with input voltages of between 12.5 V (dc) and 17.5 V (dc). An emitter assembly shall not be damaged by input voltages up to 7.5 V (dc) above supply voltage. The emitter assembly shall not generate voltage transients, on the input supply, which exceed the supply voltage by more than 4 volts.

Each emitter assembly shall consume not more than 100 W at 17.5 V (dc) and shall have a power input circuit breaker rated at 10 A to 12 A, 12 V (dc).

The design and circuitry of each emitter shall permit its use on vehicles with either negative or positive ground without disassembling or rewiring of the unit.

Mechanical

Each emitter unit shall be housed in a weatherproof corrosion-resistant housing. The housing shall be provided with facilities to permit mounting on various types of vehicles and shall have provision for aligning the emitter unit properly and for locking the emitter unit into this alignment.

Each emitter control unit shall be provided with hardware to permit the unit to be mounted in or on an emergency vehicle or mass transit vehicle. Where required for certain emergency vehicles, the emitter control unit and exposed controls shall be weatherproof.

OPTICAL DETECTION/DISCRIMINATOR ASSEMBLY

General

Each optical detection/discriminator assembly shall consist of one or more optical detectors, connecting cable and a discriminator module.

Each assembly, when used with standard emitters, shall have a range of at least 1,000 feet for Class I signals and 1,800 feet for Class II signals. Standard emitters for both classes of signals shall be available from the manufacturer of the system. Range measurements shall be taken with all range adjustments on the discriminator module set to "maximum".

Optical Detector

Each optical detector shall be a waterproof unit capable of receiving optical energy from two separately aimable directions. The horizontal angle between the 2 directions shall be variable from 180 degrees to 5 degrees.

The reception angle for each photocell assembly shall be a maximum of 8 degrees in all directions about the aiming axis of the assembly. Measurements of reception angle will be taken at a range of 1,000 feet for a Type I emitter and at a range of 1,800 feet for a Type II emitter.

Internal circuitry shall be solid state and electrical power shall be provided by the associated discriminator module.

Each optical detector shall be contained in a housing, which shall include 2 rotatable photocell assemblies, an electronic assembly and a base. The base shall have an opening to permit mounting on a mast arm or a vertical pipe nipple, or suspension from a span wire. The mounting opening shall have female threads for 3/4 inch conduit. A cable entrance shall be provided which shall have male threads and gasketing to permit a waterproof cable connection. Each detector shall have weight of less than 2.5 pounds and shall present a maximum wind load area of 36 square inches. The housing shall be provided with weep holes to permit drainage of condensed moisture.

Each optical detector shall be installed, wired and aimed as specified by the manufacturer.

Cable

Optical detector cable (EV-C) shall meet the requirements of IPCEA-S-61-402/NEMA WC 5, Section 7.4, 600-V (ac) control cable, 75°C, Type B, and the following:

A. The cable shall contain 3 conductors, each of which shall be No. 20 (7 x 28) stranded, tinned copper with low-density polyethylene insulation. Minimum average insulation thickness shall be 25 mils. Insulation of individual conductors shall be color coded: 1-yellow, 1-blue, 1-orange.
B. The shield shall be either tinned copper braid or aluminized polyester film with a nominal 20 percent overlap. Where film is used, a No. 20 (7 x 28) stranded, tinned, bare drain wire shall be placed between the insulated conductors and the shield and in contact with the conductive surface of the shield.
C. The jacket shall be black polyvinyl chloride with minimum ratings of 600 V (ac) and 80°C and a minimum average thickness of 43 mils. The jacket shall be marked as required by IPCEA/NEMA.
D. The finished outside diameter of the cable shall not exceed 0.35-inch.
E. The capacitance, as measured between any conductor and the other conductors and the shield, shall not exceed 48 pf per foot at 1000 Hz.
F. The cable run between each detector and the controller cabinet shall be continuous without splices or shall be spliced only as directed by the detector manufacturer.

Discriminator Module

Each discriminator module shall be designed to be compatible and usable with a Model 170/2070 controller unit and to be mounted in the input file of a Model 332L controller cabinet, and shall conform to the requirements of Chapter I of the State of California, Department of Transportation, "Traffic Signal Control Equipment Specifications."

Each discriminator module shall be capable of operating 2 channels, each of which shall provide an independent output for each separate input.

Each discriminator module, when used with its associated detectors, shall perform the following:

A. Receive Class I signals at a range of up to 1,000 feet and Class II signals at a range of up to 1,800 feet.
B. Decode the signals, on the basis of frequency, at 9.639 Hz ± 0.119 Hz for Class I signals and 14.035 Hz ± 0.255 Hz for Class II signals.
C. Establish the validity of received signals on the basis of frequency and length of time received. A signal shall be considered valid only when received for more than 0.50-second. No combination of Class I signals shall be recognized as a Class II signal regardless of the number of signals being received, up to a maximum of 10 signals. Once a valid signal has been recognized, the effect shall be held by the module in the event of temporary loss of the signal for a period adjustable from 4.5 seconds to 11 seconds in at least 2 steps at 5 seconds ± 0.5 second and 10 seconds ± 0.5 second.
D. Provide an output for each channel that will result in a "low" or grounded condition of the appropriate input of a Model 170/2070 controller unit. For Class I signals the output shall be a 6.25 Hz ± 0.1 percent, rectangular waveform with a 50 percent duty cycle. For Class II signals the output shall be steady.

Each discriminator module shall receive electric power from the controller cabinet at either 24 V (dc) or 120 V (ac).

Each channel together with the channel's associated detectors shall draw not more than 100 mA at 24 V (dc) or more than 100 mA at 120 V (ac). Electric power, one detector input for each channel and one output for each channel shall terminate at the printed circuit board edge connector pins listed below:

BOARD EDGE CONNECTOR PIN ASSIGNMENT

A	DC ground		
B	+24 V (dc)	P	(NC)
C	(NC)		
D	Detector input, Channel A	R	(NC)
E	+24V (dc) to detectors	S	(NC)
F	Channel A output (C)	T	(NC)
		U	(NC)
H	Channel A output (E)	V	(NC)
J	Detector input, Channel B	W	Channel B Output (C)
K	DC Ground to detectors	X	Channel B Output (E)
L	Chassis ground	Y	(NC)
M	AC-	Z	(NC)
N	AC+		

(C) Collector, Slotted for Keying
(E) Emitter, Slotted for Keying
(NC) Not connected, cannot be used by manufacturer for any purpose.

Two auxiliary inputs for each channel shall enter each module through the front panel connector. Pin assignment for the connector shall be as follows:

A. Auxiliary detector 1 input, Channel A
B. Auxiliary detector 2 input, Channel A
C Auxiliary detector 1 input, Channel B

D. Auxiliary detector 2 input, Channel B

Each channel output shall be an optically isolated NPN open collector transistor capable of sinking 50 mA at 30 V (ac) and shall be compatible with the Model 170/2070 controller unit inputs.

Each discriminator module shall be provided with means of preventing transients received by the detector from affecting the Model 170/2070 controller assembly.

Each discriminator module shall have a single connector board and shall occupy one slot width of the input file. The front panel of each module shall have a handle to facilitate withdrawal and the following controls and indicators for each channel:

A. Three separate range adjustments each for both Class I and Class II signals.
B. A 3-position, center-off, momentary contact switch, one position (down) labeled for test operation of Class I signals, and one position (up) labeled for test operation of Class II signals.
C. A "signal" indication and a "call" indication each for Class I and for Class II signals. The "signal" indication denotes that a signal above the threshold level has been received. A "call" indication denotes that a steady, validly coded signal has been received. These 2 indications may be accomplished with a single indication lamp; "signal" being denoted by a flashing indication and "call" with a steady indication.

In addition, the front panel shall be provided with a single circular, bayonet-captured, multi-pin connector for 2 auxiliary detector inputs for each channel. Connector shall be a mechanical configuration conforming to the requirements in Military Specification MIL-C-26482 with 10-4 insert arrangement, such as Burndy Trim Trio Bantamate Series, consisting of the following:

A. Wall mounting receptacle, G0B10-4PNE with SM20M-1S6 gold plated pins.
B. Plug, G6L10-4SNE with SC20M-1S6 gold plated sockets, cable clamp and strain relief that shall provide for a right angle turn within 2-1/2 inches maximum from the front panel surface of the discriminator module.

Cabinet Wiring

The Model 332L cabinet has provisions for connections between the optical detectors, the discriminator module and the Model 170/2070 controller unit.

Wiring for a Model 332L cabinet shall conform to the following:

A. Slots 12 and 13 of input file "J" have each been wired to accept a 2-channel module.
B. Field wiring for the primary detectors, except 24-V (dc) power, shall terminate on either terminal board TB-9 in the controller cabinet or on the rear of input file "J," depending on cabinet configuration. Where TB-9 is used, position assignments shall be as follows:

Position	Assignment
4	Channel A detector input, 1st module (Slot J-12)
5	Channel B detector input, 1st module (Slot J-12)
7	Channel A detector input, 2nd module (Slot J-13)
8	Channel B detector input, 2nd module (Slot J-13)

The 24-V (dc) cabinet power will be available at Position 1 of terminal board TB-1 in the controller cabinet.

Field wiring for the auxiliary detectors shall terminate on terminal board TB-O in the controller cabinet. Position assignments are as follows:

FOR MODULE 1 (J-12)		FOR MODULE 2 (J-13)	
Position	Assignment	Position	Assignment
1	+24V (dc) from (J-12E)	7	+24V (dc) from (J-13E)
2	Detector ground From (J-12K)	8	Detector ground from (J-13K)
3	Channel A auxiliary detector input 1	9	Channel A auxiliary detector input 1
4	Channel A auxiliary detector input 2	10	Channel A auxiliary detector input 2
5	Channel B auxiliary detector input 1	11	Channel B auxiliary detector input 1
6	Channel B auxiliary detector input 2	12	Channel B auxiliary detector input 2

SYSTEM OPERATION

The Contractor shall demonstrate that the components of each system are compatible and will perform satisfactorily as a system. Satisfactory performance shall be determined using the following test procedure during the functional test period:

A. Each system to be used for testing shall consist of an optical emitter assembly, an optical detector, an optical detector cable and a discriminator module.
B. The discriminator modules shall be installed in the proper input file slot of the Model 170/2070 controller assembly.
C. Two tests shall be conducted; one using a Class I signal emitter and a distance of 1,000 feet between the emitter and the detector, the other using a Class II signal emitter and a distance of 1,800 feet between the emitter and the detector. Range adjustments on the module shall be set to "Maximum" for each test.
D. Each test shall be conducted for a period of one hour, during which the emitter shall be operated for 30 cycles, each consisting of a one minute "on" interval and a one minute "off" interval. During the total test period the emitter signal shall cause the proper response from the Model 170/2070 controller unit during each "on" interval and there shall be no improper operation of either the Model 170/2070 controller unit or the monitor during each "off" interval.

101-1.19 PEDESTRIAN PUSH BUTTONS

At the option of the Contractor, pedestrian push button housings may be the plastic type.

101-1.20 LED LUMINAIRES

GENERAL

Summary

This work includes installing LED luminaires.

Definitions

CALiPER: Commercially available LED product evaluation and reporting. A United States Department of Energy (US DOE) program for the testing and monitoring of commercially available LED luminaires and lights.

correlated color temperature: The absolute temperature in kelvin of a blackbody whose chromaticity most nearly resembles that of the light source.

houseside lumens: Lumens from a luminaire directed to light up areas between the fixture and the pole (e.g., sidewalks at intersection or areas off of the shoulders on freeways).

IP Code: Enclosure protection rating that delineates the level at which foreign objects and water can intrude a device.

junction temperature: The temperature of the electronic junction of the LED device. The junction temperature is critical in determining photometric performance, estimating operational life, and preventing catastrophic failure of the LED.

L70: The extrapolated life in hours of the luminaire when the luminous output depreciates 30 percent from initial values.

LM-79: A test method from the Illumination Engineering Society of North America (IESNA) specifying test conditions, measurements, and report format for testing solid state lighting devices including LED luminaires.

LM-80: A test method from the IESNA specifying test conditions, measurements, and report format for testing and estimating the long term performance of LEDs for general lighting purposes.

National Voluntary Laboratory Accreditation Program (NVLAP): A US DOE program that accredits independent testing laboratories to qualify.

power factor: Ratio of the real power component to the complex power component.

streetside lumens: Lumens from a luminaire directed to light up areas between the fixture and the roadway (e.g., traveled ways, freeway lanes).

surge protection device (SPD): A subsystem or component that can protect the unit against short duration voltage and current surges.

total harmonic distortion: The ratio of the root-mean-square (rms) value of the sum of the squared individual harmonic amplitudes to the rms value of the fundamental frequency of a complex waveform.

Submittals

Submit a sample luminaire to the Transportation Laboratory for testing after the manufacturer's testing is completed. Include the manufacturer's testing data.

Product submittals must include the following:

1. LED luminaire checklist.
2. Product specification sheets, including:

    2.1. Maximum power in watts.
    2.2. Maximum designed junction temperature.
    2.3. Heat sink area in square inches.
    2.4. Designed junction to ambient thermal resistance calculation with thermal resistance components clearly defined.
    2.5. L70 in hours when extrapolated for the average nighttime operating temperature.

3. IES LM-79 and IES LM-80 compliant test reports from a CALiPER-qualified or NVLAP-approved testing laboratory for the specific model submitted.
4. Photometric file based on LM-79 test report.
5. Initial and depreciated isofootcandle charts showing the specified minimum illuminance curve for that particular application. The charts must be calibrated to feet and show a 40 by 40 foot grid. The charts must be calibrated to the mounting height specified for that particular application. The depreciated isofootcandle curve must be calculated at the minimum operational life.
6. Test report showing SPD performance as tested under ANSI/IEEE C62.41.2 and ANSI/IEEE C62.45.
7. Test report showing mechanical vibration test results as tested under California Test 611 or equal.
8. Datasheets from the LED manufacturer that include information on life expectancy based on junction temperature.
9. Datasheets from power supply manufacturer that include life expectancy information.

Quality Control and Assurance

General

Production quality assurance must be performed by the luminaire manufacturer and must include statistically-controlled routine tests to ensure minimum performance levels of the modules built to comply with this specification and a documented process for resolving problems. The manufacturer must keep the process and test results documentation on file for a minimum of 7 years.

The Department may perform random sample testing on all shipments. Testing will be completed within 30 days after delivery to the Transportation Laboratory. Luminaires will be tested under California Test 678 and as specified. All parameters of the specification may be tested on the shipment sample. When testing is complete, you will be notified. You must pick up the equipment from the test site and deliver to the job site.

One sample luminaire must be fitted with a thermistor or thermo-couple temperature sensor. A temperature sensor must be mounted on the LED solder pad as close to the LED as possible. Another temperature sensor must be mounted on the power supply case. Light bar or modular systems must have 1 sensor for each module mounted as close to the center of the module. Other configurations must have at least 5 sensors per luminaire. Contact the Transportation Laboratory for advice on sensor location. Thermocouples must be either Type K or C. Thermistors must be

a negative temperature coefficient type with a nominal resistance of 20 kΩ. The appropriate thermocouple wire must be used. The leads must be a minimum of 6 ft. Documentation must accompany the test unit that details the type of sensor used.

The sample luminaires must be energized for a minimum of 24 hours, at 100 percent on-time duty cycle, at a temperature of +70 °F before performing any testing.

The luminaire lighting performance must be depreciated for the minimum operating life by using the LED manufacturer's data or the data from the LM-80 test report, whichever results in a higher lumen depreciation.

Failure of the luminaire that renders the unit noncompliant with the specification will be cause for rejection. If a unit is rejected, you must allow 30 days for retesting. Retesting period starts when the replacement luminaire is delivered to test site. You must pay for all retesting costs. Delays resulting from submittal of noncompliant materials do not relieve you from executing the Contract within the allotted time.

If a luminaire submitted for testing does not comply with the specifications, remove the unit from the Transportation Laboratory within 5 business days after notification that it is rejected. If the unit is not removed within that period, it may be shipped to you at your expense.

You must pay for all shipping, handling, and transportation costs related to testing and retesting.

Warranty

Provide a 2-year replacement warranty from the manufacturer of the luminaires from the date of installation against any defects or failures. Replacement luminaires must be provided within 10 days after receipt of the failed luminaire at no cost to the Department. All warranty documentation must be submitted to the Engineer before installation. Replacement luminaires must be delivered to the Department Maintenance Electrical Shop at 11325 Sanders Dr., Rancho Cordova, CA 95742.

MATERIALS

General

The luminaire includes an assembly that uses LEDs as the light source. In addition, a complete luminaire includes a housing, an LED array, and an electronic driver (i.e., power supply). The luminaire must comply with the following requirements:

1. UL listed under UL 1598 for luminaires in wet locations or an equivalent standard from a recognized testing laboratory
2. Have a minimum operational life of 63,000 hours
3. Expected to operate at an average operating time of 11.5 hours per night
4. Designed to operate at an average nighttime operating temperature of 70 °F
5. Have an operating temperature range from -40 to +130 °F.
6. Defined by the following application:

Application	Typically Replaces
Roadway 1	200 Watt HPS mounted at 34 ft
Roadway 2	310 Watt HPS mounted at 40 ft
Roadway 3	310 Watt HPS mounted at 40 ft with back side control
Roadway 4	400 Watt HPS mounted at 40 ft

The individual LEDs must be connected such that a catastrophic loss or a failure of 1 LED will not result in the loss of more than 20 percent of the luminous output of the luminaire.

Luminaire Identification

Each luminaire must have the following identification permanently marked inside the unit and outside of its packaging box:

1. Manufacturer's name
2. Trademark
3. Model number
4. Serial number
5. Date of manufacture (month-year)
6. Lot number
7. Project/Contract number
8. Rated voltage
9. Rated wattage
10. Rated power in VA

Electrical

The luminaire must operate from a 60 ± 3 Hz AC power line over a minimum voltage range of 95 to 250 V(ac). The fluctuations of line voltage must have no visible effect on the luminous output. The standard operating voltages are 120 and 240 V(ac). The power factor of the luminaire must be 0.90 or greater. Total harmonic distortion, current and voltage, induced into an AC power line by a luminaire must not exceed 20 percent. The maximum power consumption allowed for the luminaire depends on the application and is as shown in the following table:

Application	Maximum Wattage
Roadway 1	165
Roadway 2	235
Roadway 3	235
Roadway 4	300

Surge Suppression and Electromagnetic Interference

The luminaire on-board circuitry must include an SPD to withstand high repetition noise transients because of utility line switching, nearby lightning strikes, and other interference. The SPD must protect the luminaire from damage and failure for transient voltages and currents as defined in ANSI/IEEE C64.41.2 (Tables 1 and 4) for Location Category C-High. SPD must comply with UL 1449 depending on the components used in the design. SPD performance must be tested under ANSI/IEEE C62.45 based on ANSI/IEEE C62.41.2 definitions for standard and optional waveforms for Location Category C-High.

The luminaires and associated on-board circuitry must comply with the Class A emission limits provided in FCC title 47, subpart B, section 15 regulations concerning the emission of electronic noise.

Compatibility

The luminaire must be operationally compatible with currently used lighting control systems and photoelectric controls.

Photometric Requirements

The luminaire must maintain a minimum illuminance level throughout the minimum operating life. The illuminance must not decrease by more than 30 percent over the minimum operating life or L70 must be at least the minimum operating life. The measurements must be calibrated to standard photopic calibrations. The minimum maintained illuminance values, measured as a point, are as shown in the following table:

Application	Mounting Height (ft)	Minimum Maintained Illuminance (fc)	Light Pattern Figure (iso-footcandle curve)
Roadway 1	34	0.15	Pattern defined by ellipse with equation: $$\frac{x^2}{(82)^2} + \frac{(y-20)^2}{(52)^2} = 1$$ where: *x* =direction is longitudinal to the roadway *y* = direction is transverse to the roadway and the luminaire is offset from the center of the pattern by 20 feet to the "houseside" of the pattern.
Roadway 2	40	0.2	Pattern defined by ellipse with equation: $$\frac{x^2}{(82)^2} + \frac{(y-20)^2}{(52)^2} - 1$$ where: *x* =direction is longitudinal to the roadway *y* = direction is transverse to the roadway and the luminaire is offset from the center of the pattern by 20 feet to the "houseside" of the pattern.
Roadway 3	40	0.2	Pattern defined by ellipse with equation: $$\frac{x^2}{(92)^2} + \frac{(y-23)^2}{(55)^2} = 1$$ for $y \geq 0$ (street side) where: *x* = direction is longitudinal to the roadway *y* = direction is transverse to the roadway and the luminaire is offset from the center of the pattern by 23 feet to the "houseside" of the pattern.
Roadway 4	40	0.2	Pattern defined by ellipse with equation: $$\frac{x^2}{(92)^2} + \frac{(y-23)^2}{(55)^2} = 1$$ where: *x* = direction is longitudinal to the roadway *y* = direction is transverse to the roadway and the luminaire is offset from the center of the pattern by 23 feet to the "houseside" of the pattern.

The luminaire must have a correlated color temperature range of 3,500 to 6,500 K. The color rendering index must be 65 or greater.

The luminaire must not allow more than:

1. 10 percent of the rated lumens to project above 80 degrees from vertical
2. 2.5 percent of the rated lumens to project above 90 degrees from vertical

Thermal Management

The thermal management of the heat generated by the LEDs must be of a sufficient capacity to assure proper operation of the luminaire over the minimum operation life. The LED manufacturer's maximum junction temperature for the minimum operation life must not be exceeded. The maximum allowed junction temperature is 221 °F.

The junction-to-ambient thermal resistance must be 95 °F per watt or less. Thermal management must be passive by design. The use of fans or other mechanical devices is not allowed. The heat sink material must be aluminum or other material of equal or lower thermal resistance.

The luminaire may contain circuitry that will automatically reduce the power to the LEDs to a level that will insure the maximum junction temperature is not exceeded, when the ambient outside air temperature is 100 °F or greater.

Physical and Mechanical Requirements

The luminaire must be a single, self-contained device, not requiring on-site assembly for installation. The power supply for the luminaire is integral to the unit. The maximum weight of the luminaire must be 35 lb. The maximum effective projected area when viewed from either side or either end must be 1.4 sq ft. The housing must match a color no. of FED-STD-595 within the range of 26250 to 26500 for semi-gloss sheen or 36250 to 36500 for flat sheen.

The housing must be fabricated from materials designed to withstand a 3,000-hour salt spray test under ASTM B 117. All aluminum used in housings and brackets must be of a marine grade alloy with less than 0.2 percent copper. All exposed aluminum must be anodized.

Each refractor or lens must be made from UV-inhibited high impact plastic (e.g., acrylic or polycarbonate) or heat- and impact-resistant glass, and be resistant to scratching. Polymeric materials of enclosures containing either the power supply or electronic components of the luminaire must be made of UL94VO flame retardant materials. The lenses of the luminaire are excluded from this requirement. Paint or powder coating of the housing must comply with section 86. A chromate conversion undercoating must be used underneath a thermoplastic polyester powder coat.

Each housing must be provided with a slip fitter capable of mounting on a 2-inch pipe tenon. This slip fitter must fit on mast arms with outside diameters from 1-5/8 to 2-3/8 inches. The slip fitter must be capable of being adjusted a minimum of ±5 degrees from the axis of the tenon in a minimum of five steps: +5, +2.5, 0, -2.5, -5. The clamping brackets of the slip fitter must not bottom out on the housing bosses when adjusted within the designed angular range. No part of the slip fitter mounting brackets on the luminaires must develop a permanent set in excess of 1/32 inch when the two or four, 3/8-inch diameter cap screws used for mounting are tightened to 10 ft-lb. Two sets of cap screws may be supplied to allow the slip fitter to be mounted on the pipe tenon in the acceptable range without the cap screws bottoming out in the threaded holes. The cap screws and the clamping brackets must be made of corrosion resistant materials or

treated to prevent galvanic reactions, and be compatible with the luminaire housing and the mast-arm.

The assembly and manufacturing process for the LED luminaire must be designed to assure internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources. When tested under California Test 611, the luminaire to be mounted horizontally on the mast arm must be capable of withstanding the following cyclic loading for a minimum of 2 million cycles without failure of any luminaire parts:

Cyclic Loading

Plane	Power Supply	Minimum Peak Acceleration Level (G = acceleration due to gravity)
Vertical	Installed	3.0 G peak-to-peak sinusoidal loading (same as 1.5 G peak)
Horizontal[a]	Installed	1.5 G peak-to-peak sinusoidal loading (same as 0.75 G peak)

[a]Perpendicular to direction of mast arm

The housing must be designed to prevent the buildup of water on top of the housing. Exposed heat sink fins must be oriented to allow the water to freely run off of the luminaire and carry dust and other accumulated debris away from the unit. The optical assembly of the luminaire must be protected against dust and moisture intrusion to at least IP66. The power supply enclosure must be protected to at least IP43.

Each mounted luminaire may be furnished with or without a photoelectric unit receptacle. If a photoelectric unit receptacle is included, a rain tight shorting cap must be provided and installed. The receptacle must comply with Section 86-6.08A, "Types," of the Standard Specifications. If the luminaire housing is provided with a hole for the receptacle, the hole must be closed, covered, and permanently sealed with weatherproof material.

When the components are mounted on a down-opening door, the door must be hinged and secured to the luminaire housing separately from the refractor or flat lens frame. The door must be secured to the housing so to prevent its accidental opening. A safety cable must mechanically connect the door to the housing.

Field wires connected to the luminaire must terminate on a barrier type terminal block secured to the housing. The terminal screws must be captive and equipped with wire grips for conductors up to No. 6. Each terminal position must be clearly identified.

The power supply must be rated for outdoor operation and have a minimum IP rating of IP65.

The power supply must be rated for a minimum operational life equal to the minimum operational life of the luminaire, or greater.

The power supply case temperature must have a self rise of 77 °F or less above ambient temperature in free air with no additional heat sinks.

Conductors and terminals must be identified.

101-1.21 PHOTOELECTRIC CONTROLS

Contactors shall be the mechanical armature type.

101-1.22 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT

Salvaged electrical materials shall be hauled to the District Recycle Center at 2001 Evergreen St., Sacramento and stockpiled. The district coordinator is Richard Johnson at 916-263-4921.

The Contractor shall provide the equipment, as necessary, to safely unload and stockpile the material. A minimum notice of 2 business days shall be given prior to delivery. All equipment shown on the plans as salvaged shall be tagged with a suitable waterproof tag and marking pen before removal from the work site. The tag shall show the date, and location from which the equipment was removed. The Contractor shall be responsible for unloading the equipment at the delivery location, including providing any necessary cranes or other lifting devices. All other equipment shown to be removed and not reused shall become the property of the Contractor and shall be removed from the right-of-way and disposed of by the Contractor.

101-1.23 PAYMENT

The contract lump sum price or prices paid for modify signal and lighting (Location 1), (Location 2) shall include highway lighting at intersections in connection with signals only.

Full compensation for hauling and stockpiling electrical materials shall be considered as included in the contract price paid for the item requiring the material to be salvaged and no additional compensation will be allowed therefor.

If any of the fabrication sites for the materials listed are located more than 300 air line miles from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impractical and difficult to determine the actual increase in these expenses, it is agreed that payment to the Contractor for furnishing these listed materials from each fabrication site located more than 300 air line miles from both Sacramento and Los Angeles will be reduced $2,000:

1. Service equipment enclosures

102. STANDARD PLANS LIST

Standard Plans List

The Standard Plan sheets applicable to this contract include, but are not limited to those indicated below. Applicable Revised Standard Plans (RSP) and New Standard Plans (NSP) indicated below are included in the project plans as Standard Plan sheets.

	ACRONYMS, ABBREVIATIONS AND SYMBOLS
A10A	**Acronyms and Abbreviations (Sheet 1 of 2)**
A10B	**Acronyms and Abbreviations (Sheet 2 of 2)**
A10C	**Symbols (Sheet 1 of 2)**
A10D	**Symbols (Sheet 2 of 2)**
	PAVEMENT MARKERS, TRAFFIC LINES, AND PAVEMENT MARKINGS
A20A	**Pavement Markers and Traffic Lines, Typical Details**
A20B	**Pavement Markers and Traffic Lines, Typical Details**
A20C	**Pavement Markers and Traffic Lines, Typical Details**
A20D	**Pavement Markers and Traffic Lines, Typical Details**
A24A	**Pavement Markings – Arrows**
A24B	**Pavement Markings – Arrows**
RSP A24C	**Pavement Markings – Symbols and Numerals**
A24D	**Pavement Markings – Words**
A24E	**Pavement Markings – Words and Crosswalks**
	EXCAVATION AND BACKFILL
A62A	**Excavation and Backfill – Miscellaneous Details**
A62B	**Limits of Payment for Excavation and Backfill – Bridge Surcharge and Wall**
A62C	**Limits of Payment for Excavation and Backfill – Bridge**
A62D	**Excavation and Backfill – Concrete Pipe Culverts**
RSP A62DA	**Excavation and Backfill – Concrete Pipe Culverts**
A62F	**Excavation and Backfill – Metal and Plastic Culverts**
	OBJECT MARKERS, DELINEATORS, CHANNELIZERS AND BARRICADES
A73A	**Object Markers**
A73B	**Markers**
A73C	**Delineators, Channelizers and Barricades**
	METAL BEAM GUARD RAILING – STANDARD RAILING SECTIONS
RSP A77A1	**Metal Beam Guard Railing – Standard Railing Section (Wood Post with Wood Block)**
A77B1	**Metal Beam Guard Railing – Standard Hardware**

A77C1	**Metal Beam Guard Railing – Wood Post and Wood Block Details**
RSP A77C3	**Metal Beam Guard Railing – Typical Line Post Embedment and Hinge Point Offset Details**
RSP A77C4	**Metal Beam Guard Railing – Typical Railing Delineation and Dike Positioning Details**
NSP A77C5	**Metal Beam Guard Railing – Typical Vegetation Control Standard Railing Section**
NSP A77C6	**Metal Beam Guard Railing – Typical Vegetation Control for Terminal System End Treatments**
NSP A77C7	**Metal Beam Guard Railing – Typical Vegetation Control at Structure Approach and Departure**
NSP A77C8	**Metal Beam Guard Railing – Typical Vegetation Control at Fixed Object**
NSP A77C9	**Metal Beam Guard Railing – Typical Vegetation Control at Fixed Object**
NSP A77C10	**Metal Beam Guard Railing – Typical Vegetation Control at Fixed Object**
	METAL BEAM GUARD RAILING – TYPICAL LAYOUTS FOR EMBANKMENTS
RSP A77E1	**Metal Beam Guard Railing – Typical Layouts for Embankments**
	METAL BEAM GUARD RAILING – TYPICAL LAYOUTS FOR STRUCTURES
RSP A77F1	**Metal Beam Guard Railing – Typical Layouts for Structure Approach**
	METAL BEAM GUARD RAILING – END ANCHORAGE AND RAIL TENSIONING ASSEMBLY
RSP A77H1	**Metal Railing – End Anchor Assembly (Type SFT)**
A77H3	**Metal Railing – Anchor Cable and Anchor Plate Details**
	METAL BEAM GUARD RAILING – CONNECTIONS DETAILS AND TRANSITION RAILING TO BRIDGE RAILINGS, ABUTMENTS AND WALLS
RSP A77J1	**Metal Beam Guard Railing – Connections to Bridge Railings without Sidewalks Details No. 1**
RSP A77J2	**Metal Beam Guard Railing – Connections to Bridge Railings without Sidewalks Details No. 2**
RSP A77J4	**Metal Beam Guard Railing – Transition Railing (Type WB)**
	METAL BEAM GUARD RAILING – TERMINAL SYSTEM END TREATMENT
A77L1	**Metal Beam Railing – Terminal System (Type SRT)**
A77L4	**Metal Beam Railing – Terminal System (Type CAT)**
A77L5	**Metal Beam Railing – Terminal System (Type FLEAT)**
	CRASH CUSHIONS
A82A1	**Crash Cushion (Type CAT)**
	CURBS, DRIVEWAYS, DIKES, CURB RAMPS AND ACCESSIBLE PARKING
RSP A87A	**Curbs and Driveways**

A87B	**Asphalt Concrete Dikes**
RSP A88A	**Curb Ramp Details**
A88B	**Curb Ramp and Island Passageway Details**
	DRAINAGE INLETS, PIPE INLETS AND GRATES
NSP D71	**Drainage Inlet Markers**
D73	**Drainage Inlets**
RSP D74B	**Drainage Inlets**
D74C	**Drainage Inlets Details**
RSP D75B	**Concrete Pipe Inlets**
D75C	**Pipe Inlets – Ladder and Trash Rack Details**
RSP D77A	**Grate Details**
D77B	**Bicycle Proof Grate Details**
D77C	**Alternative Hinged Cover for Type OL and OS Inlets and Trash Rack for Type OCP Inlet**
	GUTTER AND INLET DEPRESSIONS
D78A	**Gutter Depressions**
D78C	**Inlet Depressions – Asphalt Concrete Shoulders**
	PIPE DOWNDRAINS, ANCHORAGE SYSTEMS AND OVERSIDE DRAINS
D87D	**Overside Drains**
	CONSTRUCTION LOADS ON CULVERTS AND STRUT DETAILS
D88	**Construction Loads on Culverts**
	FLARED END SECTIONS
D94A	**Metal and Plastic Flared End Sections**
D94B	**Concrete Flared End Sections**
	PIPE COUPLING AND JOINT DETAILS
D97A	**Corrugated Metal Pipe Coupling Details No. 1 – Annular Coupling Band Bar and Strap and Angle Connections**
D97C	**Corrugated Metal Pipe Coupling Details No. 3 – Helical and Universal Couplers**
RSP D97D	**Corrugated Metal Pipe Coupling Details No. 4 – Hugger Coupling Bands**
RSP D97E	**Corrugated Metal Pipe Coupling Details No. 5 – Standard Joint**
RSP D97F	**Corrugated Metal Pipe Coupling Details No. 6 – Positive Joint**
RSP D97G	**Corrugated Metal Pipe Coupling Details No. 7 – Downdrain**
D97H	**Reinforced Concrete Pipe or Non-Reinforced Concrete Pipe – Standard and Positive Joints**
	EROSION CONTROL
RNSP H51	**Erosion Control Details (Fiber Roll)**
	TEMPORARY CRASH CUSHIONS, RAILING AND TRAFFIC SCREEN
RSP T1A	**Temporary Crash Cushion, Sand Filled (Unidirectional)**

RSP T1B	**Temporary Crash Cushion, Sand Filled (Bidirectional)**
RSP T2	**Temporary Crash Cushion, Sand Filled (Shoulder Installations)**
T3	**Temporary Railing (Type K)**
NSP T3A	**Temporary Railing (Type K)**
	PROJECT FUNDING SIGNS
RSP T7	**Construction Project Funding Identification Signs**
	TEMPORARY TRAFFIC CONTROL SYSTEMS
T11	**Traffic Control System for Lane Closure on Multilane Conventional Highways**
T15	**Traffic Control System for Moving Lane Closure on Multilane Highways**
	TEMPORARY WATER POLLUTION CONTROL
T51	**Temporary Water Pollution Control Details (Temporary Silt Fence)**
T53	**Temporary Water Pollution Control Details (Temporary Cover)**
T54	**Temporary Water Pollution Control Details (Temporary Erosion Control Blanket)**
T55	**Temporary Water Pollution Control Details (Temporary Erosion Control Blanket)**
RSP T56	**Temporary Water Pollution Control Details (Temporary Fiber Roll)**
T57	**Temporary Water Pollution Control Details (Temporary Check Dam)**
T58	**Temporary Water Pollution Control Details (Temporary Construction Entrance)**
T59	**Temporary Water Pollution Control Details (Temporary Concrete Washout Facility)**
NSP T61	**Temporary Water Pollution Control Details (Temporary Drainage Inlet Protection)**
NSP T62	**Temporary Water Pollution Control Details (Temporary Drainage Inlet Protection)**
NSP T63	**Temporary Water Pollution Control Details (Temporary Drainage Inlet Protection)**
NSP T64	**Temporary Water Pollution Control Details (Temporary Drainage Inlet Protection)**
NSP T65	**Temporary Water Pollution Control Details [Temporary Fence (Type ESA)]**
	BRIDGE DETAILS
B0-1	**Bridge Details**
B0-3	**Bridge Details**
B0-5	**Bridge Details**
	PILES
B2-5	**Pile Details – Class 90 and Class 140**
	JOINT SEALS
RSP B6-21	**Joint Seals (Maximum Movement Rating = 2")**

	BRIDGE CONCRETE BARRIERS
B11-55	**Concrete Barrier Type 732**
	COMMUNICATION AND SPRINKLER CONTROL CONDUITS (BRIDGE)
B14-3	**Communication and Sprinkler Control Conduits (Conduit Less Than 4")**
	ROADSIDE SIGNS
RS1	**Roadside Signs, Typical Installation Details No. 1**
RS2	**Roadside Signs – Wood Post, Typical Installation Details No. 2**
RS4	**Roadside Signs, Typical Installation Details No. 4**
	OVERHEAD AND ROADSIDE SIGNS PANELS
S93	**Framing Details for Framed Single Sheet Aluminum Signs, Rectangular Shape**
S94	**Roadside Framed Single Sheet Aluminum Signs, Rectangular Shape**
	ELECTRICAL SYSTEMS – SYMBOLS AND ABBREVIATIONS
RSP ES-1A	**Electrical Systems (Symbols and Abbreviations)**
RSP ES-1B	**Electrical Systems (Symbols and Abbreviations)**
RSP ES-1C	**Electrical Systems (Symbols and Abbreviations)**
	ELECTRICAL SYSTEMS – SERVICE EQUIPMENT AND WIRING DIAGRAMS
ES-2A	**Electrical Systems (Service Equipment)**
RSP ES-2C	**Electrical Systems (Service Equipment Notes, Type III Series)**
RSP ES-2D	**Electrical Systems (Service Equipment and Typical Wiring Diagram, Type III – A Series)**
	ELECTRICAL SYSTEMS – CONTROLLER CABINETS
ES-3C	**Electrical Systems (Controller Cabinet Details)**
	ELECTRICAL SYSTEMS – SIGNAL HEADS, SIGNAL FACES AND MOUNTINGS
ES-4A	**Electrical Systems (Signal Heads and Mountings)**
ES-4B	**Electrical Systems (Signal Heads and Mountings)**
RSP ES-4C	**Electrical Systems (Signal Heads and Mountings)**
RSP ES-4D	**Electrical Systems (Signal Heads and Mountings)**
ES-4E	**Electrical Systems (Signal Faces and Mountings)**
	ELECTRICAL SYSTEMS – DETECTORS
RSP ES-5A	**Electrical Systems (Detectors)**
ES-5B	**Electrical Systems (Detectors)**
ES-5C	**Electrical Systems (Detectors)**
ES-5D	**Electrical Systems (Detectors)**
	ELECTRICAL SYSTEMS – SIGNAL AND LIGHTING STANDARD, PUSH BUTTON POSTS AND TYPE 15TS STANDARD
ES-7A	**Electrical Systems (Signal and Lighting Standards, Push Button Posts and Type 15TS Standard)**

	ELECTRICAL SYSTEMS – SIGNAL AND LIGHTING STANDARDS
RSP ES-7B	**Electrical Systems (Signal and Lighting Standard – Type 1 Standards and Equipment Numbering)**
RSP ES-7F	**Electrical Systems (Signal and Lighting Standard – Case 4 Arm Loading, Wind Velocity = 100 mph, Arm Lengths 25' to 45')**
ES-7H	**Electrical Systems (Signal and Lighting Standard – Case 5 Arm Loading, Wind Velocity = 100 mph, Arm Lengths 60' to 65')**
	ELECTRICAL SYSTEMS – SIGNAL AND LIGHTING STANDARD DETAILS
ES-7M	**Electrical Systems (Signal and Lighting Standards – Details No. 1)**
ES-7N	**Electrical Systems (Signal and Lighting Standards – Details No. 2)**
	ELECTRICAL SYSTEMS – PULL BOX DETAILS
ES-8	**Electrical Systems (Pull Box Details)**
	ELECTRICAL SYSTEMS – ISOFOOTCANDLE DIAGRAMS AND FOUNDATION DETAILS
ES-10	**Electrical Systems (Isofootcandle Diagrams)**
ES-11	**Electrical Systems (Foundation Installations)**
	ELECTRICAL SYSTEMS – SPLICING, WIRING DETAILS AND FUSE RATINGS
ES-13A	**Electrical Systems (Splicing Details)**
ES-13B	**Electrical Systems (Wiring Details and Fuse Ratings)**

AMENDMENTS ISSUE DATE: 10-21-11

SECTION 0 GLOBAL REVISIONS
(Issued 06-05-09)

Global revisions are changes to contract documents not specific to a section of the Standard Specifications. In each contract document at each occurrence, interpret the following terms as shown:

Term	Interpretation	Conditions
AC	HMA	1. Where AC means asphalt concrete 2. Except where existing AC is described
Asphalt concrete	Hot mix asphalt	Except where existing asphalt concrete is described
Class 1 concrete	Concrete containing not less than 675 pounds of cementitious material per cubic yard	--
Class 2 concrete	Concrete containing not less than 590 pounds of cementitious material per cubic yard	--
Class 3 concrete	Concrete containing not less than 505 pounds of cementitious material per cubic yard	--
Class 4 concrete	Concrete containing not less than 420 pounds of cementitious material per cubic yard	--
Clause providing an option to use either a class concrete or minor concrete	Use minor concrete	--
Clause referring to a delay as a right-of-way delay	Delay under Section 8-1.09, "Delays"	--
Contact joint	Construction joint	--
Controlling operation	Controlling activity	--
Engineer's Estimate	Verified Bid Item List	--
Engineering fabrics	Geosynthetics	--
Notice to Contractors	Notice to Bidders	--
Partial payments	Progress payments	Except in Section 9-1.07D, "Mobilization"
PCC pavement	Concrete pavement	Except where existing PCC pavement is described
Portland cement concrete pavement	Concrete pavement	Except where existing portland cement concrete pavement is described
Project information	Supplemental project information	Except in "Contract Project Information Signs"
Reference to a working day or non–working day under Section 8-1.06, "Time of Completion"	Working day as defined in Section 1-4.02, "Glossary"	--
Section 9-1.015	Section 9-1.01C	--
Section 86, "Signal, Lighting and Electrical Systems"	Section 86, "Electrical Systems"	--
Section 86-2.07, "Traffic Pull Boxes"	Section 86-2.06, "Pull Boxes"	

Section 86-2.08, "Conductors"	Section 86-2.08, "Conductors and Cables"	--
Section 86-5.01A(5), "Installation Details"	Section 86-5.01A(4), "Installation Details"	--
Section 86-6.05, "Sign Lighting Fixtures—Mercury"	Section 86-6.05, "Induction Sign Lighting Fixtures"	--
Time extension due to an unanticipated event not caused by either party or an issue involving a third party under Section 8-1.07, "Liquidated Damages"	Non–working day	--
Time extension due to an act of the Engineer or of the Department not contemplated by the contract	Time adjustment under Section 8-1.09B, "Time Adjustments"	--
Weakened plane joint	Contraction joint	--

^^

SECTION 1 DEFINITIONS AND TERMS
(Issued 05-13-11)

Replace Section 1 with:
SECTION 1 GENERAL
1-1 GENERAL

1-1.01 GENERAL

Section 1 includes general rules of interpretation.

The Department is gradually standardizing the style and language of the specifications. The new style and language includes:

1. Use of:

    1.1. Imperative mood
    1.2. Introductory modifiers
    1.3. Conditional clauses

2. Elimination of:

    2.1. Language variations
    2.2. Definitions for industry-standard terms
    2.3. Redundant specifications
    2.4. Needless cross-references

The use of this new style does not change the meaning of a specification not yet using this style.

Sections 1 through 9 include general specifications applicable to every contract unless specified as applicable under certain conditions.

Sections 10 through 15 include specifications for general construction applicable to every contract unless specified as applicable under certain conditions.

The specifications are written to the Bidder before award and the Contractor after. Before award, interpret sentences written in the imperative mood as starting with "The Bidder must" and interpret "you" as "the Bidder" and "your" as "the Bidder's." After award, interpret sentences written in the imperative mood as starting with "The Contractor must" and interpret "you" as "the Contractor" and "your" as "the Contractor's."

Omission of "a," "an," and "the" is intentional. These articles have been omitted in some specifications for streamlining purposes.

Unless an object or activity is specified to be less than the total, the quantity or amount is all of the object or activity.

A plural term includes the singular.

All items in a list apply unless the items are specified as choices.

Headings are included for the purposes of organization and referencing. Inclusion of a heading with no related content, "Reserved," or "Not Used" does not indicate that no specification exists for that subject; applicable specifications may be covered in a general or referenced specification.

1-2 REFERENCES

1-2.01 REFERENCES

Where Standard Specifications refer to the special provisions to describe the work, interpret the reference as a reference to the Bid Item List, the special provisions, or both.

Interpret a reference to a section of the Standard Specifications as a reference to the Standard Specifications as revised by any amendment, special provision, or both.

A reference within parentheses to a law or regulation is included in the contract for convenience only and is not a comprehensive listing of related laws and regulations. Lack of a reference does not indicate no related laws or regulations exist.

Where the version of a referenced document is not specified, use the current version in effect on the date of Notice to Bidders.

A reference to a subsection includes the section's general specifications of which the subsection is a part.

A code not specified as a Federal code is a California code.

1-3 ABBREVIATIONS AND MEASUREMENT UNITS

1-3.01 ABBREVIATIONS

Abbreviations

Abbreviation	Meaning
AAN	American Association of Nurserymen
AASHTO	American Association of State Highway and Transportation Officials
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AMA	archaeological monitoring area
ANSI	American National Standards Institute
APHA	American Public Health Association
API	American Petroleum Institute
AREMA	American Railway Engineering and Maintenance-of-Way Association
ASME	American Society of Mechanical Engineers
ASTM	American Society for Testing and Materials
AWG	American Wire Gage
AWPA	American Wood-Preservers' Association
AWS	American Welding Society
AWWA	American Water Works Association
CIH	Certified Industrial Hygienist
DBE	Disadvantaged Business Enterprise
DVBE	Disabled Veteran Business Enterprise
EIA	Electronic Industries Alliance
ESA	environmentally sensitive area
ETL	Electrical Testing Laboratories
(F)	final pay item
FHWA	Federal Highway Administration
IEEE	Institute of Electrical and Electronics Engineers
ITE	Institute of Transportation Engineers
NEC	National Electrical Code
NETA	National Electrical Testing Association, Inc.
NEMA	National Electrical Manufacturers Association
PLAC	permit, license, agreement, certification, or any combination of these
RFI	request for information
SSPC	The Society for Protective Coatings
TIA	time impact analysis
UL	Underwriters' Laboratories Inc.

1-3.02 MEASUREMENT UNITS

Measurement Units

Symbols as used in the specifications	Symbols as used in the Bid Item List	Meaning
A	—	amperes
	ACRE	acre
	CF	cubic foot
	CY	cubic yard
--	EA	each
g	--	gram
ksi	--	kips per square inch
	GAL	gallon
h	H	hour
	LB	pound
--	LS	lump sum
	LF	linear foot
	LNMI	lane mile
	MFBM	thousand foot board measure
	MI	mile
	MSYD	thousand station yard
Ω	--	ohm
pcf	--	pounds per cubic foot
s	--	second
	STA	100 feet
	SQFT	square foot
	SQYD	square yard
	TAB	tablet
ton	TON	2,000 pounds
V	--	volt
W	--	watt
--	WDAY	working day

1-4 DEFINITIONS

1-4.01 GENERAL

Interpret terms as defined in the contract documents. A construction-industry term not defined in the contract documents has the meaning defined in Means Illustrated Construction Dictionary, Condensed Version, Second Edition.

1-4.02 GLOSSARY

aerially deposited lead: Lead primarily from vehicle emissions deposited within unpaved areas or formerly unpaved areas.

archaeological monitoring area: Area within, near, or straddling the project limits where access is allowed, but work is subject to archaeological monitoring.

archaeological resources: Remains of past human activity, including historic and prehistoric material (e.g., tools and tool fragments, hearth and food remains, structural remains, and human remains).

acceptance: Formal written acceptance by the Director of an entire contract that has been completed in all respects in accordance with the plans and specifications and any modifications to them previously approved.

base: Layer of specified material of planned thickness placed immediately below the pavement or surfacing.

basement material: Material in excavation or embankments underlying the lowest layer of subbase, base, pavement, surfacing, or other specified layer to be placed.

bid item: Specific work unit for which the bidder provides a price.

Bid Item List: List of bid items and the associated quantities.

Bid Item List, verified: Bid Item List with verified prices. The Contract Proposal of Low Bidder at the Department's Web site is the verified Bid Item List.

bridge: Structure, with a bridge number, that carries a utility facility, or railroad, highway, pedestrian or other traffic, over a water course or over or under or around any obstruction.

building-construction contract: Contract that has "building construction" on the cover of the Notice to Bidders and Special Provisions.

business day: Day on the calendar except Saturday or holiday.

California Manual on Uniform Traffic Control Devices: The California Manual on Uniform Traffic Control Devices for Streets and Highways (California MUTCD) is issued by the Department of Transportation and is the Federal Highway Administration's MUTCD 2003 Edition, as amended for use in California.

Certified Industrial Hygienist: Industrial hygienist certified in comprehensive practice by the American Board of Industrial Hygiene.

conduit: Pipe or tube in which smaller pipes, tubes, or electrical conductors are inserted or are to be inserted.

contract: Written and executed contract between the Department and the Contractor.

contract bonds: Security for the payment of workers and suppliers furnishing materials, labor, and services and for guaranteeing the Contractor's work performance.

contract item: Bid item.

Contractor: Person or business or its legal representative entering into a contract with the Department for performance of the work.

culvert: Structure, other than a bridge, that provides an opening under a roadway for drainage or other purposes.

day: 24 consecutive hours running from midnight to midnight; calendar day.

deduction: Amount of money permanently taken from progress payment and final payment. Deductions are not retentions under Pub Cont Code § 7107.

Department: Department of Transportation as defined in St & Hwy Code § 20 and authorized in St & Hwy Code § 90; its authorized representatives.

detour: Temporary route for traffic around a closed road part. A passageway through a job site is not a detour.

Director: Department's Director.

Disabled Veteran Business Enterprise: Business certified as a DVBE by the Office of Small Business and DVBE Services, Department of General Services.

divided highway: Highway with separated traveled ways for traffic, generally in opposite directions.

Engineer: Department's Chief Engineer acting either directly or through properly authorized agents; the agents acting within the scope of the particular duties delegated to them.

environmentally sensitive area: Area within, near, or straddling the project limits where access is prohibited or limited to protect environmental resources.

Federal-aid contract: Contract that has a Federal-aid project number on the cover of the Notice to Bidders and Special Provisions.

fixed costs: Labor, material, or equipment cost directly incurred by the Contractor as a result of performing or supplying a particular bid item that remains constant regardless of the item's quantity.

frontage road: Local street or road auxiliary to and located generally on the side of an arterial highway for service to abutting property and adjacent areas and for control of access.

grading plane: Basement material surface on which the lowest layer of subbase, base, pavement, surfacing, or other specified layer is placed.

highway: Whole right of way or area that is reserved for and secured for use in constructing the roadway and its appurtenances.

holiday:

1. Every Sunday
2. January 1st, New Year's Day
3. 3rd Monday in January, Birthday of Martin Luther King, Jr.
4. February 12th, Lincoln's Birthday
5. 3rd Monday in February, Washington's Birthday
6. March 31st, Cesar Chavez Day
7. Last Monday in May, Memorial Day
8. July 4th, Independence Day
9. 1st Monday in September, Labor Day
10. 2nd Monday in October, Columbus Day
11. November 11th, Veterans Day
12. 4th Thursday in November, Thanksgiving Day
13. Day after Thanksgiving Day
14. December 25th, Christmas Day

If January 1st, February 12th, March 31st, July 4th, November 11th, or December 25th falls on a Sunday, the Monday following is a holiday. If November 11th falls on a Saturday, the preceding Friday is a holiday. Interpret "legal holiday" as "holiday."

idle equipment: Equipment:

1. On the job site at the start of a delay
2. Idled because of the delay
3. Not operated during the delay

informal-bid contract: Contract that has "Informal Bid Authorized by Pub Cont Code §10122" on the cover of the Notice to Bidders and Special Provisions.

Information Handout: Supplemental project information furnished to bidders as a handout.

laboratory: Laboratory authorized by the Department to test materials.

liquidated damages: Amount prescribed in the specifications, pursuant to the authority of Pub Cont Code § 10226, to be paid to the State or to be deducted for each day's delay in completing the whole or any specified portion of the work beyond the time allowed in the specifications.

listed species: Any species listed as threatened or endangered under (1) Federal Endangered Species Act of 1973, 16 USC §1531 et seq., (2) California Endangered Species Act, Fish & Game Code §§ 2050–2115.5, (3) or both.

material shortage: Shortage of raw or produced material that is area-wide and caused by an unusual market condition, except if any of the following occurs:

1. Shortage relates to a produced, nonstandard material

2. Supplier's and the Contractor's priority for filling an order differs
3. Event outside the U.S. for a material produced outside the U.S.

median: Portion of a divided highway separating the traveled ways for traffic in opposite directions including inside shoulders.

mobilization: Preparatory work that must be performed or costs incurred before starting work on the various items on the job site (Pub Cont Code § 10104).

Notice to Bidders: Document that provides a general work description, bidder and bid specifications, and the time and location the Department receives bids.

paleontological resources: Fossils and the deposits they are found in. Fossils are evidence of ancient life preserved in sediments and rock. Examples of paleontological resources are remains of (1) animals, (2) animal tracks, (3) plants, and (4) other organisms. Archaeological resources are not paleontological and fossils found within an archaeological resource are generally considered archaeological resources, not paleontological resources.

pavement: Uppermost layer of material placed on the traveled way or shoulders. This term is used interchangeably with surfacing.

permitted biological activities: Monitoring, surveying, or other practices that require a take permit and project specific permission from U.S. Fish and Wildlife Service or NOAA Fisheries or a take permit or Memorandum of Understanding with Department of Fish and Game.

plans: Official project plans and Standard Plans, profiles, typical cross sections, working drawings and supplemental drawings, or reproductions thereof, approved by the Engineer, which show the location, character, dimensions and details of the work to be performed. These documents are to be considered as a part of the plans.

In the above definition, the following terms are defined as follows:

Standard Plans: Standard Plans issued by the Department.

project plans: Specific details and dimensions peculiar to the work supplemented by the Standard Plans insofar as the same may apply.

protective radius: Minimum distance between construction activities and regulated species.

regulated species: Any species protected by one or any combination of the following:

1. Federal Endangered Species Act of 1973, 16 USC §1531 et seq.
2. California Endangered Species Act, Fish & Game Code §§2050–2115.5
3. Fish & Game Code §§1600–1616
4. National Environmental Policy Act, 42 USC §4321 et seq.
5. California Environmental Quality Act, Pub Res Code § 21000 et.seq.
6. Other law or regulation that governs activities that affect species or their habitats.

roadbed: Area between the intersection of the upper surface of the roadway and the side slopes or curb lines. The roadbed rises in elevation as each increment or layer of subbase, base, surfacing or pavement is placed. Where the medians are so wide as to include areas of undisturbed land, a divided highway is considered as including 2 separate roadbeds.

roadway: Highway portion included between the outside lines of sidewalks, or curbs, slopes, ditches, channels, waterways, and including all the appertaining structures, and other features necessary to proper drainage and protection.

routine biological activities: Biological monitoring, surveying, or other activity that does not require a take permit from the U.S. Fish and Wildlife Service or NOAA Fisheries or a take permit or Memorandum of Understanding with Department of Fish and Game.

service-approved biologist: Biologist whose activities must be approved by a state or federal agency as provided in PLACs.

shoulder: Roadway portion contiguous with the traveled way for accommodation of stopped vehicles, for emergency use, and for lateral support of base and surface courses.

small tool: Tool or piece of equipment not listed in Labor Surcharge and Equipment Rental Rates that has a replacement value of $500 or less.

special provisions: Specific clauses setting forth conditions or requirements peculiar to the work and supplementary to these Standard Specifications. The Department's publication titled "Labor Surcharge And Equipment Rental Rates" is part of the special provisions.

specifications: Directions, provisions, and requirements contained in these Standard Specifications, Amendments to the Standard Specifications, and the special provisions. Where the term "these specifications" or "these Standard Specifications" is used in this book, it means the provisions set forth in this book.

State: State of California, including its agencies, departments, or divisions, whose conduct or action is related to the work.

Structure Design: Offices of Structure Design of the Department.

subbase: Layer of specified material of planned thickness between a base and the basement material.

subgrade: Roadbed portion on which pavement, surfacing, base, subbase, or a layer of any other material is placed.

substructure: Bridge portions below the bridge seats, tops of piers, haunches of rigid frames, or below the spring lines of arches. Backwalls and parapets of abutments and wingwalls of bridges are portions of the substructure.

superstructure: Bridge portion except the bridge substructure.

supplemental project information: Information relevant to the project, specified as supplemental project information, and made available to bidders.

surfacing: Uppermost layer of material placed on the traveled way, or shoulders. This term is used interchangeably with pavement.

take: Legal definition regarding harm to listed species as defined in 16 USC §1532 and Fish & Game Code § 86.

take permit: Permit granted by the US Fish and Wildlife Service or by the NOAA Fisheries that allows take of federal listed species under 16 USC §1539 or by the Department of Fish & Game that allows take of state listed species under to Fish & Game Code § 2081.

traffic lane: Portion of a traveled way for the movement of a single line of vehicles.

traveled way: Portion of the roadway for the movement of vehicles, exclusive of shoulders.

total bid: Sum of the item totals as verified by the Department; original contract price.

withhold: Money temporarily or permanently taken from progress payment. Withholds are not retentions under Pub Cont Code § 7107.

work: All the work specified, indicated, shown or contemplated in the contract to construct the improvement, including all alterations, amendments, or extensions to it made by contract change order or other written orders of the Engineer.

working day: Time measure unit for work progress. A working day is any day except:

1. Saturdays and holidays

2. A day when you cannot perform work on the controlling activity for at least 50 percent of the day with at least 50 percent of the normal labor and equipment due to any of the following:

    2.1. Adverse weather-related conditions that cause you to dismiss the crew
    2.2. Maintaining traffic under the contract
    2.3. The Engineer's direction to suspend the controlling activities for reasons unrelated to your performance
    2.4. An unanticipated event not caused by either party such as:

        2.4.1. Act of God (Pub Cont Code § 7105)
        2.4.2. Act of a public enemy
        2.4.3. Epidemic
        2.4.4. Fire
        2.4.5. Flood
        2.4.6. Governor-declared state of emergency
        2.4.7. Landslide
        2.4.8. Quarantine restriction

    2.5. An issue involving a third-party, including:

        2.5.1. Industry or area-wide labor strike
        2.5.2. Material shortage
        2.5.3. Freight embargo
        2.5.4. Jurisdictional requirement of a law enforcement agency
        2.5.5. Workforce labor dispute of a utility or non-highway facility owner resulting in a utility or non-highway facility reconstruction not described and not solely for the Contractor's convenience

1-5 DISTRICTS

District Composition and Office Addresses

District	Counties	Location Address	Mailing Address
1	Del Norte (DN), Humboldt (Hum), Lake (Lak), Mendocino (Men)	1656 UNION ST EUREKA, CA	PO BOX 3700 EUREKA CA 95502
2	Lassen (Las), Modoc (Mod), Plumas (Plu), Shasta (Sha), Siskiyou (Sis), Tehama (Teh), Trinity (Tri)	1657 RIVERSIDE DR REDDING, CA	PO BOX 496073 REDDING CA 96049-6073
3	Butte (But), Colusa (Col), El Dorado (ED), Glenn (Gle), Nevada (Nev), Placer (Pla), Sacramento (Sac), Sierra (Sie), Sutter (Sut), Yolo (Yol), Yuba (Yub)	703 B ST MARYSVILLE, CA	PO BOX 911 MARYSVILLE CA 95901
4	Alameda (Ala), Contra Costa (CC), Marin (Mrn), Napa (Nap), San Francisco (SF), San Mateo (SM), Santa Clara (SCl), Solano (Sol), Sonoma (Son)	111 GRAND AVE OAKLAND, CA	PO BOX 23660 OAKLAND CA 94623-0660
5	Monterey (Mon), San Benito (SBt), San Luis Obispo (SLO), Santa Barbara (SB), Santa Cruz (SCr)	50 HIGUERA ST SAN LUIS OBISPO, CA	50 HIGUERA ST SAN LUIS OBISPO CA 93401-5415
6	Fresno (Fre), Kern (Ker), Kings (Kin), Madera (Mad), Tulare (Tul)	1352 W. OLIVE AVE FRESNO, CA	PO BOX 12616 FRESNO CA 93728-2616
7	Los Angeles (LA), Ventura (Ven)	100 S. MAIN ST LOS ANGELES	100 S MAIN ST LOS ANGELES CA 90012
8	Riverside (Riv), San Bernardino (SBd)	464 W 4TH ST SAN BERNARDINO, CA	464 W 4TH ST SAN BERNARDINO CA 92401-1400
9	Inyo (Iny), Mono (Mno)	500 S MAIN ST BISHOP, CA	500 S MAIN ST BISHOP CA 93514-3423
10	Alpine (Alp), Amador (Ama), Calaveras (Cal), Mariposa (Mpa), Merced (Mer), San Joaquin (SJ), Stanislaus (Sta), Tuolumne (Tuo)	1976 E CHARTER WAY STOCKTON, CA	PO BOX 2048 STOCKTON CA 95201
11	Imperial (Imp), San Diego (SD)	4050 TAYLOR ST SAN DIEGO, CA	4050 TAYLOR ST SAN DIEGO CA 92110-2737
12	Orange (Ora)	3347 MICHELSON DR STE 100 IRVINE, CA	3347 MICHELSON DR STE 100 IRVINE CA 92612-0661

A project with work in District 1, 2, or 3 is a North Region project. For Districts 1, 2, and 3, interpret each reference to the district office as the North Region office. The North Region office address is the District 3 address.

1-6 WEB SITES, ADDRESSES, AND TELEPHONE NUMBERS

Web Sites, Addresses, and Telephone Numbers

Agency, Department Unit, or Reference	Web Site	Address	Telephone No.
Bidders' Exchange	www.dot.ca.gov/hq/esc/oe/bidex	MSC 26 BIDDERS' EXCHANGE DEPARTMENT OF TRANSPORTATION 1727 30TH ST SACRAMENTO CA 95816-7005	(916) 227-6259
Department	www.dot.ca.gov		
Department of General Services, Office of Small Business and DVBE Services	www.pd.dgs.ca.gov/smbus/default.htm	OFFICE OF SMALL BUSINESS AND DVBE SERVICES DEPARTMENT OF GENERAL SERVICES 707 3RD ST WEST SACRAMENTO CA 95605-2811	(800) 559-5529 (916) 375-4940
Department of Industrial Relations	www.dir.ca.gov		
Department of Industrial Relations, Division of Apprenticeship Standards		455 GOLDEN GATE AVENUE SAN FRANCISCO, CA 94102	
Division of Accounting, Office of External Accounts Payable	http://www.dot.ca.gov/hq/asc/oap/payments/contact.htm#conpets1	MAJOR CONSTRUCTION PAYMENT AND INFORMATION UNIT OFFICE OF EXTERNAL ACCOUNTS PAYABLE DIVISION OF ACCOUNTING DEPARTMENT OF TRANSPORTATION P.O. BOX 168043 SACRAMENTO, CA 95816-8043	(916) 227-9013
Office Engineer		MSC 43 OFFICE ENGINEER DEPARTMENT OF TRANSPORTATION 1727 30TH ST SACRAMENTO CA 95816-7005	
Office Engineer–Verified Bid Results	http://www.dot.ca.gov/hq/esc/oe/awards/bidsum_html/6week_list.html.		
Offices of Structure Design, Documents Unit		MSC 9-4/4I DOCUMENTS UNIT OFFICES OF STRUCTURE DESIGN DEPARTMENT OF TRANSPORTATION 1801 30TH ST SACRAMENTO CA 95816-7006	(916) 227-0716

Publication Distribution Unit		PUBLICATION UNIT DEPARTMENT OF TRANSPORTATION 1900 ROYAL OAKS DRIVE SACRAMENTO CA 95815-3800	
Transportation Laboratory		MATERIALS AND ENGINEERING TESTING SERVICES AND GEOTECHNICAL SERVICES DEPARTMENT OF TRANSPORTATION 5900 FOLSOM BLVD SACRAMENTO CA 95819-4612	(916) 227-7000
Department's Pre-Qualified Products List	http://www.dot.ca.gov/hq/esc/approved_products_list		

^^

SECTION 2 PROPOSAL REQUIREMENTS AND CONDITIONS
(Issued 11-15-10)

Replace Section 2 with:

SECTION 2 BIDDING

2-1.01 GENERAL

Section 2, "Bidding," includes specifications related to bid eligibility and the bidding process.

2-1.02 BID INELIGIBILITY

A firm that has provided architectural or engineering services to the Department for this contract before bid submittal for this contract is prohibited from any of the following:

1. Submit a bid
2. Subcontract for a part of the work
3. Supply materials

2-1.03 BID DOCUMENTS

2-1.03A General

Standard Specifications and Standard Plans may be viewed at the Department's Web site and may be purchased at the Publication Distribution Unit.

Special provisions, Amendments to the Standard Specifications, and project plans may be viewed at the Bidders' Exchange. To obtain bid books, submit a request to the Bidders' Exchange. For an informal-bid contract, you may also obtain special provisions, Amendments to the Standard Specifications, and project plans at the Bidders' Exchange.

2-1.03B Supplemental Project Information

Logs of test borings attached to the project plans are supplemental project information. The Department makes other supplemental information available as specified in the special provisions.

If an Information Handout is available, you may view it at:

http://www.dot.ca.gov/hq/esc/oe/weekly_ads/index.php

If rock cores are available for inspection, you may view them by sending a request to Coreroom@dot.ca.gov. If other supplemental project information is available for inspection, you may view it by phoning in a request. Make your request at least 7 days before viewing. Include in your request:

1. District-County-Route
2. Contract number
3. Viewing date
4. Contact information, including telephone number.

For rock cores, also include the bridge number in your request.

If bridge as-built drawings are available:

1. For a project in District 1 through 6 or 10, you may request them from the Office of Structure Maintenance and Investigations, fax (916) 227-8357
2. For a project in District 7, 8, 9, 11, or 12, you may request them from the Office of Structure Maintenance and Investigations, fax (916) 227-8357, and are available at the Office of Structure Maintenance and Investigations, Los Angeles, CA, telephone (213) 897-0877

As-built drawings may not show existing dimensions and conditions. Where new construction dimensions are dependent on existing bridge dimensions, verify the field dimensions and adjust dimensions of the work to fit existing conditions.

2-1.04–2-1.10 RESERVED

2-1.11 JOB SITE AND DOCUMENT EXAMINATION

Examine the job site and bid documents.

Bid submission is your acknowledgment that you have examined the job site and bid documents and are satisfied with:

1. General and local conditions to be encountered
2. Character, quality, and scope of work to be performed
3. Quantities of materials to be furnished
4. Character, quality, and quantity of surface and subsurface materials or obstacles
5. Requirements of the contract

2-1.12 BID DOCUMENT COMPLETION

2-1.12A General

Complete forms in the Bid book.

On the Subcontractor List you may either submit each subcontracted bid item number and corresponding percentage with your bid or fax this information to (916) 227-6282 within 24 hours after bid opening. If you fail to submit this information within the time specified, your bid is nonresponsive.

Except for the bid item number and the percentage of each item subcontracted, do not fax submittals.

2-1.12B Bid Item List and Bid Comparison

Submit a bid based on the work item quantities the Department shows in the Bid Item List.

For a lump sum based bid, the Department compares bids based on the total price.

For a unit price based bid, the Department compares bids based on the sum of the item totals.

For a cost plus time based bid, the Department compares bids based on the sum of the item totals and the total bid for time. If your bid for time exceeds the number of working days described in the Notice to Bidders, your bid is nonresponsive.

2-1.12C Subcontractor List

In the Subcontractor List, list each subcontractor to perform work in an amount in excess of 1/2 of 1 percent of the total bid or $10,000, whichever is greater (Pub Cont Code § 4100 et seq.)

The Subcontractor List must show the name, address, and work portions to be performed by each subcontractor listed. Show work portion by bid item number, description, and percentage of each bid item subcontracted.

2-1.13 BIDDER'S SECURITY

Submit your bid with one of the following forms of bidder's security equal to at least 10 percent of the bid:

1. Cash
2. Cashier's check
3. Certified check
4. Bidder's bond signed by a surety insurer who is licensed in California

Make checks and bonds payable to the Department of Transportation.

If using a bidder's bond, you may use the form in the Bid book. If you do not use the form in the Bid book, use a form containing the same information.

2-1.14 BID SUBMITTAL

Submit your bid:

1. Under sealed cover
2. Marked as a bid
3. Identifying the contract number and the bid opening date

If an agent other than the authorized corporation officer or a partnership member signs the bid, file a Power of Attorney with the Department either before opening bids or with the bid. Otherwise, the bid may be nonresponsive.

2-1.15 BID WITHDRAWAL

An authorized agent may withdraw a bid before the bid opening date and time by submitting a written bid withdrawal request at the location where the bid was submitted. Withdrawing a bid does not prevent you from submitting a new bid.

After the bid opening time, you cannot withdraw a bid.

2-1.16 BID OPENING

The Department publicly opens and reads bids at the time and place described in the Notice to Bidders.

2-1.17 BID REJECTION

The Department may reject:

1. All bids
2. A nonresponsive bid

2-1.18 BID RELIEF

The Department may grant bid relief under Pub Cont Code § 5100 et seq. Submit any request for bid relief to the Office Engineer. For Relief of Bid Request form, go to:

http://www.dot.ca.gov/hq/esc/oe/contractor_info/relief.pdf

2-1.19 SUBMITTAL FAILURE HISTORY

The Department considers a bidder's past failure to submit documents required after bid opening in determining a bidder's responsibility.

2-1.20 BID RIGGING

Section 2-1.20, "Bid Rigging," applies to a Federal-aid contract.

The U.S. Department of Transportation (DOT) provides a toll-free hotline to report bid rigging activities. Use the hotline to report bid rigging, bidder collusion, and other fraudulent activities. The hotline number is (800) 424-9071. The service is available Monday through Friday between 11:00 a.m. and 8:00 p.m. and is confidential and anonymous. The hotline is part of the DOT's effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General.

^^

SECTION 3 AWARD AND EXECUTION OF CONTRACT
(Issued 11-15-10)

Replace Section 3 with:

SECTION 3 CONTRACT AWARD AND EXECUTION

3-1.01 SCOPE

Section 3, "Contract Award and Execution," includes specifications related to contract award and execution.

3-1.02 CONTRACT AWARD

Submit any bid protest to the Office Engineer.

If the Department awards the contract, the award is made to the lowest responsible bidder within the number of days shown in the following table:

Contract Award Period

Days (after bid opening)	Project Estimated Cost shown in the Notice to Bidders
30	< $200 million
60	≥ $200 million

The Department may extend the specified award period if the bidder agrees.

3-1.03 CONTRACT BONDS (PUB CONT CODE §§ 10221 AND 10222)

The successful bidder must furnish:

1. Payment bond to secure the claim payments of laborers, workers, mechanics, or materialmen providing goods, labor, or services under the contract. This bond must be equal to at least 100 percent of the total bid.
2. Performance bond to guarantee the faithful performance of the contract. This bond must be equal to at least 50 percent of the total bid.

The Department furnishes the successful bidder with the bond forms.

3-1.04 CONTRACTOR LICENSE

For a Federal-aid contract, the Bidder must be properly licensed (Pub Cont Code § 10164) from contract award through contract acceptance.

For a non-Federal-aid contract:

1. The Bidder must be properly licensed from bid opening through contract acceptance (Bus & Prof Code § 7028.15)
2. Joint venture bidders must obtain a joint venture license before contract award (Bus & Prof Code § 7029.1)

3-1.05 INSURANCE POLICIES

The successful bidder must submit:

1. Copy of its commercial general liability policy and its excess policy or binder until such time as a policy is available, including the declarations page, applicable endorsements, riders, and other modifications in effect at the time of contract execution. Standard ISO form No. CG 0001 or similar exclusions are allowed if not inconsistent with Section 7-

1.12, "Indemnification and Insurance." Allowance of additional exclusions is at the discretion of the Department.

2. Certificate of insurance showing all other required coverages. Certificates of insurance, as evidence of required insurance for the auto liability and any other required policy, shall set forth deductible amounts applicable to each policy and all exclusions that are added by endorsement to each policy. The evidence of insurance shall provide that no cancellation, lapse, or reduction of coverage will occur without 10 days prior written notice to the Department.
3. A declaration under the penalty of perjury by a CPA certifying the accountant has applied GAAP guidelines confirming the successful bidder has sufficient funds and resources to cover any self-insured retentions if the self-insured retention is over $50,000.

If the successful bidder uses any form of self-insurance for workers compensation in lieu of an insurance policy, it shall submit a certificate of consent to self-insure under Labor Code § 3700.

3-1.06–3-1.08 RESERVED

3-1.09 CONTRACT EXECUTION

The successful bidder must sign the contract and return it to the Office Engineer along with:

1. Contract bonds
2. Documents identified in Section 3-1.05, "Insurance Policies"

For an informal-bid contract, the Office Engineer must receive these documents before the 5th business day after the bidder receives the contract. For all other contracts, the Office Engineer must receive these documents before the 10th business day after the bidder receives the contract.

The bidder's security may be forfeited for failure to execute the contract within the time specified (Pub Cont Code §§ 10181, 10182, and 10183).

The following is a copy of the Contract form:

STATE OF CALIFORNIA • DEPARTMENT OF TRANSPORTATION
CONTRACT
DES-OE-0103A (REV 03/2010)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
CONTRACT NO. _____

This contract is entered into between the State of California's Department of Transportation and the Contractor named below:

_____
CONTRACTOR'S NAME

The parties agree to comply with the terms of the following exhibits that are by this reference made a part of this contract.

Exhibit A - Bid book dated _____
Exhibit B - Notice to Bidders and Special Provisions dated _____
Exhibit C - Project Plans approved _____
Exhibit D - Standard Specifications dated _____
Exhibit E - Standard Plans dated _____
Exhibit F - Addenda

Exhibits A, B, C, and F are those exhibits identified with the same contract number as this contract.

This contract has been executed by the following parties:

CONTRACTOR

CONTRACTOR'S NAME *(if other than an individual, state whether a corporation, partnership, etc.)*

BY *(Authorized Signature)* | DATE SIGNED *(Do not type)*

PRINTED NAME AND TITLE OF PERSON SIGNING

FEDERAL EMPLOYER IDENTIFICATION NUMBER | LICENSE NUMBER

DEPARTMENT OF TRANSPORTATION

BY *(Authorized Signature)* | DATE SIGNED *(Do not type)*

PRINTED NAME AND TITLE OF PERSON SIGNING

This contract has been certified as complying with the State Contract Act:

BY *(Authorized Signature)* | DATE SIGNED *(Do not type)*

PRINTED NAME AND TITLE OF PERSON SIGNING

ADA Notice For individuals with sensory disabilities, this document is available in alternate formats. For information call (916) 654-6410 or TDD (916) 654-3880 or write Records and Forms Management, 1120 N Street, MS-89, Sacramento, CA 95814.

3-1.10 BIDDERS' SECURITIES

The Department keeps the securities of the 1st, 2nd, and 3rd low bidders until the contract has been executed. The other bidders' securities, other than bidders' bonds, are returned upon

determination of the 1st, 2nd, and 3rd low bidders, and their bidders' bonds are of no further effect (Pub Cont Code § 10184).

^^

SECTION 4 SCOPE OF WORK
(Issued 06-05-09)

Add to Section 4-1.01:

Nothing in the specifications voids the Contractor's public safety responsibilities.

Add:

4-1.015 PROJECT DESCRIPTION

Construct the work described in the special provisions and on project plans and by the bid items. The special provisions, project plans, and bid item descriptions set forth the specifications that apply.

Replace Section 4-1.03 with:

4-1.03 CHANGES

4-1.03A General

The Department may make changes within the scope of work and add extra work. The Engineer describes the changes and extra work, the payment basis, and any time adjustment in a Contract Change Order.

A Contract Change Order is approved when the Department signs the Contract Change Order.

Submit detailed cost data for a payment adjustment for:

1. Request for a payment adjustment for a bid item
2. Payment adjustment resulting from a change of more than 25 percent in the bid item's quantity if requested

If ordered, start the work before receipt of an approved Contract Change Order.

You may protest a Contract Change Order.

4-1.03B Increased or Decreased Quantities

The Department adjusts payment for changed quantities and eliminated items under Section 9-1.05, "Changed Quantity Payment Adjustments."

4-1.03C Changes in Character of Work

The Department adjusts payment for an item if:

1. An ordered plan or specification change materially changes the character of a work item from that on which the bid price was based
2. The unit cost of the changed item differs when compared to the unit cost of that item under the original plans and specifications
3. No approved Contract Change Order addresses the payment

The Department adjusts the payment under Section 9-1.06, "Work-Character Changes."

4-1.03D Extra Work

The Department classes new and unforeseen work as extra work if the Engineer determines that the work is not covered by any of the various items for which there is a bid price or by combinations of those items. If portions of this work are covered by some of the various items for which there is a bid price or combinations of those items, the remaining portion of the work will be classed as extra work. Extra work also includes work specifically designated as extra work in the plans or specifications.

Add:

4-1.035 VALUE ENGINEERING

4-1.035A General

Reserved

4-1.035B Value Engineering Change Proposal

You may submit a VECP to reduce any of the following:

1. Total cost of construction
2. Construction activity duration
3. Traffic congestion

Before preparing a VECP, meet with the Engineer to discuss:

1. Proposal concept
2. Permit issues
3. Impact on other projects
4. Project impacts, including traffic, schedule, and later stages
5. Peer reviews
6. Overall proposal merits
7. Review times required by the Department and other agencies

The VECP must not impair the project's essential functions or characteristics, such as:

1. Service life
2. Operation economy
3. Maintenance ease
4. Desired appearance
5. Design and safety

The VECP must include:

1. Description of the contract specifications and drawing details for performing the work and the proposed changes.
2. Itemization of contract specifications and drawing details that would be changed.
3. Detailed cost estimate for performing the work under the existing contract and under the proposed change. Determine the estimates under Section 9-1.03, "Force Account Payment."
4. Deadline for the Engineer to decide on the changes.
5. Bid items affected and resulting quantity changes.

The Department is not required to consider a VECP. If a VECP is similar to a change in the plans or specifications being considered by the Department at the time the proposal is submitted or if the proposal is based on or similar to drawings or specifications adopted by the Department before Contract award, the Department does not accept the VECP and may make these changes without VECP payments.

Until the Department approves a change order incorporating the VECP or parts of it, continue to perform the work under the contract. If the Department does not approve a change order before the deadline stated in the VECP or other date you subsequently stated in writing, the VECP is rejected. The Department does not adjust time or payment for a rejected VECP.

The Department decides whether to accept a VECP and the estimated net construction-cost savings from adopting the VECP or parts of it.

The Department may require you to accept a share of the investigation cost as a condition of reviewing a VECP. After written acceptance, the Department considers the VECP and deducts the agreed cost.

If the Department accepts the VECP or parts of it, the Department issues a change order that:

1. Incorporates changes in the contract necessary to implement the VECP or the parts adopted
2. Includes the Department's acceptance conditions
3. States the estimated net construction-cost savings resulting from the VECP
4. Obligates the Department to pay you 50 percent of the estimated net savings

In determining the estimated net construction-cost savings, the Department excludes your VECP preparation cost and the Department's VECP investigation cost, including parts paid by you.

If a VECP providing for a reduction in working days is accepted by the Department, 50 percent of the reduction is deducted from contract time.

If a VECP providing for a reduction in traffic congestion or avoiding traffic congestion is accepted by the Department, the Department pays 60 percent of the estimated net savings in construction costs attributable to the VECP. Submit detailed traffic handling comparisons between the existing contract and the proposed change, including estimates of the traffic volumes and congestion.

The Department may apply an accepted VECP for general use on other contracts.

If an accepted VECP is adopted for general use, the Department pays only the contractor who first submitted the VECP and only to the contracts awarded to that contractor before the submission of the accepted VECP.

If the Department does not adopt a general-use VECP, an identical or similar submitted proposal is eligible for acceptance.

4-1.035C Value Analysis Workshop

Section 4-1.035C, "Value Analysis Workshop," applies to a non-building-work contract with a total bid of over $5 million.

You may request a value analysis workshop by submitting a request after contract approval.

The Department offers a value analysis workshop to:

1. Identify value enhancing opportunities
2. Consider changes to the contract that will reduce the total cost of construction, construction activity duration, or traffic congestion without impairing the essential functions specified for a VECP in Section 4-1.035B, "Value Engineering Change Proposal."

If the request is authorized, you and the Engineer:

1. Schedule a value analysis workshop
2. Select a facilitator and workshop site
3. Agree to other workshop administrative details

The workshop must be conducted under the methods described in the Department's Value Analysis Team Guide available at:

http://www.dot.ca.gov/hq/oppd/value/

The facilitator must be a certified value specialist as recognized by the Society of American Value Engineers.

The Department reimburses you for 1/2 of the workshop cost. The workshop cost is the sum of the workshop-facilitator cost and the workshop-site cost. The Department determines the workshop cost based on the facilitator and workshop-site invoice prices minus any available or offered discounts. The Department does not pay you for any other associated costs.

^^

SECTION 5 CONTROL OF WORK
(Issued 06-01-11)

Add:

5-1.005 GENERAL

Failure to comply with any specification part is a waiver of your right to an adjustment of time and payment related to that part.

After contract approval, submit documents and direct questions to the Engineer. Orders, approvals, authorizations, and requests to the Contractor are by the Engineer.

The Engineer furnishes the following in writing:

1. Approvals
2. Authorizations
3. Certifications
4. Decisions
5. Notifications
6. Orders
7. Responses

The Contractor must furnish the following in writing:

1. Assignments
2. Notifications
3. Proposals
4. Reports
5. Requests, including RFIs, sequentially numbered
6. Subcontracts
7. Test results

The Department rejects a form if it has any error or any omission.

Convert foreign language documents to English.

Use contract administration forms available at the Department's Web site.

If the last day for submitting a document falls on a Saturday or holiday, it may be submitted on the next business day with the same effect as if it had been submitted on the day specified.

Add to 5-1.01:

Failure to enforce a contract provision does not waive enforcement of any contract provision.

Add:

5-1.011 PROTESTS

You may protest an Engineer's decision by submitting an RFI under Section 5-1.145, "Requests for Information."

Add:

5-1.012 PARTNERING

5-1.012A General

The Department strives to work cooperatively with all contractors; partnering is our way of doing business. The Department encourages project partnering among the project team, made up of significant contributors from the Department and the Contractor, and their invited stakeholders.

For a project with a total bid greater than $1 million, professionally facilitated project partnering is encouraged.

For a project with a total bid greater than $10 million, professionally facilitated project partnering is required.

In implementing project partnering, you and the Engineer manage the contract by:

1. Using early and regular communication with involved parties
2. Establishing and maintaining a relationship of shared trust, equity, and commitment
3. Identifying, quantifying, and supporting attainment of mutual goals
4. Developing strategies for using risk management concepts
5. Implementing timely communication and decision making
6. Resolving potential problems at the lowest possible level to avoid negative impacts
7. Holding periodic partnering meetings and workshops as appropriate to maintain partnering relationships and benefits throughout the life of the project
8. Establishing periodic joint evaluations of the partnering process and attainment of mutual goals

Partnering does not void any contract part.

The Department's "Field Guide to Partnering on Caltrans Construction Projects" current at the time of bid is available to the project team as reference. This guide provides structure, context, and clarity to the partnering process requirements. This guide is available at the Department's Partnering Program website:

http://www.dot.ca.gov/hq/construc/partnering.html

In implementing project partnering, the project team must:

1. Create a partnering charter that includes:

    1.1. Mutual goals, including core project goals and may also include project-specific goals and mutually supported individual goals.
    1.2. Partnering maintenance and close-out plan.
    1.3. Dispute resolution plan that includes a dispute resolution ladder and may also include use of facilitated dispute resolution sessions.
    1.4. Team commitment statement and signatures.

2. Participate in monthly partnering evaluation surveys to measure progress on mutual goals and may also measure short-term key issues as they arise.
3. Evaluate the partnering facilitator on Forms CEM-5501 and CEM-5502. The Engineer provides the evaluation forms to the project team and collects the results. The Department makes evaluation results available upon request. Facilitator evaluations must be completed:

    3.1. At the end of the initial partnering workshop on Form CEM-5501.
    3.2. At the end of the project close-out partnering workshop on Form CEM-5502.

4. Conduct a project close-out partnering workshop.
5. Document lessons learned before contract acceptance.

5-1.012B Partnering Facilitator, Workshops, and Monthly Evaluation Surveys

The Engineer sends you a written invitation to enter into a partnering relationship after contract approval. Respond within 15 days to accept the invitation and request the initial and additional partnering workshops. After the Engineer receives the request, you and the Engineer cooperatively:

1. Select a partnering facilitator that offers the service of a monthly partnering evaluation survey with a 5-point rating and agrees to follow the Department's "Partnering Facilitator Standards and Expectations" available at the Department's Partnering Program website
2. Schedule initial partnering workshop
3. Determine initial workshop site and duration
4. Agree to other workshop administrative details

Additional partnering workshops and sessions are encouraged throughout the life of the project as determined necessary by you and the Engineer, recommended quarterly.

5-1.012C Training in Partnering Skills Development

For a project with a total bid of $25 million or greater, training in partnering skills development is required.

For a project with a total bid between $10 million and $25 million, training in partnering skills is optional.

You and the Engineer cooperatively schedule the training session and select a professional trainer, training site, and 1 to 4 topics from the following list to be covered in the training:

1. Active Listening
2. Building Teams
3. Change Management
4. Communication
5. Conflict Resolution
6. Cultural Diversity
7. Dealing with Difficult People
8. Decision Making
9. Effective Escalation Ladders
10. Emotional Intelligence
11. Empathy
12. Ethics
13. Facilitation Skills
14. Leadership
15. Partnering Process and Concepts
16. Project Management
17. Project Organization
18. Problem Solving
19. Running Effective Meetings
20. Time Management
21. Win-Win Negotiation

Before the initial partnering workshop, the trainer conducts a 1-day training session in partnering skills development for the Contractor's and the Engineer's representatives. This

training session must be a separate session from the initial partnering workshop and must be conducted locally. The training session must be consistent with the partnering principles under the Department's "Field Guide to Partnering on Caltrans Construction Projects."

Send at least 2 representatives to the training session. One of these must be your assigned representative as specified in Section 5-1.06, "Superintendence," of the Standard Specifications.

5-1.012D Payment

The Department pays you for:

1. 1/2 of partnering workshops and sessions based on facilitator and workshop site cost
2. 1/2 of monthly partnering evaluation survey service cost
3. Partnering skills development trainer and training site cost

The Department determines the costs based on invoice prices minus any available or offered discounts. The Department does not pay markups on these costs.

The Department does not pay for wages, travel expenses, or other costs associated with the partnering workshops and sessions, monthly partnering evaluation surveys, and training in partnering skills development.

Add:

5-1.015 RECORDS

5-1.015A General

Reserved

5-1.015B Record Retention

Retain project records from bid preparation through:

1. Final payment
2. Resolution of claims, if any

For at least 3 years after the later of these, retain cost records, including records of:

1. Bid preparation
2. Overhead
3. Payrolls
4. Payments to suppliers and subcontractors
5. Cost accounting

Maintain the records in an organized way in the original format, electronic and hard copy, conducive to professional review and audit.

5-1.015C Record Inspection, Copying, and Auditing

Make your records available for inspection, copying, and auditing by State representatives for the same time frame specified under Section 5-1.015B, "Record Retention." The records of subcontractors and suppliers must be made available for inspection, copying, and auditing by State representatives for the same period. Before contract acceptance, the State representative

notifies the Contractor, subcontractor, or supplier 5 business days before inspection, copying, or auditing.

If an audit is to start more than 30 days after contract acceptance, the State representative notifies the Contractor, subcontractor, or supplier when the audit is to start.

5-1.015D Cost Accounting Records

Maintain cost accounting records for the project distinguishing between the following work cost categories:

1. Work performed based on bid item prices
2. Work performed by change order other than extra work. Distinguish this work by:

    2.1. Bid item prices
    2.2. Force account
    2.3. Agreed price

3. Extra work. Distinguish extra work by:

    3.1. Bid item prices
    3.2. Force account
    3.3. Agreed price
    3.4. Specialist billing

4. Work performed under potential claim records
5. Overhead
6. Subcontractors, suppliers, owner-operators, and professional services

Cost accounting records must include:

1. Final cost code lists and definitions
2. Itemization of the materials used and corresponding vendor's invoice copies
3. Direct cost of labor
4. Equipment rental charges
5. Workers' certified payrolls
6. Equipment:

    6.1. Size
    6.2. Type
    6.3. Identification number
    6.4. Hours operated

5-1.015E Extra Work Bills

Maintain separate records for costs of work performed by change order.

Within 7 days after performing the work, submit extra work bills using the Department's Internet extra work billing system.

The Contractor submitting and the Engineer approving an extra work bill using the Internet force account work billing system is the same as each party signing the bill.

The Department provides billing system:

1. Training within 30 days of your written request
2. Accounts and user identification to your assigned representatives after a representative has received training

Each representative must maintain a unique password.

Replace Section 5-1.04 with:

5-1.04 CONTRACT COMPONENTS

A component in one contract part applies as if appearing in each. The parts are complementary and describe and provide for a complete work.

If a discrepancy exists:

1. The governing ranking of contract parts in descending order is:

    1.1. Special provisions
    1.2. Project plans
    1.3. Revised Standard Plans
    1.4. Standard Plans
    1.5. Amendments to the Standard Specifications
    1.6. Standard Specifications
    1.7. Supplemental project information

2. Written numbers and notes on a drawing govern over graphics
3. A detail drawing governs over a general drawing
4. A detail specification governs over a general specification
5. A specification in a section governs over a specification referenced by that section

If a discrepancy is found or confusion arises, request correction or clarification.

Add:

5-1.055 SUBCONTRACTING

5-1.055A General

No subcontract releases you from the contract or relieves you of your responsibility for a subcontractor's work.

If you violate Pub Cont Code § 4100 et seq., the Department may exercise the remedies provided under Pub Cont Code § 4110. The Department may refer the violation to the Contractors State License Board as provided under Pub Cont Code § 4111.

Except for a building-construction non-federal-aid contract, perform work equaling at least 30 percent of the value of the original total bid with your employees and with equipment owned or rented by you, with or without operators.

Each subcontract must comply with the contract.

The Department encourages you to include a dispute resolution process in each subcontract.

Each subcontractor must have an active and valid State contractor's license with a classification appropriate for the work to be performed (Bus & Prof Code, § 7000 et seq.).

Submit copies of subcontracts upon request.

Before subcontracted work starts, submit a Subcontracting Request form.

Do not use a debarred contractor; a current list of debarred contractors is available at the Department of Industrial Relations' Web site.

Upon request, immediately remove and not again use a subcontractor who fails to prosecute the work satisfactorily.

Replace Section 5-1.07 with:

5-1.07 LINES AND GRADES

The Engineer places stakes and marks under Chapter 12, "Construction Surveys," of the Department's Surveys Manual.

Submit your request for Department-furnished stakes:

1. On a Request for Construction Stakes form. Ensure:

    1.1. Requested staking area is ready for stakes
    1.2. You use the stakes in a reasonable time

2. A reasonable time before starting an activity using the stakes

Establish priorities for stakes and note priorities on the request.

Preserve stakes and marks placed by the Engineer. If the stakes or marks are destroyed, the Engineer replaces them at the Engineer's earliest convenience and deducts the cost.

Replace Section 5-1.10 with:

5-1.10 EQUIPMENT

Clearly stencil or stamp at a clearly visible location on each piece of equipment except hand tools an identifying number and:

1. On compacting equipment, its make, model number, and empty gross weight that is either the producer's rated weight or the scale weight
2. On meters and on the load-receiving element and indicators of each scale, the make, model, serial number, and producer's rated capacity

Submit a list:

1. Describing each piece of equipment
2. Showing its identifying number

Upon request, submit producer's information that designates portable vehicle scale capacities.

For proportioning materials, use measuring devices, material plant controllers, and undersupports complying with Section 9-1.01B, "Weighing Equipment and Procedures."

Measuring devices must be tested and approved under California Test 109 in the Department's presence by any of the following:

1. County Sealer of Weights and Measures

2. Scale Service Agency
3. Division of Measurement Standards Official

The indicator over-travel must be at least 1/3 of the loading travel. The indicators must be enclosed against moisture and dust.

Group measuring system dials such that the smallest increment for each indicator can be read from the location at which proportioning is controlled.

Replace Section 5-1.116 with:

5-1.116 DIFFERING SITE CONDITIONS (23 CFR 635.109)

5-1.116A Contractor's Notification

Promptly notify the Engineer if you find either of the following:

1. Physical conditions differing materially from either of the following:

    1.1. Contract documents
    1.2. Job site examination

2. Physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract

Include details explaining the information you relied on and the material differences you discovered.

If you fail to notify the Engineer promptly, you waive the differing site condition claim for the period between your discovery of the differing site condition and your notification to the Engineer.

If you disturb the site after discovery and before the Engineer's investigation, you waive the differing site condition claim.

5-1.116B Engineer's Investigation and Decision

Upon your notification, the Engineer investigates job site conditions and:

1. Notifies you whether to resume affected work
2. Decides whether the condition differs materially and is cause for an adjustment of time, payment, or both

You may protest the Engineer's decision.

Replace Section 5-1.14 with:

5-1.14 COST REDUCTION INCENTIVE

Comply with Section 4-1.035B, "Value Engineering Change Proposal."

Add:

5-1.145 REQUESTS FOR INFORMATION

Submit an RFI upon recognition of any event or question of fact arising under the Contract.

The Engineer responds to the RFI within 5 days. Proceed with the work unless otherwise ordered. You may protest the Engineer's response by:

1. Submitting an Initial Potential Claim Record within 5 days after receipt of the Engineer's response
2. Complying with Section 5-1.146, "Potential Claims and Dispute Resolution"

Add:

5-1.146 POTENTIAL CLAIMS AND DISPUTE RESOLUTION

5-1.146A General

Minimize and mitigate impacts of potentially claimed work or event.

For each potential claim, assign an identification number determined by chronological sequencing and the 1st date of the potential claim.

Use the identification number for each potential claim on the:

1. Initial Potential Claim Record
2. Supplemental Potential Claim Record
3. Full and Final Potential Claim Record

Failure to comply with this procedure is:

1. Waiver of the potential claim and a waiver of the right to a corresponding claim for the disputed work in the administrative claim procedure
2. Bar to arbitration (Pub Cont Code § 10240.2)

5-1.146B Initial Potential Claim Record

Submit an Initial Potential Claim Record within 5 days of the Engineer's response to the RFI or within 5 days from the date when a dispute arises due to an act or failure to act by the Engineer. The Initial Potential Claim Record establishes the claim nature and circumstances. The claim nature and circumstances must remain consistent.

The Engineer responds within 5 days of the date of the Initial Potential Claim Record. Proceed with the potentially claimed work unless ordered.

Within 20 days of a request, provide access to the project records determined necessary by the Engineer to evaluate the potential claim.

5-1.146C Supplemental Potential Claim Record

Within 15 days of submitting the Initial Potential Claim Record, submit a Supplemental Potential Claim Record including:

1. Complete nature and circumstances causing the potential claim or event
2. Contract specifications supporting the basis of a claim
3. Estimated claim cost and an itemized breakdown of individual costs stating how the estimate was determined

4. TIA

The Engineer evaluates the Supplemental Potential Claim Record and furnishes you a response within 20 days of submittal. If the estimated cost or effect on the scheduled completion date changes, update the Supplemental Potential Claim Record information as soon as the change is recognized and submit this information.

5-1.146D Full and Final Potential Claim Record

Notify the Engineer within 10 days of the completion date of the potentially claimed work. The Engineer approves this completion date or notifies you of a revised date.

Within 30 days of the completion of the potentially claimed work, submit a Full and Final Potential Claim Record including:

1. A detailed factual account of the events causing the potential claim, including:

    1.1. Necessary dates
    1.2. Locations
    1.3. Work items affected by the potential claim

2. The Contract documents supporting the potential claim and a statement of the reasons these parts support entitlement
3. If a payment adjustment is requested, an itemized cost breakdown. Segregate costs into the following categories:

    3.1. Labor, including:

        3.1.1. Individuals
        3.1.2. Classifications
        3.1.3. Regular and overtime hours worked
        3.1.4. Dates worked

    3.2. Materials, including:

        3.2.1. Invoices
        3.2.2. Purchase orders
        3.2.3. Location of materials either stored or incorporated into the work
        3.2.4. Dates materials were transported to the job site or incorporated into the work

    3.3. Equipment, including:

        3.3.1. Detailed descriptions, including make, model, and serial number
        3.3.2. Hours of use
        3.3.3. Dates of use
        3.3.4. Equipment rates at the rental rate listed in Labor Surcharge and Equipment Rental Rates in effect when the affected work related to the claim was performed

4. If a time adjustment is requested:

    4.1. Dates for the requested time.
    4.2. Reasons for a time adjustment.
    4.3. Contract documentation supporting the requested time adjustment.
    4.4. TIA. The TIA must demonstrate entitlement to a time adjustment.

5. Identification and copies of your documents and copies of communications supporting the potential claim, including certified payrolls, bills, cancelled checks, job cost reports, payment records, and rental agreements
6. Relevant information, references, and arguments that support the potential claim

The Department does not consider a Full and Final Potential Claim Record that does not have the same nature, circumstances, and basis of claim as those specified on the Initial Potential Claim Record and Supplemental Potential Claim Record.

The Engineer evaluates the information presented in the Full and Final Potential Claim Record and furnishes you a response within 30 days of its receipt unless the Full and Final Potential Claim Record is submitted after Contract acceptance; in which case, a response may not be furnished. The Engineer's receipt of the Full and Final Potential Claim Record must be evidenced by postal return receipt or the Engineer's written receipt if delivered by hand.

5-1.146E Dispute Resolution

Comply with Section 5-1.15, "Dispute Resolution."

Add:

5-1.15 DISPUTE RESOLUTION

5-1.15A General

Section 5-1.15, "Dispute Resolution," applies to a contract with 100 or more working days.

The dispute resolution process is not a substitute for the submitting an RFI or a potential claim record.

5-1.15B Dispute Resolution Advisor

Section 5-1.15B, "Dispute Resolution Advisor," applies to a contract with a total bid from $3 million to $10 million.

A dispute resolution advisor, hereinafter referred to as "DRA," is chosen by the Department and the Contractor to assist in the resolution of disputes.

The DRA shall be established by the Department and the Contractor within 30 days of contract approval.

The Department and the Contractor shall each propose 3 potential DRA candidates. Each potential candidate shall provide the Department and the Contractor with their disclosure statement. The disclosure statement shall include a resume of the potential candidate's experience and a declaration statement describing past, present, anticipated, and planned relationships with all parties involved in this contract.

The Department and the Contractor shall select one of the 6 nominees to be the DRA. If the Department and the Contractor cannot agree on one candidate, the Department and the

Contractor shall each choose one of the 3 nominated by the other. The final selection of the DRA will be decided by a coin toss between the two candidates.

The Department and the Contractor shall complete and adhere to the Dispute Resolution Advisor Agreement. No DRA meeting shall take place until the Dispute Resolution Advisor Agreement has been signed by all parties, unless all parties agree to sign it at the first meeting.

If DRA needs outside technical services, technical services shall be preapproved by both the Department and the Contractor.

DRA recommendations are nonbinding.

The Contractor shall not use the DRA for disputes between subcontractors or suppliers that have no grounds for a lawsuit against the Department.

DRA replacement is selected in the same manner as the original selection. The appointment of a replacement DRA will begin promptly upon determination of the need for replacement. The Dispute Resolution Advisor Agreement shall be amended to reflect the change of the DRA.

Failure of the Contractor to participate in selecting DRA will result in the withhold of 25 percent of the estimated value of all work performed during each estimate period that the Contractor fails to comply. DRA withholds will be released for payment on the next monthly progress payment following the date that the Contractor has provided assistance in choosing the DRA and no interest will be due the Contractor.

The State and the Contractor shall bear the costs and expenses of the DRA equally.

The DRA shall be compensated at an agreed rate of $1,500 per day for time spent per meeting either at the start of the project or for a dispute. A member serving on more than one State DRA or Dispute Resolution Board, regardless the number of meetings per day shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel, and incidentals for each day or portion thereof that the DRA is at an authorized DRA meeting.

No additional compensation will be made for time spent by the DRA to review and research activities outside the official DRA meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRA, has been specifically agreed to in advance by the State and Contractor. Time away from the project that has been specifically agreed to in advance by the Department and the Contractor will be compensated at an agreed rate of $150 per hour. The agreed amount of $150 per hour shall include all incidentals including expenses for telephone, fax, and computer services.

The State will provide conference facilities for DRA meetings at no cost to the Contractor.

The Contractor shall make direct payments to the DRA for participation in authorized meetings and approved hourly rate charges from invoices submitted.

The State will reimburse the Contractor for the State's share of the costs.

There will be no markups applied to expenses associated with the DRA, either by the DRA or by the Contractor when requesting payment of the State's share of DRA expenses. Regardless of the DRA recommendation, neither party will be entitled to reimbursement of DRA costs from the other party.

The Contractor shall submit extra work bills and include invoices with original supporting documents for reimbursement of the State's share.

The cost of technical services will be borne equally by the State and Contractor. There will be no markups for these costs.

A copy of the "Dispute Resolution Advisor Agreement" to be executed by the Contractor, State and the DRA is as follows:

Form CEM 6206 Rev (04-06-07)

DISPUTE RESOLUTION ADVISOR AGREEMENT

_____
(Contract Identification)

Contract No. _____

THIS DISPUTE RESOLUTION ADVISOR AGREEMENT, hereinafter called "AGREEMENT", made and entered into this _____ day of _____, _____, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," _____ hereinafter called the "CONTRACTOR," and _____, the Dispute Resolution Advisor, hereinafter called the "DRA."

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the Standard Specifications for the above referenced contract provides for the establishment and operation of the DRA to assist in resolving disputes; and

WHEREAS, the DRA is composed of one person, chosen by the CONTRACTOR and the STATE;

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRA hereto agree as follows:

SECTION I DESCRIPTION OF WORK

To assist in the timely resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRA. The DRA is to fairly and impartially consider disputes placed before it and provide recommendations for resolution of these disputes to the parties. The DRA shall provide recommendations based on the facts related to the dispute, the contract and applicable laws and regulations. The DRA shall perform the services necessary to participate in the DRA's actions as designated in Section III, Scope of Work.

SECTION II DRA QUALIFICATIONS

The DRA shall be knowledgeable in the type of construction and contract documents anticipated by the contract and shall have completed training through the Dispute Review Board Foundation. In addition, it is desirable for the DRA to have served on several State Dispute Resolution Boards (DRB).

No DRA shall have prior direct involvement in this contract. No DRA shall have a financial interest in this contract or parties thereto, including but not limited to the CONTRACTOR, subcontractors, suppliers, consultants, and legal and business services, within a period 6 months

prior to award and during this contract. Exceptions to above are compensation for services on this or other DRAs and DRBs or retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.

The DRA shall fully disclose all direct or indirect professional or personal relationships with all key members of the contract.

SECTION III SCOPE OF WORK

The Scope of Work of the DRA includes, but is not limited to, the following:

A. PROCEDURES

The DRA shall meet with the parties at the start of the project to establish procedures that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. The DRA established procedures shall only be implemented upon approval by the parties. Subsequent meetings shall be held only to hear disputes between the parties.

The DRA shall not meet with, or discuss contract issues with individual parties.

The State shall provide the DRA with the contract and all written correspondence regarding the dispute between the parties and, if available, the Contractor's supplemental potential claim record, and the Engineer's response to the supplemental potential claim record.

The parties shall not call the DRA who served on this contract as a witness in arbitration proceedings, which may arise from this contract.

The DRA shall have no claim against the STATE or the CONTRACTOR, or both, from claimed harm arising out of the parties' evaluations of the DRA's opinions.

B. DISPUTE MEETING

The term "dispute meeting" as used in this subsection shall refer to both the informal and traditional dispute meeting processes, unless otherwise noted.

If the CONTRACTOR requests a dispute meeting with the DRA, the Contractor must simultaneously notify the STATE. Upon being notified of the need for a dispute meeting, the DRA shall review and consider the dispute. The DRA shall determine the time and location of the dispute meeting with due consideration for the needs and preferences of the parties, while recognizing the importance of a speedy resolution to the dispute.

Dispute meetings shall be conducted at any location that would be convenient and provide required facilities and access to necessary documentation.

Only the STATE's Area Construction Engineer, Resident Engineer, and Structure Representative and the CONTRACTOR's or subcontractor's, Superintendent or Project Manager may present information at a dispute meeting. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute. The exception to this is technical services, as described below:

> The DRA, with approval of the parties, may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the two parties as specified in an approved contract change order. The CONTRACTOR shall not be entitled to markups for the payments made for these services.

At the dispute meeting the DRA may ask questions, seek clarification, and request further clarification of data presented by either of the parties as may be necessary to assist in making a fully informed recommendation. However, the DRA shall refrain from expressing opinions on the merits of statements on matters under dispute during the parties' presentations. Each party will be given ample time to fully present its position, make rebuttals, provide relevant documents, and respond to DRA questions and requests.

There shall be no testimony under oath or cross-examination, during DRA dispute meetings. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRA in conformance with the rules and regulations established at the first meeting between the DRA and parties. These established rules and regulations need not comply with prescribed legal laws of evidence.

Failure to attend a dispute meeting by either of the parties shall be conclusively considered by the DRA as indication that the non-attending party considers all written documents and correspondence submitted as their entire and complete argument. The claimant shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals at the meeting until all aspects of the dispute are thoroughly covered.

1. TRADITIONAL DISPUTE MEETING:

The following procedure shall be used for the traditional dispute meeting:

a. Within 5 days after receiving the STATE's written response to the CONTRACTOR's supplemental potential claim record, the CONTRACTOR shall refer the dispute to the DRA, if the CONTRACTOR wishes to further pursue the dispute. The CONTRACTOR shall make the referral in writing to the DRA, simultaneously copied to the STATE. The written dispute referral shall describe the disputed matter in individual discrete segments, so that it will be clear to both parties and the DRA what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.

b. The parties shall each be afforded an opportunity to be present and to be heard by the DRA, and to offer evidence. Either party furnishing written evidence or documentation to the DRA must furnish copies of such information to the other party a minimum of 10 days prior to the date the DRA is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRA may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRA. The DRA shall not consider evidence not furnished in conformance with the terms specified herein.

c. Upon receipt by the DRA of a written referral of a dispute, the DRA shall convene to review and consider the dispute. The dispute meeting shall be held no later than 25 days after receipt of the written referral unless otherwise agreed to by all parties.

d. The DRA shall furnish a written report to both parties. The DRA may request clarifying information of either party within 5 days after the DRA dispute meeting. Requested information shall be submitted to the DRA within 5 days of the DRA request. The DRA shall complete its report and submit it to the parties within 10 days of the DRA dispute meeting, except that time extensions may be granted at the request of the DRA with the written concurrence of both parties. The report shall

summarize the facts considered, the contract language, law or regulation viewed by the DRA as pertinent to the dispute, and the DRA's interpretation and philosophy in arriving at its conclusions and recommendations and, if appropriate, recommends guidelines for determining compensation. The DRA's written opinion shall stand on its own, without attachments or appendices.

e. Within 10 days after receiving the DRA's report, both parties shall respond to the DRA in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRA's recommendation or response to a request for reconsideration presented in the report by either party, shall conclusively indicate that the party(s) failing to respond accepts the DRA recommendation. Immediately after responses have been received from both parties, the DRA shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRA's report from the DRA prior to responding to the report. The DRA shall consider any clarification request only if submitted within 5 days of receipt of the DRA's report, and if submitted simultaneously in writing to both the DRA and the other party. Each party may submit only one request for clarification for any individual DRA report. The DRA shall respond, in writing, to requests for clarification within 5 days of receipt of such requests.
f. Either party may seek a reconsideration of the DRA's recommendation. The DRA shall only grant reconsideration based upon submission of new evidence and if the request is submitted within the 10 day time limit specified for response to the DRA's written report. Each party may submit only one request for reconsideration regarding an individual DRA recommendation.
g. If the parties are able to settle their dispute with the aid of the DRA's report, the STATE and CONTRACTOR shall promptly accept and implement the settlement of the parties. If the parties cannot agree on compensation within 30 days of the acceptance by both parties of the settlement, either party may request the DRA to make a recommendation regarding compensation.

2. INFORMAL DISPUTE MEETING

An informal dispute meeting shall be convened, only if, the parties and the DRA agree that this dispute resolution process is appropriate to settle the dispute.
The following procedure shall be used for the informal dispute meeting:

a. The parties shall furnish the DRA with one copy of pertinent documents requested by the DRA that are or may become necessary for the DRA to perform its function. The party furnishing documents shall furnish such documents to the other party at the same time the document is provided to the DRA.
b. After the dispute meeting has concluded, the DRA shall deliberate in private the same day, until a response to the parties is reached or as otherwise agreed to by the parties.
c. The DRA then verbally delivers its recommendation with findings to the parties.
d. After the recommendation is presented, the parties may ask for clarifications.
e. Occasionally the DRA, on complex issues, may be unable to formulate a recommendation based on the information given at a dispute meeting. However, the DRA may provide the parties with advice on strengths and weaknesses of their prospective positions, in the hope of the parties reaching settlement.

f. If the parties are able to settle their dispute with the aid of the DRA's opinion, the STATE and CONTRACTOR shall promptly accept and implement the settlement of the parties.
g. The DRA will not be bound by its oral recommendation in the event that a dispute is later heard by the DRA in a traditional dispute meeting.

Unless the dispute is settled, use of the informal dispute meeting does not relieve the parties of their responsibilities under Section 5-1.15B, "Dispute Resolution Advisor," of the Standard Specifications or Subsection, "Traditional Dispute Meeting," of this AGREEMENT. There will be no extension of time allowed for the process to permit the use of the informal dispute meeting, unless otherwise agreed to by the parties.

SECTION IV TIME FOR BEGINNING AND COMPLETION

Once established, the DRA shall be in operation until the day the Director accepts the contract. The DRA shall not begin work under the terms of this AGREEMENT until authorized in writing by the STATE or as agreed to by the parties.

SECTION V PAYMENT

The DRA shall be compensated at an agreed rate of $1,500 per day for time spent per meeting, either at the start of the project or for a dispute. A member serving on more than one State DRA or DRB, regardless the number of meetings per day, shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for onsite time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof that the DRA is at an authorized DRA meeting. No additional compensation will be made for time spent by the DRA to review and research activities outside the official DRA meetings unless that time, (such as time spent evaluating and preparing recommendations on specific issues presented to the DRA), has been specifically agreed to in advance by the parties. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of $150 per hour. The agreed amount of $150 per hour shall include all incidentals including expenses for telephone, fax, and computer services. The State will provide administrative services such as conference facilities to the DRA.

A. PAYMENT PROCESSING

The CONTRACTOR shall make direct payments to the DRA for their participation in authorized meetings and approved hourly rate charges, from invoices submitted by the DRA, and technical services.

The DRA may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed during that billing period. Payment for hourly fees, at the agreed rate, shall not be paid to the DRA until the amount and extent of those fees are approved by the STATE and CONTRACTOR.

B. INSPECTION OF COSTS RECORDS

The DRA and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period,

the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

SECTION VI ASSIGNMENT OF TASKS OF WORK

The DRA shall not assign the work of this AGREEMENT.

SECTION VII TERMINATION OF DRA

The DRA may resign after providing not less than 15 days written notice of the resignation to the STATE and CONTRACTOR. The DRA may be terminated, by either party, for failing to fully comply at all times with all required employment or financial disclosure conditions of DRA membership in conformance with the terms of the contract and this AGREEMENT. Each party shall document the need for replacement and substantiate the replacement request in writing to the other party and the DRA.

SECTION VIII LEGAL RELATIONS

The parties hereto mutually understand and agree that the DRA in the performance of duties is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRA from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRA.

SECTION IX CONFIDENTIALITY

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRA, which documents and records are marked "Confidential - for use by the DRA only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRA findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of this AGREEMENT. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRA. However, the parties understand that such documents may be subsequently discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

SECTION X DISPUTES

Disputes between the parties arising out of the work or other terms of this AGREEMENT that cannot be resolved by negotiation and mutual concurrence between the parties or through the administrative process provided in the contract shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications. Disputes between the DRA and the parties that cannot be resolved by negotiation and mutual concurrence shall be resolved in the appropriate forum.

SECTION XI VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION

In the event that any party, including the DRA, deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

SECTION XII FEDERAL REVIEW AND REQUIREMENTS

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRA in progress, except for private meetings or deliberations of the DRA.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

SECTION XIII CERTIFICATION OF CONTRACTOR, DRA, AND STATE

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRA

By: _____

Title: _____

CONTRACTOR	CALIFORNIA DEPARTMENT OF TRANSPORTATION
By: _____	By: _____
Title: _____	Title: _____

5-1.15C Dispute Resolution Board

Section 5-1.15C, "Dispute Resolution Board," applies to a contract with a total bid of over $10 million.

The Dispute Resolution Board, hereinafter referred to as "DRB," is a three member board established by the Department and Contractor to assist in the resolution of disputes.

The DRB shall be established by the Department and the Contractor within 45 days after contract approval.

The DRB shall consist of one member selected by the Department and approved by the Contractor, one member selected by the Contractor and approved by the Department, and a third member selected by the first 2 members and approved by both the Department and the Contractor.

The Department and Contractor shall provide the other written notification for approval of the name of their DRB nominee along with the nominee's disclosure statement.

Disclosure statements shall include a resume of the nominee's experience and a declaration statement describing past, present, anticipated, and planned relationships with all parties involved in this contract. Objections to nominees shall be based on a specific breach or violation of nominee responsibilities or on nominee qualifications. The Department or the Contractor may, on a one-time basis, object to the other's nominee without specifying a reason and this person shall not be selected for the DRB. Another person shall then be nominated within 15 days.

The 2 DRB members shall proceed with the selection of the third DRB member immediately after receiving written notification from the Department of their selection. The 2 DRB members shall provide their recommendation simultaneously to the parties within 15 days. The third member shall provide disclosure statement to the first 2 DRB members, to the Department, and the Contractor. The professional experience of the third DRB member shall complement that of the first 2 DRB members. The third DRB member shall be subject to mutual approval of the Department and the Contractor. If the 2 DRB members cannot agree on the third nominee, they shall submit a list of nominees to the Department and the Contractor for final selection and approval.

If the Department and the Contractor cannot agree on the third DRB member, or if the first 2 DRB members are unable to agree upon a recommendation, the Department and the Contractor shall select 6 names from the current list of arbitrators certified by the Public Works Contract Arbitration Committee created by Article 7.2 of the State Contract Act. The 2 DRB members shall then select one of the 6 names by a blind draw.

The 3 DRB members shall appoint one member as a chairperson to provide leadership for the DRB's activities. The chairperson shall be approved by the Department and the Contractor. In the event of an impasse, the third DRB member shall become the chairperson.

The Department and Contractor shall complete and adhere to the Dispute Resolution Board Agreement. No DRB meeting shall take place until the Dispute Resolution Board Agreement has been signed by all parties, unless all parties agree to sign it at the first meeting.

If the DRB needs outside technical services, technical services shall be preapproved by both the Department and the Contractor.

DRB recommendations are nonbinding.

The Contractor shall not use the DRB for disputes between the subcontractors or suppliers that have no grounds for a lawsuit against the Department.

DRB member replacements are selected in the same manner as the original selection. The appointment of a replacement DRB member will begin promptly upon determination of the need

for replacement. The Dispute Resolution Board Agreement shall be amended to reflect the change in the DRB.

Failure of the Contractor to participate in establishing the DRB will result in the withholding of 25 percent of the estimated value of all work performed during each estimate period that the Contractor fails to comply. DRB withholds will be released for payment on the next monthly progress payment following the date that the Contractor has provided assistance in establishing the DRB and no interest will be due the Contractor.

The Department and the Contractor shall bear the costs and expenses of the DRB equally.

Each DRB member shall be compensated at an agreed rate of $1,500 per day for time spent per meeting either at the start of the project, for scheduled progress, or dispute meetings. A member serving on more than one Department DRB or Dispute Resolution Advisor (DRA), regardless of the number of meetings per day shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel, and incidentals for each day or portion thereof that the DRB member is at an authorized DRB meeting.

No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRB, has been specifically agreed to in advance by the Department and Contractor. Time away from the project, which has been specifically agreed to in advance by the Department and Contractor, will be compensated at an agreed rate of $150 per hour. The agreed amount of $150 per hour shall include all incidentals including expenses for telephone, fax, and computer services.

The Department will provide conference facilities for DRB meetings at no cost to the Contractor.

The Contractor shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member.

The Department will reimburse the Contractor for the Department's share of the costs.

There will be no markups applied to expenses connected with the DRB, either by the DRB members or by the Contractor when requesting payment of the Department's share of DRB expenses. Regardless of the DRB recommendation, neither party shall be entitled to reimbursement of DRB costs from the other party.

The Contractor shall submit extra work bills and include evidence of every payment to each DRB member in the form of a cancelled check or bank statement within 30 days of payment.

The cost of technical services requested by the DRB will be borne equally by the State and Contractor. There will be no markups for these costs.

A copy of the "Dispute Resolution Board Agreement" to be executed by the Department, Contractor, and the 3 DRB members after approval of the contract follows:

DISPUTE RESOLUTION BOARD AGREEMENT

_____
(Contract Identification)

Contract No. _____

THIS DISPUTE RESOLUTION BOARD AGREEMENT, hereinafter called "AGREEMENT", made and entered into this _____ day of _____, _____, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," _____ _____ hereinafter called the "CONTRACTOR," and the Dispute Resolution Board, hereinafter called the "DRB" consisting of the following members:

_____ ,
(DRB Member)

_____ ,
(DRB Member)

and _____
(DRB Chairperson)

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the Standard Specifications for the above referenced contract provides for the establishment and operation of the DRB to assist in resolving disputes; and

WHEREAS, the DRB is composed of three members, one selected by the STATE, one selected by the CONTRACTOR, and the third member selected by the other two members and approved by the parties; and

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRB members hereto agree as follows:

SECTION I DESCRIPTION OF WORK

To assist in the timely resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRB. The DRB is to fairly and impartially consider disputes placed before it and provide recommendations for resolution of these disputes to the parties. The DRB shall provide recommendations based on the facts related to the dispute, the contract and applicable laws and regulations. The DRB shall perform the services necessary to participate in the DRB's actions as designated in Section III, Scope of Work.

SECTION II DRB QUALIFICATIONS

DRB members shall be knowledgeable in the type of construction and contract documents anticipated by the contract and shall have completed training through the Dispute Review Board Foundation.

No DRB member shall have prior direct involvement in this contract. No DRB member shall have a financial interest in this contract or parties thereto, including but not limited to the CONTRACTOR, subcontractors, suppliers, consultants, and legal and business services, within a period 6 months prior to award and during this contract. Exceptions to above are compensation for services on this or other DRBs and DRAs or retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.

DRB members shall fully disclose all direct or indirect professional or personal relationships with all key members of the contract.

SECTION III SCOPE OF WORK

The scope of work of the DRB includes, but is not limited to, the following:

A. PROCEDURES

The DRB shall establish procedures that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. The DRB established procedures shall only be implemented upon approval of the parties.

The DRB Chairperson shall schedule progress and dispute meetings and any other DRB activities.

The parties shall not call on any of the DRB members, who served on this contract, as a witness in arbitration proceedings, which may arise from this contract.

DRB members shall have no claim against the STATE or the CONTRACTOR, or both, from claimed harm arising out of the parties' evaluations of the DRB's opinions.

During progress or dispute meetings, DRB members shall refrain from expressing opinions on the merits of statements on matters under dispute or potential dispute. Opinions of DRB members expressed in private sessions shall be kept strictly confidential. Individual DRB members shall not meet with, or discuss contract issues with individual parties. Discussions regarding the project between the DRB members and the parties shall be in the presence of all three members and both parties. Individual DRB members shall not undertake independent investigations of any kind pertaining to disputes or potential disputes, except with the knowledge of both parties and as expressly directed by the DRB Chairperson.

B. PROGRESS MEETINGS

DRB members shall visit the project site and meet with representatives of the parties to keep abreast of construction activities and to develop familiarity with the work in progress. Scheduled progress meetings shall be held at or near the project site. The DRB shall meet at least once at the start of the project, and at least once every 4 months thereafter. The frequency, exact time, and duration of additional site visits and progress meetings shall be as recommended by the DRB and approved by the parties consistent with the construction activities or matters under consideration and dispute. Scheduled progress meetings may be waived, if the parties are in agreement, when the only work remaining is plant establishment work. Each meeting shall consist of a round table discussion and a field inspection of the work being performed on the contract, if necessary. Each meeting shall be attended by representatives of both parties. The agenda shall generally be as follows:

1. Meeting opened by the DRB Chairperson.
2. Remarks by the STATE's representative.
3. A description by the CONTRACTOR's representative of work accomplished since the last meeting; the current schedule status of the work; and a forecast for the coming period.
4. An outline by the STATE's representative of the status of the work as the STATE views it.
5. An outline by the CONTRACTOR's representative of potential problems and a description of proposed solutions.
6. A brief description by the CONTRACTOR's and the STATE's representative of potential claims and disputes that have surfaced since the last meeting.
7. A summary by the STATE's representative, the CONTRACTOR's representative, or the DRB of the status of past potential claims and disputes.

The STATE's representative will prepare minutes of all progress meetings and circulate them for revision and approval by all concerned within 10 days of the meeting.

C. DISPUTE MEETING

The term "dispute meeting" as used in this subsection shall refer to both the informal and traditional dispute meeting processes, unless otherwise noted.

Either the STATE or the CONTRACTOR may request a dispute meeting with the DRB. The requesting party shall simultaneously notify the other party of each dispute meeting request. Upon being notified of the need for a dispute meeting, the DRB shall review and consider the dispute. The DRB shall determine the time and location of the dispute meeting with due consideration for the needs and preferences of the parties, while recognizing the importance of a speedy resolution to the dispute.

Dispute meetings shall be conducted at any location that would be convenient and provide required facilities and access to necessary documentation.

No DRB dispute meeting shall take place later than 30 days prior to acceptance of the contract.

Only the STATE's Area Construction Engineer, Resident Engineer, and Structure Representative and the CONTRACTOR's or subcontractor's, Superintendent or Project Manager may present information at a dispute meeting. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute. The exception to this is technical services, as described below:

> The DRB, with approval of the parties, may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the two parties as specified in an approved contract change order. The CONTRACTOR shall not be entitled to markups for the payments made for these services.

At the dispute meeting the DRB may ask questions, seek clarification, and request further clarification of data presented by either of the parties as may be necessary to assist in making a fully informed recommendation. However, the DRB shall refrain from expressing opinions on the merits of statements on matters under dispute during the parties' presentations. The claimant

shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals at the meeting until all aspects of the dispute are thoroughly covered. Each party will be given ample time to fully present its position, make rebuttals, provide relevant documents, and respond to DRB questions and requests.

There shall be no testimony under oath or cross-examination, during DRB dispute meetings. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRB in conformance with the procedures established at the first meeting between the DRB and the parties. These established procedures need not comply with prescribed legal laws of evidence.

Failure to attend a dispute meeting by either of the parties shall be conclusively considered by the DRB as indication that the non-attending party considers all written documents and correspondence submitted as their entire and complete argument.

After dispute meetings are concluded, the DRB shall meet in private and reach a conclusion supported by two or more members. Private sessions of the DRB may be held at a location other than the job site or by electronic conferencing as deemed appropriate, in order to expedite the process.

The DRB shall make every effort to reach a unanimous decision.

1. TRADITIONAL DISPUTE MEETING:

The following procedure shall be used for the traditional dispute meeting:

a. Within 21 days after receiving the STATE's written response to the CONTRACTOR's supplemental potential claim record, the CONTRACTOR shall refer the dispute to the DRB if the CONTRACTOR wishes to further pursue the dispute. The CONTRACTOR shall make the referral in writing to the DRB, simultaneously copied to the STATE. The written dispute referral shall describe the disputed matter in individual discrete segments, so that it will be clear to both parties and the DRB what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.
b. The parties shall each be afforded an opportunity to be present and to be heard by the DRB, and to offer evidence. Either party furnishing written evidence or documentation to the DRB must furnish copies of such information to the other party a minimum of 15 days prior to the date the DRB is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRB may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRB. The DRB shall not consider evidence not furnished in conformance with the terms specified herein.
c. Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral unless otherwise agreed to by all parties.
d. The DRB may request clarifying information of either party within 10 days after the dispute meeting. Requested information shall be submitted to the DRB within 10 days of the DRB request.
e. The DRB shall furnish a written report to the parties with its conclusion(s) and recommendation(s). The DRB shall complete its report, including minority opinion, if any, and submit it to the parties within 30 days of the dispute meeting, except that time

extensions may be granted at the request of the DRB with the written concurrence of the parties. The report shall summarize the facts considered, the contract language, law or regulation viewed by the DRB as pertinent to the dispute, and the DRB's interpretation and reasoning in arriving at its conclusion(s) and recommendation(s) and, if appropriate, recommends guidelines for determining compensation. The DRB's written opinion shall stand on its own, without attachments or appendices. The DRB Chairperson shall furnish a copy of the written recommendation report to the DRB Coordinator, Division of Construction, MS 44, P.O. Box 942874, Sacramento, CA 94274.

f. Within 30 days after receiving the DRB's report, the parties shall respond to the DRB in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRB's recommendation or a written response requesting the DRB reconsider their recommendation, shall conclusively indicate that the party(s) failing to respond accepts the DRB recommendation. Immediately after responses have been received from both parties, the DRB shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRB's report from the DRB prior to responding to the report. The DRB shall consider any clarification request only if submitted within 10 days of receipt of the DRB's report, and if submitted simultaneously in writing to both the DRB and the other party. Each party may submit only one request for clarification for any individual DRB report. The DRB shall respond, in writing, to requests for clarification within 10 days of receipt of such requests.
g. Either party may seek a reconsideration of the DRB's recommendation. The DRB shall only grant reconsideration based upon submission of new evidence and if the request is submitted within the 30 day time limit specified for response to the DRB's written report. Each party may submit only one request for reconsideration regarding an individual DRB recommendation.
h. If the parties are able to settle their dispute with the aid of the DRB's report, the STATE and the CONTRACTOR shall promptly accept and implement the settlement of the parties. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the settlement, either party may request the DRB to make a recommendation regarding compensation.

2. INFORMAL DISPUTE MEETING

An informal dispute meeting shall be convened, only if, the parties and the DRB agree that this dispute resolution process is appropriate to settle the dispute.

The following procedure shall be used for the informal dispute meeting:

a. The parties shall furnish the DRB with one copy of pertinent documents requested by the DRB that are or may become necessary for the DRB to perform its function. The party furnishing documents shall furnish such documents to the other party at the same time the document is provided to the DRB.
b. After the dispute meeting has concluded, the DRB members shall deliberate in private the same day until a response to the parties is reached or as otherwise agreed to by the parties.
c. The DRB then verbally delivers its recommendation with findings, including minority opinion, if any, to the parties.
d. After the recommendation is presented, the parties may ask for clarifications.

e. Occasionally the DRB may be unable to formulate a recommendation based on the information given at a dispute meeting. However, the DRB may provide the parties with advice on strengths and weaknesses of their prospective positions, in the hope of the parties reaching settlement.
f. If the parties are able to settle their dispute with the aid of the DRB's opinion, the STATE and the CONTRACTOR shall promptly accept and implement the settlement of the parties.
g. The DRB will not be bound by its verbal recommendation in the event that a dispute is later heard by the DRB in a traditional dispute meeting.

Unless the dispute is settled, use of the informal dispute meeting does not relieve the parties of their responsibilities under Section 5-1.15C, "Dispute Resolution Board," of the Standard Specifications or subsection, "Traditional Dispute Meeting," of this AGREEMENT. There will be no extension of time allowed for the process to permit the use of the informal dispute meeting, unless otherwise agreed to by the parties.

SECTION IV TIME FOR BEGINNING AND COMPLETION

DRB members shall not begin work under the terms of this AGREEMENT, until authorized in writing by the STATE or as agreed to by the parties. Once established, the DRB shall be in operation until the Director accepts the contract. If the contract is terminated in accordance with Section 8-1.08, "Termination of Control," of the Standard Specifications, the DRB will be dissolved.

SECTION V PAYMENT

Each DRB member shall be compensated at an agreed rate of $1,500 per day for time spent per meeting, either at start of project, or a scheduled progress or a dispute meeting. A member serving on more than one State DRB or DRA, regardless of the number of meetings per day, shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB member to review and research activities outside the official DRB meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRB, has been specifically agreed to in advance by the parties. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of $150 per hour. The agreed amount of $150 per hour shall include all incidentals including expenses for telephone, fax, and computer services. The State will provide administrative services such as conference facilities to the DRB.

A. PAYMENT PROCESSING

The CONTRACTOR shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges, from invoices submitted by each DRB member, and technical services.

DRB members may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed during that

billing period. Payment for hourly fees, at the agreed rate, shall not be paid to a DRB member until the amount and extent of those fees are approved by the STATE and the CONTRACTOR.

B. INSPECTION OF COSTS RECORDS

DRB members and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States federal government, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period, the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

SECTION VI ASSIGNMENT OF TASKS OF WORK

DRB members shall not assign the work of this AGREEMENT.

SECTION VII TERMINATION OF A DRB MEMBER

DRB members may resign after providing not less than 15 days written notice of their resignation to the STATE and the CONTRACTOR. A DRB member may be terminated, by either party, for failing to comply at all times with all required employment or financial disclosure conditions of DRB membership in conformance with the terms of the contract and this AGREEMENT.

Service of a DRB member may be terminated at any time with not less than 15 days notice as follows:

A. The State may terminate service of the State appointed member.
B. The Contractor may terminate service of the Contractor appointed member.
C. Upon the written recommendation of the State and Contractor appointed members for the removal of the third member.
D. Upon resignation of a member.

When a member of the DRB is replaced, the replacement member shall be appointed in the same manner as the replaced member was appointed. The appointment of a replacement DRB member will begin promptly upon determination of the need for replacement and shall be completed within 15 days. Changes in either of the DRB members chosen by the 2 parties will not require re-selection of the third member, unless both parties agree to such re-selection in writing. The Dispute Resolution Board Agreement shall be amended to reflect the change of a DRB member.

Each party shall document the need for replacement and substantiate the replacement request in writing to the other party and DRB members.

SECTION VIII LEGAL RELATIONS

The parties hereto mutually understand and agree that each DRB member in the performance of duties is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not

limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

SECTION IX CONFIDENTIALITY

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRB, which documents and records are marked "Confidential - for use by the DRB only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRB findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of this AGREEMENT. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRB. However, the parties understand that such documents may be subsequently discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

SECTION X DISPUTES

Disputes between the parties arising out of the work or other terms of this AGREEMENT, which cannot be resolved by negotiation and mutual concurrence between the parties, or through the administrative process provided in the contract, shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications. Disputes between the DRB and either party, which cannot be resolved by negotiation and mutual concurrence, shall be resolved in the appropriate forum.

SECTION XI VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION

In the event that any party deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

SECTION XII FEDERAL REVIEW AND REQUIREMENTS

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRB in progress, except for private meetings or deliberations of the DRB that do not become part of the project records.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

SECTION XIII CERTIFICATION OF CONTRACTOR, DRB, AND STATE

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRB MEMBER DRB MEMBER

By: _____ By: _____

Title: _____ Title :_____

DRB CHAIRPERSON

By :_____

Title :_____

CONTRACTOR

CALIFORNIA DEPARTMENT
OF TRANSPORTATION

By: _____ By: _____

Title: _____ Title: _____

Add:

5-1.16–5-17 (BLANK)

Add:

5-1.18 PROPERTY AND FACILITY PRESERVATION

5-1.18A General

Preserve property and facilities, including:

1. Adjacent property
2. Department's instrumentation
3. ESAs
4. Lands administered by other agencies
5. Railroads and railroad equipment
6. Roadside vegetation not to be removed
7. Utilities
8. Waterways

Immediately report damage to the Engineer.

If you cause damage, you are responsible.

Install sheet piling, cribbing, bulkheads, shores, or other supports necessary to support existing facilities or support material carrying the facilities.

Dispose of temporary facilities when they are no longer needed.

If you damage plants not to be removed:

1. Dispose of them outside the right of way unless the Engineer allows you to reduce them to chips and spread the chips within the highway at locations designated by the Engineer
2. Replace them

Replace plants with plants of the same species.

Replace trees with 24-inch-box trees.

Replace shrubs with No. 15 container shrubs.

Replace ground cover plants with plants from flats. Replace Carpobrutus ground cover plants with plants from cuttings. Plant ground cover plants 1 foot on center.

If a plant establishment period is specified, replace plants before the start of the plant establishment period; otherwise, replace plants at least 30 days before Contract acceptance.

Water each plant immediately after planting and saturate the backfill soil around and below the roots or ball of earth around the roots of each plant. Water as necessary to maintain plants in a healthy condition until Contract acceptance.

The Department may make a temporary repair to restore service to a damaged facility.

If working on or adjacent to railroad property, do not interfere with railroad operations.

For an excavation on or affecting railroad property, submit work plans showing the system to be used to protect railroad facilities. Allow 65 days for the Engineer's review of the plans. Do not perform work based on the plans until the Engineer notifies you they are accepted.

5-1.18B Nonhighway Facilities (Including Utilities)

The Department may rearrange a nonhighway facility during the Contract. Rearrangement of a nonhighway facility includes installation, relocation, alteration, or removal of the facility.The Department may authorize facility owners and their agents to enter the highway to perform rearrangement work for their facilities or to make connections or repairs to their property. Coordinate activities to avoid delays.

Notify the Engineer at least 3 business days before you contact the regional notification center under Govt Code § 4216 et seq. Failure to contact the notification center prohibits excavation.

Before starting work that could damage or interfere with underground infrastructure, locate the infrastructure described in the Contract, including laterals and other appurtenances, and determine the presence of other underground infrastructure inferred from visible facilities such as buildings, meters, or junction boxes.

Notify the Engineer if the infrastructure described in the Contract cannot be found. If after giving the notice, you find the infrastructure in a substantially different location than described, finding the infrastructure is paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Underground infrastructure described in the Contract may be in different locations than described, and additional infrastructure may exist.

Upon discovering an underground main or trunk line not described in the Contract, immediately notify the Engineer and the infrastructure owner. The Engineer orders the locating and protecting of the infrastructure. The locating and protecting is paid for as extra work as

specified in Section 4-1.03D, "Extra Work." If ordered, repair infrastructure damage. If the damage is not due to your negligence, the repair is paid for as extra work as specified in Section 4-1.03D, "Extra Work."

If necessary underground infrastructure rearrangement is not described in the Contract, the Engineer may order you to perform the work. The rearrangement is paid for as extra work as specified in Section 4-1.03D, "Extra Work."

If you want infrastructure rearrangement different from that described in the Contract:

1. Notify the Engineer
2. Make an arrangement with the infrastructure owner
3. Obtain authorization for the rearrangement
4. The Department does not adjust time or payment for rearrangement different from the Contract
5. Pay the infrastructure owner any additional cost

Immediately notify the Engineer of a delay due to the presence of main line underground infrastructure not described in the Contract or in a substantially different location or due to rearrangement different from the Contract. The Department pays for one of these delays in the same manner as specified for a right of way delay in Section 8-1.09, "Right of Way Delays."

^^

SECTION 6 CONTROL OF MATERIALS
(Issued 05-01-09)

Replace Section 6-1.05 with:

6-1.05 SPECIFIC BRAND OR TRADE NAME AND SUBSTITUTION

A reference to a specific brand or trade name establishes a quality standard and is not intended to limit competition. You may use a product that is equal to or better than the specified brand or trade name if approved.

Submit a substitution request within a time period that:

1. Follows Contract award
2. Allows 30 days for review
3. Causes no delay

Include substantiating data with the substitution request that proves the substitution:

1. Is of equal or better quality and suitability
2. Causes no delay in product delivery and installation

Add:

6-1.075 GUARANTEE

Guarantee the work remains free from substantial defects for 1 year after contract acceptance except for work parts for which you were relieved of maintenance and protection. Guarantee each of these relieved work parts for 1 year after the relief date.

The guarantee excludes damage or displacement caused by an event outside your control including:

1. Normal wear and tear
2. Improper operation
3. Insufficient maintenance
4. Abuse
5. Unauthorized change
6. Act of God

During the guarantee period, repair or replace each work portion having a substantial defect.

The Department does not pay for corrective work.

During corrective work activities, provide insurance coverage specified for coverage before contract acceptance.

The contract bonds must be in full force and effect until the later of:

1. Expiration of guarantee period
2. Completion of corrective work

If a warranty specification conflicts with Section 6-1.075, "Guarantee," comply with the warranty specification.

During the guarantee period, the Engineer monitors the completed work. If the Engineer finds work having a substantial defect, the Engineer lists work parts and furnishes you the list.

Within 10 days of receipt of the list, submit for authorization a detailed plan for correcting the work. Include a schedule that includes:

1. Start and completion dates
2. List of labor, equipment, materials, and any special services you plan to use
3. Work related to the corrective work, including traffic control and temporary and permanent pavement markings

The Engineer notifies you when the plan is authorized. Start corrective work and related work within 15 days of notice.

If the Engineer determines corrective work is urgently required to prevent injury or property damage:

1. The Engineer furnishes you a request to start emergency repair work and a list of parts requiring corrective work
2. Mobilize within 24 hours and start work
3. Submit a corrective work plan within 5 days of starting emergency repair work

If you fail to perform work as specified, the Department may perform the work and bill you.

In Section 6-1.08 delete the 2nd paragraph.

Add:

6-1.085 BUY AMERICA (23 CFR 635.410)

For a Federal-aid contract, furnish steel and iron materials to be incorporated into the work that are produced in the United States except:

1. Foreign pig iron and processed, pelletized, and reduced iron ore may be used in the domestic production of the steel and iron materials [60 Fed Reg 15478 (03/24/1995)]
2. If the total combined cost of the materials does not exceed the greater of 0.1 percent of the total bid or $2,500, material produced outside the United States may be used

Production includes:

1. Processing steel and iron materials, including smelting or other processes that alter the physical form or shape (such as rolling, extruding, machining, bending, grinding, and drilling) or chemical composition
2. Coating application, including epoxy coating, galvanizing, and painting, that protects or enhances the value of steel and iron materials

For steel and iron materials to be incorporated into the work, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications that certifies all production processes occurred in the United States except for the above exceptions.

Add:

6-1.087 BUY AMERICA (PUB RES CODE § 42703(d))

Furnish crumb rubber to be incorporated into the work that is produced in the United States and is derived from waste tires taken from vehicles owned and operated in the United States.

For crumb rubber to be incorporated into the work, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications that certifies only crumb rubber manufactured in the United States and derived from waste tires taken from vehicles owned and operated in the United States is used.

In Section 6-2.01 delete the 4th paragraph.

In Section 6-2.01 replace the 7th paragraph with:

Upon the Contractor's written request, the Department tests materials from an untested local source. If satisfactory material from that source is used in the work, the Department does not charge the Contractor for the tests; otherwise, the Department deducts the test cost.

In Section 6-2.01 delete the 8th paragraph.

In Section 6-2.02 delete the 3rd paragraph.

In Section 6-2.02 in the 7th paragraph, replace the 2nd sentence with:

The Department deducts the charges for the removed material.

In Section 6-2.03 in the 3rd paragraph, replace the 5th sentence with:

No allowance or additional compensation will be made for lost time or for delay in completing the work due to moving the Contractor's plant from the designated mandatory source to the alternative mandatory source, other than a time adjustment as specified in Section 8-1.09, "Delays."

In Section 6-3.01 delete the 4th paragraph.

In Section 6-3.01 in the 6th paragraph, delete the 1st sentence.

In Section 6-3.01 add:

As used in Section 6-3.01, "Testing," tests are tests to assure the quality and to determine the acceptability of the work.

The Department deducts costs of testing work found to be noncompliant.

^^

SECTION 7 LEGAL RELATIONS AND RESPONSIBILITY
(Issued 09-16-11)

Replace Section 7-1.01 with:

7-1.01 LAWS TO BE OBSERVED

Comply with laws, regulations, orders, decrees, and PLACs applicable to the project. Indemnify and defend the State against any claim or liability arising from the violation of a law, regulation, order, decree, or PLAC by you or your employees. Immediately report to the Engineer in writing a discrepancy or inconsistency between the contract and a law, regulation, order, decree, or PLAC.

In Section 7-1.01A replace the 1st clause with:

Work on the job site must comply with Labor Code §§ 1727 and 1770-1815 and 8 CA Code of Regs § 16000 et seq. Work includes roadside production and processing of materials.

In Section 7-1.01A(2) in the 1st paragraph, replace item 3 with:

3. Upon becoming aware of the subcontractor's failure to pay the specified prevailing rate of wages to the subcontractor's workers, the Contractor must diligently take corrective action to stop or rectify the failure, including withholding sufficient funds due the subcontractor for work performed on the public works project.

In Section 7-1.01A(2), replace the 2nd paragraph with:

Pursuant to Section 1775 of the Labor Code, the Division of Labor Standards Enforcement must notify the Contractor on a public works project within 15 days of the receipt by the Division of Labor Standards Enforcement of a complaint of the failure of a subcontractor on that public works project to pay workers the general prevailing rate of per diem wages. If the Division of Labor Standards Enforcement determines that employees of a subcontractor were not paid the general prevailing rate of per diem wages and if the Department did not withhold sufficient money under the contract to pay those employees the balance of wages owed under the general prevailing rate of per diem wages, the Contractor must withhold an amount of moneys due the subcontractor sufficient to pay those employees the general prevailing rate of per diem wages if requested by the Division of Labor Standards Enforcement. The Contractor must pay any money withheld from and owed to a subcontractor upon receipt of notification by the Division of Labor Standards Enforcement that the wage complaint has been resolved. If notice of the resolution of the wage complaint has not been received by the Contractor within 180 days of the filing of a valid notice of completion or acceptance of the public works project, whichever occurs later, the Contractor must pay all moneys withheld from the subcontractor to the Department. The Department withholds these moneys pending the final decision of an enforcement action.

In Section 7-1.01A(2) replace 7th paragraph with:

Changes in general prevailing wage determinations apply to the contract when the Director of Industrial Relations has issued them at least 10 days before advertisement (Labor Code § 1773.6 and 8 CA Code of Regs 16204).

In Section 7-1.01A(3) replace the 2nd paragraph with:

The Department withholds the penalties specified in subdivision (g) of Labor Code § 1776 for noncompliance with the requirements in Section 1776.

In Section 7-1.01A(3) replace the 4th paragraph with:

The Department withholds for delinquent or inadequate payroll records (Labor Code § 1771.5). If the Contractor has not submitted an adequate payroll record by the month's 15th day for the period ending on or before the 1st of that month, the Department withholds 10 percent of the monthly progress estimate, exclusive of mobilization. The Department does not withhold more than $10,000 or less than $1,000.

In Section 7-1.01A(3) delete the 5th paragraph.

Replace Section 7-1.01A(6) with:

7-1.01A(6) (Blank)

Replace Section 7-1.01A(7) with:

7-1.01A(7) (Blank)

Replace Section 7-1.01F with:

7-1.01F Environmental Stewardship

Comply with Section 14.

Replace Section 7-1.01I with:

7-1.01I (Blank)

In Section 7-1.02 in the 2nd paragraph, replace the 4th sentence with:

Trucks used to haul treated base, portland cement concrete, or hot mix asphalt shall enter onto the base to dump at the nearest practical entry point ahead of spreading equipment.

In Section 7-1.02 between the 4th and 5th paragraphs, add:

Loads imposed on existing, new, or partially completed structures shall not exceed the load carrying capacity of the structure or any portion of the structure as determined by AASHTO LRFD with interims and California Amendments, Design Strength Limit State II. The compressive strength of concrete (f'_c) to be used in computing the load carrying capacity shall be the smaller of the following:

1. Actual compressive strength at the time of loading
2. Value of f'_c shown on the plans for that portion of the structure or 2.5 times the value of f_c (extreme fiber compressive stress in concrete at service loads) shown on the plans for portions of the structure where no f'_c is shown

Replace Section 7-1.04 with:

7-1.04 PERMITS, LICENSES, AGREEMENTS, AND CERTIFICATIONS

7-1.04A General

Comply with PLACs. The Department makes PLAC changes under Section 4-1.03, "Changes."

7-1.04B Before Award

To make a change to a PLAC made available to you before award, submit the proposed change. The Department sends the proposed change to the appropriate authority for consideration.

7-1.04C After Award

Confirm with the Engineer which after-award PLACs are obtained by the Department and which are obtained by the Contractor.

To make a change to an after-award PLAC obtained by the Department, submit the proposed change. The Department sends the proposed change to the appropriate authority for consideration.

Obtain those PLACs to be issued to you and pay fees and costs associated with obtaining them. Submit copies of Contractor-obtained after-award PLACs for review.

In Section 7-1.06 in the 1st paragraph, add:

The Contractor's Injury and Illness Prevention Program shall be submitted to the Engineer. The program shall address the use of personal and company issued electronic devices during work. The use of entertainment and personal communication devices in the work zone shall not be allowed. Workers may use a communication device for business purposes in the work area, at a location where their safety and the safety of other workers and the traveling public is not compromised.

Replace Section 7-1.07 with:

7-1.07 Lead Compliance Plan

Section 7-1.07 applies if a bid item for a lead compliance plan is included in the Contract.

Prepare a work plan to prevent or minimize worker exposure to lead while managing and handling earth materials, paint system debris, traffic stripe residue, and pavement marking residue containing lead. Regulations containing specific Cal/OSHA requirements when working with lead include 8 CA Code of Regs § 1532.1.

The plan must contain the items listed in 8 CA Code of Regs § 1532.1(e)(2)(B). Before submittal, a CIH must sign and seal the plan. Submit the plan at least 7 days before starting any activity that presents the potential for lead exposure. The Engineer notifies you of the acceptability of the plan within 4 business days of receipt.

Before starting any activity that presents the potential for lead exposure to employees who have no prior training, including State employees, provide a safety training program to these employees that complies with 8 CA Code of Regs § 1532.1 and your lead compliance program.

Submit copies of air monitoring or job site inspection reports made by or under the direction of the CIH under 8 CA Code of Regs § 1532.1 within 10 days after the date of monitoring or inspection.

Supply personal protective equipment, training, and washing facilities required by your lead compliance plan for 5 State employees.

The contract lump sum price paid for lead compliance plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and implementing the plan as specified in this section.

Replace Section 7-1.08 with:

7-1.08 PUBLIC CONVENIENCE

Compliance with the provisions of this section does not relieve you of your responsibility for public safety.

Construction activities must not inconvenience the public or abutting property owners. Schedule and conduct work to avoid unnecessary inconvenience to the public and abutting property owners. Avoid undue delay in construction activities to reduce the public's exposure to construction.

Where possible, route traffic on new or existing paved surfaces.

Maintain convenient access to driveways, houses, and buildings. When the abutting property owner's access across the right of way line is to be eliminated or replaced under the contract, the existing access must not be closed until the replacement access facilities are usable. Construct temporary approaches to crossings and intersecting highways.

Provide a reasonably smooth and even surface for use by traffic at all time during excavation of roadways and construction of embankments. Before other grading activities, place fill at culverts and bridges to allow traffic to cross. If ordered, excavate roadway cuts in layers and construct embankments in partial widths at a time alternating construction from one side to the other and routing traffic over the side opposite the one under construction. Install or construct culverts on only 1/2 the width of the traveled way at a time; keep the traveled way portion being used by traffic open and unobstructed until the opposite side of the traveled way is ready for use by traffic.

Upon completion of rough grading or placing any subsequent layer, bring the surface of the roadbed to a smooth and even condition, free of humps and depressions and satisfactory for the use of the public.

After subgrade preparation for a specified layer of material has been completed, repair any damage to the roadbed or completed subgrade, including damage due to use by the public.

While subgrade and paving activities are underway, allow the public to use the shoulders. If half-width paving methods are used, allow the public to use the side of the roadbed opposite the one under construction. If enough width is available, keep open a passageway wide enough to accommodate at least 2 lanes of traffic at locations where subgrade and paving activities are underway. Shape shoulders or reshape subgrade as necessary to accommodate traffic during subgrade preparation and paving activities.

Apply water or dust palliative for the prevention or alleviation of dust nuisance.

Install signs, lights, flares, temporary railing (Type K), barricades and other facilities to direct traffic. Furnish flaggers whenever necessary to direct the movement of the public through or around the work.

You will be required to pay the cost of replacing or repairing all facilities installed under extra work for the convenience or direction or warning of the public which are lost while in your custody, or are damaged by your operations to such an extent as to require replacement or repair.

The Engineer may order or consent to your request to open a completed section of surfacing, pavement, or structure roadway surface for public use. You will not be compensated for any delay to your construction activities caused by the public. This does not relieve you from any other contractual responsibility.

Replace Section 7-1.09 with:

7-1.09 PUBLIC SAFETY

You are responsible to provide for public safety.

Do not construct a temporary facility that interferes with the safe passage of traffic.

Control dust resulting from the work, inside and outside the right-of-way.

Move workers, equipment, and materials without endangering traffic.

Whenever your operations create a condition hazardous to the public, furnish, erect and maintain those fences, temporary railing, barricades, lights, signs, and other devices and take any other necessary protective measures to prevent damage or injury to the public.

Any fences, temporary railing, barricades, lights, signs, or other devices furnished, erected and maintained by you are in addition to those for which payment is provided elsewhere in the specifications.

Provide flaggers whenever necessary to ensure that the public is given safe guidance through the work zone. Except as ordered, at locations where traffic is being routed through construction under one-way controls, move your equipment in compliance with the one-way controls.

Use of signs, lights, flags, or other protective devices must conform with the California MUTCD and as ordered. Signs, lights, flags or other protective devices must not obscure the visibility of, nor conflict in intent, meaning and function of either existing signs, lights and traffic control devices or any construction area signs or traffic control devices.

Keep existing traffic signals and highway lighting in operation. Other entities perform routine maintenance of these facilities during the work.

Cover signs that direct traffic to a closed area. Providing, maintaining, and removing the covers on construction area signs is paid as extra work under Section 4-1.03D, "Extra Work."

Install temporary illumination in a manner which the illumination and the illumination equipment does not interfere with public safety. The installation of general roadway illumination does not relieve you from furnishing and maintaining any protective devices.

Equipment must enter and leave the highway via existing ramps and crossovers and must move in the direction of public traffic. All movements of workmen and construction equipment on or across lanes open to public traffic must be performed in a manner that will not endanger the public. Your vehicles or other mobile equipment leaving an open traffic lane to enter the construction area, must slow down gradually in advance of the location of the turnoff to give traffic following an opportunity to slow down. When leaving a work area and entering a roadway carrying public traffic, your vehicles and equipment must yield to public traffic.

Immediately remove hauling spillage from roadway lanes or shoulders open to traffic. When hauling on roadways, trim loads and remove material from shelf areas to minimize spillage.

Notify the Engineer not less than 25 days and not more than 125 days before the anticipated start of an activity that will change the vertical or horizontal clearance available to public traffic, including shoulders.

If vertical clearance is temporarily reduced to 15.5 feet or less, place low clearance warning signs in accordance with the California MUTCD and as ordered. Signs must comply with the dimensions, color, and legend requirements of the California MUTCD and these specifications except that the signs must have black letters and numbers on an orange retroreflective background. W12-2P signs must be illuminated so that the signs are clearly visible.

Pave or provide full width continuous and cleared wood walks for pedestrian openings through falsework. Protect pedestrians from falling objects and curing water for concrete. Extend overhead protection for pedestrians not less than 4 feet beyond the edge of the bridge deck. Illuminate all pedestrian openings through falsework. Temporary pedestrian facilities must comply with the American with Disabilities Act of 1990 (ADA).

Do not store vehicles, material, or equipment in a way that:

1. Creates a hazard to the public
2. Obstructs traffic control devices

Do not install or place temporary facilities used to perform the work which interfere with the free and safe passage of public traffic.

Temporary facilities which could be a hazard to public safety if improperly designed shall comply with design requirements specified in the contract for those facilities or, if none are specified, with standard design criteria or codes appropriate for the facility involved. Working drawings and design calculations for the temporary facilities shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California and shall be submitted to the Engineer for approval pursuant to Section 5-1.02, "Plans and Working Drawings." The submittals shall designate thereon the standard design criteria or codes used. Installation of the temporary facilities shall not start until the Engineer has reviewed and approved the drawings.

If you appear to be neglectful or negligent in furnishing warning devices and taking protective measures, the Engineer may direct your attention to the existence of a hazard and the necessary warning devices must be furnished and installed and protective measures taken by you. If the Engineer points out the inadequacy of warning devices and protective measures, that action on the part of the Engineer does not relieve you from your responsibility for public safety or abrogate the obligation to furnish and pay for these devices and measures.

Install temporary railing (Type K) or other approved protection system under the following conditions:

1. Excavations: Where the near edge of the excavation is within 15 feet from the edge of an open traffic lane
2. Temporarily Unprotected Permanent Obstacles: When the work includes the installation of a fixed obstacle together with a protective system, such as a sign structure together with protective railing, and you elect to install the obstacle before installing the protective system; or you, for your convenience and as authorized, remove a portion of an existing protective railing at an obstacle and do not replace such railing completely the same day
3. Storage Areas: When material or equipment is stored within 15 feet of the edge of an open traffic lane and the storage is not otherwise prohibited by the provisions of these Standard Specifications and the special provisions
4. Height Differentials: When construction operations create a height differential greater than 0.15 feet within 15 feet of the edge of traffic lane

Temporary railing (Type K) does not need to be installed where excavations within 15 feet from edge of an open traffic lane are:

1. Covered with steel plates or concrete covers of adequate thickness to prevent accidental entry by traffic or the public
2. In side slopes, where the downhill slope is 4:1 (horizontal:vertical) or less unless a naturally occurring condition
3. Protected by existing barrier or railing

Offset the approach end of temporary railing (Type K) a minimum of 15 feet from the edge of an open traffic lane. Install the temporary railing on a skew toward the edge of the traffic lane of not more than one foot transversely to 10 feet longitudinally with respect to the edge of the traffic lane. If the 15-foot minimum offset cannot be achieved, the temporary railing must be installed on the 10 to 1 skew to obtain the maximum available offset between the approach end of the railing and the edge of the traffic lane, and an array of temporary crash cushion modules must be installed at the approach end of the temporary railing.

Secure in place temporary railing (Type K) before starting work for which the temporary railing is required.

Where 2 or more lanes in the same direction are adjacent to the area where the work is being performed, including shoulders, the adjacent lane must be closed under any of the following conditions:

1. Work is off the traveled way but within 6 feet of the edge of traveled way, and approach speed is greater than 45 miles per hour
2. Work is off the traveled way but within 3 feet of the edge of traveled way, and approach speed is less than 45 miles per hour

Closure of the adjacent traffic lane is not required when:

1. Performing work behind a barrier
2. Paving, grinding, or grooving
3. Installing, maintaining, or removing traffic control devices except temporary railing (Type K)

Do not reduce an open traffic lane width to less than 10 feet. When traffic cones or delineators are used for temporary edge delineation, the line of cones or delineators is considered the edge of the traveled way.

If a traffic lane is closed with channelizers for excavation work, move the devices to the adjacent edge of the traveled way when not excavating. Space the devices the same as specified for the lane closure.

Do not move or temporarily suspend anything over a traffic lane open to the public unless the public is protected.

Replace Section 7-1.11 with:

7-1.11 PRESERVATION OF PROPERTY

Comply with Section 5-1.18, "Property and Facility Preservation."

Replace Section 7-1.12 with:

7-1.12 INDEMNIFICATION AND INSURANCE

The Contractor's obligations regarding indemnification of the State of California and the requirements for insurance shall conform to the provisions in Section 3-1.05, "Insurance Policies," and Sections 7-1.12A, "Indemnification," and 7-1.12B, "Insurance," of this Section 7-1.12.

7-1.12A Indemnification

The Contractor shall defend, indemnify, and save harmless the State, including its officers, employees, and agents (excluding agents who are design professionals) from any and all claims, demands, causes of action, damages, costs, expenses, actual attorneys' fees, losses or liabilities, in law or in equity (Section 7-1.12A Claims) arising out of or in connection with the Contractor's performance of this contract for:

1. Bodily injury including, but not limited to, bodily injury, sickness or disease, emotional injury or death to persons, including, but not limited to, the public, any employees or agents of the Contractor, the State, or any other contractor; and
2. Damage to property of anyone including loss of use thereof; caused or alleged to be caused in whole or in part by any negligent or otherwise legally actionable act or omission of the Contractor or anyone directly or indirectly employed by the Contractor or anyone for whose acts the Contractor may be liable.

Except as otherwise provided by law, these requirements apply regardless of the existence or degree of fault of the State. The Contractor is not obligated to indemnify the State for Claims arising from conduct delineated in Civil Code Section 2782 and to Claims arising from any defective or substandard condition of the highway that existed at or before the start of work, unless this condition has been changed by the work or the scope of the work requires the Contractor to maintain existing highway facilities and the Claim arises from the Contractor's failure to maintain. The Contractor's defense and indemnity obligation shall extend to Claims arising after the work is completed and accepted if the Claims are directly related to alleged acts or omissions by the Contractor that occurred during the course of the work. State inspection is not a waiver of full compliance with these requirements.

The Contractor's obligation to defend and indemnify shall not be excused because of the Contractor's inability to evaluate liability or because the Contractor evaluates liability and determine that the Contractor is not liable. The Contractor shall respond within 30 days to the tender of any Claim for defense and indemnity by the State, unless this time has been extended by the State. If the Contractor fails to accept or reject a tender of defense and indemnity within 30 days, in addition to any other remedy authorized by law, the Department may withhold such funds the State reasonably considers necessary for its defense and indemnity until disposition has been made of the Claim or until the Contractor accepts or rejects the tender of defense, whichever occurs first.

With respect to third-party claims against the Contractor, the Contractor waives all rights of any type to express or implied indemnity against the State, its officers, employees, or agents (excluding agents who are design professionals).

Nothing in the Contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these indemnification specifications.

7-1.12B Insurance

7-1.12B(1) General

Nothing in the contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these insurance specifications.

7-1.12B(2) Casualty Insurance

The Contractor shall procure and maintain insurance on all of its operations with companies acceptable to the State as follows:

1. The Contractor shall keep all insurance in full force and effect from the beginning of the work through contract acceptance.
2. All insurance shall be with an insurance company with a rating from A.M. Best Financial Strength Rating of A- or better and a Financial Size Category of VII or better.

3. The Contractor shall maintain completed operations coverage with a carrier acceptable to the State through the expiration of the patent deficiency in construction statute of repose set forth in Code of Civil Procedure Section 337.15.

7-1.12B(3) Workers' Compensation and Employer's Liability Insurance

In accordance with Labor Code Section 1860, the Contractor shall secure the payment of worker's compensation in accordance with Labor Code Section 3700.

In accordance with Labor Code Section 1861, the Contractor shall submit to the Department the following certification before performing the work:

> I am aware of the provisions of Section 3700 of the Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the work of this contract.

Contract execution constitutes certification submittal.

The Contractor shall provide Employer's Liability Insurance in amounts not less than:

1. $1,000,000 for each accident for bodily injury by accident
2. $1,000,000 policy limit for bodily injury by disease
3. $1,000,000 for each employee for bodily injury by disease

If there is an exposure of injury to the Contractor's employees under the U.S. Longshoremen's and Harbor Workers' Compensation Act, the Jones Act, or under laws, regulations, or statutes applicable to maritime employees, coverage shall be included for such injuries or claims.

7-1.12B(4) Liability Insurance

7-1.12B(4)(a) General

The Contractor shall carry General Liability and Umbrella or Excess Liability Insurance covering all operations by or on behalf of the Contractor providing insurance for bodily injury liability and property damage liability for the following limits and including coverage for:

1. Premises, operations, and mobile equipment
2. Products and completed operations
3. Broad form property damage (including completed operations)
4. Explosion, collapse, and underground hazards
5. Personal injury
6. Contractual liability

7-1.12B(4)(b) Liability Limits/Additional Insureds

The limits of liability shall be at least the amounts shown in the following table:

Total Bid	For Each Occurrence[1]	Aggregate for Products/Completed Operation	General Aggregate[2]	Umbrella or Excess Liability[3]
≤$1,000,000	$1,000,000	$2,000,000	$2,000,000	$5,000,000
>$1,000,000 ≤$10,000,000	$1,000,000	$2,000,000	$2,000,000	$10,000,000
>$10,000,000 ≤$25,000,000	$2,000,000	$2,000,000	$4,000,000	$15,000,000
>$25,000,000	$2,000,000	$2,000,000	$4,000,000	$25,000,000

1. Combined single limit for bodily injury and property damage.
2. This limit shall apply separately to the Contractor's work under this contract.
3. The umbrella or excess policy shall contain a clause stating that it takes effect (drops down) in the event the primary limits are impaired or exhausted.

The Contractor shall not require certified Small Business subcontractors to carry Liability Insurance that exceeds the limits in the table above. Notwithstanding the limits specified herein, at the option of the Contractor, the liability insurance limits for certified Small Business subcontractors of any tier may be less than those limits specified in the table. For Small Business subcontracts, "Total Bid" shall be interpreted as the amount of subcontracted work to a certified Small Business.

The State, including its officers, directors, agents (excluding agents who are design professionals), and employees, shall be named as additional insureds under the General Liability and Umbrella Liability Policies with respect to liability arising out of or connected with work or operations performed by or on behalf of the Contractor under this contract. Coverage for such additional insureds does not extend to liability:

1. Arising from any defective or substandard condition of the roadway which existed at or before the time the Contractor started work, unless such condition has been changed by the work or the scope of the work requires the Contractor to maintain existing roadway facilities and the claim arises from the Contractor's failure to maintain;
2. For claims occurring after the work is completed and accepted unless these claims are directly related to alleged acts or omissions of the Contractor that occurred during the course of the work; or
3. To the extent prohibited by Insurance Code Section 11580.04

Additional insured coverage shall be provided by a policy provision or by an endorsement providing coverage at least as broad as Additional Insured (Form B) endorsement form CG 2010, as published by the Insurance Services Office (ISO), or other form designated by the Department.

7-1.12B(4)(c) Contractor's Insurance Policy is Primary

The policy shall stipulate that the insurance afforded the additional insureds applies as primary insurance. Any other insurance or self-insurance maintained by the State is excess only and shall not be called upon to contribute with this insurance.

7-1.12B(5) Automobile Liability Insurance

The Contractor shall carry automobile liability insurance, including coverage for all owned, hired, and nonowned automobiles. The primary limits of liability shall be not less than $1,000,000 combined single limit each accident for bodily injury and property damage. The

umbrella or excess liability coverage required under Section 7-1.12B(4)(b) also applies to automobile liability.

7-1.12B(6) Policy Forms, Endorsements, and Certificates

The Contractor shall provide its General Liability Insurance under Commercial General Liability policy form No. CG0001 as published by the Insurance Services Office (ISO) or under a policy form at least as broad as policy form No. CG0001.

7-1.12B(7) Deductibles

The State may expressly allow deductible clauses, which it does not consider excessive, overly broad, or harmful to the interests of the State. Regardless of the allowance of exclusions or deductions by the State, the Contractor is responsible for any deductible amount and shall warrant that the coverage provided to the State is in accordance with Section 7-1.12B, "Insurance."

7-1.12B(8) Enforcement

The Department may assure the Contractor's compliance with its insurance obligations. Ten days before an insurance policy lapses or is canceled during the contract period, the Contractor shall submit to the Department evidence of renewal or replacement of the policy.

If the Contractor fails to maintain any required insurance coverage, the Department may maintain this coverage and withhold or charge the expense to the Contractor or terminate the Contractor's control of the work in accordance with Section 8-1.08, "Termination of Control."

The Contractor is not relieved of its duties and responsibilities to indemnify, defend, and hold harmless the State, its officers, agents, and employees by the Department's acceptance of insurance policies and certificates.

Minimum insurance coverage amounts do not relieve the Contractor for liability in excess of such coverage, nor do they preclude the State from taking other actions available to it, including the withholding of funds under this contract.

7-1.12B(9) Self-Insurance

Self-insurance programs and self-insured retentions in insurance policies are subject to separate annual review and approval by the State.

If the Contractor uses a self-insurance program or self-insured retention, the Contractor shall provide the State with the same protection from liability and defense of suits as would be afforded by first-dollar insurance. Execution of the contract is the Contractor's acknowledgement that the Contractor will be bound by all laws as if the Contractor were an insurer as defined under Insurance Code Section 23 and that the self-insurance program or self-insured retention shall operate as insurance as defined under Insurance Code Section 22.

Replace Section 7-1.125 with:

7-1.125 Legal Actions Against the Department

If legal action is brought against the Department over compliance with a State or Federal law, rule, or regulation applicable to highway work, then:

1. If the Department, in complying with a court order, prohibits you from performing work, the resulting delay is a suspension related to your performance, unless the Department

terminates the contract.

2. If a court order other than an order to show cause or the final judgment in the action prohibits the Department from requiring you to perform work, the Department may delete the prohibited work or terminate the contract.

In Section 7-1.13 delete the 5th and 6th paragraphs.

Add:

7-1.50 FEDERAL LAWS FOR FEDERAL-AID CONTRACTS

7-1.50A General

Section 7-1.50, "Federal Laws for Federal-Aid Contracts," includes specifications required in a Federal-aid construction contract and applies to a Federal-aid contract.

Form FHWA-1273 is included in the contract in Section 7-1.50B, "FHWA-1273." Some contract terms on the form are different than those used in other contract parts as shown in the following table:

FHWA-1273 Terms and Department Equivalencies

FHWA-1273 Term	Equivalent Term Used in Other Contract Parts
SHA	Department
SHA contracting officer	Engineer
SHA resident engineer	Engineer

7-1.50B FHWA-1273

FHWA-1273 Electronic version -- March 10, 1994
with revised Section VI

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Payment of Predetermined Minimum Wage
V. Statements and Payrolls
VI. Record of Materials, Supplies, and Labor
VII. Subletting or Assigning the Contract
VIII. Safety: Accident Prevention
IX. False Statements Concerning Highway Projects
X. Implementation of Clean Air Act and Federal Water Pollution Control Act
XI. Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion
XII. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment Preference for Appalachian Contracts (included in Appalachian contracts only)

I. GENERAL

1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.
2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.
3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.
4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

   Section I, paragraph 2;
   Section IV, paragraphs 1, 2, 3, 4, and 7;
   Section V, paragraphs 1 and 2a through 2g.

5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.
6. **Selection of Labor:** During the performance of this contract, the contractor shall not:

   a. discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or
   b. employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 *et seq.*) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the

execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.
b. The contractor will accept as his operating policy the following statement:

   "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training."

2. **EEO Officer:** The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.
3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
   b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
   c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.
   d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
   e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.
b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)
c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.

5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

   a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
   b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
   c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
   d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6. **Training and Promotion:**

   a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.
   b. Consistent with the contractor’s work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each

occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

7. **Unions**: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

   a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.
   b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
   c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.
   d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these specifications, such contractor shall immediately notify the SHA.

8. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

   a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.
c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

   a. The records kept by the contractor shall document the following:

      1. The number of minority and non-minority group members and women employed in each work classification on the project;
      2. The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;
      3. The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and
      4. The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

   b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.
b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains,

recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of $10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1. **General:**
   a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b) (2) of the Davis- Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.
   b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.
   c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. **Classification:**

a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.
b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

    1. the work to be performed by the additional classification requested is not performed by a classification in the wage determination;
    2. the additional classification is utilized in the area by the construction industry;
    3. the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and
    4. with respect to helpers, when such a classification prevails in the area in which the work is performed.

c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. **Payment of Fringe Benefits:**

a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in

the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided, that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. **Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:**

a. Apprentices:

1. Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.
2. The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.
3. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

4. In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

1. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.
2. The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.
3. Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which case such trainees shall receive the same fringe benefits as apprentices.
4. In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV.2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. **Apprentices and Trainees (Programs of the U.S. DOT):**

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection

with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. **Withholding:**

   The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. **Overtime Requirements:**

   No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. **Violation:**

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of $10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. **Withholding for Unpaid Wages and Liquidated Damages:**

   The SHA shall upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted

contract subject to the contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. **Compliance with Copeland Regulations (29 CFR 3):**

   The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. **Payrolls and Payroll Records:**

   a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.
   b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.
   c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices, trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029- 005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

1. that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;
2. that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;
3. that each laborer or mechanic has been paid not less that the applicable wage rate and fringe benefits or cash equivalent for the classification of worked performed, as specified in the applicable wage determination incorporated into the contract.

e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.
f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 231.
g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

(As of May 22, 2007, Form FHWA-47 is no longer required.)

VII. SUBLETTING OR ASSIGNING THE CONTRACT

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime

contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.
4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY: ACCIDENT PREVENTION

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).
3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by Engineers, contractors, suppliers, and workers on Federal-aid highway projects,

it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more that $10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $100,000 or more.)

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 *et seq*., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 *et seq*., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.
2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.
3. That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, EPA, indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. **Instructions for Certification - Primary Covered Transactions:**

(Applicable to all Federal-aid contracts - 49 CFR 29)

a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.
b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.
c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.
d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.
f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended,

ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded From Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Primary Covered Transactions

1. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

   a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
   b. Have not within a 3-year period preceding this proposal been convicted of or had a civil judgement rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
   c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and
   d. Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

2. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

2. **Instructions for Certification - Lower Tier Covered Transactions:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions of $25,000 or more - 49 CFR 29)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.
e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.
h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Covered Transactions:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.
2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

    a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
    b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

7-1.50C Female and Minority Goals

To comply with Section II, "Nondiscrimination," of "Required Contract Provisions Federal-Aid Construction Contracts," the Department is including in Section 7-1.50C, "Female and Minority Goals," female and minority utilization goals for Federal-aid construction contracts and subcontracts that exceed $10,000.

The nationwide goal for female utilization is 6.9 percent.

The goals for minority utilization [45 Fed Reg 65984 (10/3/1980)] are as follows:

Minority Utilization Goals

	Economic Area	Goal (Percent)
174	Redding CA: Non-SMSA Counties: CA Lassen; CA Modoc; CA Plumas; CA Shasta; CA Siskiyou; CA Tehema	6.8
175	Eureka, CA Non-SMSA Counties: CA Del Norte; CA Humboldt; CA Trinity	6.6
176	San Francisco-Oakland-San Jose, CA: SMSA Counties: 7120 Salinas-Seaside-Monterey, CA CA Monterey 7360 San Francisco-Oakland CA Alameda; CA Contra Costa; CA Marin; CA San Francisco; CA San Mateo 7400 San Jose, CA CA Santa Clara, CA 7485 Santa Cruz, CA CA Santa Cruz 7500 Santa Rosa CA Sonoma 8720 Vallejo-Fairfield-Napa, CA CA Napa; CA Solano Non-SMSA Counties: CA Lake; CA Mendocino; CA San Benito	 28.9 25.6 19.6 14.9 9.1 17.1 23.2
177	Sacramento, CA: SMSA Counties: 6920 Sacramento, CA CA Placer; CA Sacramento; CA Yolo Non-SMSA Counties CA Butte; CA Colusa; CA El Dorado; CA Glenn; CA Nevada; CA Sierra; CA Sutter; CA Yuba	 16.1 14.3
178	Stockton-Modesto, CA: SMSA Counties: 5170 Modesto, CA CA Stanislaus 8120 Stockton, CA CA San Joaquin Non-SMSA Counties CA Alpine; CA Amador; CA Calaveras; CA Mariposa; CA Merced; CA Toulumne	 12.3 24.3 19.8
179	Fresno-Bakersfield, CA SMSA Counties: 0680 Bakersfield, CA CA Kern 2840 Fresno, CA CA Fresno Non-SMSA Counties: CA Kings; CA Madera; CA Tulare	 19.1 26.1 23.6
180	Los Angeles, CA: SMSA Counties: 0360 Anaheim-Santa Ana-Garden Grove, CA CA Orange 4480 Los Angeles-Long Beach, CA CA Los Angeles 6000 Oxnard-Simi Valley-Ventura, CA CA Ventura	 11.9 28.3 21.5

	6780 Riverside-San Bernardino-Ontario, CA CA Riverside; CA San Bernardino 7480 Santa Barbara-Santa Maria-Lompoc, CA CA Santa Barbara Non-SMSA Counties CA Inyo; CA Mono; CA San Luis Obispo	19.0 19.7 24.6
181	San Diego, CA: SMSA Counties 7320 San Diego, CA CA San Diego Non-SMSA Counties CA Imperial	 16.9 18.2

For each July during which work is performed under the contract, you and each non-material-supplier subcontractor with a subcontract of $10,000 or more must complete Form FHWA PR-1391 (Appendix C to 23 CFR 230). Submit the forms by August 15.

7-1.50D Training

Section 7-1.50D, "Training," applies if a number of trainees or apprentices is specified in the special provisions.

As part of your equal opportunity affirmative action program, provide on-the-job training to develop full journeymen in the types of trades or job classifications involved.

You have primary responsibility for meeting this training requirement.

If you subcontract a contract part, determine how many trainees or apprentices are to be trained by the subcontractor.

Include these training requirements in your subcontract.

Where feasible, 25 percent of apprentices or trainees in each occupation must be in their 1st year of apprenticeship or training.

Distribute the number of apprentices or trainees among the work classifications on the basis of your needs and the availability of journeymen in the various classifications within a reasonable recruitment area.

Before starting work, submit to the Department:

1. Number of apprentices or trainees to be trained for each classification
2. Training program to be used
3. Training starting date for each classification

Obtain the Department's approval for this submitted information before you start work. The Department credits you for each apprentice or trainee you employ on the work who is currently enrolled or becomes enrolled in an approved program.

The primary objective of Section 7-1.50D, "Training," is to train and upgrade minorities and women toward journeymen status. Make every effort to enroll minority and women apprentices or trainees, such as conducting systematic and direct recruitment through public and private sources likely to yield minority and women apprentices or trainees, to the extent they are available within a reasonable recruitment area. Show that you have made the efforts. In making these efforts, do not discriminate against any applicant for training.

Do not employ as an apprentice or trainee an employee:

1. In any classification in which the employee has successfully completed a training course leading to journeyman status or in which the employee has been employed as a journeyman
2. Who is not registered in a program approved by the US Department of Labor, Bureau of Apprenticeship and Training

Ask the employee if the employee has successfully completed a training course leading to journeyman status or has been employed as a journeyman. Your records must show the employee's answers to the questions.

In your training program, establish the minimum length and training type for each classification. The Department and FHWA approves a program if one of the following is met:

1. It is calculated to:

    1.1. Meet the your equal employment opportunity responsibilities
    1.2. Qualify the average apprentice or trainee for journeyman status in the classification involved by the end of the training period

2. It is registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training and it is administered in a way consistent with the equal employment responsibilities of federal-aid highway construction contracts

Obtain the State's approval for your training program before you start work involving the classification covered by the program.

Provide training in the construction crafts, not in clerk-typist or secretarial-type positions. Training is allowed in lower level management positions such as office engineers, estimators, and timekeepers if the training is oriented toward construction applications. Training is allowed in the laborer classification if significant and meaningful training is provided and approved by the division office. Off-site training is allowed if the training is an integral part of an approved training program and does not make up a significant part of the overall training.

The Department reimburses you 80 cents per hour of training given an employee on this contract under an approved training program:

1. For on-site training
2. For off-site training if the apprentice or trainee is currently employed on a federal-aid project and you do at least one of the following:

    2.1. Contribute to the cost of the training
    2.2. Provide the instruction to the apprentice or trainee
    2.3. Pay the apprentice's or trainee's wages during the off-site training period

3. If you comply with Section 7-1.50D, "Training"

Each apprentice or trainee must:

1. Begin training on the project as soon as feasible after the start of work involving the apprentice's or trainee's skill

2. Remain on the project as long as training opportunities exist in the apprentice's or trainee's work classification or until the apprentice or trainee has completed the training program

Furnish the apprentice or trainee:

1. Copy of the program you will comply with in providing the training
2. Certification showing the type and length of training satisfactorily completed

Maintain records and submit reports documenting your performance under Section 7-1.50D, "Training."

^^

SECTION 8 PROSECUTION AND PROGRESS
(Issued 06-05-09)

Replace Section 8 with:

SECTION 8 PROSECUTION AND PROGRESS

8-1.01 (BLANK)

8-1.02 ASSIGNMENT

No third-party agreement relieves you or your surety of your responsibility to complete the work. Do not sell, transfer, or otherwise dispose of any contract part without prior written consent from the Department.

If you assign the right to receive contract payments, the Department accepts the assignment upon the Engineer's receipt of a notice. Assigned payments remain subject to deductions and withholds described in the contract. The Department may use withheld payments for work completion whether payments are assigned or not.

8-1.025 PRECONSTRUCTION CONFERENCE

Attend a preconstruction conference with key personnel, including your assigned representative, at a time and location determined by the Engineer. Submit documents as required before the preconstruction conference. You may begin work before the preconstruction conference.

Be prepared to discuss the following topics and documents:

Topics	Document
Potential claim and dispute resolution	Potential claim forms
Contractor's representation	Assignment of Contractor's representative
DBE and DVBE	Final utilization reports
Equipment	Equipment list
Labor compliance and equal employment opportunity	Job site posters and benefit and payroll reports
Material inspection	Notice of Materials to be Used
Materials on hand	Request for Payment for Materials on Hand
Measurements	--
Partnering	Field Guide to Partnering on Caltrans Construction Projects
Quality control	QC plans
Safety	Injury and Illness Prevention Program and job site posters
Schedule	Baseline schedule and Weekly Statement of Working Days
Subcontracting	Subcontracting Request
Surveying	Survey Request
Traffic control	Traffic contingency plan and traffic control plans
Utility work	--
Weight limitations	--
Water pollution control	SWPPP or WPCP
Work restrictions	PLACs
Working drawings	--

8-1.03 BEGINNING OF WORK

Begin work within 15 days after receiving notice that the contract has been approved by the Attorney General or the attorney appointed and authorized to represent the Department. Submit a written notice 72 hours before beginning work. If the project has more than one location of work, submit a separate notice for each location.

You may begin work before receiving the notice of contract approval if you:

1. Deliver the signed contract, bonds, and evidence of insurance to the Department
2. Submit 72-hour notice
3. Obtain an encroachment permit from the Department
4. Are authorized by the Department to begin
5. Perform work at your own risk
6. Perform work under the contract

The Engineer does not count working days for days worked before contract approval.

If the contract is approved, work already performed that complies with the contract is authorized.

If the contract does not get approved, leave the job site in a neat condition. If a facility has been changed, restore it to its former or equivalent condition at your expense.

The Department does not adjust time for beginning before the approval date.

8-1.04 PROGRESS SCHEDULE

8-1.04A General

Reserved

8-1.04B Critical Path Method Schedule

The following definitions apply to critical path method schedules:

activity: Task, event, or other project element on a schedule that contributes to completing the project. Activities have a description, start date, finish date, duration, and one or more logic ties.

baseline schedule: The initial schedule showing the original work plan beginning on the date of contract approval. This schedule shows no completed work to date and no negative float or negative lag to any activity.

controlling activity: Construction activity that extends the scheduled completion date if delayed.

critical path: Longest continuous chain of activities for the project that has the least amount of total float of all chains. In general, a delay on the critical path extends the scheduled completion date.

critical path method (CPM): Network based planning technique using activity durations and relationships between activities to calculate a schedule for the entire project.

revised schedule: Schedule that incorporates a proposed or past change to logic or activity durations.

scheduled completion date: Planned project completion date shown on the current schedule.

updated schedule: Current schedule developed from the accepted baseline and any subsequent accepted updated or revised schedules through regular monthly review to incorporate actual past progress.

Before or at the preconstruction conference, submit a CPM baseline schedule.

Submit a monthly updated schedule that includes the status of work completed to date and the work yet to be performed as planned.

On each schedule, show:

1. Planned and actual start and completion date of each work activity, including applicable:

    1.1. Submittal development
    1.2. Submittal review and approval
    1.3. Material procurement
    1.4. Contract milestones and constraints
    1.5. Equipment and plant setup
    1.6. Interfaces with outside entities
    1.7. Erection and removal of falsework and shoring
    1.8. Test periods
    1.9. Major traffic stage change
    1.10. Final cleanup

2. Order that you propose to prosecute the work
3. Logical links between the time-scaled work activities
4. All controlling activities
5. Legible description of each activity
6. At least one predecessor and one successor to each activity, except for project start and project end milestones
7. Duration of not less than one working day for each activity
8. Start milestone date as the contract approval date

You may include changes on updated schedules that do not alter the critical path or extend the schedule completion date compared to the current schedule. Changes may include:

1. Adding or deleting activities
2. Changing activity constraints
3. Changing durations
4. Changing logic

If any proposed change in planned work results in altering the critical path or extending the scheduled completion date, submit a revised schedule within 15 days of the proposed change.

For each schedule submittal:

1. Submit a plotted original, time-scaled network diagram on a sheet of at least 8.5" x 11" with a title block and timeline
2. If a computer program is used to make the schedule, submit a read-only compact disc or diskette containing the schedule data. Label the compact disc or diskette with:

    2.1. Contract number
    2.2. CPM schedule number and date produced
    2.3. File name

If there is no contract item for progress schedule (critical path method), full compensation for this work is included in the contract prices paid for the items of work involved, and no additional compensation will be allowed therefor.

8-1.05 TEMPORARY SUSPENSION OF WORK

8-1.05A General

The Engineer may suspend work wholly or in part due to any of the following:

1. Conditions are unsuitable for work progress.
2. You fail to do any of the following:

    2.1. Fulfill the Engineer's orders.
    2.2. Fulfill a contract part.
    2.3. Perform weather-dependent work when conditions are favorable so that weather-related unsuitable conditions are avoided or do not occur.

Upon the Engineer's written order of suspension, suspend work immediately. Provide for public safety and a smooth and unobstructed passageway through the work zone during the suspension as specified in Sections 7-1.08, "Public Convenience," and 7-1.09, "Public Safety." Resume work when ordered.

8-1.05B Suspensions Unrelated to Contractor Performance

For a suspension unrelated to your performance, providing for a smooth and unobstructed passageway through the work during the suspension will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The days during a suspension unrelated to your performance are non-working days.

8-1.05C Suspensions Related to Contractor Performance

For a suspension related to your performance, the Department may provide for a smooth and unobstructed passageway through the work during the suspension and deduct the cost from payments.

The days during a suspension related to your performance are working days.

8-1.06 TIME OF COMPLETION

The time to complete the work is specified in the special provisions.

The Engineer issues a Weekly Statement of Working Days by the end of the following week unless the contract is suspended for reasons unrelated to your performance.

The Weekly Statement of Working Days shows:

1. Working days and non–working days during the reporting week
2. Time adjustments
3. Work completion date computations, including working days remaining
4. Controlling activities

You may protest a Weekly Statement of Working Days.

8-1.07 LIQUIDATED DAMAGES

8-1.07A General

The Department specifies liquidated damages (Pub Cont Code § 10226). Liquidated damages, if any, accrue starting on the 1st day after the expiration of the working days through the day of contract acceptance except as specified in Sections 8-1.07B, "Failure to Complete Work Parts within Specified Times," and 8-1.07C, "Failure to Complete Work Parts by Specified Dates."

The Department withholds liquidated damages before the accrual date if the anticipated liquidated damages may exceed the value of the remaining work.

Liquidated damages for all work, except plant establishment, are:

Liquidated Damages		
Total Bid		Liquidated Damages per Day
From over	To	
$0	$50,000	$1,200
$50,000	$120,000	$1,500
$120,000	$1,000,000	$1,900
$1,000,000	$5,000,000	$3,000
$5,000,000	$10,000,000	$5,400
$10,000,000	$30,000,000	$8,300
$30,000,000	$100,000,000	$10,500
$100,000,000	$250,000,000	$28,500

If all work, except plant establishment, is complete and the total number of working days has expired, liquidated damages are $950 per day.

8-1.07B Failure to Complete Work Parts within Specified Times

The Department may deduct specified damages from payments for each day in completing a work part beyond the time specified for completing the work part.

Damages for untimely completion of work parts may not be equal to the daily amount specified as liquidated damages for the project as a whole, but the Department does not simultaneously assess damages for untimely completion of work parts and for the whole work.

Damages accrue starting the 1st day after a work part exceeds the specified time through the day the specified work part is complete.

8-1.07C Failure to Complete Work Parts by Specified Dates

The Department may deduct specified damages from payments for each day in completing a work part beyond the specified completion date for the work part.

Damages for untimely work part completion may not be equal to the daily amount specified as liquidated damages for the project as a whole, but the Department does not simultaneously assess damages for untimely work part completion and the whole work.

Damages accrue starting the 1st day after an unmet completion date through the day the work part is complete.

8-1.07D Director Days

If the work is not completed within the working days, the Director may grant director days if it serves the State's best interest.

By granting director days, the Director adds working days to the contract. The Director may either grant enough days to eliminate the liquidated damages or fewer. In the latter case, the Department deducts liquidated damages for the remaining overrun in contract time. The Director may deduct the Department's engineering, inspection, and overhead costs incurred during the period of extension granted as director days.

8-1.08 TERMINATION OF CONTROL

The Department may terminate your control of the work for failure to do any of the following (Pub Cont Code § 10253):

1. Supply an adequate workforce
2. Supply material as described
3. Pay subcontractors (Pub Cont Code §10262)
4. Prosecute the work as described in the contract

The Department may also terminate your control for failure to maintain insurance coverage.

For a Federal-aid contract, the Department may terminate your control of the work for failure to include "Required Contract Provisions, Federal-Aid Construction Contracts" in subcontracts.

The Department gives you and your surety notice at least 5 days before terminating control. The notice describes the failures and the time allowed to remedy the failures. If failures are not remedied within the time provided, the Department takes control of the work.

The Department may complete the work if the Department terminates your control or you abandon the project (Pub Cont Code § 10255). The Department determines the unpaid balance under Pub Cont Code § 10258 and the contract.

At any time before final payment of all claims, the Department may convert a termination of control to a termination of contract.

8-1.09 DELAYS

8-1.09A General

An excusable delay is a delay of a controlling activity beyond your control, not foreseeable when the work began such as:

1. Change in the work
2. Department action that is not part of the contract
3. Presence of an underground utility main not described in the contract or in a location different from that specified
4. Described facility reconstruction not reconstructed as described, by the utility owner by the date specified, unless the reconstruction is solely for your convenience
5. Department's failure to obtain timely access to the right-of-way
6. Department's failure to perform an action in the time specified

A critical delay is a delay that extends the schedule completion date.

To request a delay-related time or payment adjustment, submit an RFI.

8-1.09B Time Adjustments

For an excusable critical delay, the Department may make a time adjustment. The Engineer uses information from the schedule to evaluate requests for time adjustments.

If requesting an adjustment, submit a revised schedule showing the delay's effect on the controlling activity. If the delay has:

1. Occurred, submit records of dates and what work was performed during the delayed activity
2. Not occurred, submit the expected dates or duration of the delayed activity

If the Engineer requests, update the schedule to the last working day before the start of the delay.

8-1.09C Payment Adjustments

The Department may make a payment adjustment for an excusable delay that affects your costs.

Only losses for idle equipment, idle workers, and equipment moving or transporting are eligible for delay-related payment adjustments.

The Engineer determines payment for idle time of equipment in the same manner as determinations are made for equipment used in the performance of force account work under Section 9-1.03, "Force Account," with the following exceptions:

1. Delay factor in the Labor Surcharge and Equipment Rental Rates applies to each equipment rental rate.
2. Daily number of payable hours equals the normal working hours during the delay, not to exceed 8 hours per day.
3. Delay days exclude non–working days.
4. Markups are not added.

The Engineer determines payment adjustment for idle workers under Section 9-1.03B, "Labor," but does not add markups.

The Engineer includes costs due to necessary extra equipment moving or transporting.

8-1.10 (BLANK)

8-1.11 TERMINATION OF CONTRACT

8-1.11A General

The Director may terminate the contract if it serves the State's best interest. The Department issues you a written notice, implements the termination, and pays you.

8-1.11B Relief from Responsibility for Work

On receiving a termination notice:

1. Stop work
2. Notify subcontractors and suppliers of the contract termination and stop contract-related work
3. Perform the Engineer-ordered work to secure the job site for termination
4. Remove equipment
5. If authorized, settle termination-related claims and liabilities involving subcontractors and suppliers; assign to the Department the rights, titles, or interests held by you with respect to these parties

8-1.11C Responsibility for Materials

On receiving a termination notice, protect unused material until:

1. You submit an inventory of materials already produced, purchased, or ordered but not yet used; include the location of the material.
2. The Engineer identifies materials that will be retained by the Department. Submit bills of sales or other records of material title.
3. The Engineer confirms that unused materials paid by progress payment and materials furnished by the State have been delivered and stored as ordered.
4. Titles are transferred for materials purchased by the Department.

Dispose of materials that will not be retained by the Department.

8-1.11D Contract Acceptance after Termination

The Engineer recommends contract acceptance after determining completion of:

1. Contract work ordered to be completed before termination
2. Other work ordered to secure the project before termination
3. Material delivery and title transfer

The Department pays you under Section 9-1.08, "Payment After Contract Acceptance."

8-1.11E Payment Adjustment for Termination

If the Department issues a termination notice, the Engineer determines payment for termination based on the following:

1. Direct cost for the work:

    1.1. Including mobilization, demobilization, securing the job site for termination, and losses from the sale of materials
    1.2. Not including the cost of materials you keep, profit realized from the sale of materials, the cost of material damaged by an occurrence as defined in Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," and other credits.

2. Cost of remedial work, as estimated by the Engineer, is not reimbursed.
3. Allowance for profit not to exceed 4 percent of the cost of the work. Prove a likelihood of having made a profit had the contract not been terminated.
4. Material handling costs for material returned to the vendor or disposed of as ordered.
5. Costs in determining the payment adjustment due to the termination, excluding attorney fees and litigation costs.

Termination of the contract does not relieve the surety of its obligation for any just claims arising out of the work performed.

^^

SECTION 9 MEASUREMENT AND PAYMENT
(Issued 03-11-10)

Replace Section 9 with:

SECTION 9 MEASUREMENT AND PAYMENT

9-1.01 MEASUREMENT OF QUANTITIES

9-1.01A General

The Department determines bid item quantities under U.S. customary units.

9-1.01B Weighing Equipment and Procedures

9-1.01B(1) General

The Engineer measures material quantities for payment with devices that comply with:

1. 4 CA Code of Regs § 4000 et seq.
2. Bus & Prof Code § 12001 et seq.

To determine the material payment quantities, use measuring devices that have been sealed by the Department of Food and Agriculture's Division of Measurement Standards or its designated representative.

If a device is not type approved by the Division of Measurement Standards, type approve it under California Test 109.

Notify the Engineer at least 1 business day in advance of equipment testing.

Use material plant controllers having elements affecting the data accuracy and delivery that have been sealed by the Engineer. Make these elements available to the Engineer for inspection.

If the elements are adequate for use, the Engineer seals them. If security seal manipulation occurs, stop material production. Do not resume production until the Engineer reinspects and reseals the device.

The Engineer measures material paid for by weight on Contractor-furnished sealed scales regularly inspected by the Department of Food and Agriculture's Division of Measurement Standards or its designated representative.

Obtain authorization of portable vehicle scale installations before sealing.

Proportioning scales must comply with Section 5-1.10, "Equipment."

9-1.01B(2) Equipment

Each scale must be long enough to fit an entire vehicle or a combination vehicle on the scale deck. The Department allows you to weigh a combination vehicle separately if you disconnect the vehicles.

Construct scale undersupports:

1. Using portland cement concrete containing at least 470 pounds of cement per cubic yard produced from commercial quality materials
2. Such that footing heights are at least 20 inches thick
3. With a bearing surface at least 30 inches wide and bearing pressure on the footing not over 4000 pounds per square foot

In constructing a scale:

1. Furnish drainage to prevent water from saturating the ground under the scale
2. Use bulkheads that prevent displacement
3. If shimming is necessary:

    3.1. Use securely attached metal shims or grout
    3.2 Do not use wedges to shim the supports
    3.3. Do not use shim material in excess of 3 inches

4. Install mechanical indicating elements level, plumb, and rigidly mounted on the concrete undersupports
5. For a hopper scale, rigidly attach hopper scale lever systems and mechanical indicating elements so no weight is lost from bending or support distortion

Each scale used to determine material payment quantities must be operated by a licensed weighmaster (Bus & Prof Code § 12700 et seq.).

Submit a public weighmaster's certificate or certified daily summary weigh sheets for each weighed material quantity. The Department may witness material weighing and check and compile the daily scale weight record.

Each vehicle operator must obtain weight or load slips from the weighmaster. Submit these records at the delivery point.

9-1.01B(3) Procedures

Daily, weigh empty vehicles used to haul material paid for by weight. Each vehicle must have a legible identification mark. The Department may verify material weight by having an empty and loaded vehicle weighed on any scale the Engineer designates.

For imported topsoil measured by volume, soil amendment, and mulch:

1. Each vehicle must allow a ready and accurate contents determination
2. Unless vehicles are of uniform capacity, each vehicle must have a legible identification mark showing its volume capacity
3. Load vehicles to at least the volume capacity
4. Level vehicle loads on arrival at the delivery point

If determining a quantity paid on a volume basis is impractical or if you request and the Engineer authorizes the request, the Engineer weighs the material and converts the result to a volume measurement. The Engineer determines the conversion factors and, if you agree, adopts this method of measurement.

9-1.01C Final Pay Items

The Department shows a bid item quantity as a final pay item for payment purposes only. For a final pay item, accept payment based on the verified Bid Item List quantity, regardless of actual quantity used unless dimensions are changed by the Engineer.

9-1.01D Quantities of Aggregate and Other Roadway Materials

The Engineer determines the weight of aggregate and other roadway materials that are being paid for by weight as shown and does not include the deducted weight of water in their payment quantities.

Material	Quantity Determination
Aggregate or other roadway material except as otherwise shown in this table	By deducting the weight of water in the material[a] in excess of 3 percent of the dry weight of the material from the weight of the material
Imported borrow, imported topsoil, aggregate subbase	By deducting the weight of water in the material[a] in excess of 6 percent of the dry weight of the material from the weight of the material
Straw	By deducting the weight of water in the material[a] in excess of 15 percent of the dry weight of the material from the weight of the material
Fiber[b]	Engineer does not deduct the weight of water
Aggregate base and aggregate for cement treated bases	As specified in Section 26, "Aggregate Bases," and Section 27, "Cement Treated Bases"

NOTE: Percentage of water is determined by California Test 226.
[a]At the time of weighing
[b]Weight of water in the fiber[a] must not exceed 15 percent of the dry weight of the fiber.

9-1.02 SCOPE OF PAYMENT

The Department pays you for furnishing the resources and activities required to complete the Contract work. The Department's payment is full compensation for furnishing the resources and activities, including:

1. Risk, loss, damage repair, or cost of whatever character arising from or relating to the work and performance of the work
2. PLACs and taxes

Full compensation for work specified in Sections 1 through 9 is included in the payment for the bid items involved unless:

1. Bid item for the work is shown on the verified Bid Item List
2. Work is specified as paid for as extra work

The Department does not pay for your loss, damage, repair, or extra costs of whatever character arising from or relating to the work that is a direct or indirect result of your choice of construction methods, materials, equipment, or manpower, unless specifically mandated by the Contract.

Payment is:

1. Full compensation for each bid item specified by the description and measurement unit shown on the verified Bid Item List
2. For the price bid for each bid item shown on the verified Bid Item List or as changed by change order with a specified price adjustment

If an alternative is described in the Contract, the Department pays based on the bid items for the details and specifications not described as an alternative.

The Department pays for work performed by change order based on one or a combination of the following:

1. Bid item prices
2. Force account
3. Agreed price
4. Specialist billing

If the Engineer chooses to pay for work performed by change order based on an agreed price, but you and the Engineer cannot agree on the price, the Department pays by force account.

If a portion of extra work is covered by bid items, the Department pays for this work as changed quantities in those items. The Department pays for the remaining portion of the extra work by force account or agreed price.

The Department pays 10 percent annual interest for unpaid and undisputed:

1. Progress payments
2. After-acceptance payment except for claims

For these payments, interest starts to accrue 30 days after the 1st working day following the 20th day of the month payment is due. For extra work bills not submitted within 7 days after performing the work as specified in 5-1.015E, "Extra Work Bills," interest starts to accrue 60 days after the 1st working day following the 20th day of the month payment is due.

The Department pays 6 percent annual interest for unpaid and undisputed claims. Interest starts to accrue 61 days after the Department accepts a claim statement.

The Department pays 6 percent annual interest for awards in arbitration (Civ Code § 3289).

If the amount of a deduction or withhold exceeds final payment, the Department invoices you for the difference, to be paid upon receipt.

9-1.03 FORCE ACCOUNT PAYMENT

9-1.03A General

For work paid by force account, the Engineer compares the Department's records to your daily force account work report. When you and the Engineer agree on the contents of the daily force account work reports, the Engineer accepts the report and the Department pays for the work. If the records differ, the Department pays for the work based only on the information shown on the Department's records.

If a subcontractor performs work at force account, accept an additional 10 percent markup to the total cost of that work paid at force account, including markups specified in Section 9-1.03, as reimbursement for additional administrative costs.

The markups specified in labor, materials, and equipment include compensation for all delay costs, overhead costs, and profit.

If an item's payment is adjusted for work-character changes, the Department excludes your cost of determining the adjustment.

Payment for owner-operated labor and equipment is made at the market-priced invoice submitted.

9-1.03B Labor

Labor payment is full compensation for the cost of labor used in the direct performance of the work plus a 35 percent markup. Force account labor payment consists of:

1. Employer payment to the worker for:

    1.1. Basic hourly wage
    1.2. Health and welfare
    1.3. Pension
    1.4. Vacation
    1.5. Training
    1.6. Other State and federal recognized fringe benefit payments

2. Labor surcharge percentage in Labor Surcharge and Equipment Rental Rates current during the work paid at force account for:

    2.1. Workers' compensation insurance
    2.2. Social security
    2.3. Medicare
    2.4. Federal unemployment insurance
    2.5. State unemployment insurance
    2.6. State training taxes

3. Subsistence and travel allowances paid to the workers
4. Employer payment to supervisors, if authorized

The 35 percent markup consists of payment for all overhead costs related to labor but not designated as costs of labor used in the direct performance of the work including:

1. Home office overhead
2. Field office overhead

3. Bond costs
4. Profit
5. Labor liability insurance
6. Other fixed or administrative costs that are not costs of labor used in the direct performance of the work

9-1.03C Materials

Material payment is full compensation for materials you furnish and use in the work. The Engineer determines the cost based on the material purchase price, including delivery charges, except:

1. A 15 percent markup is added.
2. Supplier discounts are subtracted whether you took them or not.
3. If the Engineer believes the material purchase prices are excessive, the Department pays the lowest current wholesale price for a similar material quantity.
4. If you procured the materials from a source you wholly or partially own, the determined cost is based on the lower of the:

    4.1. Price paid by the purchaser for similar materials from that source on Contract items
    4.2. Current wholesale price for those materials

5. If you do not submit a material cost record within 30 days of billing, the determined cost is based on the lowest wholesale price:

    5.1. During that period
    5.2. In the quantities used

9-1.03D Equipment Rental

9-1.03D(1) General

Equipment rental payment is full compensation for:

1. Rental equipment costs, including moving rental equipment to and from the site of work performed by change order using its own power.
2. Transport equipment costs for rental equipment that cannot be transported economically using its own power. No payment is made during transport for the transported equipment.
3. 15 percent markup.

If you want to return the equipment to a location other than its original location, the payment to move the equipment must not exceed the cost of returning the equipment to its original location. If you use the equipment for work other than work paid by force account, the transportation cost is included in the other work.

Before moving or loading the equipment, obtain authorization for the equipment rental's original location.

The Engineer determines rental costs:

1. Using rates in Labor Surcharge and Equipment Rental Rates:

1.1. By classifying equipment using manufacturer's ratings and manufacturer-approved changes.
1.2. Current during the work paid by force account.
1.3. Regardless of equipment ownership; but the Department uses the rental document rates or minimum rental cost terms if:

1.3.1. Rented from equipment business you do not own.
1.3.2. The Labor Surcharge and Equipment Rental Rates hourly rate is $10.00 per hour or less.

2. Using rates established by the Engineer for equipment not listed in Labor Surcharge and Equipment Rental Rates. You may submit cost information that helps the Engineer establish the rental rate; but the Department uses the rental document rates or minimum rental cost terms if:

2.1. Rented from equipment business you do not own.
2.2. The Engineer establishes a rate of $10.00 per hour or less.

3. Using rates for transport equipment not exceeding the hourly rates charged by established haulers.

Equipment rental rates include the cost of:

1. Fuel
2. Oil
3. Lubrication
4. Supplies
5. Small tools that are not consumed by use
6. Necessary attachments
7. Repairs and maintenance
8. Depreciation
9. Storage
10. Insurance
11. Incidentals

The Department pays for small tools consumed by use. The Engineer determines payment for small tools consumed by use based on Contractor-submitted invoices.

9-1.03D(2) Equipment On the Job Site

For equipment on the job site at the time required to perform work paid by force account, the time paid is the time:

1. To move the equipment to the location of work paid by force account plus an equal amount of time to move the equipment to another location on the job site when the work paid by force account is completed
2. To load and unload equipment
3. Equipment is operated to perform work paid by force account and:

3.1. Hourly rates are paid in 1/2-hour increments
3.2 Daily rates are paid in 1/2-day increments

When rented equipment on the job site is used to perform work at force account not required by the original contract work, the Engineer may authorize rates in excess of those in Labor Surcharge and Equipment Rental Rates if:

1. You submit a request to use rented equipment
2. Equipment is not available from your owned equipment fleet or from your subcontractors
3. Rented equipment is from an independent rental company
4. Proposed equipment rental rate is reasonable
5. Engineer authorizes the equipment source and the rental rate before you use the equipment

The Department pays for fuel consumed during operation of rented equipment not included in the invoiced rental rate.

9-1.03D(3) Equipment Not On the Job Site Required for Original Contract Work

For equipment not on the job site at the time required to perform work paid by force account and required for original Contract work, the time paid is the time the equipment is operated to perform work paid by force account and the time to move the equipment to a location on the job site when the work paid by force account is completed.

The minimum total time paid is:

1. 1 day if daily rates are paid
2. 8 hours if hourly rates are paid

If daily rates are recorded, equipment:

1. Idled is paid as 1/2 day
2. Operated 4 hours or less is paid as 1/2 day
3. Operated 4 hours or more is paid as 1 day

If the minimum total time exceeds 8 hours and if hourly rates are listed, the Department rounds up hours operated to the nearest 1/2-hour increment and pays based on the following table. The table does not apply when equipment is not operated due to breakdowns; in which case rental hours are the hours the equipment was operated.

Equipment Rental Hours

Hours operated	Hours paid
0.0	4.00
0.5	4.25
1.0	4.50
1.5	4.75
2.0	5.00
2.5	5.25
3.0	5.50
3.5	5.75
4.0	6.00
4.5	6.25

5.0	6.50
5.5	6.75
6.0	7.00
6.5	7.25
7.0	7.5
7.5	7.75
≥8.0	hours used

9-1.03D(4) Equipment Not On the Job Site Not Required for Original Contract Work

For equipment not on the job site at the time required to perform work paid by force account and not required for original Contract work, the time paid is the time:

1. To move the equipment to the location of work paid by force account plus an equal amount of time to return the equipment to its source when the work paid by force account is completed
2. To load and unload equipment
3. Equipment is operated to perform work paid by force account

For this equipment, the Engineer may authorize rates in excess of those in Labor Surcharge and Equipment Rental Rates subject to the following:

1. Equipment is not available from your normal sources or from one of your subcontractors
2. Proposed equipment rental rate is reasonable
3. Engineer authorizes the equipment source and the rental rate before you use the equipment

9-1.03D(5) Non-Owner-Operated Dump Truck Rental

Submit the rental rate for non-owner-operated dump truck rental. The Engineer determines the payment rate. Payment for non-owner-operated dump truck rental is for the cost of renting a dump truck, including its driver. For the purpose of markup payment only, the non-owner-operated dump truck is rental equipment and the owner is a subcontractor.

9-1.04 EXTRA WORK PERFORMED BY SPECIALISTS

If the Engineer determines that you or your subcontractors are not capable of performing specialty extra work, a specialist may be used. Itemize the labor, material, and equipment rental costs unless it is not the special service industry's established practice to provide itemization; in which case, the Engineer accepts current market-priced invoices for the work.

The Engineer may accept an invoice as a specialist billing for work performed at an off–job site manufacturing plant or machine shop.

The Engineer determines the cost based on the specialist invoice price minus any available or offered discounts plus a 10 percent markup.

9-1.05 CHANGED QUANTITY PAYMENT ADJUSTMENTS

9-1.05A General

The unit prices specified in Section 9-1.05 are adjusted under Section 9-1.03, "Force Account."

9-1.05B Increases of More Than 25 Percent

If the total bid item quantity exceeds 125 percent of the quantity shown on the verified Bid Item List and if no approved Contract Change Order addresses payment for the quantity exceeding 125 percent, the Engineer may adjust the unit price for the excess quantity under Section 9-1.03, "Force Account," or the following:

1. The adjustment is the difference between the unit price and the unit cost of the total item pay quantity.
2. In determining the unit cost, the Engineer excludes the item's fixed costs. You have recovered the fixed costs in the payment for 125 percent shown on the verified Bid Item List.
3. After excluding fixed costs, the Engineer determines the item unit cost under Section 9-1.03, "Force Account."

If the payment for the number of units of a bid item in excess of 125 percent of the verified Bid Item List is less than $5,000 at the unit price, the Engineer may not adjust the unit price unless you request it.

9-1.05C Decreases of More Than 25 Percent

If the total item pay quantity is less than 75 percent of the quantity shown on the verified Bid Item List and if no approved Contract Change Order addresses payment for the quantity less than 75 percent, you may request a unit price adjustment. The Engineer may adjust the unit price for the decreased quantity under Section 9-1.03, "Force Account" or the following:

1. The adjustment is the difference between the unit price and the unit cost of the total pay quantity.
2. In determining the unit cost, the Engineer includes the item's fixed costs.
3. After including fixed costs, the Engineer determines the item unit cost under Section 9-1.03, "Force Account."

The Department does not pay more than 75 percent of the item total in the verified Bid Item List.

9-1.05D Eliminated Items

If the Engineer eliminates an item, the Department pays your costs incurred before the Engineer's elimination notification date.

If you order authorized material for an eliminated item before the notification date and the order cannot be canceled, either of the following occurs:

1. If the material is returnable to the vendor, the Engineer orders you to return the material and the Department pays your handling costs and vendor charges.
2. The Department pays your cost for the material and its handling and becomes the material owner.

The Engineer determines the payment for the eliminated bid item under Section 9-1.03, "Force Account."

9-1.06 WORK-CHARACTER CHANGES

The Department adjusts a bid item unit price based on the difference between the cost to perform the work as planned and the cost to perform the work as changed. The Engineer determines the payment adjustment under Section 9-1.03, "Force Account." The Department adjusts payment for only the work portion that changed in character.

9-1.07 PROGRESS PAYMENTS

9-1.07A General

The Department pays you based on Engineer-prepared monthly progress estimates. Each estimate reflects:

1. Total work completed during the pay period
2. Extra work bills if:
   2.1. Submitted by the 15th of a month
   2.2. Approved by the 20th of a month
3. Amount for materials on hand
4. Amount earned for mobilization
5. Deductions
6. Withholds
7. Resolved potential claims
8. Payment adjustments

Submit certification stating the work complies with the QC procedures. The Engineer does not process a progress estimate without a signed certification.

You may protest a progress payment.

9-1.07B Schedule of Values

Section 9-1.07B applies to a lump sum bid item for which a schedule of values is specified to be submitted.

The sum of the amounts for the work units listed in the schedule of values must equal the lump sum price bid for the bid item.

Obtain authorization of a schedule of values before you perform work shown on the schedule. The Department does not process a progress payment for the bid item without an authorized schedule of values.

Accept progress payments for overhead, profit, bond costs, and other fixed or administrative costs as distributed proportionally among the items listed except that for a contract with a bid item for mobilization, accept progress payments for bond costs as included in the mobilization bid item.

For changed quantities of the work units listed, the Department adjusts payments in the same manner as specified for changed quantities of bid items under Section 9-1.05, "Changed Quantity Payment Adjustments."

9-1.07C Materials On Hand

A material on hand but not incorporated into the work is eligible for progress payment if:

1. Listed in a special provision as eligible and is in compliance with other Contract parts
2. Purchased

3. An invoice is submitted
4. Stored within the State and you submit evidence that the stored material is subject to the Department's control
5. Requested on the Department-furnished form

9-1.07D Mobilization

Mobilization is eligible for partial payments if the Contract includes a bid item for mobilization. The Department makes the partial payments under Pub Cont Code § 10264. If the Contract does not include a mobilization bid item, mobilization is included in the payment for the various bid items.

The Department pays the item total for mobilization in excess of 10 percent of the total bid in the 1st payment after Contract acceptance.

9-1.07E Withholds

9-1.07E(1) General

The Department may withhold payment for noncompliance.

The Department returns the noncompliance withhold in the progress payment following correction of noncompliance.

Withholds are not retentions under Pub Cont Code § 7107 and do not accrue interest under Pub Cont Code § 10261.5.

Withholds are cumulative and independent of deductions.

Section 9-1.07E does not include all withholds that may be taken; the Department may withhold other payments as specified.

9-1.07E(2) Progress Withholds

The Department withholds 10 percent of a partial payment for noncompliant progress. Noncompliant progress occurs when:

1. Total days to date exceed 75 percent of the revised Contract working days
2. Percent of working days elapsed exceeds the percent of value of work completed by more than 15 percent

The Engineer determines the percent of working days elapsed by dividing the total days to date by the revised Contract working days and converting the quotient to a percentage.

The Engineer determines the percent of value of work completed by summing payments made to date and the amount due on the current progress estimate, dividing this sum by the current total estimated value of the work, and converting the quotient to a percentage. These amounts are shown on the Progress Payment Voucher.

When the percent of working days elapsed minus the percent of value of work completed is less than or equal to 15 percent, the Department returns the withhold in the next progress payment.

9-1.07E(3) Performance Failure Withholds

During each estimate period you fail to comply with a Contract part, including submittal of a document as specified, the Department withholds a part of the progress payment. The documents include QC plans, schedules, traffic control plans, and water pollution control submittals.

For 1 performance failure, the Department withholds 25 percent of the progress payment but does not withhold more than 10 percent of the total bid.

For multiple performance failures, the Department withholds 100 percent of the progress payment but does not withhold more than 10 percent of the total bid.

9-1.07E(4) Stop Notice Withholds

The Department may withhold payments to cover claims filed under Civ Code § 3179 et seq.

Stop notice information may be obtained from the Office of External Accounts Payable, Division of Accounting.

9-1.07E(5) Penalty Withholds

Penalties include fines and damages that are proposed, assessed, or levied against you or the Department by a governmental agency or private lawsuit. Penalties are also payments made or costs incurred in settling alleged violations of federal, state, or local laws, regulations, requirements, or PLACs. The cost incurred may include the amount spent for mitigation or correcting a violation.

If you or the Department is assessed a penalty, the Department may withhold the penalty amount until the penalty disposition has been resolved. The Department may withhold penalty funds without notifying you.

Instead of the withhold, you may provide a bond equal to the highest estimated liability for any disputed penalties proposed.

9-1.07E(6)–9-1.07E(10) Reserved

9-1.07F Retentions

The Department does not retain moneys from progress payments due to the Contractor for work performed (Pub Cont Code § 7202).

9-1.07G–9-1.07K Reserved

9-1.08 PAYMENT AFTER CONTRACT ACCEPTANCE

9-1.08A General

Reserved

9-1.08B Payment Before Final Estimate

After Contract acceptance, the Department pays you based on the Engineer-prepared estimate that includes withholds and the balance due after deduction of previous payments.

9-1.08C Proposed Final Estimate

The Engineer estimates the amount of work completed and shows the amount payable in a proposed final estimate based on:

1. Contract items
2. Payment adjustments
3. Work paid by force account or agreed price
4. Extra work

5. Deductions

Submit either a written final estimate acceptance or a claim statement no later than the 30th day after receiving the proposed final estimate. Evidence of the Contractor's receipt of the final estimate and the Engineer's receipt of the Contractor's written acceptance or claim statement is a delivery service's proof of delivery or Engineer's written receipt if hand delivered.

If you claim that the final estimate is less than 90 percent of your total bid, the Department adjusts the final payment to cover your overhead. The adjustment is 10 percent of the difference between the total bid and the final estimate. The Department does not make this adjustment on a terminated contract.

9-1.08D Final Payment and Claims

9-1.08D(1) General

If you accept the proposed final estimate or do not submit a claim statement within 30 days of receiving the estimate, the Engineer furnishes the final estimate to you and the Department pays the amount due within 30 days. This final estimate and payment is conclusive except as specified in Sections 5-1.015, "Records," 6-1.075, "Guarantee," and 9-1.09, "Clerical Errors."

If you submit a claim statement within 30 days of receiving the Engineer's proposed final estimate, the Engineer furnishes a semifinal estimate to the Contractor and the Department pays the amount due within 30 days. The semifinal estimate is conclusive as to the amount of work completed and the amount payable except as affected by the claims or as specified in Sections 5-1.015, "Records," 6-1.075, "Guarantee," and 9-1.09, "Clerical Errors."

9-1.08D(2) Claim Statement

9-1.08D(2)(a) General

For each claim, submit a claim statement showing only the identification number that corresponds to the Full and Final Potential Claim Record and the final amount of additional payment requested except:

1. If the final amount of requested payment differs from the amount requested in the Full and Final Potential Claim Record
2. For a claim for quantities, withholds, deductions, liquidated damages, or change order bills
3. For an overhead claim

If the final amount of requested payment differs from the amount requested in the Full and Final Potential Claim Record, submit:

1. Identification number that corresponds to the Full and Final Potential Claim Record
2. Final amount of additional payment requested
3. Basis for the changed amount
4. Contract documentation that supports the changed amount
5. Statement of the reasons the Contract documentation supports the claim

The Engineer notifies you of an omission of or a disparity in the exclusive identification number. Within 15 days of the notification, correct the omission or disparity. If the omission or disparity is not resolved after the 15 days, the Engineer assigns a new number.

For a claim for quantities, withholds, deductions, or change order bills submit:

1. Final amount of additional payment requested
2. Enough detail to enable the Engineer to determine the basis and amounts of the additional payment requested

9-1.08D(2)(b) Overhead Claims

Include with an overhead claim:

1. Final amount of additional payment requested
2. Independent CPA audit report

Failure to submit the audit report with an overhead claim with the claim statement is a waiver of the overhead claim and operates as a bar to arbitration on the claim (Pub Cont Code § 10240.2).

The Department deducts an amount for field and home office overhead paid on added work from any claim for overhead. The value of the added work equals the value of the work completed minus the total bid. The home office overhead deduction equals 5 percent of the added work. The field office overhead deduction equals 5-1/2 percent of the added work.

If you intend to pursue a claim for reimbursement for field or home office overhead beyond that provided expressly by the Contract:

1. Notify the Engineer within 30 days of receipt of the proposed final estimate of your intent to seek reimbursement for specific overhead costs beyond that provided by the Contract
2. Specifically identify each claim and each date associated with each claim from which you seek reimbursement for specific overhead costs beyond that provided by the Contract
3. Timely submit all other claims
4. Within 30 days of receipt of the proposed final estimate, submit an audit report prepared by an independent CPA

    4.1. The audit report must show calculations with supporting documentation of actual home office and project field overhead costs
    4.2. The calculations must specify the actual daily rates for both field and home office overhead for the entire duration of the project expressed as a rate per working day
    4.3. The start and end dates of the actual project performance period, number of working days, overhead cost pools, and all allocation bases must be disclosed in the calculations of your actual field and home office overhead daily rates
    4.4. Neither daily rate may include a markup for profit

5. Field overhead costs from which the daily rate is calculated must be:

    5.1. Allowable under 48 CFR 31
    5.2. Supported by reliable records
    5.3. Related solely to the project
    5.4. Incurred during the actual project performance period
    5.5. Comprised of only time-related field overhead costs
    5.6. Not a direct cost

6. Home office overhead costs from which the daily rate is calculated must be:

6.1. Allowable under 48 CFR 31
6.2. Supported by reliable records
6.3. Incurred during the actual project performance period
6.4. Comprised of only fixed home office overhead costs
6.5. Not a direct cost

The actual rate of time-related overhead is subject to authorization by the Engineer.

The CPA's audit must be performed under the Attestation Standards published by the American Institute of Certified Public Accountants. The CPA's audit report must express an opinion whether or not your calculations of your actual field and home office overhead daily rates comply with Section 9-1.08D(2)(b), "Overhead Claims." The attest documentation prepared by the CPA in connection with the audit must be reproduced and submitted for review with the audit report.

The Department provides markups for all work paid by force account. Overhead for field and home office costs are included in the markups. Overhead claims in excess of Contract markups are not allowed under the Contract. If you seek reimbursement for costs not allowed under the Contract, the Department does not pay your cost of performing the independent CPA examination specified in section 9-1.08D(2)(b), "Overhead Claims," including preparation of the audit report.

9-1.08D(2)(c) Declaration

Submit a declaration that includes the following language with the claim statement:

> I declare under penalty of perjury, according to the laws of the State of California, that the foregoing claims, with specific reference to the California False Claims Act (Govt Code § 12650 et seq.) and to the extent the project contains federal funding, the U.S. False Claims Act (31 USC § 3729 et seq.), are true and correct, and that this declaration was signed on _____(date)_____, 20__ at _____, California.

9-1.08D(2)(d) Waiver

A claim is waived if:

1. Claim does not have a corresponding Full and Final Potential Claim Record identification number
2. Claim does not have the same nature, circumstances, and basis of claim as the corresponding Full and Final Potential Claim Record
3. Claim is not included in the claim statement
4. You do not comply with the claim procedures
5. You do not submit the declaration specified in 9-1.08D(2)(c), "Declaration"

9-1.08D(3) Final Determination of Claims

Failure to allow timely access to claim supporting data when requested waives the claim.

The Department's costs in reviewing or auditing a claim not supported by the Contractor's accounting or other records are damages incurred by the State within the meaning of the California False Claims Act.

If the Engineer determines that a claim requires additional analysis, the Engineer schedules a board of review meeting. Meet with the board of review and make a presentation supporting the claim.

After claim review completion by the Engineer or board of review, the Department makes the final determination of claims and furnishes it to the Contractor.

After the determination, the Engineer furnishes a final estimate to the Contractor and the Department pays the amount due within 30 days. The final estimate is conclusive as to the amount of work completed and the amount payable except as specified in Sections 5-1.015, "Records," 6-1.075, "Guarantee," and 9-1.09, "Clerical Errors."

The Contractor's failure to comply with the claim procedures is a bar to arbitration under Pub Cont Code § 10240.2.

9-1.09 CLERICAL ERRORS

For 3 years after Contract acceptance, estimates and payments are open to correction and adjustment for clerical errors. Either the Department or the Contractor pays to the other the amount due except for clerical errors resulting in an adjustment less than $200; in which case, no payment is made.

9-1.10 ARBITRATION

Pub Cont Code § 10240 through 10240.13 provides for the resolution of contract claims by arbitration.

Start arbitration by filing a complaint with the Office of Administrative Hearings in Sacramento (1 CA Code Regs § 1350). File the arbitration complaint no later than 90 days after receiving the Department's final written decision on a claim (Pub Cont Code § 10240.1).

^^

SECTION 10 DUST CONTROL
(Issued 02-06-09)

Replace Section 10 with:
SECTION 10 (BLANK)

^^

SECTION 11 MOBILIZATION
(Issued 06-05-09)

Replace Section 11 with:
SECTION 11 (BLANK)

^^

SECTION 12 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES
(Issued 11-07-08)

In Section 12-1.01 in the 2nd paragraph, replace the 1st sentence with:

Attention is directed to Part 6 of the California MUTCD.

Replace Section 12-2.01 with:

12-2.01 FLAGGERS

Flaggers while on duty and assigned to traffic control or to give warning to the public that the highway is under construction and of any dangerous conditions to be encountered as a result thereof, shall perform their duties and shall be provided with the necessary equipment in conformance with Part 6 of the California MUTCD. The equipment shall be furnished and kept clean and in good repair by the Contractor at the Contractor's expense.

All flaggers shall wear safety apparel meeting the requirements of ANSI/ISEA 107-2004 for Class 2 or 3 garment and complying with 71 Fed Reg 67792.

In Section 12-3.01 replace the 1st paragraph with:

In addition to the requirements in Part 6 of the California MUTCD, all devices used by the Contractor in the performance of the work shall conform to the provisions in this Section 12-3.

In Section 12-3.06 in the 1st paragraph, replace the 2nd sentence with:

Construction area signs are shown in or referred to in Part 6 of the California MUTCD.

In Section 12-3.06 in the 4th paragraph, replace the 1st sentence with:

All construction area signs shall conform to the dimensions, color and legend requirements of the plans, Part 6 of the California MUTCD and these specifications.

In Section 12-3.06 in the 8th paragraph, replace the 1st sentence with:

Used signs with the specified sheeting material will be considered satisfactory if they conform to the requirements for visibility and legibility and the colors conform to the requirements in Part 6 of the California MUTCD.

^^

SECTION 14 (BLANK)
(Issued 06-01-11)

Replace Section 14 with:

SECTION 14 ENVIRONMENTAL STEWARDSHIP

14-1 GENERAL

14-1.01 GENERAL

Environmental stewardship includes both environmental compliance and environmental resource management.

If an ESA is shown on the plans:

1. The boundaries shown are approximate; the Department marks the exact boundaries on the ground
2. Do not enter the ESA unless authorized
3. If the ESA is breached, immediately:
   3.1. Secure the area and stop all operations within 60 feet of the ESA boundary
   3.2. Notify the Engineer
4. If the ESA is damaged, the Department determines what efforts are necessary to remedy the damage and who performs the remedy; you are responsible for remedies and charges.

14-2 CULTURAL RESOURCES

14-2.01 GENERAL

Reserved

14-2.02 ARCHAEOLOGICAL RESOURCES

If archaeological resources are discovered at the job site, do not disturb the resources and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the discovery area
3. Notify the Engineer

The Department investigates. Do not move archaeological resources or take them from the job site. Do not resume work within the discovery area until authorized.

If, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of an archaeological find, or investigation or recovery of archeological materials, you will be compensated for resulting losses, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

If ordered, furnish resources to assist in the investigation or recovery of archaeological resources. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

14-2.03 ARCHAEOLOGICAL MONITORING AREA

Section 14-2.03 applies if an AMA is described in the Contract.

The Department assigns an archaeological monitor to monitor job site activities within the AMA. Do not work within the AMA unless the archeological monitor is present.

The Engineer and the Department archaeological monitor conduct an AMA location field review with you at least 5 business days before start of work. The Department marks the exact boundaries of the AMA on the ground.

If temporary fence (Type ESA) or other exclosure for an AMA is described in the Contract, install temporary fence (Type ESA) or other exclosure to define the boundaries of the AMA during the AMA location field review.

At least 5 business days before starting work within an AMA, submit a schedule of days and hours to be worked for the Engineer's approval. If you require changes in the schedule, submit an update for the Engineer's approval at least 5 business days before any changed work day.

If archaeological resources are discovered within an AMA, comply with Section 14-2.02, "Archaeological Resources."

14-2.04 HISTORIC STRUCTURES

Reserved

14-3 COMMUNITY IMPACTS AND ENVIRONMENTAL JUSTICE

Reserved

14-4 NATIVE AMERICAN CONCERNS

Reserved

14-5 AESTHETICS

Reserved

14-6 BIOLOGICAL RESOURCES

14-6.01 GENERAL

Reserved

14-6.02 BIRD PROTECTION

Protect migratory and nongame birds, their occupied nests, and their eggs.

The Department anticipates nesting or attempted nesting from February 15 to September 1.

The federal Migratory Bird Treaty Act, 16 USC § 703–711, and 50 CFR Pt 10 and Fish & Game Code §§ 3503, 3513, and 3800 protect migratory and nongame birds, their occupied nests, and their eggs.

The federal Endangered Species Act of 1973, 16 USC §§ 1531 and 1543, and the California Endangered Species Act, Fish & Game Code §§ 2050–2115.5, prohibit the take of listed species and protect occupied and unoccupied nests of threatened and endangered bird species.

The Bald and Golden Eagle Protection Act, 16 USC § 668, prohibits the destruction of bald and golden eagles and their occupied and unoccupied nests.

If migratory or nongame bird nests are discovered that may be adversely affected by construction activities or an injured or killed bird is found, immediately:

1. Stop all work within a 100-foot radius of the discovery.
2. Notify the Engineer.

The Department investigates. Do not resume work within the specified radius of the discovery until authorized.

When ordered, use exclusion devices, take nesting prevention measures, remove and dispose of partially constructed and unoccupied nests of migratory or nongame birds on a regular basis to

prevent their occupation, or perform any combination of these. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Prevent nest materials from falling into waterways.

Bird protection that causes a delay to the controlling activity is a condition unfavorable to the suitable prosecution of work as specified in Section 8-1.05, "Temporary Suspension of Work."

14-7 PALEONTOLOGICAL RESOURCES

If paleontological resources are discovered at the job site, do not disturb the material and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the area
3. Notify the Engineer

The Department investigates and modifies the dimensions of the protected area if necessary. Do not move paleontological resources or take them from the job site. Do not resume work within the specified radius of the discovery until authorized.

14-8 NOISE AND VIBRATION

14-8.01 GENERAL

Reserved

14-8.02 NOISE CONTROL

Do not exceed 86 dBA LMax at 50 feet from the job site activities from 9 p.m. to 6 a.m.

Equip an internal combustion engine with the manufacturer-recommended muffler. Do not operate an internal combustion engine on the job site without the appropriate muffler.

14-9 AIR QUALITY

14-9.01 AIR POLLUTION CONTROL

Comply with air pollution control rules, regulations, ordinances, and statutes that apply to work performed under the Contract, including air pollution control rules, regulations, ordinances, and statutes provided in Govt Code § 11017 (Pub Cont Code § 10231).

Do not burn material to be disposed of.

14-9.02 DUST CONTROL

Prevent and alleviate dust by applying water, dust palliative, or both under Section 14-9.01.

Apply water under Section 17, "Watering."

Apply dust palliative under Section 18,"Dust Palliative."

If ordered, apply water, dust palliative, or both to control dust caused by public traffic. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

14-10 SOLID WASTE DISPOSAL AND RECYCLING

14-10.01 SOLID WASTE DISPOSAL AND RECYCLING

Submit an annual Solid Waste Disposal and Recycling Report between January 1 and 15 for each year work is performed under the Contract at any time during the previous calendar year.

Show the types and amounts of project-generated solid waste taken to or diverted from landfills or reused on the project from January 1 through December 31 of the previous calendar year.

Submit a final annual Solid Waste Disposal and Recycling Report within 5 business days after Contract acceptance. Show the types and amounts of project-generated solid waste taken to or diverted from landfills or reused on the project from January 1 to Contract acceptance.

For each failure to submit a completed form, the Department withholds $10,000.

14-11 HAZARDOUS WASTE AND CONTAMINATION

14-11.01 GENERAL

Reserved

14-11.02 ASBESTOS AND HAZARDOUS SUBSTANCES

Upon discovery, immediately stop working in and notify the Engineer of areas where asbestos or a hazardous substance is present if the:

1. Contractor reasonably believes the substance is asbestos as defined in Labor Code § 6501.7 or a hazardous substance as defined in Health & Safety Code §§ 25316 and 25317
2. Presence is not described in the Contract
3. Substance has not been made harmless

14-12 OTHER INTERAGENCY RELATIONS

Reserved

14-13 PAYMENT

Payment for work specified in Section 14 is included in the payment for the bid items involved unless:

1. Bid item for the work is shown in the verified Bid Item List
2. Work is specified as paid for as extra work

^^

SECTION 15 EXISTING HIGHWAY FACILITIES

(Issued 05-01-09)

In Section 15-1.02 replace the 1st paragraph with:

Existing facilities which are to remain in place shall be protected in conformance with the provisions in Sections 5-1.18, "Property and Facility Preservation," and 7-1.12, "Indemnification and Insurance."

^^

SECTION 19 EARTHWORK

(Issued 09-16-11)

Replace Section 19-1.02 with:

19-1.02 (BLANK)

Replace Section 19-1.03 with:

19-1.03 GRADE TOLERANCE

Immediately prior to placing subsequent layers of material thereon, the grading plane shall conform to one of the following:

A. When hot mix asphalt is to be placed on the grading plane, the grading plane at any point shall not vary more than 0.05 foot above or below the grade established by the Engineer.
B. When subbase or base material to be placed on the grading plane is to be paid for by the ton, the grading plane at any point shall not vary more than 0.10 foot above or below the grade established by the Engineer.
C. When the material to be placed on the grading plane is to be paid for by the cubic yard, the grading plane at any point shall be not more than 0.05 foot above the grade established by the Engineer.

In Section 19-3.025C replace the 1st paragraph with:

Cementitious material used in soil cement bedding shall conform to the provisions in Section 90-2.01, "Cementitious Materials." Supplementary cementitious material will not be required.

In Section 19-3.025C replace the 4th paragraph with:

The aggregate, cementitious material, and water shall be proportioned either by weight or by volume. Soil cement bedding shall contain not less than 282 pounds of cementitious material per cubic yard. The water content shall be sufficient to produce a fluid, workable mix that will flow and can be pumped without segregation of the aggregate while being placed.

In Section 19-3.06 replace the 9th paragraph with:

Unless otherwise shown on the plans or specified in these specifications or the special provisions, material for structure backfill to be compacted to a relative compaction of not less than 90 percent, except material to be placed behind retaining walls, shall consist of material free of rocks, broken concrete, other solid material exceeding 3 inches in greatest dimension, or organic or other unsatisfactory material.

In Section 19-3.062 replace the 1st paragraph with:

Slurry cement backfill shall consist of a fluid, workable mixture of aggregate, cementitious material, and water.

In Section 19-3.062 replace the 5th paragraph with:

Cementitious material shall conform to the provisions in Section 90-2.01, "Cementitious Materials." Supplementary cementitious material will not be required.

In Section 19-3.062 replace the 8th paragraph with:

The aggregate, cementitious material, and water shall be proportioned either by weight or by volume. Slurry cement backfill shall contain not less than 188 pounds of cementitious material per cubic yard. The water content shall be sufficient to produce a fluid, workable mix that will flow and can be pumped without segregation of the aggregate while being placed.

^^

SECTION 20 EROSION CONTROL AND HIGHWAY PLANTING
(Issued 08-17-07)

Replace Section 20-2.03 with:

20-2.03 SOIL AMENDMENT

Soil amendment shall comply with the requirements in the California Food and Agricultural Code.

Soil amendment producers shall comply with the following:

1. Be fully permitted to produce compost as specified under the California Integrated Waste Management Board, Local Enforcement Agencies and any other State and Local Agencies that regulate Solid Waste Facilities. If exempt from State permitting requirements, the composting facility must certify that it follows guidelines and procedures for production of compost meeting the environmental health standards of Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7.
2. Be a participant in United States Composting Council's Seal of Testing Assurance program.

Soil amendment shall be composted and may be derived from any single, or mixture of any of the following feedstock materials:

1. Green material consisting of chipped, shredded, or ground vegetation; or clean processed recycled wood products
2. Biosolids
3. Manure
4. Mixed food waste

Soil amendment feedstock materials shall be composted to reduce weed seeds, pathogens and deleterious materials as specified under Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7, Section 17868.3.

Soil amendment shall not be derived from mixed municipal solid waste and must be reasonably free of visible contaminates. Soil amendment must not contain paint, petroleum products, pesticides or any other chemical residues harmful to animal life or plant growth. Soil amendment must not possess objectionable odors.

Metal concentrations in soil amendment must not exceed the maximum metal concentrations listed in Title 14, California Code of Regulations, Division 7, Chapter 3.1, Section 17868.2.

Soil amendment must comply with the following:

Physical/Chemical Requirements

Property	Test Method	Requirement
pH	*TMECC 04.11-A, Elastometric pH 1:5 Slurry Method, pH Units	6.0–8.0
Soluble Salts	TMECC 04.10-A, Electrical Conductivity 1:5 Slurry Method dS/m (mmhos/cm)	0-10.0
Moisture Content	TMECC 03.09-A, Total Solids & Moisture at 70+/- 5 deg C, % Wet Weight Basis	30–60
Organic Matter Content	TMECC 05.07-A, Loss-On-Ignition Organic Matter Method (LOI), % Dry Weight Basis	30–65
Maturity	TMECC 05.05-A, Germination and Vigor Seed Emergence Seedling Vigor % Relative to Positive Control	 80 or Above 80 or Above
Stability	TMECC 05.08-B, Carbon Dioxide Evolution Rate mg CO_2-C/g OM per day	8 or below
Particle Size	TMECC 02.02-B Sample Sieving for Aggregate Size Classification % Dry Weight Basis	95% Passing 5/8 inch 70% Passing 3/8 inch
Pathogen	TMECC 07.01-B, Fecal Coliform Bacteria < 1000 MPN/gram dry wt.	Pass
Pathogen	TMECC 07.01-B, Salmonella < 3 MPN/4 grams dry wt.	Pass
Physical Contaminants	TMECC 02.02-C, Man Made Inert Removal and Classification: Plastic, Glass and Metal, % > 4mm fraction	Combined Total: < 1.0
Physical Contaminants	TMECC 02.02-C, Man Made Inert Removal and Classification: Sharps (Sewing needles, straight pins and hypodermic needles), % > 4mm fraction	None Detected

*TMECC refers to "Test Methods for the Examination of Composting and Compost," published by the United States Department of Agriculture and the United States Compost Council (USCC).

Prior to application, the Contractor shall provide the Engineer with a copy of the soil amendment producer's Compost Technical Data Sheet and a copy of the compost producers STA certification. The Compost Technical Data Sheet shall include laboratory analytical test results, directions for product use, and a list of product ingredients.

Prior to application, the Contractor shall provide the Engineer with a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

In Section 20-2.10 delete the 8th, 9th, and 10th paragraphs.

In Section 20-3.04A delete the last paragraph.

Replace Section 20-4.055 with:

20-4.055 PRUNING

Pruning of plants shall be consistent with American National Standards Institute (ANSI), "Tree, Shrub and Other Woody Plant Maintenance Standard Practices," ANSI 300 (Part 1)-2001

and "Best Management Practices Tree Pruning," 2002 (ISBN 1-881956318), published by the International Society of Arboriculture, P.O. Boc 3129, Champaign, IL 61826.

^^

SECTION 24 LIME STABILIZATION
(Issued 06-05-09)

Replace Section 24 with:
SECTION 24 LIME STABILIZED SOIL

24-1.01 GENERAL

24-1.01A Summary

Section 24 includes specifications for stabilizing soil by mixing lime and water with soil and compacting the mixture to the specified dimensions.

24-1.01B Definitions

lime: Quicklime made from high-calcium or dolomitic sources specified under ASTM C 51. For high-calcium quicklime, the calcium oxide content must be greater than 90 percent. For dolomitic quicklime, the calcium oxide content must be greater than 55 percent and the combined calcium oxide and magnesium oxide content must be greater than 90 percent.

mellowing period: The time between the initial and final mixing to promote initial chemical reactions between lime, water, and soil.

24-1.01C Submittals

From 30 to 180 days before use, submit one 10-pound sample of each lime product proposed and from each source.

Submit lime samples in airtight containers under ASTM C 50. Mark the sample date on the container. Include the MSDS and chemical and physical analysis with the submittal.

With the lime samples, submit a Certificate of Compliance from the pre-qualified lime source under Section 6-1.07, "Certificates of Compliance," with a statement certifying the lime furnished is the same as that pre-qualified.

Fifteen days before starting soil stabilization activities, submit for the Engineer's approval a laboratory to perform quality control tests. The laboratory must be qualified under the Department's Independent Assurance Program.

Before you apply lime in slurry form, submit the slurry's lime content for Engineer's approval 25 days before application.

Before performing quality control sampling and testing, submit the time and location the sampling and testing will occur. Submit quality control testing results within 24 hours of receiving the results.

Submit a weighmaster certificate or bill of lading with each load of lime delivered to the jobsite.

24-1.01D Quality Control and Assurance

General

Perform quality control testing in the presence of the Engineer.

Place unique, sequentially numbered lock seals on each load and affix them to trailer blow down valves that are locked open. The bill of lading for each lime delivery must have that specific lock seal number legibly and visibly imprinted.

The Engineer samples each lime delivery truck at the job site and randomly tests them off-site.

Pre-qualification of Lime Sources

Lime sources must be listed on the Department's pre-qualified products list. The list is available at the METS web site.

The pre-qualified list for lime sources describes the application procedures for inclusion on the list.

Preparing Soil

After you prepare an area for lime soil stabilization, test the soil to be stabilized every 500 cubic yards for relative compaction under California Test 231 and moisture content under California Test 226, and verify the surface grades.

Applying Lime

The Engineer determines the final application rate for each lime product proposed from the samples submitted. If the soil being stabilized changes, the Engineer changes the application rate. Based on California Test 373, the Engineer reports the application rates as the percent of lime by dry weight of soil. The Engineer provides the optimum moisture content determined under California Test 373 for each application rate.

Before applying lime, measure the temperature at the ground surface.

If lime in dry form is used, the Engineer verifies the application rate using the drop pan method once per 40,000 square feet stabilized, or twice per day, whichever is greater.

If lime in slurry form is used, report the quantity of slurry placed by measuring the volume of slurry in the holding tank once per 40,000 square feet stabilized, or twice per day, whichever is greater.

Mixing

For each day of initial mixing, test the moisture content. Sample the material immediately after initial mixing.

Randomly test the adequacy of the final mixing with a phenolphthalein indicator solution.

During mixing operations, measure the ground temperature at full mixing depth.

After mixing and before compacting, determine maximum density under California Test 216 from composite samples of the mixed material and at each distinct change in material. Test the moisture content of the mixed material under California Test 226. Test the gradation for compliance with "Materials."

Compaction

Test relative compaction on a wet weight basis.

After initial compaction, determine in-place density under California Test 231 and moisture content under California Test 226 at the same locations. The testing frequency must be 1 test per 250 cubic yards of lime stabilized soil. Test in 0.50-foot depth intervals.

Before requesting to compact material in layers greater than 0.50 foot, construct a test strip in the production area and demonstrate the test strip passes compaction tests using the proposed thickness. The test strip must contain no more material than 1 day's production. The Engineer tests at not more than 0.50-foot depth intervals regardless of the thickness of your layers.

Construct test pads by scraping away material to the depth ordered by the Engineer. If a compaction test fails corrective action must include the layers of material already placed above the test pad elevation.

Finish Grading

Do not proceed with construction activities for subsequent layers of material until the Engineer verifies the final grades of the lime stabilized soil.

Dispute Resolution

You and the Engineer must work together to avoid potential conflicts and to resolve disputes regarding test result discrepancies. Notify the Engineer within 5 days of receiving a test result if you dispute the test result.

If you or the Engineer dispute each other's test results, submit written quality control test results and copies of paperwork including worksheets used to determine the disputed test results to the Engineer. An Independent Third Party (ITP) performs referee testing. Before the ITP participates in a dispute resolution, the ITP must be accredited under the Department's Independent Assurance Program. The ITP must be independent of the project. By mutual agreement, the ITP is chosen from:

1. A Department laboratory
2. A Department laboratory in a district or region not in the district or region the project is located
3. The Transportation Laboratory
4. A laboratory not currently employed by you or your lime producer

If split quality control or acceptance samples are not available, the ITP uses any available material representing the disputed material for evaluation.

24-1.02 MATERIALS

24-1.02A Lime

Lime must comply with ASTM C 977 and the following:

Lime

Quality Characteristic	ASTM	Specification
Available Calcium and Magnesium Oxide(min., %)	C 25[a]	High Calcium Quicklime: CaO > 90 Dolomitic Quicklime: CaO > 55 and CaO + MgO > 90
Loss on ignition (max., %)	C 25	7 (total loss) 5 (carbon dioxide) 2 (free moisture)
Slaking rate	C 110	30 °C rise in 8 minutes

Notes:
[a] You may use ASTM C25 or ASTM C1301 and ASTM C1271.

A 0.5-pound sample of lime dry-sieved in a mechanical sieve shaker for 10 minutes ±30 seconds must comply with:

Sieve Sizes	Percentage Passing
3/8-inch	98-100

Slurry must:

1. Be free of contaminants
2. Contain at least the minimum dry solids
3. Have uniform consistency

If you prepare lime slurry, prepare it at the jobsite.

24-1.02B Water

If available, use potable water. Inform the Engineer if a water source other than potable water is used. If not using potable water, water for mixing soil and lime must:

1. Contain no more than 650 parts per million of chlorides as Cl, and no more than 1,300 parts per million of sulfates as SO_4
2. Not contain an amount of impurities that will cause a reduction in the strength of the stabilize soil

24-1.02C Mixed Material

Take a composite sample from 5 random locations after initial mixing. The moisture content of the composite sample tested under California Test 226 must be a minimum of 3 percent greater than optimum. Determine the moisture versus density relationship of the composite sample material determined under California Test 216, except Part 2, Section E, Paragraph 6 is modified as follows:

After adjustment of the moisture content, compact each of the remaining test specimens in the mold, then record the water adjustment, tamper reading, and the corresponding adjusted wet density from the chart on Table 1 using the column corresponding to the actual wet weight of the test specimen compacted. Note each of these wet weights on Line I.

The mixed material before compaction excluding rock must comply with:

Sieve Sizes	Percentage Passing
1"	98 - 100
No. 4	60 - 100

24-1.02D Curing Treatment

Curing treatment may be any of the following:

1. Water cure
2. Curing seal
3. Moist material blanket

Curing seal must be SS or CSS grade asphaltic emulsion under Section 94, "Asphaltic Emulsions."

24-1.03 CONSTRUCTION

24-1.03A General

If using different types of lime or lime from more than one source, do not mix them. The Engineer determines separate application rates.

Deliver lime in full loads unless it is the last load needed for a work shift.

Apply lime at ground temperatures above 35 °F. Do not apply lime if you expect the ground temperature to drop below 35 °F before you complete mixing and compacting.

During mixing, maintain the in-place moisture of the soil to be stabilized a minimum 3 percent above the optimum moisture determined under California Test 216 as modified in "Mixed Material." During compaction and finish grading, add water to the surface to prevent drying until the next layer of mixed material is placed, or until you apply curing treatment.

Scarify the surface of lime stabilized soil at least 2 inches between each layer. Do not scarify the final surface of the lime stabilized soil.

Between the time of applying lime and 3 days after applying curing treatment, only allow equipment or vehicles on the soil being stabilized that are essential to the work.

24-1.03B Preparing Soil

Except for soil clods, remove rocks or solids larger than 1/3 of the layer thickness. Regardless of the layer thickness, remove rocks and solids greater than 4 inches. Notify the Engineer if you encounter rocks or solids greater than 1/3 of the layer thickness.

Before adding lime, place the soil to be stabilized to within 0.08 foot of the specified lines and grades and compact to not less than 90 percent relative compaction.

24-1.03C Applying Lime

Apply lime uniformly over the area to be stabilized using a vane spreader.

The Engineer determines the final application rate. Do not vary from this application rate by more than 5 percent.

Apply lime in dry form. If you request and the Engineer approves, you may apply lime in slurry form.

Lime slurry must be in suspension during application. Apply lime slurry uniformly making successive passes over a measured section or roadway until the specified lime content is reached. Apply the residue from lime slurry over the length of the roadway being processed.

24-1.03D Mixing

Lime and soil to be stabilized must be mixed uniformly at least twice to within 0.10 foot of the specified depth at any point. If the mixing depth exceeds the specified depth by more than 10 percent, add lime in proportion to the exceeded depth. The Department does not pay for this added lime.

Mix lime on the same day it is applied. After the initial mixing, allow a mellowing period for at least 36 hours before final mixing. Moisture content during the mellowing period determined under California Test 226 must be at least 3 percent higher than the optimum moisture content. You may add water and mix during the mellowing period.

Remix until the mixture is uniform with no streaks or pockets of lime.

Except for clods larger than 1 inch, mixed material must have a color reaction with sprayed phenolphthalein alcohol indicator solution.

Complete all the mixing work within 7 days of the initial application of lime.

24-1.03E Compaction

Begin compacting immediately after final mixing, but not less than 36 hours after the beginning of initial mixing.

Compact by using sheepsfoot or segmented wheel rollers immediately followed by steel drum or pneumatic-tired rollers. Do not use vibratory rollers.

If you request and the Engineer approves, you may compact mixed material in layers greater than 0.50 foot.

If the specified thickness is 0.50 foot or less, compact in one layer. If the specified thickness is more than 0.50 foot, compact in 2 or more layers of approximately equal thickness. The maximum compacted thickness of any one layer must not exceed 0.50 foot unless you first demonstrate your equipment and methods provide uniform distribution of lime and achieve the specified compaction.

Use other compaction methods in areas inaccessible to rollers.

Compact the lime stabilized soil to at least 95 percent relative compaction determined under California Test 216 as modified under "Mixed Material." The relative compaction is determined on a wet weight basis.

24-1.03F Finish Grading

Maintain the moisture content of the lime stabilized soil through the entire finish grading operation at a minimum of 3 percent above optimum moisture content.

The finished surface of the lime stabilized soil must not vary more than 0.08 foot above or below the grade established by the Engineer unless the lime stabilized soil is to be covered by material paid for by the cubic yard, in which case the finished surface may not vary above the grade established by the Engineer.

If lime stabilized soil is above the allowable tolerance, trim, remove, and dispose of the excess material. Do not leave loose material on the finished surface. If finish rolling cannot be completed within 2 hours of trimming, defer trimming.

If lime stabilized soil is below the allowable tolerance, you may use trimmed material to fill low areas only if final grading and final compaction occurs within 48 hours of beginning initial compaction. Before placing trimmed material, scarify the surface of the area to be filled at least 2 inches deep.

Finish rolling of trimmed surfaces must be performed with at least 1 complete coverage with steel drum or pneumatic-tired rollers.

24-1.03G Curing

General

Choose the method of curing.

Apply the chosen cure method within 48 hours of completing the sheepsfoot or segmented wheel compaction. Apply the chosen cure method within the same day of any trimming and finish grading.

Water Cure

Water may be used to cure the finished surface before you place a moist material blanket, or apply curing seal. Keep the surface above the optimum moisture content of the lime stabilized soil. Use this method for no more than 3 days, after which you must place a curing seal or moist material blanket.

Curing Seal

Curing seal equipment must have a gage indicating the volume of curing seal in the storage tank.

If curing seal is used, apply it:

1. To the finished surface of lime stabilized soil under Section 94-1.06, "Applying," of the Standard Specifications
2. At a rate from 0.10 to 0.20 gallon per square yard. The Engineer determines the exact rate
3. When the lime stabilized soil is at optimum moisture
4. When the ambient temperature is above 40 °F and rising

Repair damaged curing seal the same day the damage occurs.

Moist Material Blanket

Moist material blanket consists of moist structural material. Moist material blanket may be a temporary or permanent layer of material of sufficient thickness to prevent drying of the lime stabilized soil. You may use moist material blanket if the lime stabilized soil can bear the weight of construction equipment. Maintain the moist material blanket above the optimum moisture content, as appropriate, until the next structural layer is placed.

24-1.04 MEASUREMENT AND PAYMENT

Lime stabilized soil is measured by the square yard determined from horizontal measurements of the planned surface of the lime stabilized soil.

Curing seal is measured under Section 94, "Asphaltic Emulsions." The amount of curing seal used is determined from the gauge specified for the curing equipment.

The contract item prices for the work involved with lime stabilized soil are paid:

1. Per square yard for lime stabilized soil
2. Per ton for lime
3. Per ton for asphaltic emulsion (curing seal)

Payment for the contract items involved with lime stabilized soil includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the lime stabilized soil, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The Department does not adjust payment for lime.

Quantities of lime wasted or disposed of in a manner not specified, or remaining on hand after completion of the work, will not be paid for. If you use a partial load of lime, weigh the truck and the remaining lime on a scale under Section 9-1.01, "Measurement of Quantities," and submit a weighmaster certificate to the Engineer.

Full compensation for preparing soil to be stabilized is included in the contract price paid per square yard for lime stabilized soil, and no separate payment is made therefor, except removing and disposing of rocks and solids larger 1/3 of the layer thickness and larger than 4 inches from native soil or embankment other than imported borrow is paid for as extra work as provided in Section 4-1.03D, "Extra Work." Removing and disposing of rocks and solids larger than 1/3 of the lift thickness and larger than 4 inches from imported borrow is at your expense.

Full compensation for mixing, compacting, and maintaining the moisture content of the lime stabilized soil is included in the contract price paid per square yard for lime stabilized soil, and no separate payment is made therefor.

Full compensation for applying lime is included in the contract price paid per ton for lime, and no additional compensation is allowed therefor.

If the dispute resolution ITP determines the Engineer's test results are correct, the Engineer deducts the ITP's testing costs from payments. If the ITP determines your test results are correct, the State pays the ITP testing costs.

^^

SECTION 25 AGGREGATE SUBBASES
(Issued 02-16-07)

In Section 25-1.02A replace the 1st paragraph with:

Aggregate must be clean and free from organic matter and other deleterious substances. Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:

5.1. Asphalt concrete
5.2. Portland cement concrete
5.3. Lean concrete base
5.4. Cement treated base

Replace Section 25-1.02B with:

25-1.02B Class 4 Aggregate Subbase

Aggregate must be clean and free from organic matter and other deleterious substances. Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:

   5.1. Asphalt concrete
   5.2. Portland cement concrete
   5.3. Lean concrete base
   5.4. Cement treated base

^^

SECTION 26 AGGREGATE BASES
(Issued 02-16-07)

In Section 26-1.02A replace the 1st paragraph with:

Aggregate must be clean and free from organic matter and other deleterious substances. Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:

   5.1. Asphalt concrete
   5.2. Portland cement concrete
   5.3. Lean concrete base
   5.4. Cement treated base

In Section 26-1.02B replace the 1st paragraph with:

Aggregate must be clean and free from organic matter and other deleterious substances. Aggregate must consist of any combination of:

1. Broken stone
2. Crushed gravel
3. Natural rough surfaced gravel
4. Sand
5. Up to 100 percent of any combination of processed:

    5.1. Asphalt concrete
    5.2. Portland cement concrete
    5.3. Lean concrete base
    5.4. Cement treated base

^^

SECTION 27 CEMENT TREATED BASES
(Issued 07-31-07)

In Section 27-1.02 replace the 1st paragraph with:

Cement shall be Type II portland cement conforming to the provisions in Section 90-2.01A, "Cement."

In Section 27-1.02 replace the 3rd paragraph with:

Aggregate for use in Class A cement treated base shall be of such quality that when mixed with cement in an amount not to exceed 5 percent by weight of the dry aggregate and compacted at optimum moisture content, the compressive strength of a sample of the compacted mixture shall not be less than 750 pounds per square inch at 7 days, when tested by California Test 312.

In Section 27-1.02 replace the 4th paragraph with:

Aggregate for use in Class B cement treated base shall have a Resistance (R-value) of not less than 60 before mixing with cement and a Resistance (R-value) of not less than 80 after mixing with cement in an amount not to exceed 2.5 percent by weight of the dry aggregate.

In Section 27-1.07 replace the 9th paragraph with:

When surfacing material is hot mix asphalt, the low areas shall be filled with hot mix asphalt conforming to the requirements for the lowest layer of hot mix asphalt to be placed as surfacing. This filling shall be done as a separate operation prior to placing the lowest layer of surfacing, and full compensation for this filling will be considered as included in the contract price paid for cement treated base and no additional compensation will be allowed therefor.

^^

SECTION 28 LEAN CONCRETE BASE
(Issued 05-15-09)

In Section 28-1.02 replace the 1st paragraph with:

Cement shall be Type II portland cement conforming to the provisions in Section 90-2.01A, "Cement."

In Section 28-1.02 replace the 6th paragraph with:

Aggregate shall be of such quality that, when mixed with cement in an amount not to exceed 300 pounds per cubic yard, and tested in conformance with the requirements in California Test 548, the compressive strength of a sample will be not less than 700 pounds per square inch at 7 days.

Replace Section 28-1.05 with:

Placing of lean concrete base shall conform to the provisions for placing concrete pavement in Section 40-3.04, "Placing Concrete," except that the third paragraph in Section 40-3.04A, "General," shall not apply.

Unless otherwise required by the plans or the special provisions, lean concrete base shall be constructed in not less than 12-foot widths separated by construction joints. Lean concrete base constructed monolithically in widths greater than 26 feet shall be constructed with a longitudinal contraction joint offset not more than 3 feet from the centerline of the width being constructed.

Longitudinal contraction joints in lean concrete base shall be constructed in conformance with the provisions in Section 40-3.08E, "Sawing Method."

When concrete pavement is to be placed over lean concrete base, longitudinal construction joints and longitudinal contraction joints in the lean concrete base shall not be within one foot of planned longitudinal contraction joints nor longitudinal construction joints in the concrete pavement.

Lean concrete base shall not be mixed nor placed while the atmospheric temperature is below 35 °F, and shall not be placed on frozen ground.

In Section 28-1.06 replace the 1st and 2nd paragraphs with:

Lean concrete base shall be spread, compacted, and shaped in conformance with the provisions in Section 40-3.04D, "Stationary Side Form Construction," and Section 40-3.04E, "Slip-Form Construction."

In advance of curing operations, lean concrete base to be surfaced with hot mix asphalt shall be textured with a drag strip of burlap, a broom or a spring steel tine device which will produce scoring in the finished surface. The scoring shall be parallel with the centerline or transverse thereto. The operation shall be performed at a time and in a manner to produce the coarsest texture practical for the method used.

In Section 28-1.08 replace the 2nd paragraph with:

Hardened lean concrete base with a surface lower than 0.05 foot below the grade established by the Engineer shall be removed and replaced with lean concrete base which complies with these specifications, or if permitted by the Engineer, the low areas shall be filled with pavement material as follows:

1. When pavement material is hot mix asphalt, the low areas shall be filled with hot mix asphalt conforming to the requirements for the lowest layer of hot mix asphalt to be placed as pavement. This shall be done as a separate operation prior to placing the lowest layer of pavement, and full compensation for this filling will be considered as included in the contract price paid per cubic yard for lean concrete base and no additional compensation will be allowed therefor.
2. When pavement material is portland cement concrete, the low areas shall be filled with pavement concrete at the time and in the same operation that the pavement is placed. Full compensation for this filling will be considered as included in the contract price paid per cubic yard for lean concrete base and no additional compensation will be allowed therefor.

^^

SECTION 29 TREATED PERMEABLE BASES
(Issued 05-15-09)

In Section 29-1.02B replace the 2nd paragraph with:

Cement shall be Type II portland cement conforming to the provisions in Section 90-2.01A, "Cement."

In Section 29-1.04A replace the 1st paragraph with:

Aggregates and asphalt for asphalt treated permeable base shall be stored, proportioned and mixed in the same manner provided for storing, proportioning and mixing aggregates and asphalt for hot mix asphalt in Section 39-1.08, "Production," except as follows:

1. The aggregate need not be separated into sizes.
2. The temperature of the aggregate before adding the asphalt binder shall be not less than 275° F nor more than 325° F.
3. Asphalt treated permeable base stored in excess of 2 hours shall not be used in the work.
4. The aggregate shall be combined with 2.5 percent paving asphalt by weight of the dry aggregate. After testing samples of the Contractor's proposed aggregate supply, the Engineer may order an increase or decrease in the asphalt content. If an increase or decrease is ordered, and the increase or decrease exceeds the specified amount by more than 0.1 percent by weight of the dry aggregate, the compensation payable to the Contractor for the asphalt treated permeable base will be increased or decreased on the basis of the total increase or decrease in asphalt.

5. The asphalt content of the asphalt mixture will be determined, at the option of the Engineer, by extraction tests in conformance with the requirements in California Test 310 or 362, or will be determined in conformance with the requirements in California Test 379. The bitumen ratio pounds of asphalt per 100 pounds of dry aggregate shall not vary by more than 0.5 pound of asphalt above or 0.5 pound of asphalt below the amount designated by the Engineer. Compliance with this requirement will be determined either by taking samples from trucks at the plant or from the mat behind the paver before rolling. If the sample is taken from the mat behind the paver, the bitumen ratio shall be not less than the amount designated by the Engineer, less 0.7 pound of asphalt per 100 pounds of dry aggregate.

In Section 29-1.04B replace the 2nd paragraph with:

Cement treated permeable base shall contain not less than 287 pounds of cement per cubic yard.

In Section 29-1.05 replace the 1st paragraph with:

Asphalt treated permeable base shall be spread and compacted as specified for hot mix asphalt under the "Method" construction process in Section 39, "Hot Mix Asphalt," and these specifications.

In Section 29-1.05 in the 8th paragraph, replace the 2nd sentence with:

The filter fabric shall conform to the provisions in Section 88-1.02, "Filtration," and shall be placed in conformance with the provisions for placing filter fabric for edge drains in Section 68-3.03, "Installation."

In Section 29-1.06 replace the 1st and 2nd paragraphs with:

Cement treated base shall be placed, spread, compacted, and shaped in conformance with the provisions in Section 40-3.04D, "Stationary Side Form Construction," and Section 40-3.04E, "Slip-Form Construction," except that vibrators shall not be used and the third paragraph in Section 40-3.04A, "General," shall not apply.

In Section 29-1.06 in the 9th paragraph, replace the 2nd sentence with:

The filter fabric shall conform to the provisions in Section 88-1.02, "Filtration," and shall be placed in conformance with the provisions for placing filter fabric for edge drains in Section 68-3.03, "Installation."

In Section 29-1.07 replace the 2nd paragraph with:

Hardened treated permeable base with a surface lower than 0.05 foot below the grade established by the Engineer shall be removed and replaced with treated permeable base which complies with these specifications, or if permitted by the Engineer, the low areas shall be filled with pavement material as follows:

1. When pavement material is hot mix asphalt, the low areas shall be filled with hot mix asphalt conforming to the requirements for the lowest layer of hot mix asphalt to be placed as pavement. This shall be done as a separate operation prior to placing the lowest layer of pavement.
2. When pavement material is portland cement concrete, the low areas shall be filled with pavement concrete at the time and in the same operation in which the pavement is placed.
3. Full compensation for filling low areas will be considered as included in the contract price paid per cubic yard for treated permeable base and no additional compensation will be allowed therefor.

^^

SECTION 37 BITUMINOUS SEALS
(Issued 06-05-09)

In Section 37-1.03 replace the 4th through 6th paragraphs with:

On 2-lane two-way roadways, W8-7 "LOOSE GRAVEL" signs and W13-1 (35) speed advisory signs shall be furnished and placed adjacent to both sides of the traveled way where screenings are being spread on a traffic lane. The first W8-7 sign in each direction shall be placed where traffic first encounters loose screenings, regardless of which lane the screenings are being spread on. The W13-1 (35) signs need not be placed in those areas with posted speed limits of less than 40 MPH. The signs shall be placed at maximum 2,000-foot intervals along each side of the traveled way and at public roads or streets entering the seal coat area as directed by the Engineer.

On multilane roadways (freeways, expressways and multilane conventional highways) where screenings are being spread on a traffic lane, W8-7 "LOOSE GRAVEL" signs and W13-1 (35) speed advisory signs shall be furnished and placed adjacent to the outside edge of the traveled way nearest to the lane being worked on. The first W8-7 sign shall be placed where the screenings begin with respect to the direction of travel on that lane. The W13-1 (35) signs need not be placed in those areas with posted speed limits of less than 40 MPH. The signs shall be placed at maximum 2,000-foot intervals along the edge of traveled way and at on-ramps, public roads or streets entering the seal coat area as directed by the Engineer.

The W8-7 and W13-1 signs shall be maintained in place at each location until final brooming of the seal coat surface at that location is completed. The W8-7 and W13-1 signs shall conform to the provisions for construction area signs in Section 12, "Construction Area Traffic Control Devices." The signs may be set on temporary portable supports with the W13-1 below the W8-7 or on barricades with the W13-1 sign alternating with the W8-7 sign.

In Section 37-1.07 replace the 2nd paragraph with:

Rollers shall be oscillating type pneumatic-tired rollers. A minimum of 2 pneumatic-tired rollers conforming to the provisions in Section 39-3.03 "Spreading and Compacting Equipment," shall be furnished.

In Section 37-1.09 replace the 2nd paragraph with:

The above prices and payments shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in applying seal coat, complete in place, including furnishing, placing, maintaining, and removing W8-7 and W13-1 signs, when required, and temporary supports or barricades for the signs, as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer.

In Section 37-2.05 replace the 6th paragraph with:

In addition to conforming to the provisions in Section 5-1.10, "Equipment," the identifying number of mixer-spreader trucks shall be at least 2 inches in height, located on the front and rear of the vehicle.

^^

SECTION 39 ASPHALT CONCRETE
(Issued 09-16-11)

Replace Section 39 with:
SECTION 39 HOT MIX ASPHALT

39-1 GENERAL

39-1.01 DESCRIPTION

Section 39 includes specifications for producing and placing hot mix asphalt (HMA) by mixing aggregate and asphalt binder at a mixing plant and spreading and compacting the HMA mixture.

The special provisions specify one or more type of HMA, including:

1. Type A
2. Type B
3. Open graded friction course (OGFC). OGFC includes hot mix asphalt (open graded)[HMA-O], rubberized hot mix asphalt (open graded) [RHMA-O] and rubberized hot mix asphalt (open graded high binder) [RHMA-O-HB]
4. Rubberized hot mix asphalt (gap graded) [RHMA-G]

The special provisions specify the HMA construction process, including:

1. Standard
2. Method
3. Quality Control / Quality Assurance (QC / QA)

39-1.02 MATERIALS

39-1.02A Geosynthetic Pavement Interlayer

Geosynthetic pavement interlayer must comply with the specifications for pavement fabric, paving mat, paving grid, paving geocomposite grid, or geocomposite strip membrane in Section 88-1.07, "Pavement Interlayer."

39-1.02B Tack Coat

Tack coat must comply with the specifications for asphaltic emulsion in Section 94, "Asphaltic Emulsion," or asphalt binder in Section 92, "Asphalts." Choose the type and grade.

Notify the Engineer if you dilute asphaltic emulsion with water. The weight ratio of added water to asphaltic emulsion must not exceed 1 to 1.

Measure added water either by weight or volume in compliance with the specifications for weighing, measuring, and metering devices under Section 9-1.01, "Measurement of Quantities," or you may use water meters from water districts, cities, or counties. If you measure water by volume, apply a conversion factor to determine the correct weight.

With each dilution, submit in writing:

1. The weight ratio of water to bituminous material in the original asphaltic emulsion
2. The weight of asphaltic emulsion before diluting
3. The weight of added water
4. The final dilution weight ratio of water to asphaltic emulsion

39-1.02C Asphalt Binder

Asphalt binder in HMA must comply with Section 92, "Asphalts," or Section 39-1.02D, "Asphalt Rubber Binder." The special provisions specify the grade.

Asphalt binder for geosynthetic pavement interlayer must comply with Section 92, "Asphalts." Choose from Grades PG 64-10, PG 64-16, or PG 70-10.

39-1.02D Asphalt Rubber Binder

General

Use asphalt rubber binder in RHMA-G, RHMA-O, and RHMA-O-HB. Asphalt rubber binder must be a combination of:

1. Asphalt binder
2. Asphalt modifier
3. Crumb rubber modifier (CRM)

The combined asphalt binder and asphalt modifier must be 80.0 ± 2.0 percent by weight of the asphalt rubber binder.

Asphalt Modifier

Asphalt modifier must be a resinous, high flash point, and aromatic hydrocarbon, and comply with:

Asphalt Modifier for Asphalt Rubber Binder

Quality Characteristic	ASTM	Specification
Viscosity, m^2/s (x 10^{-6}) at 100 °C	D 445	X ± 3 [a]
Flash Point, CL.O.C., °C	D 92	207 minimum
Molecular Analysis		
Asphaltenes, percent by mass	D 2007	0.1 maximum
Aromatics, percent by mass	D 2007	55 minimum

Note:
[a] The symbol "X" is the proposed asphalt modifier viscosity. "X" must be between 19 and 36. A change in "X" requires a new asphalt rubber binder design.

Asphalt modifier must be from 2.0 percent to 6.0 percent by weight of the asphalt binder in the asphalt rubber binder.

Crumb Rubber Modifier

CRM consists of a ground or granulated combination of scrap tire CRM and high natural CRM. CRM must be 75.0 ± 2.0 percent scrap tire CRM and 25.0 ± 2.0 percent high natural CRM by total weight of CRM. Scrap tire CRM must be from any combination of automobile tires, truck tires, or tire buffings.

Sample and test scrap tire CRM and high natural CRM separately. CRM must comply with:

Crumb Rubber Modifier for Asphalt Rubber Binder

Quality Characteristic	Test Method	Specification
Scrap tire CRM gradation (% passing No. 8 sieve)	LP-10	100
High natural CRM gradation (% passing No. 10 sieve)	LP-10	100
Wire in CRM (% max.)	LP-10	0.01
Fabric in CRM (% max.)	LP-10	0.05
CRM particle length (inch max.) [a]	--	3/16
CRM specific gravity [a]	CT 208	1.1 – 1.2
Natural rubber content in high natural CRM (%) [a]	ASTM D 297	40.0 – 48.0

Note:
[a] Test at mix design and for Certificate of Compliance.

Only use CRM ground and granulated at ambient temperature. If steel and fiber are cryogenically separated, it must occur before grinding and granulating. Only use cryogenically produced CRM particles that can be ground or granulated and not pass through the grinder or granulator.

CRM must be dry, free-flowing particles that do not stick together. CRM must not cause foaming when combined with the asphalt binder and asphalt modifier. You may add calcium carbonate or talc up to 3 percent by weight of CRM.

Asphalt Rubber Binder Design and Profile

Submit in writing an asphalt rubber binder design and profile that complies with the asphalt rubber binder specifications. In the design, designate the asphalt, asphalt modifier, and CRM and their proportions. The profile is not a performance specification and only serves to indicate expected trends in asphalt rubber binder properties during binder production. The profile must include the same component sources for the asphalt rubber binder used.

Design the asphalt rubber binder from testing you perform for each quality characteristic and for the reaction temperatures expected during production. The 24-hour (1,440-minute)

interaction period determines the design profile. At a minimum, mix asphalt rubber binder components, take samples, and perform and record the following tests:

Asphalt Rubber Binder Reaction Design Profile

Test	Minutes of Reaction [a]							Limits
	45	60	90	120	240	360	1440	
Cone penetration @ 77 °F, 0.10-mm (ASTM D 217)	X [b]				X		X	25 - 70
Resilience @ 77 °F, percent rebound (ASTM D 5329)	X				X		X	18 min.
Field softening point, °F (ASTM D 36)	X				X		X	125 - 165
Viscosity, centipoises (LP-11)	X	X	X	X	X	X	X	1,500 - 4,000

Notes:
[a] Six hours (360 minutes) after CRM addition, reduce the oven temperature to 275 °F for a period of 16 hours. After the 16-hour (1320 minutes) cool-down after CRM addition, reheat the binder to the reaction temperature expected during production for sampling and testing at 24 hours (1440 minutes).
[b] "X" denotes required testing

Asphalt Rubber Binder

After interacting for a minimum of 45 minutes, asphalt rubber binder must comply with:

Asphalt Rubber Binder

Quality Characteristic	Test for Quality Control or Acceptance	Test Method	Specification	
			Minimum	Maximum
Cone penetration @ 77 °F, 0.10-mm	Acceptance	ASTM D 217	25	70
Resilience @ 77 °F, percent rebound	Acceptance	ASTM D 5329	18	--
Field softening point, °F	Acceptance	ASTM D 36	125	165
Viscosity @ 375 °F, centipoises	Quality Control	LP-11	1,500	4,000

39-1.02E Aggregate

Aggregate must be clean and free from deleterious substances. Aggregate:

1. Retained on the No. 4 sieve is coarse
2. Passing the No. 4 sieve is fine
3. Added and passing the No. 30 sieve is supplemental fine, including:

    3.1. Hydrated lime
    3.2. Portland cement
    3.3. Fines from dust collectors

The special provisions specify the aggregate gradation for each HMA type.

The specified aggregate gradation is before the addition of asphalt binder and includes supplemental fines. The Engineer tests for aggregate grading under California Test 202, modified by California Test 105 if there is a difference in specific gravity of 0.2 or more between the coarse and fine parts of different aggregate blends.

Choose a sieve size target value (TV) within each target value limit presented in the aggregate gradation tables.

Aggregate Gradation
(Percentage Passing)
HMA Types A and B

3/4–inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	90 - 100	TV ±5
1/2"	70 - 90	TV ±6
No. 4	45 - 55	TV ±7
No. 8	32 - 40	TV ±5
No. 30	12 - 21	TV ±4
No. 200	2 - 7	TV ±2

1/2–inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 99	TV ±6
3/8"	75 - 95	TV ±6
No. 4	55 - 66	TV ±7
No. 8	38 - 49	TV ±5
No. 30	15 - 27	TV ±4
No. 200	2 - 8	TV ±2

3/8–inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	95 - 100	TV ±6
No. 4	58 - 72	TV ±7
No. 8	34 - 48	TV ±6
No. 30	18 - 32	TV ±5
No. 200	2 - 9	TV ±2

No. 4 HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/8"	100	—
No. 4	95 - 100	TV ±7
No. 8	72 - 77	TV ±7
No. 30	37 - 43	TV ±7
No. 200	2 - 12	TV ±4

Rubberized Hot Mix Asphalt - Gap Graded (RHMA-G)

3/4–inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	95 - 100	TV ±5
1/2"	83 - 87	TV ±6
3/8"	65 - 70	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

1/2–inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	90 - 100	TV ±6
3/8"	83 - 87	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

Open Graded Friction Course (OGFC)

1–inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1 1/2"	100	—
1"	99 - 100	TV ±5
3/4"	85 - 96	TV ±5
1/2"	55 - 71	TV ±6
No. 4	10 - 25	TV ±7
No. 8	6 - 16	TV ±5
No. 200	1 - 6	TV ±2

1/2–inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 100	TV ±6
3/8"	78 - 89	TV ±6
No. 4	28 - 37	TV ±7
No. 8	7 - 18	TV ±5
No. 30	0 - 10	TV ±4
No. 200	0 - 3	TV ±2

3/8–inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	90 - 100	TV ±6
No. 4	29 - 36	TV ±7
No. 8	7 - 18	TV ±6
No. 30	0 - 10	TV ±5
No. 200	0 - 3	TV ±2

Before the addition of asphalt binder and lime treatment, aggregate must comply with:

Aggregate Quality

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Percent of crushed particles	CT 205				
Coarse aggregate (% min.)					
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face		70	20	70	90
Los Angeles Rattler (% max.)	CT 211				
Loss at 100 Rev.		12	--	12	12
Loss at 500 Rev.		45	50	40	40
Sand equivalent (min.) [a]	CT 217	47	42	47	--
Fine aggregate angularity (% min.) [b]	CT 234	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	CT 235	10	10	10	10

Notes:
[a] Reported value must be the average of 3 tests from a single sample.
[b] The Engineer waives this specification if HMA contains less than 10 percent of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

39-1.02F Reclaimed Asphalt Pavement

You may produce HMA using reclaimed asphalt pavement (RAP). HMA produced using RAP must comply with the specifications for HMA except aggregate quality specifications do not apply to RAP. You may substitute RAP aggregate for a part of the virgin aggregate in HMA in a quantity not exceeding 15.0 percent of the aggregate blend. Do not use RAP in OGFC and RHMA-G.

Assign the substitution rate of RAP aggregate for virgin aggregate with the job mix formula (JMF) submittal. The JMF must include the percent of RAP used. If you change your assigned RAP aggregate substitution rate by more than 5 percent (within the 15.0 percent limit), submit a new JMF.

Process RAP from asphalt concrete. You may process and stockpile RAP throughout the project's life. Prevent material contamination and segregation. Store RAP in stockpiles on smooth surfaces free of debris and organic material. Processed RAP stockpiles must consist only of homogeneous RAP.

39-1.03 HOT MIX ASPHALT MIX DESIGN REQUIREMENTS

39-1.03A General

A mix design consists of performing California Test 367 and laboratory procedures on combinations of aggregate gradations and asphalt binder contents to determine the optimum binder content (OBC) and HMA mixture qualities. If RAP is used, use Laboratory Procedure LP-9. The result of the mix design becomes the proposed JMF.

Use Form CEM-3512 to document aggregate quality and mix design data. Use Form CEM-3511 to present the JMF.

Laboratories testing aggregate qualities and preparing the mix design and JMF must be qualified under the Department's Independent Assurance Program. Take samples under California Test 125.

The Engineer reviews the aggregate qualities, mix design, and JMF and verifies and accepts the JMF.

You may change the JMF during production. Do not use the changed JMF until the Engineer accepts it. Except when adjusting the JMF in compliance with Section 39-1.03E, "Job Mix Formula Verification," perform a new mix design and submit in writing a new JMF submittal for changing any of the following:

1. Target asphalt binder percentage
2. Asphalt binder supplier
3. Asphalt rubber binder supplier
4. Component materials used in asphalt rubber binder or percentage of any component materials
5. Combined aggregate gradation
6. Aggregate sources
7. Substitution rate for RAP aggregate of more than 5 percent
8. Any material in the JMF

For OGFC, submit in writing a complete JMF submittal except asphalt binder content. The Engineer determines the asphalt binder content under California Test 368 within 20 days of your complete JMF submittal and provides you a Form CEM-3513.

39-1.03B Hot Mix Asphalt Mix Design

Perform a mix design that produces HMA in compliance with:

Hot Mix Asphalt Mix Design Requirements

Quality Characteristic	Test Method	HMA Type		
		A	B	RHMA-G
Air voids content (%)	CT 367[a]	4.0	4.0	Special Provisions
Voids in mineral aggregate (% min.)	LP-2			
No. 4 grading		17.0	17.0	--
3/8" grading		15.0	15.0	--
1/2" grading		14.0	14.0	18.0 – 23.0[b]
3/4" grading		13.0	13.0	18.0 – 23.0[b]
Voids filled with asphalt (%)	LP-3			
No. 4 grading		76.0 – 80.0	76.0 – 80.0	Note d
3/8" grading		73.0 – 76.0	73.0 – 76.0	
1/2" grading		65.0 – 75.0	65.0 – 75.0	
3/4" grading		65.0 – 75.0	65.0 – 75.0	
Dust proportion	LP-4			
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0	Note d
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3	
Stabilometer value (min.) [c]	CT 366			
No. 4 and 3/8" gradings		30	30	--
1/2" and 3/4" gradings		37	35	23

Notes:

[a] Calculate the air voids content of each specimen using California Test 309 and Lab Procedure LP-1. Modify California Test 367, Paragraph C5, to use the exact air voids content specified in the selection of OBC.

[b] Voids in mineral aggregate for RHMA-G must be within this range.

[c] Modify California Test 304, Part 2.B.2.c: "After compaction in the compactor, cool to 140 °± 5 °F by allowing the briquettes to cool at room temperature for 0.5-hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

[d] Report this value in the JMF submittal.

For stability and air voids content, prepare 3 briquettes at the OBC and test for compliance. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 8 points. The average air void content may vary from the specified air void content by ±0.5 percent.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use the same briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

39-1.03C Job Mix Formula Submittal

Each JMF submittal must consist of:

1. Proposed JMF on Form CEM-3511
2. Mix design documentation on Form CEM-3512 dated within 12 months of submittal
3. JMF verification on Form CEM-3513, if applicable
4. JMF renewal on Form CEM-3514, if applicable
5. Materials Safety Data Sheets (MSDS) for:

    5.1. Asphalt binder
    5.2. Base asphalt binder used in asphalt rubber binder
    5.3. CRM and asphalt modifier used in asphalt rubber binder
    5.4. Blended asphalt rubber binder mixture
    5.5. Supplemental fine aggregate except fines from dust collectors

5.6. Antistrip additives

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.
4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

39-1.03D Job Mix Formula Review

The Engineer reviews each mix design and proposed JMF within 5 business days from the complete JMF submittal. The review consists of reviewing the mix design procedures and comparing the proposed JMF with the specifications.

The Engineer may verify aggregate qualities during this review period.

39-1.03E Job Mix Formula Verification

If you cannot submit a Department-verified JMF on Form CEM-3513 dated within 12 months before HMA production, the Engineer verifies the JMF.

Based on your testing and production experience, you may submit on Form CEM-3511 an adjusted JMF before the Engineer's verification testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to ±0.6 percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

For HMA Type A, Type B, and RHMA-G, the Engineer verifies the JMF from samples taken from HMA produced by the plant to be used. Notify the Engineer in writing at least 2 business days before sampling materials.

In the Engineer's presence and from the same production run, take samples of:

1. Aggregate
2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Sample RAP from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample from any of the following locations:

1. The plant
2. A truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

You may sample from a different project including a non-Department project if you make arrangements for the Engineer to be present during sampling.

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and use 1 part for your testing.

The Engineer verifies each proposed JMF within 20 days of receiving all verification samples and the JMF submittal has been accepted. If you request in writing, the Engineer verifies RHMA-G quality requirements within 3 business days of sampling. Verification is testing for compliance with the specifications for:

1. Aggregate quality
2. Aggregate gradation (JMF TV ± tolerance)
3. Asphalt binder content (JMF TV ± tolerance)
4. HMA quality specified in the table Hot Mix Asphalt Mix Design Requirements except:

    4.1. Air voids content (design value ± 2.0 percent)
    4.2. Voids filled with asphalt (report only if an adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC)
    4.3. Dust proportion (report only if an adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC)

The Engineer prepares 3 briquettes from a single split sample. To verify the JMF for stability and air voids content, the Engineer tests the 3 briquettes and reports the average of 3 tests. The Engineer prepares new briquettes if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

If the Engineer verifies the JMF, the Engineer provides you a Form CEM-3513.

If the Engineer's tests on plant-produced samples do not verify the JMF, the Engineer notifies you in writing and you must submit a new JMF submittal or submit an adjusted JMF based on your testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to ±0.6 percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

You may adjust the JMF only once due to a failed verification test. An adjusted JMF requires a new Form CEM-3511 and verification of a plant-produced sample.

The Engineer reverifies the JMF if HMA production has stopped for longer than 30 days and the verified JMF is older than 12 months.

For each HMA type and aggregate size specified, the Engineer verifies at the State's expense up to 2 proposed JMF including a JMF adjusted after verification failure. The Engineer deducts $3,000 from payments for each verification exceeding this limit. This deduction does not apply to verifications initiated by the Engineer or if a JMF expires while HMA production is stopped longer than 30 days.

39-1.03F Job Mix Formula Renewal

You may request a JMF renewal by submitting the following:

1. Proposed JMF on Form CEM-3511
2. A previously verified JMF documented on Form CEM-3513 dated within 12 months
3. Mix design documentation on Form CEM-3512 used for the previously verified JMF

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.
4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer reviews each complete JMF renewal submittal within 5 business days.

The Engineer may verify aggregate qualities during this review period.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate, RAP, and HMA, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer verifies the JMF renewal submittal under Section 39-1.03E, "Job Mix Formula Verification," except:

1. The Engineer retains samples until you provide test results for your part on Form CEM-3514.
2. The Engineer tests samples of materials obtained from the HMA production unit after you submit test results that comply with the specifications for the quality characteristics under Section 39-1.03E, "Job Mix Formula Verification."

3. The Engineer verifies each proposed JMF within 30 days of receiving verification samples.
4. You may not adjust the JMF due to a failed verification.
5. For each HMA type and aggregate gradation specified, the Engineer verifies at the State's expense 1 proposed JMF.

If the Engineer verifies the JMF renewal, the Engineer provides you a Form CEM-3513.

39-1.03G Job Mix Formula Acceptance

You may start HMA production if:

1. The Engineer's review of the JMF shows compliance with the specifications.
2. The Department has verified the JMF within 12 months before HMA production.
3. The Engineer accepts the verified JMF.

39-1.04 CONTRACTOR QUALITY CONTROL

39-1.04A General

Establish, maintain, and change a quality control system to ensure materials and work comply with the specifications. Submit quality control test results to the Engineer within 3 days of a request except when QC / QA is specified.

You must identify the HMA sampling location in your Quality Control Plan. During production, take samples under California Test 125 except if you request in writing and the Engineer approves, you may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

39-1.04B Prepaving Conference

Meet with the Engineer at a prepaving conference at a mutually agreed time and place. Discuss methods of performing the production and paving work.

39-1.04C Asphalt Rubber Binder

Take asphalt rubber binder samples from the feed line connecting the asphalt rubber binder tank to the HMA plant. Sample and test asphalt rubber binder under Laboratory Procedure LP-11.

Test asphalt rubber binder for compliance with the viscosity specifications in Section 39-1.02, "Materials." During asphalt rubber binder production and HMA production using asphalt rubber binder, measure viscosity every hour with not less than 1 reading for each asphalt rubber binder batch. Log measurements with corresponding time and asphalt rubber binder temperature. Submit the log daily in writing.

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance." With the Certificate of Compliance, submit test results in writing for CRM and asphalt modifier with each truckload delivered to the HMA plant. A Certificate of Compliance for asphalt

modifier must not represent more than 5,000 pounds. Use an AASHTO-certified laboratory for testing.

Sample and test gradation and wire and fabric content of CRM once per 10,000 pounds of scrap tire CRM and once per 3,400 pounds of high natural CRM. Sample and test scrap tire CRM and high natural CRM separately.

Submit certified weight slips in writing for the CRM and asphalt modifier furnished.

39-1.04D Aggregate

Determine the aggregate moisture content and RAP moisture content in continuous mixing plants at least twice a day during production and adjust the plant controller. Determine the RAP moisture content in batch mixing plants at least twice a day during production and adjust the plant controller.

39-1.04E Reclaimed Asphalt Pavement

Perform RAP quality control testing each day.

Sample RAP once daily and determine the RAP aggregate gradation under Laboratory Procedure LP-9 and submit the results to the Engineer in writing with the combined aggregate gradation.

39-1.04F Density Cores

To determine density for Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores at least once every 5 business days. Take 1 density core for every 250 tons of HMA from random locations the Engineer designates. Take density cores in the Engineer's presence and backfill and compact holes with material authorized by the Engineer. Before submitting a density core to the Engineer, mark it with the density core's location and place it in a protective container.

If a density core is damaged, replace it with a density core taken within 1 foot longitudinally from the original density core. Relocate any density core located within 1 foot of a rumble strip to 1 foot transversely away from the rumble strip.

39-1.04G Briquettes

Prepare 3 briquettes for each stability and air voids content determination. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 12 points.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use these briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

39-1.05 ENGINEER'S ACCEPTANCE

The Engineer's acceptance of HMA is specified in the sections for each HMA construction process.

The Engineer samples materials for testing under California Test 125 and the applicable test method except samples may be taken from:

1. The plant from:

    1.1. A truck

1.2. An automatic sampling device

2. The mat behind the paver

Sampling must be independent of Contractor quality control, statistically-based, and random. If you request, the Engineer splits samples and provides you with a part.

The Engineer accepts HMA based on:

1. Accepted JMF
2. Accepted QCP for Standard and QC / QA
3. Compliance with the HMA Acceptance tables
4. Acceptance of a lot for QC / QA
5. Visual inspection

The Engineer prepares 3 briquettes for each stability and air voids content determination. The Engineer reports the average of 3 tests. The Engineer prepares new briquettes and test if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

39-1.06 DISPUTE RESOLUTION

You and the Engineer must work together to avoid potential conflicts and to resolve disputes regarding test result discrepancies. Notify the Engineer in writing within 5 days of receiving a test result if you dispute the test result.

If you or the Engineer dispute each other's test results, submit written quality control test results and copies of paperwork including worksheets used to determine the disputed test results to the Engineer. An Independent Third Party (ITP) performs referee testing. Before the ITP participates in a dispute resolution, the ITP must be accredited under the Department's Independent Assurance Program. The ITP must be independent of the project. By mutual agreement, the ITP is chosen from:

1. A Department laboratory
2. A Department laboratory in a district or region not in the district or region the project is located
3. The Transportation Laboratory
4. A laboratory not currently employed by you or your HMA producer

If split quality control or acceptance samples are not available, the ITP uses any available material representing the disputed HMA for evaluation.

39-1.07 PRODUCTION START-UP EVALUATION

The Engineer evaluates HMA production and placement at production start-up.

Within the first 750 tons produced on the first day of HMA production, in the Engineer's presence and from the same production run, take samples of:

1. Aggregate

2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Take RAP samples from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and keep 1 part.

For Standard and QC / QA projects, you and the Engineer must test the split samples and report test results in writing within 3 business days of sampling. If you proceed before receipt of the test results, the Engineer may consider the HMA placed to be represented by these test results.

For Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores within the first 750 tons on the first day of HMA production. For each density core, the Engineer reports the bulk specific gravity determined under California Test 308, Method A in addition to the percent of maximum theoretical density. You may test for in-place density at the density core locations and include them in your production tests for percent of maximum theoretical density.

39-1.08 PRODUCTION

39-1.08A General

Produce HMA in a batch mixing plant or a continuous mixing plant. Proportion aggregate by hot or cold feed control.

HMA plants must be Department-qualified. Before production, the HMA plant must have a current qualification under the Department's Materials Plant Quality Program.

During production, you may adjust:

1. Hot or cold feed proportion controls for virgin aggregate and RAP
2. The set point for asphalt binder content

39-1.08B Mixing

Mix HMA ingredients into a homogeneous mixture of coated aggregates.

Asphalt binder must be between 275 °F and 375 °F when mixed with aggregate.

Asphalt rubber binder must be between 375 °F and 425 °F when mixed with aggregate.

When mixed with asphalt binder, aggregate must not be more than 325 °F except aggregate for OGFC with unmodified asphalt binder must be not more than 275 °F. Aggregate temperature specifications do not apply when you use RAP.

HMA with or without RAP must not be more than 325 °F.

39-1.08C Asphalt Rubber Binder

Deliver scrap tire CRM and high natural CRM in separate bags.

Either proportion and mix asphalt binder, asphalt modifier, and CRM simultaneously or premix the asphalt binder and asphalt modifier before adding CRM. If you premix asphalt binder and asphalt modifier, asphalt binder must be from 375 to 425 degrees F when you add the asphalt modifier. Mix them for at least 20 minutes. When you add CRM, the asphalt binder and asphalt modifier must be between 375 °F and 425 °F.

Do not use asphalt rubber binder during the first 45 minutes of the reaction period. During this period, the asphalt rubber binder mixture must be between 375 °F and the lower of 425 °F or 25 °F below the asphalt binder's flash point indicated in the MSDS.

If any asphalt rubber binder is not used within 4 hours after the reaction period, discontinue heating. If the asphalt rubber binder drops below 375 °F, reheat before use. If you add more scrap tire CRM to the reheated asphalt rubber binder, the binder must undergo a 45-minute reaction period. The added scrap tire CRM must not exceed 10 percent of the total asphalt rubber binder weight. Reheated and reacted asphalt rubber binder must comply with the viscosity specifications for asphalt rubber binder in Section 39-1.02, "Materials." Do not reheat asphalt rubber binder more than twice.

39-1.09 SUBGRADE, TACK COAT, AND GEOSYNTHETIC PAVEMENT INTERLAYER

39-1.09A General

Prepare subgrade or apply tack coat to surfaces receiving HMA. If specified, place geosynthetic pavement interlayer over a coat of asphalt binder.

39-1.09B Subgrade

Subgrade to receive HMA must comply with the compaction and elevation tolerance specifications in the sections for the material involved. Subgrade must be free of loose and extraneous material. If HMA is paved on existing base or pavement, remove loose paving particles, dirt, and other extraneous material by any means including flushing and sweeping.

39-1.09C Tack Coat

Apply tack coat:

1. To existing pavement including planed surfaces
2. Between HMA layers
3. To vertical surfaces of:

    3.1. Curbs
    3.2. Gutters
    3.3. Construction joints

Before placing HMA, apply tack coat in 1 application at the minimum residual rate specified for the condition of the underlying surface:

Tack Coat Application Rates for HMA Type A, Type B, and RHMA-G

HMA over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA (between layers)	0.02	0.03	0.02
PCC and existing HMA (AC) surfaces	0.03	0.04	0.03
Planed PCC and HMA (AC) surfaces	0.05	0.06	0.04

Tack Coat Application Rates for OGFC

OGFC over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA	0.03	0.04	0.03
PCC and existing HMA (AC) surfaces	0.05	0.06	0.04
Planed PCC and HMA (AC) surfaces	0.06	0.07	0.05

If you dilute asphaltic emulsion, mix until homogeneous before application.

Apply to vertical surfaces with a residual tack coat rate that will thoroughly coat the vertical face without running off.

If you request in writing and the Engineer authorizes, you may:

1. Change tack coat rates
2. Omit tack coat between layers of new HMA during the same work shift if:

    2.1. No dust, dirt, or extraneous material is present
    2.2. The surface is at least 140 °F

Immediately in advance of placing HMA, apply additional tack coat to damaged areas or where loose or extraneous material is removed.

Close areas receiving tack coat to traffic. Do not track tack coat onto pavement surfaces beyond the job site.

Asphalt binder tack coat must be between 285 °F and 350 °F when applied.

39-1.09D Geosynthetic Pavement Interlayer

Place geosynthetic pavement interlayer in compliance with the manufacturer's recommendations.

Before placing the geosynthetic pavement interlayer and asphalt binder:

1. Repair cracks 1/4 inch and wider, spalls, and holes in the pavement. The State pays for this repair work under Section 4-1.03D, "Extra Work."
2. Clean the pavement of loose and extraneous material.

Immediately before placing the interlayer, apply 0.25 gallon ± 0.03 gallon of asphalt binder per square yard of interlayer or until the fabric is saturated. Apply asphalt binder the width of the geosynthetic pavement interlayer plus 3 inches on each side. At interlayer overlaps, apply asphalt binder on the lower interlayer the same overlap distance as the upper interlayer.

Asphalt binder must be from 285 °F to 350 °F and below the minimum melting point of the geosynthetic pavement interlayer when applied.

Align and place the interlayer with no overlapping wrinkles, except a wrinkle that overlaps may remain if it is less than 1/2 inch thick. If the overlapping wrinkle is more than 1/2 inch thick, cut the wrinkle out and overlap the interlayer no more than 2 inches.

The minimum HMA thickness over the interlayer must be 0.12 foot thick including conform tapers. Do not place the interlayer on a wet or frozen surface.

Overlap the interlayer borders between 2 inches and 4 inches. In the direction of paving, overlap the following roll with the preceding roll at any break.

You may use rolling equipment to correct distortions or wrinkles in the interlayer.

If asphalt binder tracked onto the interlayer or brought to the surface by construction equipment causes interlayer displacement, cover it with a small quantity of HMA.

Before placing HMA on the interlayer, do not expose the interlayer to:

1. Traffic except for crossings under traffic control and only after you place a small HMA quantity
2. Sharp turns from construction equipment
3. Damaging elements

Pave HMA on the interlayer during the same work shift.

39-1.10 SPREADING AND COMPACTING EQUIPMENT

Paving equipment for spreading must be:

1. Self-propelled
2. Mechanical
3. Equipped with a screed or strike-off assembly that can distribute HMA the full width of a traffic lane
4. Equipped with a full-width compacting device
5. Equipped with automatic screed controls and sensing devices that control the thickness, longitudinal grade, and transverse screed slope

Install and maintain grade and slope references.

The screed must produce a uniform HMA surface texture without tearing, shoving, or gouging.

The paver must not leave marks such as ridges and indentations unless you can eliminate them by rolling.

Rollers must be equipped with a system that prevents HMA from sticking to the wheels. You may use a parting agent that does not damage the HMA or impede the bonding of layers.

In areas inaccessible to spreading and compacting equipment:

1. Spread the HMA by any means to obtain the specified lines, grades and cross sections.
2. Use a pneumatic tamper, plate compactor, or equivalent to achieve thorough compaction.

39-1.11 TRANSPORTING, SPREADING, AND COMPACTING

Do not pave HMA on a wet pavement or frozen surface.

You may deposit HMA in a windrow and load it in the paver if:

1. Paver is equipped with a hopper that automatically feeds the screed
2. Loading equipment can pick up the windrowed material and deposit it in the paver hopper without damaging base material
3. Activities for deposit, pick-up, loading, and paving are continuous
4. HMA temperature in the windrow does not fall below 260 °F

You may pave HMA in 1 or more layers on areas less than 5 feet wide and outside the traveled way including shoulders. You may use mechanical equipment other than a paver for these areas. The equipment must produce a uniform smoothness and texture.

HMA handled, spread, or windrowed must not stain the finished surface of any improvement including pavement.

Do not use petroleum products such as kerosene or diesel fuel to release HMA from trucks, spreaders, or compactors.

HMA must be free of:

1. Segregation
2. Coarse or fine aggregate pockets
3. Hardened lumps

Longitudinal joints in the top layer must match specified lane edges. Alternate longitudinal joint offsets in lower layers at least 0.5 foot from each side of the specified lane edges. You may request in writing other longitudinal joint placement patterns.

Until the adjoining through lane's top layer has been paved, do not pave the top layer of:

1. Shoulders
2. Tapers
3. Transitions
4. Road connections
5. Driveways
6. Curve widenings
7. Chain control lanes
8. Turnouts
9. Turn pockets

If the number of lanes change, pave each through lane's top layer before paving a tapering lane's top layer. Simultaneous to paving a through lane's top layer, you may pave an adjoining area's top layer including shoulders. Do not operate spreading equipment on any area's top layer until completing final compaction.

If HMA (leveling) is specified, fill and level irregularities and ruts with HMA before spreading HMA over base, existing surfaces, or bridge decks. You may use mechanical equipment other than a paver for these areas. The equipment must produce a uniform smoothness and texture. HMA used to change an existing surface's cross slope or profile is not HMA (leveling).

If placing HMA against the edge of existing pavement, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. If placing HMA against the edge of a longitudinal or transverse construction joint and the joint is damaged or not placed to a neat line, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. Repair or remove and replace damaged pavement at your expense.

Rolling must leave the completed surface compacted and smooth without tearing, cracking, or shoving. Complete finish rolling activities before the pavement surface temperature is:

1. Below 150 °F for HMA with unmodified binder
2. Below 140 °F for HMA with modified binder
3. Below 200 °F for RHMA-G

If a vibratory roller is used as a finish roller, turn the vibrator off.

Do not use a pneumatic tired roller to compact RHMA-G.

For Standard and QC/QA, if a 3/4-inch aggregate grading is specified, you may use a 1/2-inch aggregate grading if the total layer thickness is from 0.125 foot to 0.20 foot thick.

Spread and compact HMA under Section 39-3.03, "Spreading and Compacting Equipment," and Section 39-3.04, "Transporting, Spreading, and Compacting," for any of the following:

1. Specified paved thickness is less than 0.15 foot.
2. Specified paved thickness is less than 0.20 foot and a 3/4-inch aggregate grading is specified and used.
3. You spread and compact at:

    3.1. Asphalt concrete surfacing replacement areas
    3.2. Leveling courses
    3.3. Areas the Engineer determines conventional compaction and compaction measurement methods are impeded

Do not allow traffic on new HMA pavement until its mid-depth temperature is below 160 °F.

If you request in writing and the Engineer authorizes, you may cool HMA Type A and Type B with water when rolling activities are complete. Apply water under Section 17, "Watering."

Spread sand at a rate between 1 pound and 2 pounds per square yard on new RHMA-G, RHMA-O, and RHMA-O-HB pavement when finish rolling is complete. Sand must be free of clay or organic matter. Sand must comply with Section 90-3.03, "Fine Aggregate Grading." Keep traffic off the pavement until spreading sand is complete.

39-1.12 SMOOTHNESS

39-1.12A General

Determine HMA smoothness with a profilograph and a straightedge.

Smoothness specifications do not apply to OGFC placed on existing pavement not constructed under the same project.

If portland cement concrete is placed on HMA:

1. Cold plane the HMA finished surface to within specified tolerances if it is higher than the grade specified by the Engineer.

2. Remove and replace HMA if the finished surface is lower than 0.05 foot below the grade specified by the Engineer.

39-1.12B Straightedge

The HMA pavement top layer must not vary from the lower edge of a 12-foot long straightedge:

1. More than 0.01 foot when the straight edge is laid parallel with the centerline
2. More than 0.02 foot when the straightedge is laid perpendicular to the centerline and extends from edge to edge of a traffic lane
3. More than 0.02 foot when the straightedge is laid within 24 feet of a pavement conform

39-1.12C Profilograph

Under California Test 526, determine the zero (null) blanking band Profile Index (PI_0) and must-grinds on the top layer of HMA Type A, Type B, and RHMA-G pavement. Take 2 profiles within each traffic lane, 3 feet from and parallel with the edge of each lane.

A must-grind is a deviation of 0.3 inch or more in a length of 25 feet. You must correct must-grinds.

For OGFC, only determine must-grinds when placed over HMA constructed under the same project. The top layer of the underlying HMA must comply with the smoothness specifications before placing OGFC.

Profile pavement in the Engineer's presence. Choose the time of profiling.

On tangents and horizontal curves with a centerline radius of curvature 2,000 feet or more, the PI_0 must be at most 3 inches per 0.1-mile section.

On horizontal curves with a centerline radius of curvature between 1,000 feet and 2,000 feet including pavement within the superelevation transitions, the PI_0 must be at most 6 inches per 0.1-mile section.

Before the Engineer accepts HMA pavement for smoothness, submit written final profilograms.

Submit 1 electronic copy of profile information in Microsoft Excel and 1 electronic copy of longitudinal pavement profiles in ".erd" format or other ProVAL compatible format to the Engineer and to:

Smoothness@dot.ca.gov

The following HMA pavement areas do not require a PI_0. You must measure these areas with a 12-foot straightedge and determine must-grinds with a profilograph:

1. New HMA with a total thickness less than or equal to 0.25 foot
2. HMA sections of city or county streets and roads, turn lanes and collector lanes that are less than 1,500 feet in length

The following HMA pavement areas do not require a PI_0. You must measure these areas with a 12-foot straightedge:

1. Horizontal curves with a centerline radius of curvature less than 1,000 feet including pavement within the superelevation transitions of those curves
2. Within 12 feet of a transverse joint separating the pavement from:

2.1. Existing pavement not constructed under the same project
2.2. A bridge deck or approach slab

3. Exit ramp termini, truck weigh stations, and weigh-in-motion areas
4. If steep grades and superelevation rates greater than 6 percent are present on:

4.1. Ramps
4.2. Connectors

5. Turn lanes
6. Areas within 15 feet of manholes or drainage transitions
7. Acceleration and deceleration lanes for at-grade intersections
8. Shoulders and miscellaneous areas
9. HMA pavement within 3 feet from and parallel to the construction joints formed between curbs, gutters, or existing pavement

39-1.12D Smoothness Correction

If the top layer of HMA Type A, Type B, or RHMA-G pavement does not comply with the smoothness specifications, grind the pavement to within tolerances, remove and replace it, or place a layer of HMA. The Engineer must authorize your choice of correction before the work begins.

Remove and replace the areas of OGFC not in compliance with the must-grind and straightedge specifications, except you may grind OGFC for correcting smoothness:

1. At a transverse joint separating the pavement from pavement not constructed under the same project
2. Within 12 feet of a transverse joint separating the pavement from a bridge deck or approach slab

Corrected HMA pavement areas must be uniform rectangles with edges:

1. Parallel to the nearest HMA pavement edge or lane line
2. Perpendicular to the pavement centerline

Measure the corrected HMA pavement surface with a profilograph and a 12-foot straightedge and correct the pavement to within specified tolerances. If a must-grind area or straightedged pavement cannot be corrected to within specified tolerances, remove and replace the pavement.

On ground areas not overlaid with OGFC, apply fog seal coat under Section 37-1, "Seal Coats."

39-1.13 MISCELLANEOUS AREAS AND DIKES

Miscellaneous areas are outside the traveled way and include:

1. Median areas not including inside shoulders
2. Island areas
3. Sidewalks
4. Gutters

5. Gutter flares
6. Ditches
7. Overside drains
8. Aprons at the ends of drainage structures

Spread miscellaneous areas in 1 layer and compact to the specified lines and grades.
For miscellaneous areas and dikes:

1. Do not submit a JMF.
2. Choose the 3/8-inch or 1/2-inch HMA Type A and Type B aggregate gradations.
3. Minimum asphalt binder content must be 6.8 percent for 3/8-inch aggregate and 6.0 percent for 1/2-inch aggregate. If you request in writing and the Engineer authorizes, you may reduce the minimum asphalt binder content.
4. Choose asphalt binder Grade PG 70-10 or the same grade specified for HMA.

39-2 STANDARD

39-2.01 DESCRIPTION

If HMA is specified as Standard, construct it under Section 39-1, "General," this Section 39-2, "Standard," and Section 39-5, "Measurement and Payment."

39-2.02 CONTRACTOR QUALITY CONTROL

39-2.02A Quality Control Plan

Establish, implement, and maintain a Quality Control Plan (QCP) for HMA. The QCP must describe the organization and procedures you will use to:

1. Control the quality characteristics
2. Determine when corrective actions are needed (action limits)
3. Implement corrective actions

When you submit the proposed JMF, submit the written QCP. You and the Engineer must discuss the QCP during the prepaving conference.
The QCP must address the elements affecting HMA quality including:

1. Aggregate
2. Asphalt binder
3. Additives
4. Production
5. Paving

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

39-2.02B Quality Control Testing

Perform sampling and testing at the specified frequency for the following quality characteristics:

Minimum Quality Control – Standard

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			
			A	B	RHMA-G	OGFC
Aggregate gradation[a]	CT 202	1 per 750 tons and any remaining part	JMF ± Tolerance[b]	JMF ± Tolerance[b]	JMF ± Tolerance[b]	JMF ± Tolerance[b]
Sand equivalent (min.)[c]	CT 217		47	42	47	--
Asphalt binder content (%)	CT 379 or 382		JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (%, max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	1.0
Percent of maximum theoretical density (%)[d, e]	Quality control plan	2 per business day (min.)	91 - 97	91 - 97	91 - 97	--
Stabilometer value (min.)[c, f]	CT 366	One per 4,000 tons or 2 per 5 business days, which-ever is more				
No. 4 and 3/8" gradings			30	30	--	--
1/2" and 3/4" gradings			37	35	23	--
Air voids content (%)[c, g]	CT 367		4 ± 2	4 ± 2	Specification ± 2	--
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants[h]	CT 226 or CT 370	2 per day during production	--	--	--	--
Percent of crushed particles coarse aggregate (%, min.)	CT 205	As necessary and designat-ed in the QCP. At least once per project				
One fractured face			90	25	--	90
Two fractured faces			75	--	90	75
Fine aggregate (%, min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face			70	20	70	90
Los Angeles Rattler (%, max.)	CT 211					
Loss at 100 rev.			12	--	12	12
Loss at 500 rev.			45	50	40	40

Flat and elongated particles (%, max. by weight @ 5:1)	CT 235		Report only	Report only	Report only	Report only
Fine aggregate angularity (%, min.)	CT 234		45	45	45	--
Voids filled with asphalt (%) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		 76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	 76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	--
Voids in mineral aggregate (% min.) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		 17.0 15.0 14.0 13.0	 17.0 15.0 14.0 13.0	 -- -- 18.0 – 23.0 [j] 18.0 – 23.0 [j]	--
Dust proportion [i] No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4		 0.9 – 2.0 0.6 – 1.3	 0.9 – 2.0 0.6 – 1.3	Report only	--
Smoothness	Section 39-1.12	--	12-foot straightedge, must-grind, and PI_0	12-foot straightedge, must-grind, and PI_0	12-foot straightedge, must-grind, and PI_0	12-foot straightedge and must-grind
Asphalt rubber binder viscosity @ 350 °F, centipoises	Section 39-1.02D	Section 39-1.04C	--	--	1,500 – 4,000	1,500 – 4,000
Asphalt modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D

Notes:
[a] Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.
[b] The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
[c] Report the average of 3 tests from a single split sample.
[d] Required for HMA Type A, Type B, and RHMA-G if the specified paved thickness is at least 0.15 foot.
[e] Determine maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.
[f] Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
[g] Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
[h] For adjusting the plant controller at the HMA plant.
[i] Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
[j] Voids in mineral aggregate for RHMA-G must be within this range.

For any single quality characteristic except smoothness, if 2 consecutive quality control test results do not comply with the action limits or specifications:

1. Stop production.
2. Notify the Engineer in writing.
3. Take corrective action.

4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-2.03 ENGINEER'S ACCEPTANCE

39-2.03A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance - Standard

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Aggregate gradation [a]	CT 202	JMF ± Tolerance [c]	JMF ± Tolerance [c]	JMF ± Tolerance [c]	JMF ± Tolerance [c]
Sieve / 3/4" / 1/2" / 3/8"					
1/2" / X [b] /					
3/8" /	X				
No. 4 /		X			
No. 8 / X / X / X					
No. 200 / X / X / X					
Sand equivalent (min.) [d]	CT 217	47	42	47	--
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (%, max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0
Percent of maximum theoretical density (%) [e, f]	CT 375	91 – 97	91 – 97	91 – 97	--
Stabilometer value (min.) [d, g]	CT 366				
No. 4 and 3/8" gradings		30	30	--	--
1/2" and 3/4" gradings		37	35	23	--
Air voids content (%) [d, h]	CT 367	4 ± 2	4 ± 2	Specification ± 2	--
Percent of crushed particles	CT 205				
Coarse aggregate (%, min.)					
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (%, min) (Passing No. 4 sieve and retained on No. 8 sieve.)					
One fractured face		70	20	70	90
Los Angeles Rattler (%, max.)	CT 211				
Loss at 100 rev.		12	--	12	12
Loss at 500 rev.		45	50	40	40
Fine aggregate angularity (%, min.)	CT 234	45	45	45	--
Flat and elongated particles (%, max. by weight @ 5:1)	CT 235	Report only	Report only	Report only	Report only
Voids filled with asphalt (%) [i]	LP-3				
No. 4 grading		76.0 – 80.0	76.0 – 80.0	Report only	--
3/8" grading		73.0 – 76.0	73.0 – 76.0		
1/2" grading		65.0 – 75.0	65.0 – 75.0		
3/4" grading		65.0 – 75.0	65.0 – 75.0		
Voids in mineral aggregate (% min.) [i]	LP-2				
No. 4 grading		17.0	17.0	--	--
3/8" grading		15.0	15.0	--	
1/2" grading		14.0	14.0	18.0 – 23.0 [j]	
3/4" grading		13.0	13.0	18.0 – 23.0 [j]	
Dust proportion [i]	LP-4				
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0	Report only	--
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3		
Smoothness	Section 39-1.12	12-foot straightedge, must-grind, and PI_0	12-foot straightedge, must-grind, and PI_0	12-foot straightedge, must-grind, and PI_0	12-foot straightedge and must-grind
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92

Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and Section 39-1.02D	Section 92-1.02(C) and Section 39-1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

[a] The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.
[b] "X" denotes the sieves the Engineer considers for the specified aggregate gradation.
[c] The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
[d] The Engineer reports the average of 3 tests from a single split sample.
[e] The Engineer determines percent of maximum theoretical density if the specified paved thickness is at least 0.15 foot under California Test 375 except the Engineer uses:

1. California Test 308, Method A, to determine in-place density of each density core instead of using the nuclear gauge in Part 4, "Determining In-Place Density By The Nuclear Density Device."
2. California Test 309 to determine maximum theoretical density instead of calculating test maximum density in Part 5, "Determining Test Maximum Density."

[f] The Engineer determines maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.
[g] Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
[h] The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
[i] Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
[j] Voids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

The Engineer tests the density core you take from each 250 tons of HMA production. The Engineer determines the percent of maximum theoretical density for each density core by determining the density core's density and dividing by the maximum theoretical density.

If the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot, the Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness.

For percent of maximum theoretical density, the Engineer determines a deduction for each test result outside the specifications in compliance with:

Reduced Payment Factors for Percent of Maximum Theoretical Density

HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor	HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor
91.0	0.0000	97.0	0.0000
90.9	0.0125	97.1	0.0125
90.8	0.0250	97.2	0.0250
90.7	0.0375	97.3	0.0375
90.6	0.0500	97.4	0.0500
90.5	0.0625	97.5	0.0625
90.4	0.0750	97.6	0.0750
90.3	0.0875	97.7	0.0875
90.2	0.1000	97.8	0.1000
90.1	0.1125	97.9	0.1125
90.0	0.1250	98.0	0.1250
89.9	0.1375	98.1	0.1375
89.8	0.1500	98.2	0.1500
89.7	0.1625	98.3	0.1625
89.6	0.1750	98.4	0.1750
89.5	0.1875	98.5	0.1875
89.4	0.2000	98.6	0.2000
89.3	0.2125	98.7	0.2125
89.2	0.2250	98.8	0.2250
89.1	0.2375	98.9	0.2375
89.0	0.2500	99.0	0.2500
< 89.0	Remove and Replace	> 99.0	Remove and Replace

39-2.04 TRANSPORTING, SPREADING, AND COMPACTING

Determine the number of rollers needed to obtain the specified density and surface finish.

39-3 METHOD

39-3.01 DESCRIPTION

If HMA is specified as Method, construct it under Section 39-1, "General," this Section 39-3, "Method," and Section 39-5, "Measurement and Payment."

39-3.02 ENGINEER'S ACCEPTANCE

39-3.02A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance - Method

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Aggregate gradation [a]	CT 202	JMF ± Tolerance [b]	JMF ± Tolerance [b]	JMF ± Tolerance [b]	JMF ± Tolerance [b]
Sand equivalent (min.) [c]	CT 217	47	42	47	--
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (%, max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0
Stabilometer value (min.) [c, d]	CT 366				
No. 4 and 3/8" gradings		30	30	--	--
1/2" and 3/4" gradings		37	35	23	--
Percent of crushed particles	CT 205				
Coarse aggregate (% min.)					
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.)					
One fractured face		70	20	70	90
Los Angeles Rattler (% max.)	CT 211				
Loss at 100 rev.		12	--	12	12
Loss at 500 rev.		45	50	40	40
Air voids content (%) [c, e]	CT 367	4 ± 2	4 ± 2	Specification ± 2	--
Fine aggregate angularity (% min.)	CT 234	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	CT 235	Report only	Report only	Report only	Report only
Voids filled with asphalt (%) [f]	LP-3			Report only	--
No. 4 grading		76.0 – 80.0	76.0 – 80.0		
3/8" grading		73.0 – 76.0	73.0 – 76.0		
1/2" grading		65.0 – 75.0	65.0 – 75.0		
3/4" grading		65.0 – 75.0	65.0 – 75.0		
Voids in mineral aggregate (% min.) [f]	LP-2				--
No. 4 grading		17.0	17.0	--	
3/8" grading		15.0	15.0	--	
1/2" grading		14.0	14.0	18.0 – 23.0 [g]	
3/4" grading		13.0	13.0	18.0 – 23.0 [g]	
Dust proportion [f]	LP-4			Report only	--
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0		
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3		
Smoothness	Section 39-1.12	12-foot straightedge and must-grind	12-foot straightedge and must-grind	12-foot straightedge and must-grind	12-foot straightedge and must-grind
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92
Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and	Section 92-1.02(C) and

				Section 39-1.02D	Section 39-1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

[a] The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.
[b] The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
[c] The Engineer reports the average of 3 tests from a single split sample.
[d] Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
[e] The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
[f] Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
[g] Voids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-3.03 SPREADING AND COMPACTING EQUIPMENT

Each paver spreading HMA Type A and Type B must be followed by 3 rollers:

1. One vibratory roller specifically designed to compact HMA. The roller must be capable of at least 2,500 vibrations per minute and must be equipped with amplitude and frequency controls. The roller's gross static weight must be at least 7.5 tons.
2. One oscillating type pneumatic-tired roller at least 4 feet wide. Pneumatic tires must be of equal size, diameter, type, and ply. The tires must be inflated to 60 psi minimum and maintained so that the air pressure does not vary more than 5 psi.
3. One steel-tired, 2-axle tandem roller. The roller's gross static weight must be at least 7.5 tons.

Each roller must have a separate operator. Rollers must be self-propelled and reversible.

Compact RHMA-G under the specifications for compacting HMA Type A and Type B except do not use pneumatic-tired rollers.

Compact OGFC with steel-tired, 2-axle tandem rollers. If placing over 300 tons of OGFC per hour, use at least 3 rollers for each paver. If placing less than 300 tons of OGFC per hour, use at least 2 rollers for each paver. Each roller must weigh between 126 pounds to 172 pounds per linear inch of drum width. Turn the vibrator off.

39-3.04 TRANSPORTING, SPREADING, AND COMPACTING

Pave HMA in maximum 0.25-foot thick compacted layers.

If the surface to be paved is both in sunlight and shade, pavement surface temperatures are taken in the shade.

Spread HMA Type A and Type B only if atmospheric and surface temperatures are:

Minimum Atmospheric and Surface Temperatures

Compacted Layer Thickness, feet	Atmospheric,° F		Surface,° F	
	Unmodified Asphalt Binder	Modified Asphalt Binder[a]	Unmodified Asphalt Binder	Modified Asphalt Binder [a]
< 0.15	55	50	60	55
0.15 – 0.25	45	45	50	50

Note:
[a] Except asphalt rubber binder.

If the asphalt binder for HMA Type A and Type B is:

1. Unmodified asphalt binder, complete:

   1.1. First coverage of breakdown compaction before the surface temperature drops below 250 °F
   1.2. Breakdown and intermediate compaction before the surface temperature drops below 200 °F
   1.3. Finish compaction before the surface temperature drops below 150 °F

2. Modified asphalt binder, complete:

   2.1. First coverage of breakdown compaction before the surface temperature drops below 240 °F
   2.2. Breakdown and intermediate compaction before the surface temperature drops below 180 °F
   2.3. Finish compaction before the surface temperature drops below 140 °F

For RHMA-G:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete the first coverage of breakdown compaction before the surface temperature drops below 280 °F.
3. Complete breakdown and intermediate compaction before the surface temperature drops below 250 °F.
4. Complete finish compaction before the surface temperature drops below 200 °F.
5. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with unmodified asphalt binder:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 200 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with modified asphalt binder except asphalt rubber binder:

1. Only spread and compact if the atmospheric temperature is at least 50 °F and the surface temperature is at least 50 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 180 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For RHMA-O and RHMA-O-HB:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and surface temperature is at least 60 °F.
2 Complete the 1st coverage using 2 rollers before the surface temperature drops below 280 °F.
3. Complete compaction before the surface temperature drops below 250 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until the mixture is transferred to the paver's hopper or to the pavement surface.

For RHMA-G and OGFC, tarpaulins are not required if the time from discharge to truck until transfer to the paver's hopper or the pavement surface is less than 30 minutes.

HMA compaction coverage is the number of passes needed to cover the paving width. A pass is 1 roller's movement parallel to the paving in either direction. Overlapping passes are part of the coverage being made and are not a subsequent coverage. Do not start a coverage until completing the prior coverage.

Start rolling at the lower edge and progress toward the highest part.

Perform breakdown compaction of each layer of HMA Type A, Type B, and RHMA-G with 3 coverages using a vibratory roller. The speed of the vibratory roller in miles per hour must not exceed the vibrations per minute divided by 1,000. If the HMA layer thickness is less than 0.08 foot, turn the vibrator off. The Engineer may order fewer coverages if the HMA layer thickness is less than 0.15 foot.

Perform intermediate compaction of each layer of HMA Type A and Type B with 3 coverages using a pneumatic-tired roller at a speed not to exceed 5 mph.

Perform finish compaction of HMA Type A, Type B, and RHMA-G with 1 coverage using a steel-tired roller.

Compact OGFC with 2 coverages using steel-tired rollers.

39-4 QUALITY CONTROL / QUALITY ASSURANCE

39-4.01 DESCRIPTION

If HMA is specified as Quality Control / Quality Assurance, construct it under Section 39-1, "General," this Section 39-4, "Quality Control / Quality Assurance," and Section 39-5, "Measurement and Payment."

39-4.02 GENERAL

The QC / QA construction process consists of:

1. Establishing, maintaining, and changing if needed a quality control system providing assurance the HMA complies with the specifications
2. Sampling and testing at specified intervals, or sublots, to demonstrate compliance and to control process
3. The Engineer sampling and testing at specified intervals to verify testing process and HMA quality
4. The Engineer using test results, statistical evaluation of verified quality control tests, and inspection to accept HMA for payment

A lot is a quantity of HMA. The Engineer designates a new lot when:

1. 20 sublots are complete
2. The JMF changes
3. Production stops for more than 30 days

Each lot consists of no more than 20 sublots. A sublot is 750 tons except HMA paved at day's end greater than 250 tons is a sublot. If HMA paved at day's end is less than 250 tons, you may either make this quantity a sublot or include it in the previous sublot's test results for statistical evaluation.

39-4.03 CONTRACTOR QUALITY CONTROL

39-4.03A General

Use a composite quality factor, QF_C, and individual quality factors, QF_{QCi}, to control your process and evaluate your quality control program. For quality characteristics without quality factors, use your quality control plan's action limits to control process.

Control HMA quality including:

1. Materials
2. Proportioning
3. Spreading and compacting
4. Finished roadway surface

Develop, implement, and maintain a quality control program that includes:

1. Inspection
2. Sampling
3. Testing

39-4.03B Quality Control Plan

With the JMF submittal, submit a written Quality Control Plan (QCP). The QCP must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement. Discuss the QCP with the Engineer during the prepaving conference.

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

The QCP must include the name and qualifications of a Quality Control Manager. The Quality Control Manager administers the QCP and during paving must be at the job site within 3 hours of receiving notice. The Quality Control Manager must not be any of the following on the project:

1. Foreman
2. Production or paving crewmember
3. Inspector
4. Tester

The QCP must include action limits and details of corrective action you will take if a test result for any quality characteristic falls outside an action limit.

As work progresses, you must submit a written QCP supplement to change quality control procedures, personnel, tester qualification status, or laboratory accreditation status.

39-4.03C Quality Control Inspection, Sampling, And Testing

Sample, test, inspect, and manage HMA quality control.

Provide a roadway inspector while HMA paving activities are in progress. Provide a plant inspector during HMA production.

Inspectors must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement.

Provide a testing laboratory and personnel for quality control testing. Provide the Engineer unrestricted access to the quality control activities. Before providing services for the project, the Engineer reviews, accredits, and qualifies the testing laboratory and personnel under the Department's Independent Assurance Program.

The minimum random sampling and testing for quality control is:

Minimum Quality Control – QC / QA

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			Location of Sampling	Max. Reporting Time Allowance
			A	B	RHMA-G		
Aggregate gradation [a]	CT 202	1 per 750 tons	JMF ± Tolerance [b]	JMF ± Tolerance [b]	JMF ± Tolerance [b]	CT 125	24 hours
Asphalt binder content (%)	CT 379 or 382		JMF ±0.45	JMF ±0.45	JMF ±0.5	Loose Mix Behind Paver See CT 125	
Percent of maximum theoretical density (%) [c, d]	QC Plan		92 - 96	92 - 96	91 - 96	QC Plan	
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants [e]	CT 226 or CT 370	2 per day during production	--	--	--	Stockpiles or cold feed belts	--
Sand equivalent (min.) [f]	CT 217	1 per 750 tons	47	42	47	CT 125	24 hours
HMA moisture content (%,max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	Loose Mix Behind Paver See CT 125	24 hours
Stabilometer Value (min.) [f, g] No. 4 and 3/8" gradings 1/2" and 3/4" gradings	CT 366	1 per 4,000 tons or 2 per 5 business days, whichever is more	30 37	30 35	-- 23		48 hours
Air voids content (%) [f, h]	CT 367		4 ± 2	4 ± 2	Specification ± 2		

Percent of crushed particles coarse aggregate (% min.) One fractured face Two fractured faces Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face	CT 205	As neces-sary and designat-ed in QCP. At least once per project.	90 75 70	25 -- 20	-- 90 70	CT 125	48 hours
Los Angeles Rattler (% max.) Loss at 100 rev. Loss at 500 rev.	CT 211		12 45	-- 50	12 40	CT 125	
Fine aggregate angularity (% min.)	CT 234		45	45	45	CT 125	
Flat and elongated particle (% max. by weight @ 5:1)	CT 235		Report only	Report only	Report only	CT 125	
Voids filled with asphalt (%) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	LP-3	
Voids in mineral aggregate (% min.) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		17.0 15.0 14.0 13.0	17.0 15.0 14.0 13.0	-- -- 18.0 – 23.0 [j] 18.0 – 23.0 [j]	LP-2	
Dust proportion [i] No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4		0.9 – 2.0 0.6 – 1.3	0.9 – 2.0 0.6 – 1.3	Report only	LP-4	
Smoothness	Section 39-1.12	--	12-foot straight-edge, must-grind, and PI_0	12-foot straight-edge, must-grind, and PI_0	12-foot straight-edge, must-grind, and PI_0	--	
Asphalt rubber binder viscosity @ 350 °F, centipoises	Section 39-1.02D	--	--	--	1,500 – 4,000	Section 39-1.02D	24 hours
Crumb rubber modifier	Section 39-1.02D	--	--	--	Section 39-1.02D	Section 39-1.02D	48 hours

Notes:
[a] Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.
[b] The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
[c] Required for HMA Type A, Type B, and RHMA-G if the specified paved thickness is at least 0.15 foot.
[d] Determine maximum theoretical density (California Test 309) at the frequency specified for test maximum density under California Test 375, Part 5 D.

[e] For adjusting the plant controller at the HMA plant.
[f] Report the average of 3 tests from a single split sample.
[g] Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
[h] Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
[i] Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
[j] Voids in mineral aggregate for RHMA-G must be within this range.

Within the specified reporting time, submit written test results including:

1. Sampling location, quantity, and time
2. Testing results
3. Supporting data and calculations

If test results for any quality characteristic are beyond the action limits in the QCP, take corrective actions. Document the corrective actions taken in the inspection records under Section 39-4.03E, "Records of Inspection and Testing."

Stop production, notify the Engineer in writing, take corrective action, and demonstrate compliance with the specifications before resuming production and placement on the State highway if:

1. A lot's composite quality factor, QF_C, or an individual quality factor, QF_{QCi} for i = 3, 4, or 5, is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation," using quality control data
2. An individual quality factor, QF_{QCi} for i = 1 or 2, is below 0.75 using quality control data
3. Quality characteristics for which a quality factor, QF_{QCi}, is not determined has 2 consecutive quality control tests not in compliance with the specifications

39-4.03D Charts And Records

Record sampling and testing results for quality control on forms provided in the "Quality Control Manual for Hot Mix Asphalt," or on forms you submit with the QCP. The QCP must also include form posting locations and submittal times.

Submit quality control test results using the Department's statistical evaluation program, HMAPay, available at

www.dot.ca.gov/hq/construc/hma/index.htm

39-4.03E Records Of Inspection And Testing

During HMA production, submit in writing a daily:

1. HMA Construction Daily Record of Inspection. Also make this record available at the HMA plant and job site each day.
2. HMA Inspection and Testing Summary. Include in the summary:

    2.1. QC worksheet with updated test results from the HMAPay program
    2.2. Test forms with the testers' signatures and Quality Control Manager's initials.

2.3. Inspection forms with the inspectors' signatures and Quality Control Manager's initials.
2.4. A list and explanation of deviations from the specifications or regular practices.
2.5. A signed statement by the Quality Control Manager that says:

"It is hereby certified that the information contained in this record is accurate, and that information, tests, or calculations documented herein comply with the specifications of the contract and the standards set forth in the testing procedures. Exceptions to this certification are documented as part of this record."

Retain for inspection the records generated as part of quality control including inspection, sampling, and testing for at least 3 years after final acceptance.

39-4.03F Statistical Evaluation

General

Determine a lot's composite quality factor, QF_C, and the individual quality factors, QF_{QCi}. Perform statistical evaluation calculations to determine these quality factors based on quality control test results for:

1. Aggregate gradation
2. Asphalt binder content
3. Percent of maximum theoretical density

The Engineer grants a waiver and you must use 1.0 as the individual quality factor for percent of maximum theoretical density, QF_{QC5}, for HMA paved in:

1. Areas where the total paved thickness is less than 0.15 foot
2. Areas where the total paved thickness is less than 0.20 foot and a 3/4-inch grading is specified and used
3. Dig outs
4. Leveling courses
5. Areas where, in the opinion of the Engineer, compaction or compaction measurement by conventional methods is impeded

Statistical Evaluation Calculations

Use the Variability-Unknown / Standard Deviation Method to determine the percentage of a lot not in compliance with the specifications.

Determine the percentage of work not in compliance with the specification limits for each quality characteristic as follows:

1. Calculate the arithmetic mean ($\overline{X}$) of the test values

$$\overline{X} = \frac{\Sigma x}{n}$$

where:

x = individual test values

n = number of test values

2. Calculate the standard deviation

$$s = \sqrt{\frac{n\,(\Sigma x^2)-(\Sigma x)^2}{n(n-1)}}$$

where:

$\sum(x^2)$ = sum of the squares of individual test values
$(\sum x)^2$ = sum of the individual test values squared
n = number of test values

3. Calculate the upper quality index (Qu)

$$Q_u = \frac{USL - \overline{X}}{s}$$

where:

USL = target value plus the production tolerance or upper specification limit
s = standard deviation
$\overline{X}$ = arithmetic mean

4. Calculate the lower quality index (QL);

$$Q_L = \frac{\overline{X} - LSL}{s}$$

where:

LSL = target value minus production tolerance or lower specification limit
s = standard deviation
$\overline{X}$ = arithmetic mean

5. From the table, Upper Quality Index Q_U or Lower Quality Index Q_L, of this Section 39-4.03F, "Statistical Evaluation", determine P_U ;

where:

P_U = the estimated percentage of work outside the USL.
$P_U = 0$, when USL is not specified.

6. From the table, Upper Quality Index Q_U or Lower Quality Index Q_L, of this Section 39-4.03F, "Statistical Evaluation," determine P_L;

where:

P_L = the estimated percentage of work outside the LSL.
$P_L = 0$, when LSL is not specified.

7. Calculate the total estimated percentage of work outside the USL and LSL, percent defective

Percent defective $= P_U + P_L$

P_U and P_L are determined from:

P_U or P_L	**Upper Quality Index Q_U or Lower Quality Index Q_L**												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
0	1.72	1.88	1.99	2.07	2.13	2.20	2.28	2.34	2.39	2.44	2.48	2.51	2.56
1	1.64	1.75	1.82	1.88	1.91	1.96	2.01	2.04	2.07	2.09	2.12	2.14	2.16
2	1.58	1.66	1.72	1.75	1.78	1.81	1.84	1.87	1.89	1.91	1.93	1.94	1.95
3	1.52	1.59	1.63	1.66	1.68	1.71	1.73	1.75	1.76	1.78	1.79	1.80	1.81
4	1.47	1.52	1.56	1.58	1.60	1.62	1.64	1.65	1.66	1.67	1.68	1.69	1.70
5	1.42	1.47	1.49	1.51	1.52	1.54	1.55	1.56	1.57	1.58	1.59	1.59	1.60
6	1.38	1.41	1.43	1.45	1.46	1.47	1.48	1.49	1.50	1.50	1.51	1.51	1.52
7	1.33	1.36	1.38	1.39	1.40	1.41	1.41	1.42	1.43	1.43	1.44	1.44	1.44
8	1.29	1.31	1.33	1.33	1.34	1.35	1.35	1.36	1.36	1.37	1.37	1.37	1.38
9	1.25	1.27	1.28	1.28	1.29	1.29	1.30	1.30	1.30	1.31	1.31	1.31	1.31
10	1.21	1.23	1.23	1.24	1.24	1.24	1.25	1.25	1.25	1.25	1.25	1.26	1.26
11	1.18	1.18	1.19	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.20	1.20	1.20
12	1.14	1.14	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
13	1.10	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.11	1.11	1.11	1.11	1.11
14	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06
15	1.03	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02
16	1.00	0.99	0.99	0.99	0.99	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
17	0.97	0.96	0.95	0.95	0.95	0.95	0.94	0.94	0.94	0.94	0.94	0.94	0.94
18	0.93	0.92	0.92	0.92	0.91	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.90
19	0.90	0.89	0.88	0.88	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
20	0.87	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.83	0.83	0.83	0.83	0.83
21	0.84	0.82	0.82	0.81	0.81	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.79
22	0.81	0.79	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.76	0.76	0.76
23	0.77	0.76	0.75	0.75	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.73	0.73
24	0.74	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.70	0.70	0.70
25	0.71	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.66
26	0.68	0.67	0.67	0.65	0.65	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.63
27	0.65	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.60
28	0.62	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.57
29	0.59	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.55	0.55	0.55	0.54
30	0.56	0.55	0.54	0.54	0.53	0.53	0.52	0.52	0.52	0.52	0.52	0.52	0.52
31	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49
32	0.50	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.46	0.46	0.46
33	0.47	0.48	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43
34	0.45	0.43	0.43	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.40
35	0.42	0.40	0.40	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.38	0.38
36	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
37	0.36	0.35	0.34	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32
38	0.33	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.30
39	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
40	0.28	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
41	0.25	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
42	0.23	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
43	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
44	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
45	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
46	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10
47	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
48	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
49	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

1. If the value of Q_U or Q_L does not correspond to a value in the table, use the next lower value.
2. If Q_U or Q_L are negative values, P_U or P_L is equal to 100 minus the table value for P_U or P_L.

Quality Factor Determination

Determine individual quality factors, QF_{QCi}, using percent defective = $P_U + P_L$ and:

Quality Factors

Quality Factor	Maximum Allowable Percent Defective ($P_U + P_L$)												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
1.05				0	0	0	0	0	0	0	0	0	0
1.04			0	1	3	5	4	4	4	3	3	3	3
1.03		0	2	4	6	8	7	7	6	5	5	4	4
1.02		1	3	6	9	11	10	9	8	7	7	6	6
1.01	0	2	5	8	11	13	12	11	10	9	8	8	7
1.00	22	20	18	17	16	15	14	13	12	11	10	9	8
0.99	24	22	20	19	18	17	16	15	14	13	11	10	9
0.98	26	24	22	21	20	19	18	16	15	14	13	12	10
0.97	28	26	24	23	22	21	19	18	17	16	14	13	12
0.96	30	28	26	25	24	22	21	19	18	17	16	14	13
0.95	32	29	28	26	25	24	22	21	20	18	17	16	14
0.94	33	31	29	28	27	25	24	22	21	20	18	17	15
0.93	35	33	31	29	28	27	25	24	22	21	20	18	16
0.92	37	34	32	31	30	28	27	25	24	22	21	19	18
0.91	38	36	34	32	31	30	28	26	25	24	22	21	19
0.90	39	37	35	34	33	31	29	28	26	25	23	22	20
0.89	41	38	37	35	34	32	31	29	28	26	25	23	21
0.88	42	40	38	36	35	34	32	30	29	27	26	24	22
0.87	43	41	39	38	37	35	33	32	30	29	27	25	23
0.86	45	42	41	39	38	36	34	33	31	30	28	26	24
0.85	46	44	42	40	39	38	36	34	33	31	29	28	25
0.84	47	45	43	42	40	39	37	35	34	32	30	29	27
0.83	49	46	44	43	42	40	38	36	35	33	31	30	28
0.82	50	47	46	44	43	41	39	38	36	34	33	31	29
0.81	51	49	47	45	44	42	41	39	37	36	34	32	30
0.80	52	50	48	46	45	44	42	40	38	37	35	33	31
0.79	54	51	49	48	46	45	43	41	39	38	36	34	32
0.78	55	52	50	49	48	46	44	42	41	39	37	35	33
0.77	56	54	52	50	49	47	45	43	42	40	38	36	34
0.76	57	55	53	51	50	48	46	44	43	41	39	37	35
0.75	58	56	54	52	51	49	47	46	44	42	40	38	36
	60	57	55	53	52	51	48	47	45	43	41	40	37
	61	58	56	55	53	52	50	48	46	44	43	41	38
Reject	62	59	57	56	54	53	51	49	47	45	44	42	39
	63	61	58	57	55	54	52	50	48	47	45	43	40
	64	62	60	58	57	55	53	51	49	48	46	44	41
Reject Values Greater Than Those Shown Above													

Notes:

1. To obtain a quality factor when the estimated percent outside specification limits from table, "Upper Quality Index Q_U or Lower Quality Index Q_L," does not correspond to a value in the table, use the next larger value.

Compute the composite of single quality factors, QF_C, for a lot using:

$$QF_C = \sum_{i=1}^{5} w_i \, QF_{QC_i}$$

where:

QF_C = the composite quality factor for the lot rounded to 2 decimal places.

QF_{QCi} = the quality factor for the individual quality characteristic.
w = the weighting factor listed in the table HMA Acceptance – QC / QA.
i = the quality characteristic index number in the table HMA Acceptance – QC / QA.

39-4.04 ENGINEER'S QUALITY ASSURANCE

39-4.04A General

The Engineer assures quality by:

1. Reviewing mix designs and proposed JMF
2. Inspecting procedures
3. Conducting oversight of quality control inspection and records
4. Verification sampling and testing during production and paving

39-4.04B Verification Sampling And Testing

General

The Engineer samples:

1. Aggregate to verify gradation
2. HMA to verify asphalt binder content

Verification

For aggregate gradation and asphalt binder content, the ratio of verification testing frequency to the minimum quality control testing frequency is 1:5. The Engineer performs at least 3 verification tests per lot.

Using the t-test, the Engineer compares quality control tests results for aggregate gradation and asphalt binder content with corresponding verification test results. The Engineer uses the average and standard deviation of up to 20 sequential sublots for the comparison. The Engineer uses production start-up evaluation tests to represent the first sublot. When there are less than 20 sequential sublots, the Engineer uses the maximum number of sequential sublots available. The 21st sublot becomes the 1st sublot (n = 1) in the next lot.

The t-value for a group of test data is computed as follows:

$$t = \frac{|\overline{X}_c - \overline{X}_v|}{S_p\sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \quad \text{and} \quad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

n_c = Number of quality control tests (2 minimum, 20 maximum).
n_v = Number of verification tests (minimum of 1 required).
$\overline{X}_c$ = Mean of quality control tests.
$\overline{X}_v$ = Mean of verification tests.
S_p = Pooled standard deviation (When $n_v = 1$, $S_p = S_c$).
S_c = Standard deviation of quality control tests.
S_v = Standard deviation of verification tests (when $n_v > 1$).

The comparison of quality control test results and the verification test results is at a level of significance of $\alpha = 0.025$. The Engineer computes t and compares it to the critical t-value, t_{crit}, from:

Critical T-Value

Degrees of freedom (n_c+n_v-2)	t_{crit} (for $\alpha = 0.025$)	Degrees of freedom (n_c+n_v-2)	t_{crit} (for $\alpha = 0.025$)
1	24.452	18	2.445
2	6.205	19	2.433
3	4.177	20	2.423
4	3.495	21	2.414
5	3.163	22	2.405
6	2.969	23	2.398
7	2.841	24	2.391
8	2.752	25	2.385
9	2.685	26	2.379
10	2.634	27	2.373
11	2.593	28	2.368
12	2.560	29	2.364
13	2.533	30	2.360
14	2.510	40	2.329
15	2.490	60	2.299
16	2.473	120	2.270
17	2.458	∞	2.241

If the t-value computed is less than or equal to t_{crit}, quality control test results are verified.

If the t-value computed is greater than t_{crit} and both $\overline{X}_v$ and $\overline{X}_c$ comply with acceptance specifications, the quality control tests are verified. You may continue to produce and place HMA with the following allowable differences:

1. $\left|\overline{X}_v - \overline{X}_c\right| \leq 1.0$ percent for any grading
2. $\left|\overline{X}_v - \overline{X}_c\right| \leq 0.1$ percent for asphalt binder content

If the t-value computed is greater than t_{crit} and the $\left|\overline{X}_v - \overline{X}_c\right|$ for grading and asphalt binder content are greater than the allowable differences, quality control test results are not verified and:

1. The Engineer notifies you in writing.
2. You and the Engineer must investigate why the difference exist.
3. If the reason for the difference cannot be found and corrected, the Engineer's test results are used for acceptance and pay.

39-4.05 ENGINEER'S ACCEPTANCE

39-4.05A Testing

The Engineer samples for acceptance testing and tests for:

HMA Acceptance – QC / QA

Index (i)	Quality Characteristic				Weight-ing Factor (w)	Test Method	HMA Type		
							A	B	RHMA-G
		Aggregate gradation [a]							
	Sieve	3/4"	1/2"	3/8"					
1	1/2"	X [b]	--	--	0.05	CT 202	JMF ± Tolerance [c]		
1	3/8"	--	X	--	0.05				
1	No. 4	--	--	X	0.05				
2	No. 8	X	X	X	0.10				
3	No. 200	X	X	X	0.15				
4	Asphalt binder content (%)				0.30	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.5
5	Percent of maximum theoretical density (%) [d, e]				0.40	CT 375	92 – 96	92 – 96	91 – 96
	Sand equivalent (min.) [f]					CT 217	47	42	47
	Stabilometer value (min.) [f,, g] No. 4 and 3/8" gradings 1/2" and 3/4" gradings					CT 366	 30 37	 30 35	 -- 23
	Air voids content (%)[f, h]					CT 367	4 ± 2	4 ± 2	Specifica-tion ± 2
	Percent of crushed particles coarse aggregate (% min.) One fractured face Two fractured faces Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face					CT 205	 90 75 70	 25 -- 20	 -- 90 70
	HMA moisture content (%, max.)					CT 226 or CT 370	1.0	1.0	1.0
	Los Angeles Rattler (% max.) Loss at 100 rev. Loss at 500 rev.					CT 211	 12 45	 -- 50	 12 40
	Fine aggregate angularity (% min.)					CT 234	45	45	45
	Flat and elongated particle (% max. by weight @ 5:1)					CT 235	Report only	Report only	Report only
	Voids in mineral aggregate (% min.) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading					LP-2	 17.0 15.0 14.0 13.0	 17.0 15.0 14.0 13.0	(Note j) -- -- 18.0 - 23.0 18.0 - 23.0
	Voids filled with asphalt (%) [i] No. 4 grading 3/8" grading 1/2" grading 3/4" grading					LP-3	 76.0 - 80.0 73.0 - 76.0 65.0 - 75.0 65.0 - 75.0	 76.0 - 80.0 73.0 - 76.0 65.0 - 75.0 65.0 - 75.0	Report only
	Dust proportion [i] No. 4 and 3/8" gradings 1/2" and 3/4" gradings					LP-4	 0.9 - 2.0 0.6 - 1.3	 0.9 – 2.0 0.6 – 1.3	Report only

	Smoothness		Section 39-1.12	12-foot straight-edge, must-grind, and PI_0	12-foot straight-edge, must-grind, and PI_0	12-foot straight-edge, must-grind, and PI_0
	Asphalt binder		Various	Section 92	Section 92	Section 92
	Asphalt rubber binder		Various	--	--	Section 92-1.02(C) and Section 39-1.02D
	Asphalt modifier		Various	--	--	Section 39-1.02D
	Crumb rubber modifier		Various	--	--	Section 39-1.02D

Notes:
[a] The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.
[b] "X" denotes the sieves the Engineer considers for the specified aggregate gradation.
[c] The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."
[d] The Engineer determines percent of maximum theoretical density if the specified paved thickness is at least 0.15 foot under California Test 375 except the Engineer uses:

1. California Test 308, Method A, to determine in-place density of each density core instead of using the nuclear gauge in Part 4, "Determining In-Place Density By The Nuclear Density Device."
2. California Test 309 to determine maximum theoretical density instead of calculating test maximum density in Part 5, "Determining Test Maximum Density."

[e] The Engineer determines maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.
[f] The Engineer reports the average of 3 tests from a single split sample.
[g] Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."
[h] The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.
[i] Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.
[j] Voids in mineral aggregate for RHMA-G must be within this range.

The Engineer determines the percent of maximum theoretical density from the average density of 3 density cores you take from every 750 tons of production or part thereof divided by the maximum theoretical density.

If the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot, the Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness.

The Engineer calculates QF_{QCi} for i = 1, 2, 3, and 4 using quality control data and QF_{QCi} for i = 5 using quality assurance data.

The Engineer stops production and terminates a lot if:

1. The lot's composite quality factor, QF_C, or an individual quality factor, QF_{QCi} for i = 3, 4, or 5, is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation"
2. An individual quality factor, QF_{QCi} for i = 1 or 2, is below 0.75
3. Quality characteristics for which a quality factor, QF_{QCi}, is not determined has 2 consecutive acceptance or quality control tests not in compliance with the specifications

For any single quality characteristic for which a quality factor, QF_{QCi}, is not determined, except smoothness, if 2 consecutive acceptance test results do not comply with specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

39-4.05B Statistical Evaluation, Determination Of Quality Factors And Acceptance

Statistical Evaluation and Determination of Quality Factors

To determine the individual quality factor, $QF_{QCi,}$ for any quality factor i = 1 through 5 or a lot's composite quality factor, QF_C, for acceptance and payment adjustment, the Engineer uses the evaluation specifications under Section 39-4.03F, "Statistical Evaluation," and:

1. Verified quality control test results for aggregate gradation
2. Verified quality control test results for asphalt binder content
3. The Engineer's test results for percent of maximum theoretical density

Lot Acceptance Based on Quality Factors

The Engineer accepts a lot based on the quality factors determined for aggregate gradation and asphalt binder content, QF_{QCi} for i = 1 through 4, using the total number of verified quality control test result values and the total percent defective ($P_U + P_L$).

The Engineer accepts a lot based on the quality factor determined for maximum theoretical density, QF_{QC5}, using the total number of test result values from density cores and the total percent defective ($P_U + P_L$).

The Engineer calculates the quality factor for the lot, QF_C, which is a composite of weighted individual quality factors, QF_{QCi}, determined for each quality characteristic in the HMA Acceptance – QC / QA table in Section 39-4.05A, "Testing."

The Engineer accepts a lot based on quality factors if:

1. The current composite quality factor, QF_C, is 0.90 or greater
2. Each individual quality factor, QF_{QCi} for i = 3, 4, and 5, is 0.90 or greater
3. Each individual quality factor, QF_{QCi} for i = 1 and 2, is 0.75 or greater

No single quality characteristic test may represent more than the smaller of 750 tons or 1 day's production.

Payment Adjustment

If a lot is accepted, the Engineer adjusts payment with the following formula:

$$PA = \sum_{i=1}^{n} HMACP * wi * \left[QFQCi * (HMATT - WHMATTi) + WHMATTi\right] - (HMACP * HMATT)$$

where:

PA =	Payment adjustment rounded to 2 decimal places.
HMACP =	HMA contract price.
HMATT =	HMA total tons represented in the lot.
$WHMATT_i$ =	Total tons of waived quality characteristic HMA.
QF_{QCi} =	Running quality factor for the individual quality characteristic. QF_{QCi} for i = 1 through 4 must be from verified Contractor's QC results. QF_{QC5} must be determined from the Engineer's results on density cores taken for percent of maximum theoretical density determination.
w =	Weighting factor listed in the HMA acceptance table.
i =	Quality characteristic index number in the HMA acceptance table.

If the payment adjustment is a negative value, the Engineer deducts this amount from payment. If the payment adjustment is a positive value, the Engineer adds this amount to payment.

The 21st sublot becomes the 1st sublot (n = 1) in the next lot. When the 21st sequential sublot becomes the 1st sublot, the previous 20 sequential sublots become a lot for which the Engineer determines a quality factor. The Engineer uses this quality factor to pay for the HMA in the lot. If the next lot consists of less than 8 sublots, these sublots must be added to the previous lot for quality factor determination using 21 to 27 sublots.

39-4.05C Dispute Resolution

For a lot, if you or the Engineer dispute any quality factor, QF_{QCi}, or verification test result, every sublot in that lot must be retested.

Referee tests must be performed under the specifications for acceptance testing.

Any quality factor, QF_{QCi}, must be determined using the referee tests.

For any quality factor, QF_{QCi}, for i = 1 through 5, dispute resolution:

1. If the difference between the quality factors for QF_{QCi} using the referee test result and the disputed test result is less than or equal to 0.01, the original test result is correct.
2. If the difference between the quality factor for QF_{QCi} using the referee test result and the disputed test result is more than 0.01, the quality factor determined from the referee tests supersedes the previously determined quality factor.

39-5 MEASUREMENT AND PAYMENT

39-5.01 MEASUREMENT

The contract item for HMA is measured by weight. The weight of each HMA mixture designated in the Engineer's Estimate must be the combined mixture weight.

If tack coat, asphalt binder, and asphaltic emulsion are paid with separate contract items, their contract items are measured under Section 92, "Asphalts," or Section 94, "Asphaltic Emulsions," as the case may be.

If recorded batch weights are printed automatically, the contract item for HMA is measured by using the printed batch weights, provided:

1. Total aggregate and supplemental fine aggregate weight per batch is printed. If supplemental fine aggregate is weighed cumulatively with the aggregate, the total aggregate batch weight must include the supplemental fine aggregate weight.

2. Total asphalt binder weight per batch is printed.
3. Each truckload's zero tolerance weight is printed before weighing the first batch and after weighing the last batch.
4. Time, date, mix number, load number and truck identification is correlated with a load slip.
5. A copy of the recorded batch weights is certified by a licensed weighmaster and submitted to the Engineer.

The contract item for placing HMA dike is measured by the linear foot along the completed length. The contract item for placing HMA in miscellaneous areas is measured as the in-place compacted area in square yards. In addition to the quantities measured on a linear foot or square yard basis, the HMA for dike and miscellaneous areas are measured by weight.

The contract item for geosynthetic pavement interlayer is measured by the square yard for the actual pavement area covered.

39-5.02 PAYMENT

The contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate include full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in constructing hot mix asphalt, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If HMA is specified to comply with Section 39-4, "Quality Control / Quality Assurance," the Engineer adjusts payment under that section.

Full compensation for the Quality Control Plan and prepaving conference is included in the contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for performing and submitting mix designs and for Contractor sampling, testing, inspection, testing facilities, and preparation and submittal of results is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for reclaimed asphalt pavement is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

The contract price paid per ton for hot mix asphalt (leveling) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in hot mix asphalt (leveling), complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The State pays for HMA dike at the contract price per linear foot for place HMA dike and by the ton for HMA. The contract prices paid per linear foot for place hot mix asphalt dike as designated in the Engineer's Estimate include full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in placing HMA dike, complete in place, including excavation, backfill, and preparation of the area to receive the dike, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The State pays for HMA specified to be a miscellaneous area at the contract price per square yard for place hot mix asphalt (miscellaneous area) and per ton for hot mix asphalt. The contract price paid per square yard for place hot mix asphalt (miscellaneous area) includes full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the

work involved in placing HMA (miscellaneous area) complete in place, including excavation, backfill, and preparation of the area to receive HMA (miscellaneous area), as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If the Quality Control / Quality Assurance construction process is specified, HMA placed in dikes and miscellaneous areas is paid for at the contract price per ton for hot mix asphalt under Section 39-4, "Quality Control / Quality Assurance." Section 39-4.05B, "Statistical Evaluation, Determination of Quality Factors and Acceptance," does not apply to HMA placed in dikes and miscellaneous areas.

If there are no contract items for place hot mix asphalt dike and place hot mix asphalt (miscellaneous area) and the work is specified, full compensation for constructing HMA dikes and HMA (miscellaneous areas) including excavation, backfill, and preparation of the area to receive HMA dike or HMA (miscellaneous area) is included in the contract price paid per ton for the hot mix asphalt designated in the Engineer's Estimate and no separate payment will be made therefor.

The contract price paid per square yard for geosynthetic pavement interlayer includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in placing geosynthetic pavement interlayer, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The contract price paid per ton for paving asphalt (binder, geosynthetic pavement interlayer) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying paving asphalt (binder, geosynthetic pavement interlayer), complete in place, including spreading sand to cover exposed binder material, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

Full compensation for small quantities of HMA placed on geosynthetic pavement interlayer to prevent displacement during construction is included in the contract price paid per ton for the HMA being paved over the interlayer and no separate payment will be made therefor.

The contract price paid per ton for tack coat includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying tack coat, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The Engineer does not adjust payment for increases or decreases in the quantities for tack coat, regardless of the reason for the increase or decrease. Section 4-1.03B, "Increased or Decreased Quantities," does not apply to the items for tack coat.

Full compensation for performing smoothness testing, submitting written and electronic copies of tests, and performing corrective work including applying fog seal coat is included in the contract price paid per ton for the HMA designated in the Engineer's Estimate and no separate payment will be made therefor.

Full compensation for spreading sand on RHMA-G, RHMA-O, and RHMA-O-HB surfaces and for sweeping and removing excess sand is included in the contract price paid per ton for rubberized hot mix asphalt as designated in the Engineer's Estimate and no separate payment will be made therefor.

If the Engineer fails to comply with a specification within a specified time, and if, in the opinion of the Engineer, work completion is delayed because of the failure, the Engineer adjusts payment and contract time under Section 8-1.09, "Right of Way Delays."

If the dispute resolution ITP determines the Engineer's test results are correct, the Engineer deducts the ITP's testing costs from payments. If the ITP determines your test results are correct, the State pays the ITP's testing costs. If, in the Engineer's opinion, work completion is delayed because of incorrect Engineer test results, the Engineer adjusts payment and contract time under Section 8-1.09, "Right of Way Delays."

^^

SECTION 40 PORTLAND CEMENT CONCRETE PAVEMENT
(Issued 08-05-11)

Replace Section 40 with:
SECTION 40 CONCRETE PAVEMENT

40-1 GENERAL

40-1.01 SUMMARY

Section 40 includes specifications for constructing concrete pavement on a prepared subgrade.

40-1.02 SUBMITTALS

40-1.02A Certificates of Compliance

Submit Certificates of Compliance under Section 6-1.07, "Certificates of Compliance." Include a test result report for any specified test with certification that test was performed within 12 months before the tested material's use.

Submit Certificates of Compliance for:

1. Tie bars
2. Threaded tie bar splice couplers
3. Dowel bars
4. Tie bar baskets
5. Dowel bar baskets
6. Chemical adhesive (drill and bond)
7. Silicone joint sealant
8. Asphalt rubber joint sealant
9. Preformed compression seal
10. Backer rods. Include the manufacturer's statement of compatibility with the sealant to be used.
11. Joint filler material
12. Curing compound. For each delivery to the job site, submit a copy of the Certificate of Compliance to the Engineer and the Transportation Laboratory. Each Certificate of Compliance must not represent more than 10,000 gallons and must include a test result report for:

    12.1. Moisture loss at 24 hours under California Test 534

12.2. Reflectance under ASTM E 1347
12.3. Viscosity under ASTM D 2196
12.4. Nonvolatile content under ASTM D 2369
12.5. Pigment content under ASTM D 3723

13. Epoxy powder coating

40-1.02B Curing Compound Samples

Submit split curing compound samples to the Transportation Laboratory.

40-1.02C Drilled Corings

Submit each core taken for Engineer's acceptance in a plastic bag. Mark each core with a location description.

40-1.02D Independent Third Party Air Content Testing Laboratory

Before testing, submit for the Engineer's approval the name of a laboratory that will test drilled core specimens for air content in cases of dispute.

40-1.02E Dowel Bars

Before placing dowel bars, submit a procedure for identifying transverse contraction joint locations relative to the dowel bars' longitudinal center and a procedure for consolidating concrete around the dowel bars.

40-1.02F Concrete Field Qualification

Submit field qualification data and test reports including:

1. Mixing date
2. Mixing equipment and procedures used
3. Batch volume in cubic yards
4. Type and source of ingredients used
5. Penetration of the concrete
6. Air content of the plastic concrete
7. Age and strength at time of concrete beam testing

Field qualification test reports must be certified with a signature by an official in responsible charge of the laboratory performing the tests.

40-1.02G Frequency Measuring Device (Tachometer)

Submit calibration documentation and operational guidelines for frequency measuring devices for concrete consolidation vibrators.

40-1.02H Manufacturer's Recommendations and Instructions

If used and at least 15 days before delivery to the job site, submit manufacturer's recommendations and instructions for storage and installation of:

1. Threaded tie bar splice couplers
2. Chemical adhesive (drill and bond)

3. Silicone liquid sealant
4. Asphalt rubber liquid sealant
5. Preformed compression seals
6. Joint filler material

40-1.02I Mix Proportions

At least 15 days before starting testing for mix proportions under California Test 559, submit a copy of the AASHTO accreditation for your laboratory determining the mix proportions. At least 30 days before starting field qualification, submit under California Test 559 the proposed concrete mix proportions, the corresponding mix identifications, and laboratory test reports including the modulus of rupture for each trial mixture at 10, 21, 28, and 42 days.

40-1.02J Preformed Compression Seal

Submit the manufacturer's data sheet used to develop the recommended preformed compression seal based on the joint dimensions.

40-1.02K Concrete Pavement Early Age Crack Mitigation System

At least 24 hours before each paving shift, submit:

1. Early age stress and strength predictions
2. Scheduled sawing and curing activities
3. Contingency plan if volunteer cracking occurs

At least 24 hours before paving, meet with the Engineer to review the submittals for the early age crack mitigation system.

During paving, update the system with current weather data obtained from a portable weather station. Before paving concrete pavement with these updates, submit new stress and strength predictions and curing and sawing activity schedules.

40-1.02L Profilograms

Submit profilograms within 5 business days of initial profiling and within 2 business days of profiling corrected sections.

Submit 1 electronic copy of profile information in ".erd" format or other ProVAL compatible format to the Engineer and to:

Smoothness@dot.ca.gov

Submit the original of final profilograms before the Engineer accepts the contract.

Submitted profilograms become the Department's property.

40-1.02M Protecting Concrete Pavement During Cold Weather

Submit a plan for protecting concrete pavement when the average ambient daily temperature is below 40 °F and daytime ambient temperature is less than 50 °F during the initial 72 hours after paving.

40-1.02N Quality Control Charts

Submit updated quality control charts each paving day.

40-1.02O Quality Control Plan

At least 30 days before the start of field qualification, submit a concrete pavement quality control plan (QCP).

40-1.03 QUALITY CONTROL AND ASSURANCE

40-1.03A Contractor Quality Control Plan

Establish, implement, and maintain a QCP for concrete pavement. The QCP must describe the organization and procedures you use to:

1. Control the production process
2. Determine if changes to the production process are needed
3. Implement changes

The QCP must address the elements affecting concrete pavement quality including:

1. Mix proportions
2. Aggregate gradation
3. Materials quality
4. Stockpile management
5. Line and grade control
6. Proportioning
7. Mixing and transportation
8. Placing and consolidation
9. Contraction and construction joints
10. Dowel bar placement, alignment, and anchorage
11. Tie bar placement
12. Modulus of rupture
13. Finishing and curing
14. Surface smoothness
15. Joint sealant and compression seal installation

The QCP must include details of corrective action to be taken if any process is out of control. As a minimum, a process is out of control if any of the following occurs:

1. For fine and coarse aggregate gradation, 2 consecutive running averages of 4 tests are outside the specification limits
2. For fine and coarse aggregates, the moisture content of either aggregate changes by more than 0.5 percentage point from any reading
3. For individual penetration or air content measurements:

    3.1. One point falls outside the suspension limit line
    3.2. Two points in a row fall outside the action limit line

Stop production and take corrective action for out of control processes except fine and coarse aggregate moisture content or the Engineer rejects subsequent material.

40-1.03B Quality Control Testing

Select random locations and perform sampling and testing in compliance with:

Quality Control Testing

Test	Frequency	Test Method
Cleanness value	2 per day	CT 227
Sand equivalent	2 per day	CT 217
Aggregate gradation	2 per day	CT 202
Air content (freeze thaw) [a]	1 per hour	CT 504
Air content (non-freeze thaw)	1 per 4 hours	CT 504
Density	1 per 4 hours	CT 518
Penetration	1 per 4 hours	CT 533
Calibration of moisture meter [b, c]	1 per day	CT 223 or CT 226

Notes:
[a] If air entrainment is specified, make at least 1 air content measurement per hour. If air entrainment is not specified, make at least 1 air content measurement per 4 hours.
[b] Make at least 1 measurement of moisture content per week to check the calibration of an electronically actuated moisture meter.
[c] Random location sampling and testing is not applicable.

If air entrainment is specified, the testing laboratory and tester must be qualified under the Department's Independent Assurance Manual. The manual is available from the Transportation Laboratory.

40-1.03C Control Charts

Maintain control charts to identify potential problems and assignable causes. Post a copy of each control chart at a location determined by the Engineer.

Individual measurement control charts must use the target values in the mix proportions as indicators of central tendency.

Develop linear control charts for:

1. Cleanness value
2. Sand equivalent
3. Fine and coarse aggregate gradation
4. Air content
5. Penetration

Control charts must include:

1. Contract number
2. Mix proportions
3. Test number
4. Each test parameter
5. Action and suspension limits
6. Specification limits
7. Quality control test results

For fine and coarse aggregate gradation control charts, record the running average of the previous 4 consecutive gradation tests for each sieve and superimpose the specification limits.

For penetration and air content control charts, record the individual measurements and superimpose the following action and suspension limits:

Penetration and Air Content Action and Suspension Limits

Control Parameter	Individual Measurements	
	Action Limit	Suspension Limit
Penetration, CT 533	1 inch	1-1/2 inch
Air content, CT 504	±1.0 percent	±1.5 percent

40-1.03D Contractor's Laboratory

Use a laboratory that complies with ASTM C 1077 to determine the mix proportions for concrete pavement. The laboratory must have a current AASHTO accreditation for:

1. AASHTO T 97 or ASTM C 78
2. ASTM C 192/C 192M

40-1.03E Joint Sealant and Compression Seal Installation Training

Before installing joint sealant or compression seals, arrange for a representative from the joint sealant or compression seal manufacturer to provide training on the cleaning and preparation of the joint and installing the sealant or seal. Until your personnel and the Department's personnel have been trained, do not install joint sealant or compression seals.

40-1.03F Frequency Measuring Device (Tachometer)

Before each day's concrete pavement placement and at intervals not to exceed 4 hours of production, test and record vibration frequency for concrete consolidation vibrators.

40-1.03G Early Age Concrete Pavement Crack Mitigation System

Develop and implement a system for predicting concrete pavement stresses and strength during the initial 72 hours after paving. The system must include:

1. Subscribing to a weather service to obtain forecasts for wind speed, ambient temperatures, humidity, and cloud cover
2. Portable weather station with anemometer, temperature and humidity sensors, located at the paving site
3. Early age concrete pavement stress and strength prediction computer program
4. Analyzing, monitoring, updating, and reporting the system's predictions

40-1.03H Curing Compound

Sample curing compound from shipping containers at the manufacturer's source of supply. Split the samples.

40-1.03I Concrete Pavement Smoothness

Within 10 days after paving, measure the Profile Index (PI_0) of the concrete pavement surface using a zero (null) blanking band under California Test 526.

For the following concrete pavement areas, the Engineer does not require a profilograph and you must test and correct high points determined by a 12-foot straightedge placed parallel with and perpendicular to the centerline:

1. Horizontal curves with a centerline radius of curvature less than 1,000 feet including concrete pavement within the superelevation transitions of those curves.
2. Exit ramp termini, truck weigh stations, and weigh-in-motion areas
3. Where steep grades and superelevation rates greater than 6 percent are present on:

    3.1. Ramps
    3.2. Connectors

4. Turn lanes and areas around manholes or drainage transitions
5. Acceleration and deceleration lanes for at-grade intersections
6. Shoulders and miscellaneous gore areas

Use a California Profilograph or equivalent to determine the concrete pavement profile. If the profilograph uses a mechanical recorder, use an electronic scanner to reduce the profilogram.

The profilograph operator must be qualified under the Department's Independent Assurance Manual. The manual is available from the Transportation Laboratory.

40-1.03J Profilograph Test Procedure

Notify the Engineer at least 2 business days before performing profilograph testing. Each day before performing profilograph testing, notify the Engineer of the start location. Perform profilograph testing in the Engineer's presence.

Before starting profilograph testing, remove foreign objects from the concrete pavement surface.

Before starting profilograph testing, calibrate the profilograph in the Engineer's presence. If the Engineer chooses not to be present during profilograph testing, you may perform the testing with the Engineer's written approval. Note the Engineer's absence on the profilogram.

Determine PI_0 values for the final concrete pavement surface of each 0.1-mile section of a traffic lane. Take 2 profiles within each traffic lane, 3 feet from and parallel with the edge of each lane. Each section's PI_0 is the average of the PI_0 values for the measurements within that traffic lane. A section that is less than 0.01 mile and is the result of an interruption to continuous concrete pavement surface must comply with the PI_0 specifications for a full section. Adjust the PI_0 for a partial section to reflect a full section.

Use stationing to locate vertical deviations greater than 0.3 inches. The profilogram stationing must be the same as the project stationing. Note 0.1-mile segments on the profilogram.

Label the profilogram with:

1. Contract number
2. County and route number
3. Stationing
4. Operator's name
5. Test date
6. Test number
7. Traffic direction
8. Traffic lane (numbered from left to right in direction of travel)
9. Test wheel path (left or right in direction of travel)
10. Test direction
11. Paving direction

40-1.03K Smoothness Corrective Action

Correct concrete pavement not complying with the Engineer's acceptance specifications for smoothness by grinding under Section 42-2, "Grinding."

Do not grind before:

1. Ten days after concrete pavement placement
2. The concrete has developed a modulus of rupture of at least 550 psi

Grind the entire lane width. When completed, the lane width must be uniform in texture and appearance. Square the corrected area's start and end normal to the paved surface's centerline.

Retest sections where corrections were made.

40-1.03L Engineer's Acceptance

General

The Engineer accepts concrete pavement based on the Department's testing for the following concrete pavement quality characteristics. A single test represents no more than the quantity specified:

Concrete Pavement Acceptance

Quality Characteristic	Quantity	Test
28-day modulus of rupture	1,000 cubic yards	CT 523
Thickness	1,200 square yards for primary area measurements	CT 531
Dowel bar placement	700 square yards	Measurement
Tie bar placement	4,000 square yards	Measurement
Coefficient of friction	One day's paving	CT 342
Air content (freeze-thaw) [a]	One day's paving	CT 504

Note:
[a] Air content tests must be performed under California Test 504 if air entrainment is specified.

At the Department's option, the Engineer also accepts concrete pavement based on your or the Department's testing for smoothness. A single test represents no more than 0.1 mile.

The Engineer considers other concrete pavement quality characteristics in determining final acceptance. The Engineer's acceptance of modulus of rupture, thickness, dowel bar and tie bar placement, coefficient of friction, smoothness, and air content does not constitute final concrete pavement acceptance.

Modulus of Rupture

The Engineer accepts concrete pavement for modulus of rupture on a lot basis. The minimum modulus of rupture for each lot is 570 psi at 28 days.

For each lot of concrete for concrete pavement:

1. Quantity must not exceed 1,000 cubic yards.
2. Department determines the modulus of rupture of test beams aged 10 days and 28 days.
3. Department calculates the modulus of rupture by averaging the individual test results of 2 beams aged for 28 days.

4. Difference in the individual test results of beams aged 28 days must not exceed 12 percent when tested by Method 1, or 16 percent when tested by Method 2. The Engineer calculates the difference relative to the average of the 2 test results.

The Department provides molds and machines for modulus of rupture acceptance testing. Provide material and labor the Engineer may require.

Concrete Pavement Smoothness

If the Department tests for smoothness, the tests are performed under Section 40-1.03I, "Concrete Pavement Smoothness."

The Engineer accepts concrete pavement for smoothness in compliance with the following:

1. For tangents and horizontal curves having a centerline radius of curvature 2,000 feet or more, the PI_0 must be at most 3 inches per 0.1-mile section.
2. For horizontal curves having a centerline radius of curvature from 1,000 to 2,000 feet including concrete pavement within the superelevation transitions of those curves, the PI_0 must be at most 6 inches per 0.1-mile section.
3. If using a profilograph to measure smoothness, the surface must not have individual high points greater than 0.3 inch.
4. If using a straightedge to measure smoothness, the surface must be within 0.02 foot of the straightedge's lower edge.

Profile index specifications apply to existing pavement within 50 feet of the transverse joint separating new concrete pavement and the existing pavement.

If the Department's profilograph test results do not match yours, the Engineer may order you to recalibrate your profilograph equipment and perform a retest. If your test results are inaccurate due to operator error, the Engineer may disqualify your profilograph operator. If the Engineer determines your test results are inaccurate, the Engineer does not make adjustments to payment or contract time for recalibrating, retesting, and delays.

Concrete Pavement Thickness

The Engineer accepts concrete pavement for thickness based on coring in the primary area, which is the area placed in 1 day for each thickness. Concrete pavement thickness must not be deficient by more than 0.05 foot.

After corrective grinding has been completed, core concrete pavement in the primary area under Section 40-3.16, "Obtaining Drilled Cores," at locations determined by the Engineer and in the Engineer's presence. The core specimen diameter must be 4 inches. To identify the limits of concrete pavement deficient in thickness by more than 0.05 foot, you may divide primary areas into secondary areas. Specifications that may affect concrete pavement thickness such as allowable tolerances for subgrade construction do not change the thickness specified for concrete pavement.

In each primary area, the Engineer measures concrete pavement thickness every 1,200 square yards and any remaining area. The Engineer measures cores under California Test 531 to the nearest 0.01 foot. Core at least 1 foot from existing, contiguous, and parallel concrete pavement not constructed as part of this contract.

You may request the Engineer make additional thickness measurements and use them to determine the average thickness variation. The Engineer determines the locations with random sampling methods.

If each thickness measurement in a primary area is less than 0.05 foot deficient, the Engineer calculates the average thickness deficiency in that primary area. The Engineer uses 0.02 foot for a thickness difference more than 0.02 foot over the specified thickness.

For each thickness measurement in a primary area deficient by more than 0.05 foot, the Engineer determines a secondary area where the thickness deficiency is more than 0.05 foot. The Engineer determines this secondary area by measuring the thickness of each concrete pavement slab adjacent to the measurement found to be more than 0.05 foot deficient. The Engineer continues to measure the thickness until an area that is bound by slabs with thickness deficient by 0.05 foot or less is determined.

Slabs without bar reinforcement are defined as the areas bound by longitudinal and transverse joints and concrete pavement edges. Slabs with bar reinforcement are defined as the areas bound by longitudinal joints and concrete pavement edges and 15-foot lengths. Secondary area thickness measurements in a slab determine that entire slab's thickness.

The Engineer measures the remaining primary area thickness after removing the secondary areas from consideration for determining the average thickness deficiency.

The Engineer determines the slabs to remove and replace.

Required Use of Air-Entraining Admixtures

If air-entraining admixtures are specified, the Engineer may choose to accept concrete pavement for air content based on your air content quality control tests. The Engineer decides to use your air content quality control tests based on a *t*-test that determines the difference in the means of your test and the Engineer's verification tests. The Engineer calculates the t-value of the test data as follows:

$$t = \frac{\left|\overline{X}_c - \overline{X}_v\right|}{S_p\sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \qquad \text{and} \qquad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

n_c = Number of your quality control tests (minimum of 2 required)
n_v = Number of verification tests (minimum of 1 required)
$\overline{X}_c$ = Mean of your quality control tests
$\overline{X}_v$ = Mean of the verification tests
S_p = Pooled standard deviation
(When $n_v = 1$, $S_p = S_c$)
S_c = Standard deviation of your quality control tests
S_v = Standard deviation of the verification tests (when $n_v > 1$)

The Engineer compares your quality control test results with the Department's verification test results at a level of significance of $\alpha = 0.01$. The Engineer compares the *t*-value to t_{crit}, determined from:

t_{crit}

degrees of freedom (n_c+n_v-2)	t_{crit} (for α = 0.01)
1	63.657
2	9.925
3	5.841
4	4.604
5	4.032
6	3.707
7	3.499
8	3.355
9	3.250
10	3.169

If the *t*-value calculated is less than or equal to t_{crit}, your quality control test results are verified. If the *t*-value calculated is greater than t_{crit}, quality control test results are not verified.

If your quality control test results are not verified, core at least 3 specimens from concrete pavement under Section 40-3.16, "Obtaining Drilled Cores." The Engineer selects the core locations. Your approved third party independent testing laboratory must test these specimens for air content under ASTM C 457. The Engineer compares these test results with your quality control test results using the *t*-test method. If your quality control test results are verified based on this comparison, the Engineer uses the quality control test results for acceptance of concrete pavement for air content. If your quality control test results are not verified based on this comparison, the Engineer uses the air content of core specimens determined under ASTM C 457 for acceptance.

Dowel Bar and Tie Bar Placement

The Engineer uses core specimens to evaluate and accept concrete pavement for:

1. Dowel bar placement
2. Tie bar placement
3. Concrete consolidation

Obtain cores under Section 40-3.16, "Obtaining Drilled Cores." The Engineer determines the core locations. Each core must have a nominal diameter of 4 inches. Core each day's paving within 2 business days in compliance with:

1. One test for every 700 square yards of doweled concrete pavement or remaining fraction of that area. Each dowel bar test consists of 2 cores, 1 on each dowel bar end to expose both ends and allow measurement.
2. One test for every 4,000 square yards of concrete pavement with tie bars or remaining fraction of that area

If the tests indicate dowel or tie bars are not placed within the specified tolerances or if there are air voids around the dowel or tie bars, core additional specimens to determine the limits of unacceptable work.

The Engineer determines the slabs to remove and replace.

If the Engineer approves your request, slabs may remain in place with an adjustment in payment for:

1. Dowel bars with centers from ±2 inches to ±3 inches from the saw cut of a transverse contraction joint or with deficient concrete consolidation around the dowel bars
2. Tie bars placed outside their specified placement and position or with deficient concrete consolidation around the tie bars

Bar Reinforcing Steel

The Engineer accepts concrete pavement for bar reinforcing steel based on inspection before concrete placement.

Curing Compound

Curing compound sampled from shipping containers from the manufacturer's supply source or from the job site must match the test results for viscosity, nonvolatile content, and pigment content within the specified tolerances listed in the precision and bias statements for the test methods.

40-2 MATERIALS

40-2.01 CONCRETE

40-2.01A General

Concrete must comply with Section 90, "Portland Cement Concrete."

40-2.01B Aggregate

The specifications for reduction in Operating Range and Contract Compliance for cleanness value and sand equivalent specified under Section 90-2.02A, "Coarse Aggregate," and Section 90-2.02B, "Fine Aggregate," do not apply to concrete pavement.

Combined aggregate gradings must comply with Section 90-3, "Aggregate Gradings," and the difference between the percent passing the 3/8-inch sieve and the percent passing the No. 8 sieve must not be less than 16 percent of the total aggregate.

40-2.01C Cementitious Material

Concrete for concrete pavement must contain from 505 pounds to 675 pounds cementitious material per cubic yard. The specifications for reducing cementitious material content in Section 90-4.05, "Optional Use of Chemical Admixtures," do not apply to concrete pavement.

40-2.01D Mix Proportions

Your laboratory determining mix proportions must determine the minimum cementitious materials content or the maximum water to cementitious materials ratio under California Test 559 and:

1. You must make trial mixtures no more than 24 months before field qualification.
2. Modulus of rupture used to determine the minimum cementitious materials content or maximum water to cementitious materials ratio must be 570 psi at 28 days age and 650 psi at 42 days age.
3. Your laboratory must determine an increase in the cementitious materials content or a decrease in the water to cementitious materials ratio from the trial mixtures to ensure concrete pavement complies with the specifications.

If changing an aggregate supply source or the mix proportions, produce a trial batch and field-qualify the new concrete. The Engineer does not adjust contract time for performing sampling, testing, and qualifying new mix proportions or changing an aggregate supply source.

40-2.01E Field Qualification

Proposed mix proportions must be field qualified before you place concrete pavement. Use an American Concrete Institute (ACI) certified "Concrete Laboratory Technician, Grade I" to perform field qualification tests and calculations.

The Engineer accepts field qualification if five beams made and tested under California Test 523 comply with the following:

1. At a minimum, beams are tested at 10, 21, and 28 days of age
2. At your choice of age not later than 28 days, no single beam's modulus of rupture is less than 550 psi and the average modulus of rupture is at least 570 psi

40-2.02 TIE BARS

Tie bars must be one of the following:

1. Epoxy-coated steel reinforcing bar. Bar reinforcing must comply with either ASTM A 615/A 615M, Grade 40 or 60; ASTM A 996/A 996M; or ASTM A 706/A 706M. Epoxy coating must comply with Section 52-1.02B, "Epoxy-coated Reinforcement."
2. Stainless-steel bar. Stainless-steel bar must be descaled, pickled, and polished solid stainless-steel bars UNS Designation S31603 or S31803, Grade 60 under ASTM A 955/A 955M.
3. Low carbon, chromium-steel bar. Low carbon, chromium-steel bar must comply with ASTM A 1035/A 1035M.

Fabricate, sample, and handle epoxy-coated deformed tie bars at the job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement."

Do not bend epoxy-coated tie bars.

40-2.03 DOWEL BARS

40-2.03A General

Dowel bars must be plain steel bars and one of the following:

1. Epoxy-coated bar. Epoxy bars must comply with ASTM A 615/A 615M, Grade 40 or 60. Epoxy coating must comply with Section 52-1.02B, "Epoxy-coated Reinforcement."
2. Stainless-steel bar. Stainless-steel bars must be descaled, pickled, and polished solid stainless-steel bars, UNS Designation S31603 or S31803, Grade 60 under ASTM A 276/A 276M, and ASTM A 955/A 955M.
3. Low carbon, chromium-steel bars. Low carbon, chromium-steel bars must comply with ASTM A 1035/A 1035M.

Fabricate, sample, and handle epoxy-coated dowel bars at the job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement," except each sample must be 18 inches long. Sample each load delivered to the job site.

40-2.03B Dowel Bar Lubricant

Dowel bar lubricant must be petroleum paraffin-based or curing compound. Paraffin-based lubricant must be Dayton Superior DSC BB-Coat or Valvoline Tectyl 506 or an approved equal and must be factory-applied. Curing compound must be curing compound (3) under Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

40-2.04 CURING COMPOUND

Curing compound must be curing compound (1) or (2) with white pigment under Section 90-7.01B, "Curing Compound Method."

Reflectance must be at least 60 percent when tested under ASTM E 1347.

40-2.05 CHEMICAL ADHESIVE (DRILL AND BOND)

Chemical adhesive for drilling and bonding dowels and tie bars must be prequalified. A list of prequalified chemical adhesives is available on the Department's Materials Engineering and Testing Services website. The prequalified list indicates the appropriate chemical adhesive system for the concrete temperature and installation conditions.

Each chemical adhesive system must clearly and permanently show the manufacturer's name, model number of the system, manufacturing date, lot number, shelf life or expiration date, and current International Conference of Building Officials (ICBO) Evaluation Report number. Each chemical adhesive carton must include the manufacturer's recommended installation procedures and warning or precautions required by State or Federal laws and regulations.

40-2.06 DOWEL AND TIE BAR BASKETS

Dowel and tie bar baskets must be:

1. Minimum W10 wire size number under ASTM A 82/A 82M
2. Either U-frame or A-frame shape
3. Welded under Section 7.4 of ASTM A 185/A 185M

You may epoxy-coat dowel and tie bar baskets under Section 52-1.02B, "Epoxy-coated Reinforcement," and the following:

1. Epoxy-coated dowel and tie bar baskets must comply with ASTM A 884/A 884M, Class A, Type 1 or Type 2.
2. Epoxy-coating under ASTM A 884/ A 884M, Class A, Type 2 must be purple or gray.

If tie bars or dowel bars are stainless steel, tie bar and dowel bar baskets must be stainless steel.

If tie bars or dowel bars are low carbon, chromuim-steel, tie bar or dowel bar baskets must comply with ASTM A 1035/A 1035M.

Handle epoxy-coated dowel and tie-bar baskets at the manufacturing plant and job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement."

Fasteners must be driven fasteners under ASTM F 1667. Fasteners on lean concrete base or asphalt concrete must have a minimum shank diameter of 3/16 inch and a minimum shank length of 2 1/2 inches. For asphalt treated permeable base or cement treated permeable base, the shank diameter must be at least 3/16 inch and the shank length must be at least 5 inches.

Fasteners, clips, and washers must have a minimum 0.2-mil thick zinc coating applied either by electroplating or galvanizing.

40-2.07 BACKER RODS

Backer rods must be Type 1 under ASTM D 5249. Backer rod diameter must be at least 25 percent greater than the sawcut joint width. Backer rod material must be expanded, crosslinked, closed-cell polyethylene foam. No bond or adverse reaction may occur between the backer rod and sealant.

40-2.08 JOINT FILLER MATERIAL

Joint filler for isolation joints must be preformed expansion joint filler for concrete (bituminous type) under ASTM D 994.

40-2.09 HYDRAULIC CEMENT GROUT (NON-SHRINK)

Hydraulic cement grout (non-shrink) must comply with ASTM C 1107/ C 1107M. Use clean, uniform, rounded aggregate filler to extend the grout. Aggregate filler must not exceed 60 percent of the grout mass or the maximum recommended by the manufacturer, whichever is less. Aggregate filler moisture content must not exceed 0.5 percent. Aggregate filler must comply with:

Aggregate Filler Grading

Sieve Size	Percentage Passing
1/2-inch	100
3/8-inch	85 - 100
No. 4	10 - 30
No. 8	0 - 10
No. 16	0 - 5

40-2.10 BAR REINFORCEMENT

Bar reinforcement must comply with Section 52, "Reinforcement."

40-2.11 JOINT SEALANT

40-2.11A General

Do not use hot-pour sealant that will melt the backer rod.

40-2.11B Silicone Joint Sealant

Silicone joint sealant must be low modulus furnished in a one-part silicone formulation. Do not use acid cure sealant. Silicone joint sealant must be compatible with the surface it is applied to and comply with:

Silicone Joint Sealant

Property	Test Method	Specification
Tensile stress, 150% elongation, 7-day cure at 77 °F ± 2 °F and 45% to 55% R.H. [e]	ASTM D 412 (Die C)	45 psi max.
Flow at 77 °F ± °F	ASTM C 639 [a]	Must not flow from channel
Extrusion Rate at 77 °F ± 2 °F	ASTM C 603 [b]	3 to 9 oz/min.
Specific Gravity	ASTM D 792 Method A	1.01 to 1.51
Durometer Hardness, at 0 °F, Shore A, cured 7 days at 77 °F ±2 °F	ASTM C 661	10 to 25
Ozone and Ultraviolet Resistance, after 5,000 hours	ASTM C 793	No chalking, cracking or bond loss
Tack-free at 77 °F ±2 °F and 45% to 55% R.H.[e]	ASTM C 679	Less than 75 minutes
Elongation, 7 day cure at 77 °F ±2 °F and 45% to 55% R.H. [e]	ASTM D 412 (Die C)	500 percent min.
Set to Touch, at 77 °F ±2 °F and 45% to 55% R.H. [e]	ASTM D 1640	Less than 75 minutes
Shelf Life, from date of shipment	—	6 months min.
Bond, to concrete mortar-concrete briquettes, air cured 7 days at 77 °F ±2 °F	AASHTO T 132 [c]	50 psi min.
Movement Capability and Adhesion, 100% extension at 0 °F after, air cured 7 days at 77 °F ±2 °F , and followed by 7 days in water at 77 °F ±2 °F	ASTM C 719[d]	No adhesive or cohesive failure after 5 cycles

Notes:
[a] ASTM C 639 Modified (15 percent slope channel A).
[b] ASTM C 603, through 0.12-inch opening at 50 psi.
[c] Mold briquettes under AASHTO T 132, saw in half and bond with a 0.60-inch maximum thickness of sealant and test under AASHTO T 132. Briquettes must be dried to constant mass at 212 °F ±10 °F.
[d] Prepare 12" x 1" x 3" concrete blocks under ASTM C 719. Use a sawed face for bond surface. Seal 2 inches of block leaving 0.50 inch on each end of specimen unsealed. The depth of sealant must be 0.40 inch and the width 0.50 inch.
[e] R.H. equals relative humidity.

After application, silicone joint sealant must not flow on grades up to 15 percent.

40-2.11C Asphalt Rubber Joint Sealant

Asphalt rubber joint sealant must:

1. Be a mixture of paving asphalt and ground rubber containing not less than 22 percent ground rubber by weight. One hundred percent of ground rubber must pass a No. 8 sieve. Ground rubber must be vulcanized or a combination of vulcanized and devulcanized materials.
2. Comply with ASTM D 6690, Type II except:

    2.1. The cone penetration requirement must not exceed 120 at 77 F, 5 ounces, 5 seconds.
    2.2. The resilience requirement must be a minimum 50 percent recovery when tested at 77 F.

3. Have a Ring and Ball softening point of 135 °F minimum when tested under AASHTO T 53.
4. Be capable of being melted and applied to cracks and joints at temperatures below 400 °F.

5. Not be applied when the concrete pavement surface temperature is below 50 °F.

40-2.11D Preformed Compression Joint Seals

Preformed compression joint seals must comply with ASTM D 2628. Lubricant adhesive used with the seals must comply with ASTM D 2835. Preformed compression joint seals must have 5 or 6 cells, except seals for Type A2 and Type B joints may have 4 cells. Install preformed compression joint seals in compliance with the manufacturer's recommendations. Show evidence that the seals are compressed from 40 to 50 percent for the joint width and depth.

40-2.12 WATER

Water for core drilling must be from a local domestic water supply. Water must not contain:

1. More than 1,000 parts per million of chlorides as CL
2. More than 1,300 parts per million of sulfates as $S0_4$
3. Impurities in a quantity to cause concrete discoloration or surface etching

40-3 CONSTRUCTION

40-3.01 WATER SUPPLY

Before placing concrete pavement, develop enough water supply for the work.

40-3.02 SUBGRADE PREPARATION

Immediately before placing concrete, the subgrade to receive concrete pavement must be:

1. In compliance with the specified compaction and elevation tolerances
2. Free of loose and extraneous material
3. Uniformly moist, but free of standing or flowing water
4. Excavated for thickened parts of concrete pavement end anchors with no disturbed compaction outside the end anchor dimensions

If cement treated permeable base is specified, cover the base surface with asphaltic emulsion before placing concrete pavement. Apply the asphaltic emulsion uniformly at a rate of 0.1 gallons per square yard. Asphaltic emulsion must comply with anionic slow-setting type, SS1h grade in Section 94, "Asphaltic Emulsions." Repair damaged asphaltic emulsion before placing concrete pavement.

40-3.03 PROPORTIONING

Proportion aggregate and bulk cementitious materials under Section 90-5, "Proportioning."

40-3.04 PLACING CONCRETE

40-3.04A General

Place concrete pavement with stationary side forms or slip-form paving equipment.

Place consecutive concrete loads within 30 minutes of each other. Construct a transverse construction joint when concrete placement is interrupted by more than 30 minutes. The transverse construction joint must coincide with the next contraction joint location, or you must remove fresh concrete pavement to the preceding transverse joint location.

Place concrete pavement in full slab widths separated by construction joints or monolithically in multiples of full lane widths with a longitudinal contraction joint at each traffic lane line.

Do not retemper concrete.

If the concrete pavement surface width is constructed as specified, you may construct concrete pavement sides on a batter not flatter than 6:1 (vertical:horizontal).

40-3.04B Concrete Pavement Widening

If concrete pavement is placed adjacent to existing pavement not constructed as part of the contract, grind the existing concrete pavement lane or shoulder adjacent to the new concrete pavement. Perform the grinding before new concrete pavement is placed. The new concrete pavement must match the elevation of the existing concrete pavement after grinding. Grind existing concrete pavement under Section 42-2, "Grinding," except profile index must comply with the pavement smoothness specifications in Section 40-1.03, "Quality Control and Assurance."

Use paving equipment with padded crawler tracks or rubber-tired wheels on the existing concrete pavement with enough offset to avoid breaking or cracking the existing concrete pavement's edge.

40-3.04C Concrete Pavement Transition Panel

For concrete pavement placed in a transition panel, texture the surface with a drag strip of burlap, a broom, or a spring steel tine device that produces scoring in the finished surface. The scoring must be either parallel with or transverse to the centerline. For the method you choose, texture at the time that produces the coarsest texture.

40-3.04D Stationary Side Form Construction

Stationary side forms must be straight and without defects including warps, bends, and indentations. Side forms must be metal except at end closures and transverse construction joints where other materials may be used.

You may build up side forms by attaching a section to the top or bottom. If attached to the top of metal forms, the attached section must be metal.

The side form's base width must be at least 80 percent of the specified concrete pavement thickness.

Side forms including interlocking connections with adjoining forms must be rigid enough to prevent springing from subgrading and paving equipment and concrete pressure.

Construct subgrade to final grade before placing side forms. Side forms must bear fully on the foundation throughout their length and base width. Place side forms to the specified grade and alignment of the finished concrete pavement's edge. Support side forms during concrete placing, compacting, and finishing.

After subgrade work is complete and immediately before placing concrete, true side forms and set to line and grade for a distance that avoids delays due to form adjustment.

Clean and oil side forms before each use.

Side forms must remain in place for at least 1 day after placing concrete and until the concrete pavement edge no longer requires protection from the forms.

Spread, screed, shape, and consolidate concrete with 1 or more machines. The machine must uniformly distribute and consolidate the concrete. The machines must operate to place the concrete pavement to the specified cross section with minimal hand work.

Consolidate the concrete without segregation. If vibrators are used:

1. The vibration rate must be at least 3,500 cycles per minute for surface vibrators and 5,000 cycles per minute for internal vibrators

2. Amplitude of vibration must cause perceptible concrete surface movement at least 1 foot from the vibrating element
3. Use a calibrated tachometer for measuring frequency of vibration
4. Vibrators must not rest on side forms or new concrete pavement
5. Power to vibrators must automatically cease when forward or backward motion of the paving machine is stopped

Use high-frequency internal vibrators within 15 minutes of depositing concrete on the subgrade to uniformly consolidate the concrete across the paving width including adjacent to forms. Do not use vibrators to shift the mass of concrete.

40-3.04E Slip-Form Construction

If slip-form construction is used, spread, screed, shape, and consolidate concrete to the specified cross section with slip-form machines and minimal hand work. Slip-form paving machines must be equipped with traveling side forms and must not segregate the concrete.

Do not deviate from the specified concrete pavement alignment by more than 0.1 foot.

Slip-form paving machines must use high frequency internal vibrators to consolidate concrete. You may mount vibrators with their axes parallel or normal to the concrete pavement alignment. If mounted with axes parallel to the concrete pavement alignment, space vibrators no more than 2.5 feet measured center to center. If mounted with axes normal to the concrete pavement alignment, space the vibrators with a maximum 0.5-foot lateral clearance between individual vibrators.

Each vibrator must have a vibration rate from 5,000 cycles per minute to 8,000 cycles per minute. The amplitude of vibration must cause perceptible concrete surface movement at least 1 foot from the vibrating element. Use a calibrated tachometer to measure frequency of vibration.

40-3.05 TIE BAR PLACEMENT

Place tie bars perpendicular to the longitudinal concrete pavement joint and parallel with the concrete pavement surface at mid-slab depth with the following tolerances:

1. Not less than 1/2-inch below the saw cut depth of joints
2. With not less than 2 inches clearance from the concrete pavement's surface and bottom
3. With embedment length tolerance of ±2 inches

Install tie bars at longitudinal joints by 1 of the following methods:

1. Drill concrete and bond tie bars with chemical adhesive in compliance with the manufacturer's instructions. Clean and dry drilled holes before placing chemical adhesive and tie bars. After inserting tie bars into chemical adhesive, support the bars to prevent movement during curing. If the Engineer rejects a tie bar installation, cut the tie bar flush with the joint face and coat the exposed end of the tie bar with chemical adhesive under Section 40-2, "Materials." Offset new holes 3 inches horizontally from the rejected hole's center.
2. Insert tie bars into plastic slip-formed concrete before finishing. Inserted tie bars must have full contact between the bar and the concrete. If tie bars are inserted through the plastic concrete surface, eliminate evidence of the insertion by reworking the concrete over the tie bars.

3. Use threaded tie bar splice couplers fabricated from deformed bar reinforcement free of external welding or machining.
4. Use tie bar baskets. Anchor baskets at least 200 feet in advance of the concrete placement activity. If you request a waiver, describe the construction limitations or restricted access preventing the advanced anchoring. After the baskets are anchored and before the concrete is placed, cut and remove temporary spacer wires and demonstrate the tie bars do not move from their specified depth and alignment during concrete placement. Use fasteners to anchor tie bar baskets.

If tie bars are not placed correctly, stop paving activities until you demonstrate to the Engineer correction of the cause.

40-3.06 DOWEL BAR PLACEMENT

Center dowel bars within 2 inches in the longitudinal direction on transverse contraction joints or construction joints.

If using curing compound as lubricant, apply the curing compound to dowels in 2 separate applications. Lubricate each dowel bar entirely with bond breaker before placement. The last application must be applied not more than 8 hours before placing the dowel bars. Apply each curing compound application at a rate of 1 gallon per 150 square feet.

If dowel bars are placed by mechanical insertion, eliminate evidence of the insertion by reworking the concrete over the dowel bars. If drilling and bonding dowel bars at construction joints, use a grout retention ring.

If using dowel bar baskets, anchor them with fasteners.

Use at least 10 fasteners for basket sections greater than 12 feet and less than or equal to 16 feet. Baskets must be anchored at least 200 feet in advance of the concrete placement activity unless the Engineer approves your waiver request. If requesting a waiver, describe the construction limitations or restricted access preventing the advanced anchoring. After the baskets are anchored and before the concrete is placed, cut and remove temporary spacer wires and demonstrate the dowel bars do not move from their specified depth and alignment during concrete placement.

Place dowel bars in compliance with:

Dowel Bar Tolerances

Dimension	Tolerance
Horizontal offset	±1 inch
Longitudinal translation	±2 inches
Horizontal skew	3/8 inch, max
Vertical skew	3/8 inch, max
Vertical depth	The minimum distance below the concrete pavement surface must be: DB = d/3 + 1/2 inch where: DB = vertical distance in inches, measured from concrete pavement surface to any point along the top of dowel bar d = concrete pavement thickness in inches The maximum distance below the depth shown on the plans must be 0.05 foot.

If dowel bars are not placed correctly, stop paving activities until you demonstrate to the Engineer correction of the cause.

Remove and replace the concrete pavement 3 feet on either side of a joint with a rejected dowel bar.

40-3.07 BAR REINFORCEMENT

Place bar reinforcement under Section 52, "Reinforcement." Bar reinforcement must be more than 1/2 inch below the saw cut depth at concrete pavement joints.

40-3.08 JOINTS

40-3.08A General

Concrete pavement joints consist of:

1. Longitudinal and transverse construction joints
2. Longitudinal and transverse contraction joints
3. Isolation joints

Construction joints must be normal to the concrete pavement surface.

Until contract acceptance and except for joint filler material, keep joints free of foreign material including soil, gravel, concrete, or asphalt mix.

Volunteer cracks are cracks not coincident with constructed joints.

Repair concrete pavement damaged during joint construction under Section 40-3.17B, "Repair of Spalls, Raveling, and Tearing."

Do not bend tie bars or reinforcement in existing concrete pavement joints.

40-3.08B Construction Joints

Construction joints form where fresh concrete is placed against hardened concrete, existing pavements, or structures.

Before placing concrete at construction joints, apply a curing compound under Section 90-7.01B, "Curing Compound Method," to the vertical surface of existing or hardened concrete and allow it to dry.

Use a metal or wooden bulkhead to form transverse construction joints. If dowel bars are specified, the bulkhead must allow dowel bar installation.

40-3.08C Contraction Joints

In multilane monolithic concrete pavement, use the sawing method to construct longitudinal contraction joints. Construct transverse contraction joints by the sawing method.

Construct transverse contraction joints within 1 foot of their specified spacing. If a slab length of less than 5 feet would be formed, adjust the transverse contraction joint spacing.

Construct transverse contraction joints across the full concrete pavement width regardless of the number or types of longitudinal joints crossed. In areas of converging and diverging pavements, space transverse contraction joints so their alignment is continuous across the full width where converging and diverging pavements are contiguous. Longitudinal contraction joints must be parallel with the concrete pavement centerline. Transverse and longitudinal contraction joints must not deviate by more than 0.1 foot from either side of a 12-foot straight line, except for longitudinal joints parallel to a curving centerline.

40-3.08D Isolation Joints

Construct isolation joints by saw cutting a minimum 1/8-inch width to full concrete pavement depth at the existing concrete pavement's edge and removing the concrete to expose a flat vertical surface. Before placing concrete, secure joint filler material that prevents new concrete from adhering to the existing concrete face.

Dispose of concrete saw cutting residue under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."

40-3.08E Sawing Method

The sawing method is cutting a groove in the concrete pavement with a power driven concrete saw. Grooves for longitudinal and transverse contraction joints must be the minimum width possible for the type of saw used. If necessary, the top of the joint must be sawn wider to provide space for joint sealant. Immediately wash slurry from the joint with water under 100 psi maximum pressure.

Saw longitudinal and transverse contraction joints before volunteer cracking occurs and after the concrete is hard enough to saw without spalling, raveling, or tearing.

To keep foreign material out of grooves before joint sealant or compression seal installation, you may use joint filler in sawed contraction joints. Joint filler must not react adversely with the concrete or cause concrete pavement damage. After sawing and washing a joint, install joint filler material that keeps moisture in the adjacent concrete during the 72 hours after paving. If you install joint filler material, the specifications for spraying the sawed joint with additional curing compound under Section 40-3.13, "Curing," do not apply. If using absorptive filler material, moisten the filler immediately before or after installation.

40-3.09 JOINT SEALANT AND COMPRESSION SEAL INSTALLATION

40-3.09A General

At least 7 days after concrete pavement placement and not more than 4 hours before installing joint sealant or compression seal materials, use dry sand blasting and other methods to

clean the joint walls of objectionable material such as soil, asphalt, curing compound, paint, and rust. The maximum sand blasting nozzle diameter must be 1/4 inch. The minimum pressure must be 90 psi. Sand blast each side of the joint at least once, in at least 2 separate passes. Hold the nozzle at an angle to the joint from 1 to 2 inches from the concrete pavement. Using a vacuum, collect sand, dust, and loose material at least 2 inches on each side of the joint. Remove surface moisture and dampness at the joints with compressed air that may be moderately hot.

Before you install joint sealant or compression seal, the joint wall must be free of moisture, residue, or film.

If grinding or grooving over or adjacent to sealed joints, remove joint sealant or compression seal materials and dispose of them under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way." After grinding or grooving, replace the joint sealant or compression seal materials.

40-3.09B Liquid Sealant

Do not install liquid sealant in construction joints.

Install backer rods when the concrete pavement temperature is above the air dew point and when the air temperature is at least 40 °F.

Install liquid sealant immediately after installing the backer rod. Install sealant using a mechanical device with a nozzle shaped to introduce the sealant from inside the joint. Extrude sealant evenly and with continuous contact with the joint walls. Recess the sealant surface after placement. Remove excess sealant from the concrete pavement surface.

Do not allow traffic over sealed joints until the sealant is set.

40-3.09C Preformed Compression Seal

Do not install preformed compression seal in construction or isolation joints.

Install longitudinal seals before transverse seals. Longitudinal seals must be continuous except at intersections with transverse seals. Install transverse seals in 1 continuous piece for the entire transverse length of concrete pavement. With a sharp instrument, cut across the longitudinal seal at the intersection with transverse construction joints. If the longitudinal seal does not relax enough to properly install the transverse seal, trim the longitudinal seal to form a tight seal between the 2 joints.

Use a machine specifically designed for preformed compression seal installation. The machine must install the seal:

1. To the specified depth
2. To make continuous contact with the joint walls
3. Without cutting, nicking, or twisting the seal
4. With less than 4 percent stretch

Lay a length of preformed compression seal material cut to the exact length of the pavement joint to be sealed. The Engineer measures this length. After you install the length of preformed compression joint sealant, the Engineer measures the excess amount of material at the joint end. The Engineer divides the excess amount length by the original measured length to determine the percentage of stretch.

40-3.10 SHOULDER RUMBLE STRIP

If specified, construct shoulder rumble strips by rolling or grinding indentations in new concrete pavement.

Select the method and equipment for constructing ground-in indentations.

Do not construct shoulder rumble strips on structures or approach slabs.

Construct rumble strips within 2 inches of the specified alignment. Roller or grinding equipment must be equipped with a sighting device enabling the operator to maintain the rumble strip alignment.

Indentations must not vary from the specified dimensions by more than 1/16 inch in depth or more than 10 percent in length and width.

The Engineer orders grinding or removal and replacement of noncompliant rumble strips to bring them within specified tolerances. Ground surface areas must be neat and uniform in appearance.

The grinding equipment must be equipped with a vacuum attachment to remove residue.

Dispose of removed material under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way."

40-3.11 PRELIMINARY FINISHING

40-3.11A General

Preliminary finishing must produce a smooth and true-to-grade finish. After preliminary finishing, mark each day's concrete pavement with a stamp. The stamp must be approved by the Engineer before paving starts. The stamp must be approximately 1' x 2' in size. The stamp must form a uniform mark from 1/8 to 1/4 inch deep. Locate the mark 20 feet ± 5 feet from the transverse construction joint formed at each day's start of paving and 1 foot ± 0.25 foot from the concrete pavement's outside edge. The stamp mark must show the month, day, and year of placement and the station of the transverse construction joint. Orient the stamp mark so it can be read from the concrete pavement's outside edge.

Do not apply more water to the concrete pavement surface than can evaporate before float finishing and texturing are completed.

Allow enough time to complete finishing activities during daylight. Work may continue after daylight if the Engineer approves lighting you provide.

40-3.11B Stationary Side Form Finishing

If stationary side form construction is used, give the concrete a preliminary finish by the machine float method or the hand method.

If using the machine float method:

1. Use self-propelled machine floats.
2. Determine the number of machine floats required to perform the work at a rate equal to the concrete delivery rate. When the time from concrete placement to machine float finishing exceeds 30 minutes, stop concrete delivery . When machine floats are in proper position, you may resume concrete delivery and paving.
3. Machine floats must run on side forms or adjacent concrete pavement lanes. If running on adjacent concrete pavement, protect the adjacent concrete pavement surface under Section 40-3.15, "Protecting Concrete Pavement."
4. Floats must be hardwood, steel, or steel-shod wood. Floats must be equipped with devices that adjust the under side to a true flat surface.

If using the hand method, finish concrete smooth and true to grade with manually operated floats or powered finishing machines.

40-3.11C Slip-Form Finishing

If slip-form construction is used, the slip-form paver must give the concrete pavement a preliminary finish. You may supplement the slip-form paver with machine floats.

Before the concrete hardens, correct concrete pavement edge slump in excess of 0.02 foot exclusive of edge rounding.

40-3.12 FINAL FINISHING

After completing preliminary finishing, round the edges of the initial paving widths to a 0.04-foot radius. Round transverse and longitudinal construction joints to a 0.02-foot radius.

Before curing, texture the pavement. Perform initial texturing with a burlap drag or broom device that produces striations parallel to the centerline. Perform final texturing with a steel-tined device that produces grooves parallel with the centerline.

Construct longitudinal grooves with a self-propelled machine designed specifically for grooving and texturing concrete pavement. The machine must have tracks to maintain constant speed, provide traction, and maintain accurate tracking along the pavement surface. The machine must have a single row of rectangular spring steel tines. The tines must be from 3/32 to 1/8 inch wide, on 3/4-inch centers, and must have enough length, thickness, and resilience to form grooves approximately 3/16 inch wide. The machine must have horizontal and vertical controls. The machine must apply constant down pressure on the pavement surface during texturing. The machines must not cause ravels.

Construct grooves over the entire pavement width in a single pass except do not construct grooves 3 inches from the concrete pavement edges and longitudinal joints. Final texture must be uniform and smooth. Use a guide to properly align the grooves. Grooves must be parallel and aligned to the pavement edge across the pavement width. Grooves must be from 1/8 to 3/16 inch deep after concrete has hardened.

For irregular areas and areas inaccessible to the grooving machine, you may hand-construct grooves in compliance with the hand method under Section 40-3.11B, "Stationary Side Form Finishing." Hand-constructed grooves must comply with the specifications for machine-constructed grooves.

Initial and final texturing must produce a coefficient of friction of at least 0.30 when tested under California Test 342. Notify the Engineer when the concrete pavement is scheduled to be opened to traffic. Allow at least 25 days for the Department to test for coefficient of friction from the later of:

1. Seven days after concrete placement
2. When the concrete pavement has attained a modulus of rupture of 550 psi

Do not open the concrete pavement to traffic unless the coefficient of friction is at least 0.30.

Correct concrete pavement not complying with the Engineer's acceptance criteria for coefficient of friction by grooving or grinding under Section 42, "Groove and Grind Pavement."

Do not grind before:

1. Ten days after concrete pavement placement
2. Concrete has developed a modulus of rupture of at least 550 psi

Before opening to traffic, allow at least 25 days for the Department to retest sections for coefficient of friction after corrections are made.

40-3.13 CURING

Cure the concrete pavement's exposed area with waterproof membrane or curing compound (1) or (2) under Section 90-7.01, "Methods of Curing." When side forms are removed within 72 hours of the start of curing, also cure the concrete pavement edges.

If curing compound is used, apply it with mechanical sprayers. Reapply curing compound to sawcuts and disturbed areas.

40-3.14 EARLY USE OF CONCRETE PAVEMENT

If requesting early use of concrete pavement:

1. Furnish molds and machines for modulus of rupture testing
2. Sample concrete
3. Fabricate beam specimens
4. Test for modulus of rupture under California Test 523

When you request early use, concrete pavement must have a modulus of rupture of at least 350 psi. Protect concrete pavement under Section 40-3.15, "Protecting Concrete Pavement."

40-3.15 PROTECTING CONCRETE PAVEMENT

Protect concrete pavement under Section 90-8, "Protecting Concrete."

Maintain the concrete pavement temperature at not less than 40 °F for the initial 72 hours.

Protect the concrete pavement surface from activities that cause damage and reduce texture and coefficient of friction. Do not allow soil, gravel, petroleum products, concrete, or asphalt mixes on the concrete pavement surface.

Construct crossings for traffic convenience. If the Engineer approves your request, you may use Type III portland cement in the concrete for crossings. Do not open crossings until the Department determines by California Test 523 the concrete pavement's modulus of rupture is at least 550 psi.

Do not open concrete pavement to traffic or use equipment on the concrete pavement for 10 days after paving nor before the concrete has attained a modulus of rupture of 550 psi except:

1. If the equipment is for sawing contraction joints
2. If the Engineer approves your request, one side of paving equipment's tracks may be on the concrete pavement after a modulus of rupture of 350 psi has been attained, provided:

    2.1. Unit pressure exerted on the concrete pavement by the paver does not exceed 20 psi
    2.2. You change the paving equipment tracks to prevent damage or the paving equipment tracks travel on protective material such as planks
    2.3. No part of the track is closer than 1 foot from the concrete pavement's edge

If concrete pavement damage including visible cracking occurs, stop operating paving equipment on the concrete pavement and repair the damage.

40-3.16 OBTAINING DRILLED CORES

Drill concrete pavement cores under ASTM C 42/ C 42M. Core drilling equipment must use diamond impregnated bits.

Clean, dry, and fill core holes with hydraulic cement grout (non-shrink) or pavement concrete. Coat the core hole walls with epoxy under the specifications for epoxy adhesive for

bonding new concrete to old concrete in Section 95, "Epoxy." The backfill must match the adjacent concrete pavement surface elevation and texture.

Do not allow residue from core drilling to fall on traffic, flow across shoulders or lanes occupied by traffic, or flow into drainage facilities including gutters.

40-3.17 REPAIR, REMOVAL, AND REPLACEMENT

40-3.17A General

Working cracks are full-depth cracks essentially parallel to a planned contraction joint beneath which a contraction crack has not formed. If the Engineer orders, take 4-inch nominal diameter cores on designated cracks under Section 40-3.16, "Obtaining Drilled Cores."

40-3.17B Repair of Spalls, Raveling, and Tearing

Before concrete pavement is open to traffic, repair spalls, raveling, and tearing in sawed joints. Make repairs in compliance with the following:

1. Saw a rectangular area with a diamond-impregnated blade at least 2 inches deep.
2. Remove unsound and damaged concrete between the saw cut and the joint and to the saw cut's depth. Do not use a pneumatic hammer heavier than 15 pounds. Do not damage concrete pavement to remain in place.
3. Dispose of removed concrete pavement under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."
4. Clean the repair area's exposed surfaces with high pressure abrasive water blasting. Further clean and dry the exposed surfaces with compressed air free of moisture and oil.
5. Apply epoxy as specified for epoxy resin adhesive for bonding new concrete to old concrete under Section 95, "Epoxy." Apply the epoxy with a stiff bristle brush.
6. Apply a portland cement concrete or mortar patch immediately following the epoxy application. Install an insert to prevent bonding of the sides of planned joints.

Repair spalls if they are:

1. Deeper than 0.05 foot
2. Wider than 0.04 foot
3. Longer than 0.3 foot

40-3.17C Route and Seal Working Cracks

Treat working cracks within 0.5 foot of either side of a planned contraction joint in compliance with the following:

1. Route and seal the crack with epoxy resin in compliance with the following:

    1.1. Use a powered rotary router mounted on wheels, with a vertical shaft and a routing spindle that casters as it moves along the crack
    1.2. Form a reservoir 3/4 inch deep by 3/8 inch wide in the crack
    1.3. Use equipment that does not cause raveling or spalling
    1.4. Place liquid sealant

2. Treat the contraction joint adjacent to the working crack in compliance with the following:

2.1. Use epoxy resin under ASTM C 881/C 881M, Type IV, Grade 2 for Type B joints and secondary saw cuts for Type A1 and Type A2 joints
2.2. Pressure inject epoxy resin under ASTM C 881/C881M, Type IV, Grade 1 for narrow saw cuts including initial saw cuts for Type A1 and Type A2 joints

If a working crack intersects a contraction joint, route and seal the working crack and seal the contraction joint as specified for installing liquid sealant under Section 40-3.09, "Joint Seal and Joint Sealant Installation."

40-3.17D Removal and Replacement of Slabs

As specified, remove and replace slabs or partial slabs for:

1. Insufficient thickness
2. Dowel bar misalignment
3. Working cracks more than 0.5 foot from a planned contraction joint

40-4 MEASUREMENT AND PAYMENT

40-4.01 MEASUREMENT

The contract item for concrete pavement as designated in the Verified Bid Item List is measured by the cubic yard. The Engineer calculates the pay quantity volume based on the plan dimensions. The Engineer does not measure concrete pavement placed outside those dimensions unless it was ordered by the Engineer.

The contract items for sealing joints as designated in the Verified Bid Item List are measured by the linear foot. Sealing joints are measured from field measurements for each type of sealed joint.

The contract item for shoulder rumble strips is measured by the station along each shoulder on which the rumble strips are constructed without deductions for gaps between indentations.

40-4.02 PAYMENT

The contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the concrete pavement, complete in place including bar reinforcement, tie bars, dowel bars, anchors, and fasteners, as shown on the plans and as specified in these specifications and the special provisions, and as directed by the Engineer.

The Engineer adjusts payment for each primary area deficient in average thickness in compliance with the following:

Pay Adjustments for Deficient Thickness

Average Thickness Deficiency (foot)	Deficiency Adjustment ($/yd^2)
0.01	0.90
0.02	2.30
0.03	4.10
0.04	6.40
0.05	9.11

If the average thickness deficiency is less than 0.01 foot, the Engineer does not adjust payment for thickness deficiency. If the average thickness deficiency is more than 0.01 foot, the Engineer rounds to the nearest 0.01 foot and uses the adjustment table.

Full compensation for core drilling and backfilling the cores ordered by the Engineer for measuring concrete pavement thickness and determining full-depth cracks is included in the contract price paid per cubic yard for concrete pavement as designated in the Engineer's Estimate and no additional compensation will be allowed therefor. The Department does not pay for additional concrete pavement thickness measurements requested by the Contractor.

The Department does not pay for the portion of concrete that penetrates treated permeable base.

Full compensation for the quality control plan is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for furnishing and applying asphaltic emulsion on cement treated permeable base is included in the contract price paid per cubic yard for concrete pavement as designated in the Engineer's Estimate and no separate payment will be made therefor.

Full compensation for repairing joints is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for furnishing, calibrating, and operating profilograph equipment for Profile Index, for submitting profilograms, and for performing corrective work is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for grooving and grinding for final finishing is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for removing and replacing joint material for grooving and grinding is included in the contract price per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for removing and replacing slabs is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for drilling holes and bonding tie bars with chemical adhesive is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no additional compensation will be allowed therefor.

Full compensation for repairing damage caused by operating paving equipment on new concrete pavement is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

The material and work necessary for the construction of crossings for public convenience, and their subsequent removal and disposal, will be paid for at the contract prices for the items of work involved and if there are no contract items for the work involved, payment for concrete pavement crossings will be made by extra work as specified in Section 4-1.03D, "Extra Work."

The Department will reduce payments to the Contractor by $56.12 per square yard for concrete pavement slabs allowed to remain in place represented by cores indicating dowel bars placed with their centers from ±2 inches to ±3 inches from the saw cut of a transverse contraction joint

The Engineer will calculate the reduced payment using the slab dimensions adjacent to and inclusive of the joints with misplaced dowel bars. This reduced payment is in addition to other specified payment reductions.

The Department will reduce payments to the Contractor by $59.56 per square yard for concrete pavement allowed to remain in place represented by cores indicating either of the following:

1. Tie bars placed outside their specified placement and position tolerances
2. Bar reinforcement placed outside their specified placement and position tolerances

The Engineer will calculate the reduced payment using the slab dimensions adjacent to and inclusive of the joints with misplaced tie bars. This reduced payment is in addition to other specified payment reductions.

Full compensation for core drilling for checking dowel or tie bar alignment and backfilling the cores is included in the contract price paid per cubic yard for concrete pavement as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

If the initial cores show that dowel bars or tie bars are out of tolerance for alignment and the Engineer orders additional dowel or tie bar coring, full compensation for drilling the additional cores is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no additional compensation will be allowed therefor.

If the initial cores show that dowel bars or tie bars are within alignment tolerances and the Engineer orders more dowel or tie bar coring, the additional cores will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The Department will not pay for additional coring to check dowel or tie bar alignment you request.

Full compensation for performing profilograph tests, furnishing the profilograms and electronic files to the Engineer, and for performing corrective work is included in the contract price paid per cubic yard for the type of concrete pavement as designated in the Verified Bid Item List and no additional compensation will be allowed therefor.

The contract prices paid per linear foot for seal pavement joint, seal isolation joint, and seal longitudinal isolation joint include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in sealing pavement joints and sealing isolation joints, complete in place, as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer.

The contract price paid per station for shoulder rumble strip includes full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing the rumble strip complete in place, as shown on the plans, as specified in these Standard Specifications and as directed by the Engineer.

^^

SECTION 41 PAVEMENT SUBSEALING AND JACKING
(Issued 01-05-07)

In Section 41-1.02 replace the 2nd and 3rd paragraphs with:

Cement for grout shall be Type II portland cement conforming to the provisions in Section 90-2.01A, "Cement."

Fly ash shall conform to the requirements in AASHTO Designation: M 295 for either Class C or for Class F. The brand of fly ash used in the work shall conform to the provisions for approval of admixture brands in Section 90-4.03, "Admixture Approval."

In Section 41-1.02 replace the 5th paragraph with:

Chemical admixtures and calcium chloride may be used. Chemical admixtures in the grout mix shall conform to the provisions in Section 90-4, "Admixtures." Calcium chloride shall conform to ASTM Designation: D 98.

^^

SECTION 42 GROOVE AND GRIND PAVEMENT
(Issued 05-15-09)

In Section 42-2.02 replace the 3rd paragraph with:

Existing portland cement concrete pavement not constructed as part of the project shall be ground as follows:

> Grinding shall be performed so that the pavement surface on both sides of all transverse joints and cracks has essentially the same depth of texture and does not vary from a true plane enough to permit a 0.006-foot thick shim 0.25-foot wide to pass under a 3-foot straightedge adjacent to either side of the joint or crack when the straightedge is laid on the pavement parallel to centerline with its midpoint at the joint or crack. After grinding has been completed, the pavement shall conform to the straightedge and profile requirements specified in Section 40-1.03, "Quality Control and Assurance."
> Abnormally depressed areas due to subsidence or other localized causes will be excluded from testing with the profilograph and 12-foot straightedge specified in Section 40-1.03. The accumulated total of the excluded areas shall not exceed 5 percent of the total area to be ground. Profilograph testing shall end 25 feet prior to excluded areas and shall resume 25 feet following the excluded areas.

In Section 42-2.03 replace the 2nd paragraph with:

Replacement concrete paving shall conform to the provisions in Section 40, "Concrete Pavement." Replacement pavement may be spread and shaped by any suitable powered finishing machines, supplemented by handwork as necessary. Consolidation of the concrete shall be by means of high-frequency internal vibrators within 15 minutes after the concrete is deposited on the subgrade. Vibrating shall be done with care and in such manner to assure adequate consolidation adjacent to forms and uniformly across the full paving width. Use of vibrators for extensive shifting of the mass of concrete will not be permitted. Methods of spreading, shaping and compacting that result in segregation, voids or rock pockets shall be discontinued, and the Contractor shall adopt methods which will produce dense homogeneous

pavement conforming to the required cross section. Finishing may be performed by hand method, as specified in Section 40-3.11B, "Stationary Side Form Finishing."

^^

SECTION 49 PILING
(Issued 12-19-08)

In Section 49-1.03 replace the 4th paragraph with:

Modification to the specified installation methods and specified pile tip elevation will not be considered at locations where settlement, tension demands, or lateral load demands control design pile tip elevations or when the plans state that specified pile tip elevation shall not be revised.

In Section 49-1.03 in the 6th paragraph, replace the 1st sentence with:

Indicator compression pile load testing shall conform to the requirements in ASTM Designation: D 1143-81.

In Section 49-1.03 in the 7th paragraph, replace the 1st sentence with:

Indicator tension pile load testing shall conform to the requirements in ASTM Designation: D 3689-90.

In Section 49-1.03 replace the 9th paragraph with:

The Contractor shall furnish piling of sufficient length to obtain the specified tip elevation shown on the plans or specified in the special provisions.

In Section 49-1.04 replace the 6th paragraph with:

The Contractor may use additional cementitious material in the concrete for the load test and anchor piles.

In Section 49-6.01 replace the 1st paragraph with:

The length of timber, steel, and precast prestressed concrete piles, and of cast-in-place concrete piles consisting of driven shells filled with concrete, shall be measured along the longest side, from the tip elevation shown on the plans to the plane of pile cut-off.

In Section 49-6.02 add:

When pile tips are revised by the Engineer for timber, steel, and precast prestressed concrete piles, and for cast-in-place concrete piles consisting of driven shells filled with concrete, the additional length required, including all materials, equipment, and labor for furnishing, splicing, and installing the piling, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

^^

SECTION 50 PRESTRESSING CONCRETE
(Issued 06-05-09)

In Section 50-1.05 replace the 1st paragraph with:

Prestressing steel shall be high-tensile wire conforming to the requirements in ASTM Designation: A 421, including Supplement I; high-tensile seven-wire strand conforming to the requirements in ASTM Designation: A 416; or uncoated deformed (Type II) high-strength steel bars conforming to the requirements in ASTM Designation: A 722, including all supplementary requirements. The maximum weight requirement of ASTM Designation: A 722 will not apply.

In Section 50-1.05 in the 3rd paragraph, delete item A.

In Section 50-1.07 replace the 2nd paragraph with:

Ducts shall be fabricated with either welded or interlocked seams. Galvanizing of the welded seam will not be required. Ducts shall have sufficient strength to maintain their correct alignment during placing of concrete. Joints between sections of duct shall be positive metallic connections which do not result in angle changes at the joints. Waterproof tape shall be used at the connections. Ducts shall be bent without crimping or flattening. Transition couplings connecting the ducts to anchoring devices shall be either ferrous metal or polyolefin. Ferrous metal transition couplings need not be galvanized.

In Section 50-1.07 replace the 7th paragraph with:

All ducts with a total length of 400 feet or more shall be vented. Vents shall be placed at intervals of not more than 400 feet and shall be located within 6 feet of every high point in the duct profile. Vents shall be 1/2 inch minimum diameter standard pipe or suitable plastic pipe. Connections to ducts shall be made with metallic or plastic structural fasteners. Plastic components, if selected, shall not react with the concrete or enhance corrosion of the prestressing steel and shall be free of water soluble chlorides. The vents shall be mortar tight, taped as necessary, and shall provide means for injection of grout through the vents and for sealing the vents. Ends of vents shall be removed one inch below the roadway surface after grouting has been completed.

In Section 50-1.08 in the 11th paragraph, replace item B with:

B. When the concrete is designated by class or cementitious material content, either the concrete compressive strength shall have reached the strength shown on the plans at the time of stressing or at least 28 days shall have elapsed since the last concrete to be prestressed has been placed, whichever occurs first.

In Section 50-1.09 replace the 2nd and 3rd paragraphs with:

Grout shall consist of cement and water and may contain an admixture if approved by the Engineer.

Cement shall conform to the provisions in Section 90-2.01A, "Cement."

In Section 50-1.11 replace the 1st paragraph with:

No separate payment will be made for pretensioning precast concrete members. Payment for pretensioning precast concrete members shall be considered as included in the contract price paid for furnish precast members as provided for in Section 51, "Concrete Structures."

^^

SECTION 51 CONCRETE STRUCTURES
(Issued 08-05-11)

In Section 51-1.05 in the 11th paragraph, replace the 1st sentence with:

Form panels for exposed surfaces shall be furnished and placed in uniform widths of not less than 3 feet and in uniform lengths of not less than 6 feet, except at the end of continuously formed surfaces where the final panel length required is less than 6 feet.

In Section 51-1.06A(3) in the 1st paragraph, replace items E and F with:

E. When timber members are used to brace falsework bents which are located adjacent to roadways or railroads, all connections for the timber bracing shall be of the bolted type using 5/8-inch diameter or larger bolts or coil rod with a root diameter equal to that of the shank of a 5/8-inch diameter bolt.

F. Falsework member clearances must be at least those shown in the following table:

Falsework member	Clearances	
	To railing members, barriers, and anchored temporary railings	To unanchored temporary railings
Footings	0'-3"	2'-0"
Piles	1'-0"	2'-9"
Other members	2'-0"	2'-9"

In Section 51-1.06C in the 11th paragraph, replace the 1st sentence with:

Falsework for box culverts and other structures with decks lower than the roadway pavement and with span lengths of 14 feet or less shall not be released until the last placed concrete has attained a compressive strength of 1,600 psi, provided that curing of the concrete is not interrupted.

In Section 51-1.11 replace the 6th paragraph with:

Construction methods and equipment employed by the Contractor shall conform to the provisions in Section 7-1.02, "Load Limitations."

In Section 51-1.12D replace the 4th paragraph with:

Expanded polystyrene shall be a commercially available polystyrene board. Expanded polystyrene shall have a minimum flexural strength of 35 psi determined in conformance with the requirements in ASTM Designation: C 203 and a compressive yield strength of between 16 and 40 psi at 5 percent compression. Surfaces of expanded polystyrene against which concrete is placed shall be faced with hardboard. Hardboard shall be 1/8 inch minimum thickness, conforming to ANSI A135.4, any class. Other facing materials may be used provided they furnish equivalent protection. Boards shall be held in place by nails, waterproof adhesive, or other means approved by the Engineer.

In Section 51-1.12F replace the 3rd paragraph with:

Type A and AL joint seals shall consist of a groove in the concrete that is filled with field-mixed silicone sealant.

In Section 51-1.12F in the 6th paragraph, replace the table with:

Movement Rating (MR)	Seal Type
MR ≤ 1 inch	Type A or Type B
1 inch < MR ≤ 2 inches	Type B
2 inches < MR ≤ 4 inches	Joint Seal Assembly (Strip Seal)
MR > 4 inches	Joint Seal Assembly (Modular Unit) or Seismic Joint

In Section 51-1.12F(3)(a) replace the 1st and 2nd paragraphs with:

The sealant must consist of a 2-component silicone sealant that will withstand up to ±50 percent movement.

Silicone sealants must be tested under California Test 435 and must comply with the following:

Specification	Requirement
Modulus at 150 percent elongation	8-75 psi
Recovery	21/32 inch max.
Notch Test	Notched or loss of bond 1/4 inch, max.
Water Resistance	Notched or loss of bond 1/4 inch, max.
Ultraviolet Exposure ASTM Designation: G 154, Table X2.1,Cycle 2.	No more than slight checking or cracking.
Cone Penetration	4.5-12.0 mm

In Section 51-1.12F(3)(a) delete the 3rd and 8th paragraphs.

In Section 51-1.12F(3)(a) replace the 10th paragraph with:

A Certificate of Compliance accompanied by a certified test report must be furnished for each batch of silicone sealant in conformance with the provisions in Section 6-1.07, "Certificates of Compliance."

In Section 51-1.12F(3)(b) replace the 2nd paragraph with:

The preformed elastomeric joint seal must conform to the requirements in ASTM D 2628 and the following:

1. The seal must consist of a multichannel, nonporous, homogeneous material furnished in a finished extruded form.
2. The minimum depth of the seal measured at the contact surface must be at least 95 percent of the minimum uncompressed width of the seal as designated by the manufacturer.
3. When tested in conformance with the requirements in California Test 673 for Type B seals, joint seals must provide a movement rating (MR) of not less than that shown on the plans.
4. The top and bottom edges of the joint seal must maintain continuous contact with the sides of the groove over the entire range of joint movement.
5. The seal must be furnished full length for each joint with no more than 1 shop splice in any 60-foot length of seal.
6. The Contractor must demonstrate the adequacy of the procedures to be used in the work before installing seals in the joints.
7. One field splice per joint may be made at locations and by methods approved by the Engineer. The seals are to be manufactured full length for the intended joint, then cut at the approved splice section and rematched before splicing. The Contractor must submit splicing details prepared by the joint seal manufacturer for approval before beginning splicing work.
8. Shop splices and field splices must have no visible offset of exterior surfaces and must show no evidence of bond failure.
9. At all open ends of the seal that would admit water or debris, each cell must be filled to a depth of 3 inches with commercial quality open cell polyurethane foam or closed by other means subject to approval by the Engineer.

In Section 51-1.12F(3)(b) replace the 7th paragraph with:

The joint seal must be installed full length for each joint with equipment that does not twist or distort the seal, elongate the seal longitudinally, or otherwise cause damage to the seal or to the concrete forming the groove.

In Section 51-1.12F(3)(b) in the 11th paragraph, replace the 1st sentence with:

Samples of the prefabricated joint seals, not less than 3 feet in length, will be taken by the Engineer from each lot of material.

In Section 51-1.12H(1) in the 6th paragraph, replace the 4th and 5th sentences with:

Each ply of fabric shall have a breaking strength of not less than 800 pounds per inch of width in each thread direction when 3" x 36" samples are tested on split drum grips. The bond between double plies shall have a minimum peel strength of 20 pounds per inch.

In Section 51-1.12H(1) in the 8th paragraph in the table, replace the hardness (Type A) requirements with:

Hardness (Type A)	D 2240 with 2kg mass.	55 ±5

In Section 51-1.12H(2) in the 1st paragraph in item A, replace the 1st and 2nd sentences with:

The bearings shall consist of alternating steel laminates and internal elastomer laminates with top and bottom elastomer covers. Steel laminates shall have a nominal thickness of 0.075 inch (14 gage).

In Section 51-1.13 replace the 2nd, 3rd, and 4th paragraphs with:

Surfaces of fresh concrete at horizontal construction joints shall be thoroughly consolidated without completely removing surface irregularities. Additionally, surfaces of fresh concrete at horizontal construction joints between girder stems and decks shall be roughened to at least a 1/4-inch amplitude.

Construction joint surfaces shall be cleaned of surface laitance, curing compound, and other foreign materials using abrasive blast methods before fresh concrete is placed against the joint surface.

Construction joint surfaces shall be flushed with water and allowed to dry to a surface dry condition immediately before placing concrete.

In Section 51-1.135 replace the 1st paragraph with:

Mortar shall be composed of cementitious material, sand, and water proportioned and mixed as specified in this Section 51-1.135.

In Section 51-1.135 replace the 3rd paragraph with:

The proportion of cementitious material to sand, measured by volume, shall be 1 to 2 unless otherwise specified.

In Section 51-1.17 in 4th paragraph, replace the 3rd sentence with:

The surfaces shall have a profile trace showing no high points in excess of 0.25 inch, and the portions of the surfaces within the traveled way shall have a profile count of 5 or less in any 100 foot section.

Add:

51-1.17A Deck Crack Treatment

The Contractor shall use all means necessary to minimize the development of shrinkage cracks.

The Contractor shall remove all equipment and materials from the deck and clean the surface as necessary for the Engineer to measure the surface crack intensity. Surface crack intensity will be determined by the Engineer after completion of concrete cure, before prestressing, and before the release of falsework. In any 500 square foot portion of deck within the limits of the new concrete deck, should the intensity of cracking be such that there are more than 50 feet of cracks whose width at any location exceeds 0.02 inch, the deck shall be treated with a high molecular weight methacrylate (HMWM) resin system. The area of deck to be treated shall have a width that extends for the entire width of new deck inside the concrete barriers and a length that extends at least 5 feet beyond the furthest single continuous crack outside the 500 square foot portion, measured from where that crack exceeds 0.02 inch in width, as determined by the Engineer.

Deck crack treatment shall include furnishing, testing, and applying the HMWM resin system, with sand and absorbent material. If grinding is required, deck crack treatment shall take place before grinding.

51-1.17A(1) Submittals

Submit a HMWM resin system placement plan. When HMWM resin is to be applied within 100 feet of a residence, business, or public space including sidewalks under a structure, also submit a public safety plan. Submit plans under Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The review time is 15 days.

The HMWM resin system placement plan must include:

1. Schedule of work and testing for each bridge
2. Description of equipment for applying HMWM resin
3. Range of gel time and final cure time for HMWM resin
4. Absorbent material to be used
5. Description of equipment for applying and removing excess sand and absorbent material
6. Procedure for removing HMWM resin from the deck, including equipment
7. Storage and handling of HMWM resin components and absorbent material
8. Disposal of excess HMWM resin and containers

The public safety plan must include:

1. A public notification letter with a list of delivery and posting addresses. The letter must state HMWM resin work locations, dates, times, and what to expect. Deliver the letter to residences and businesses within 100 feet of HMWM resin work locations and to local fire and police officials at least 7 days before starting work. Post the letter at the job site.
2. An airborne emissions monitoring plan prepared and executed by a certified industrial hygienist (CIH) certified in comprehensive practice by the American Board of Industrial Hygiene. The plan must have at least 4 monitoring points including the mixing point, application point, and point of nearest public contact. Monitor airborne emissions during HMWM resin work and submit emissions monitoring results after completing the work.
3. An action plan for protection of the public when airborne emissions levels exceed permissible levels.

4. A copy of the CIH's certification.

If the measures proposed in the safety plan are inadequate to provide for public safety associated with the use of HMWM resin, the Engineer will reject the plan and direct the Contractor to revise the plan. Directions for revisions will be in writing and include detailed comments. The Engineer will notify the Contractor of the approval or rejection of a submitted or revised plan within 15 days of receipt of that plan.

51-1.17A(2) Quality Control and Assurance

Submit samples of HMWM resin components 15 days before use under Section 6-3, "Testing," of the Standard Specifications. Notify the Engineer 15 days before delivery of HMWM resin components in containers over 55 gallons to the job site.

Complete a test area before starting work. Results from airborne emissions monitoring of the test area must be submitted to the Engineer before starting production work.

The test area must:

1. Be approximately 500 square feet
2. Be placed within the project limits outside the traveled way at an approved location
3. Be constructed using the same equipment as the production work
4. Replicate field conditions for the production work
5. Demonstrate proposed means and methods meet the acceptance criteria
6. Demonstrate production work will be completed within the time allowed
7. Demonstrate suitability of the airborne emissions monitoring plan

The test area will be acceptable if:

1. The treated deck surface is tack free and non-oily
2. The sand cover adheres and resists brushing by hand
3. Excess sand and absorbent material has been removed
4. The coefficient of friction is at least 0.35 when tested under California Test 342

51-1.17A(3) Materials

HMWM resin system consists of a resin, promoter, and initiator. HMWM resin must be low odor and comply with the following:

HMWM Resin

Property	Requirement	Test Method
Volatile Content*	30 percent, maximum	ASTM D 2369
Viscosity*	25 cP, maximum, (Brookfield RVT with UL adaptor, 50 RPM at 77°F)	ASTM D 2196
Specific Gravity*	0.90 minimum, at 77°F	ASTM D 1475
Flash Point*	180°F, minimum	ASTM D 3278
Vapor Pressure*	1.0 mm Hg, maximum, at 77°F	ASTM D 323
Tack-free Time	400 minutes, maximum, at 25°C	Specimens prepared per California Test 551
PCC Saturated Surface-Dry Bond Strength	3.5 MPa, minimum at 24 hours and 21 ± 1°C	California Test 551

* Test must be performed before adding initiator.

Sand for abrasive sand finish must:

1. Be commercial quality dry blast sand
2. Have at least 95 percent pass the No. 8 sieve and at least 95 percent retained on the No. 20 sieve when tested under California Test 205

Absorbent material must be diatomaceous earth, abrasive blast dust, or substitute recommended by the HMWM resin supplier and approved by the Engineer.

51-1.17A(4) Construction

HMWM resin system applied by machine must be:

1. Combined in volumetric streams of promoted resin to initiated resin by static in-line mixers
2. Applied without atomization

HMWM resin system may be applied manually. Limit the quantity of resin mixed for manual application to 5 gallons at a time.

Prepare the area to be treated by abrasive blasting. Curing compound, surface contaminants, and foreign material must be removed from the bridge deck surface. Sweep the deck surface clean after abrasive blasting and blow loose material from cracks using high-pressure air.

The deck surface must be dry when abrasive blast cleaning is performed. When abrasive blast cleaning within 10 feet of public traffic, remove dust and residue from abrasive blast cleaning using a vacuum attachment operating concurrently with blasting equipment . If the deck surface becomes contaminated before placing HMWM, abrasive blast clean the contaminated area and sweep the deck clean.

The deck must be dry before applying HMWM resin. The concrete surface must be at least 50 degrees F and at most 100 degrees F. Relative humidity must be expected to be at most 85 percent during the work shift.

Thoroughly mix all components of the HMWM resin system. Apply HMWM resin to the deck surface within 5 minutes of mixing at approximately 90 sq ft per gallon. The Engineer

determines the exact application rate. The resin gel time must be between 40 and 90 minutes. HMWM resin that thickens during application is rejected.

Spread the HMWM resin system uniformly. Completely cover surfaces to be treated and fill all cracks. Redistribute excess resin using squeegees or brooms within 10 minutes of application. For textured or grooved deck surfaces, excess resin must be removed from the texture indentations.

Apply the abrasive sand finish of at least 2 pounds per square yard or until saturation as determined by the Engineer no sooner than 20 minutes after applying resin. Apply absorbent material before opening lane to traffic. Remove excess sand and absorbent material by vacuuming or power sweeping.

Traffic or equipment will be allowed on the overlay after the Engineer has determined:

1. The treated deck surface is tack free and non-oily
2. The sand cover adheres and resists brushing by hand
3. Excess sand and absorbent material has been removed
4. No material will be tracked beyond limits of treatment by traffic

In Section 51-1.18C replace the 2nd paragraph with:

When Class 2 surface finish (gun finish) is specified, ordinary surface finish shall first be completed. The concrete surfaces shall then be abrasive blasted to a rough texture and thoroughly washed down with water. While the washed surfaces are damp, but not wet, a finish coating of machine applied mortar, approximately 1/4 inch thick, shall be applied in not less than 2 passes. The coating shall be pneumatically applied and shall consist of either (1) sand, cementitious material, and water mechanically mixed prior to its introduction to the nozzle, or (2) premixed sand and cementitious material to which water is added prior to its expulsion from the nozzle. The use of admixtures shall be subject to the approval of the Engineer as provided in Section 90, "Portland Cement Concrete." Unless otherwise specified, supplementary cementitious materials will not be required. The proportion of cementitious material to sand shall be not less than one to 4, unless otherwise directed by the Engineer. Sand shall be of a grading suitable for the purpose intended. The machines shall be operated and the coating shall be applied in conformance with standard practice. The coating shall be firmly bonded to the concrete surfaces on which it is applied.

In Section 51-1.18C replace the 5th paragraph with:

When surfaces to be finished are in pedestrian undercrossings, the sand shall be silica sand and the cementitious material shall be standard white portland cement.

In Section 51-1.23 add:

Full compensation for deck crack treatment, including the public safety plan, shall be considered as included in the contract price paid per cubic yard for structural concrete, bridge, and no additional compensation will be allowed therefor.

^^

SECTION 52 REINFORCEMENT
(Issued 06-05-09)

In Section 52-1.02(B) between the 3rd and 4th paragraphs, add:

The epoxy powder coating shall be selected from the Department's Pre-Qualified Products List.

In Section 52-1.02(B) replace the 14th paragraph with:

Except for lap splices, splices for epoxy-coated reinforcement shall be coated with a corrosion protection covering that is selected from the Department's Pre-Qualified Products List. The covering shall be installed in accordance with the manufacturer's recommendations.

In Section 52-1.07 in the 11th paragraph, replace the table with:

Height Zone (H) (Feet above ground)	Wind Pressure Value (psf)
$H \leq 30$	20
$30 < H \leq 50$	25
$50 < H \leq 100$	30
$H > 100$	35

In Section 52-1.08B(1) replace the 1st paragraph with:

Mechanical splices to be used in the work shall be selected from the Department's Pre-Qualified Products List.

In Section 52-1.08B(1) in the 2nd paragraph, replace the table with:

Reinforcing Bar Number	Total Slip
4	0.020-inch
5	0.020-inch
6	0.020-inch
7	0.028-inch
8	0.028-inch
9	0.028-inch
10	0.036-inch
11	0.036-inch
14	0.048-inch
18	0.060-inch

In Section 52-1.08B(1), in the 6th paragraph, delete item C.

In Section 52-1.08B(2) in the 6th paragraph, replace the subparagraph with:

The minimum preheat and interpass temperatures shall be 400º F for Grade 40 bars and 600º F for Grade 60 bars. Immediately after completing the welding, at least 6 inches of the bar on each side of the splice shall be covered by an insulated wrapping to control the rate of cooling. The insulated wrapping shall remain in place until the bar has cooled below 200º F.

Replace Section 52-1.08B(3) with:

52-1.08B(3) Resistance Butt Welds

Shop produced resistance butt welds shall be produced by a fabricator who is selected from the Department's Pre-Qualified Products List.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished for each shipment of splice material. The Certificate of Compliance shall include heat number, lot number and mill certificates.

In Section 52-1.08C replace the 3rd paragraph with:

Testing on prequalification and production sample splices shall be performed at an approved independent testing laboratory. The laboratory shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors who will provide other services or materials for the project.

The independent testing laboratory shall be selected from the Department's Pre-Qualified Products List.

In Section 52-1.08C replace the 5th paragraph with:

Prequalification and production sample splices and testing shall conform to California Test 670 and these specifications.

In Section 52-1.08C delete the 6th paragraph.

In Section 52-1.08C replace the 8th paragraph with:

Each sample splice, as defined herein, shall be identified as representing either a prequalification or production test sample splice.

In Section 52-1.08C in the 10th paragraph, delete the last sentence.

Replace Section 52-1.08C(1) with:

52-1.08C(1) Splice Prequalification Report

Before using any service splices or ultimate butt splices in the work, the Contractor shall submit a Splice Prequalification Report. The report shall include the following:

A. A copy of the manufacturer's product literature giving complete data on the splice material and installation procedures.
B. Names of the operators who will be performing the splicing.
C. Descriptions of the positions, locations, equipment, and procedures that will be used in the work.
D. Certifications from the fabricator for prequalification of operators and procedures based on sample tests performed no more than 2 years before submitting the report. Each operator shall be certified by performing 2 sample splices for each bar size of each splice type that the operator will be performing in the work. For deformation-dependent types

of splice devices, each operator shall be certified by performing 2 additional samples for each bar size and deformation pattern that will be used in the work.

Prequalification sample splices shall be tested by an approved independent testing laboratory and shall conform to the appropriate production test criteria and slip requirements specified herein. When epoxy-coated reinforcement is required, resistance butt welded sample splices shall have the weld flash removed by the same procedure as will be used in the work, before coating and testing. The Splice Prequalification Report shall include the certified test results for all prequalification sample splices.

The QCM shall review and approve the Splice Prequalification Report before submitting it to the Engineer for approval. The Contractor shall allow 2 weeks for the review and approval of a complete report before performing any service splicing or ultimate butt splicing in the work.

In Section 52-1.08C(2)(a) replace the 1st, 2nd, 3rd, 4th, and 5th paragraphs with:

Production tests shall be performed by an approved independent testing laboratory for all service splices used in the work. A production test shall consist of testing 4 sample splices prepared for each lot of completed splices. The samples shall be prepared by the Contractor using the same splice material, position, operators, location, and equipment, and following the same procedure as used in the work.

At least one week before testing, the Contractor shall notify the Engineer in writing of the date and location where the testing of the samples will be performed.

The 4 samples from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the approved independent testing laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 samples of splices shall not be tested.

Before performing any tensile tests on production test sample splices, one of the 4 samples shall be tested for, and shall conform to, the requirements for total slip in Section 52-1.08B(1), "Mechanical Splices." Should this sample not meet the total slip requirements, one retest, in which the 3 remaining samples are tested for total slip, will be allowed. Should any of the 3 remaining samples not conform to the total slip requirements, all splices in the lot represented by this production test will be rejected.

If 3 or more sample splices from a production test conform to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable.

Replace Section 52-1.08C(2)(b) with:

52-1.08C(2)(b) Quality Assurance Test Requirements for Service Splices

In addition to the required production tests, the Contractor shall concurrently prepare 4 service quality assurance sample splices for:

A. The first production test performed.
B. One of every 5 subsequent production tests, or fraction thereof, randomly selected by the Engineer.

These service quality assurance sample splices shall be prepared in the same manner as specified herein for service production sample splices.

The service quality assurance sample splices shall be shipped to the Transportation Laboratory for quality assurance testing. Each set of 4 sample splices shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 samples of splices will not be tested. Sample splices not accompanied by the supporting documentation required in Section 52-1.08B(1), "Mechanical Splices," for mechanical splices, or in Section 52-1.08B(3), "Resistance Butt Welds," for resistance butt welds, will not be tested.

Quality assurance testing will be performed in conformance with the requirements for service production sample splices in Section 52-1.08C(2)(a), "Production Test Requirements for Service Splices."

Replace Section 52-1.08C(3) with:

52-1.08C(3) Ultimate Butt Splice Test Criteria

Ultimate production and quality assurance sample splices shall be tensile tested in conformance with the requirements described in ASTM Designation: A 370 and California Test 670.

Each sample splice shall be identified as representing a prequalification, production, or quality assurance sample splice.

The portion of hoop reinforcing bar, removed to obtain a sample splice, shall be replaced using a prequalified ultimate mechanical butt splice, or the hoop shall be replaced in kind.

Reinforcing bars, other than hoops, from which sample splices are removed, shall be repaired using ultimate mechanical butt splices conforming to the provisions in Section 52-1.08C(1), "Splice Prequalification Report," or the bars shall be replaced in kind. These bars shall be repaired or replaced such that no splices are located in any "No Splice Zone" shown on the plans.

Ultimate production and quality assurance sample splices shall rupture either: 1) in the reinforcing bar but outside of the affected zone, provided that the sample splice has visible necking or 2) anywhere, provided that the sample splice has achieved the strain requirement for necking.

When tested in conformance with the requirements in California Test 670, "Necking (Option I)," the visible necking shall be such that there is a visible decrease in the sample's cross-sectional area at the point of rupture.

When tested in conformance with the requirements in California Test 670, "Necking (Option II)," the strain requirement for necking shall be such that the largest measured strain is not less than 6 percent for No. 11 and larger bars, or not less than 9 percent for No. 10 and smaller bars.

The affected zone is the portion of the reinforcing bar where any properties of the bar, including the physical, metallurgical, or material characteristics, have been altered by fabrication or installation of the splice. The weld and one inch adjacent to the weld will be considered part of the affected zone.

In Section 52-1.08C(3)(a) replace the 1st paragraph with:

Production tests shall be performed for all ultimate butt splices used in the work. A production test shall consist of testing 4 sample splices removed from each lot of completed splices.

In Section 52-1.08C(3)(a) replace the 3rd paragraph with:

After notification has been received, the Engineer will randomly select the 4 sample splices to be removed from the lot and place tamper-proof markings or seals on them. These ultimate production sample splices shall be removed by the Contractor, and tested by an approved independent testing laboratory.

In Section 52-1.08(C)(3)(a) replace the 5th, 6th, and 7th paragraphs with:

A sample splice will be rejected if a tamper-proof marking or seal is disturbed before testing.

The 4 sample splices from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the approved independent testing laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 sample splices shall not be tested.

Before performing any tensile tests on production test sample splices, one of the 4 sample splices shall be tested for, and shall conform to, the requirements for total slip in Section 52-1.08B(1), "Mechanical Splices." Should this sample splice not meet these requirements, one retest, in which the 3 remaining sample splices are tested for total slip, will be allowed. Should any of the 3 remaining sample splices not conform to these requirements, all splices in the lot represented by this production test will be rejected.

Replace Section 52-1.08C(3)(b) with:

52-1.08C(3)(b) Quality Assurance Test Requirements for Ultimate Butt Splices

In addition to the required production tests, the Contractor shall concurrently prepare 4 ultimate quality assurance sample splices for:

A. The first production test performed.
B. One of every 5 subsequent production tests, or fraction thereof, randomly selected by the Engineer.

These ultimate quality assurance sample splices shall be prepared in the same manner as specified herein for ultimate production sample splices.

The ultimate quality assurance sample splices shall be shipped to the Transportation Laboratory for quality assurance testing. Each set of 4 sample splices shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 samples of splices will not be tested. Sample splices not accompanied by the supporting documentation required in Section 52-1.08B(1), "Mechanical Splices," for mechanical splices, or in Section 52-1.08B(3), "Resistance Butt Welds," for resistance butt welds, will not be tested.

Quality assurance testing will be performed in conformance with the requirements for ultimate production sample splices in Section 52-1.08C(3)(a), "Production Test Requirements for Ultimate Butt Splices."

Replace Section 52-1.08D with:

A Production Test Report for all testing performed on each lot shall be prepared by the approved independent testing laboratory performing the testing and submitted to the QCM for review and approval. The report shall be signed by an engineer who represents the laboratory

and is registered as a Civil Engineer in the State of California. The report shall include, as a minimum, the following information for each test: contract number, bridge number, lot number and location, bar size, type of splice, length of mechanical splice, length of test specimen, physical condition of test sample splice, any notable defects, total measured slip, and ultimate tensile strength of each splice. In addition, the report shall include location of visible necking area and largest measured strain for ultimate butt splices.

The QCM must review, approve, and forward each Production Test Report to the Engineer for review before the splices represented by the report are encased in concrete. The Engineer will have 3 working days to review each Production Test Report and respond in writing after a complete report has been received. Should the Contractor elect to encase any splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection.

Quality assurance test results for each bundle of 4 samples of splices will be reported in writing to the Contractor within 3 working days after receipt of the bundle by the Transportation Laboratory. In the event that more than one bundle is received on the same day, 2 additional working days shall be allowed for providing test results for each additional bundle received. A test report will be made for each bundle received. Should the Contractor elect to encase splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection.

^^

SECTION 53 SHOTCRETE
(Issued 11-02-07)

In Section 53-1.01 replace the 3rd paragraph with:

The dry-mix process shall consist of delivering dry mixed aggregate and cementitious material pneumatically or mechanically to the nozzle body and adding water and mixing the materials in the nozzle body. The wet-mix process shall consist of delivering mixed aggregate, cement, and water pneumatically to the nozzle and adding any admixture at the nozzle.

In Section 53-1.02 replace the 1st through 4th paragraphs with:

Cementitious material, fine aggregate, and mixing water shall conform to the provisions in Section 90, "Portland Cement Concrete."

Shotcrete to be mixed and applied by the dry-mix process shall consist of one part cementitious material to not more than 4.5 parts fine aggregate, thoroughly mixed in a dry state before being charged into the machine. Measurement may be either by volume or by weight. The fine aggregate shall contain not more than 6 percent moisture by weight.

Shotcrete to be mixed and applied by the wet-mix process shall consist of cementitious material, fine aggregate, and water and shall contain not less than 632 pounds of cementitious

material per cubic yard. A maximum of 30 percent pea gravel may be substituted for fine aggregate. The maximum size of pea gravel shall be such that 100 percent passes the 1/2 inch screen and at least 90 percent passes the 3/8 inch screen.

Admixtures may be added to shotcrete and shall conform to the provisions in Section 90-4, "Admixtures."

In Section 53-1.04 in the 3rd paragraph, replace item C with:

C. Aggregate and cementitious material that have been mixed for more than 45 minutes shall not be used unless otherwise permitted by the Engineer.

Replace Section 53-1.07 with:

53-1.07 MEASUREMENT

Quantities of shotcrete will be measured by the cubic yard computed from measurements, along the slope, of actual areas placed and the theoretical thickness shown on the plans. The Department does not pay for shotcrete placed outside the dimensions shown on the plans or to fill low foundation.

Replace Section 53-1.08 with:

53-1.08 PAYMENT

The contract price paid per cubic yard for shotcrete shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in placing shotcrete, including preparing the foundation, wire reinforcement, structure backfill, joint filling material, and if required by the plans, drains with sacked pervious backfill material, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

^^

SECTION 54 WATERPROOFING
(Issued 07-01-11)

In Section 54-1.02, replace the 1st paragraph with:

Waterproofing asphalt shall conform to the requirements in ASTM Designation: D 449, Type I for below ground and Type II for above ground.

^^

SECTION 55 STEEL STRUCTURES
(Issued 08-05-11)

In Section 55-1.01 replace the 4th paragraph with:

Design details, fabrication, and workmanship for steel railway bridges shall conform to the provisions in Chapter 15, "Steel Structures," of the AREMA Manual for Railway Engineering.

In Section 55-1.05 replace the 3rd paragraph with:

Construction methods and equipment employed by the Contractor shall conform to the provisions in Section 7-1.02, "Load Limitations."

In Section 55-2.01 replace the table in the 5th paragraph with:

Material Conforming to ASTM Designation: A 709/A 709M	CVN Impact Value (Ft. Lbs at Temp.)
Grade 36	15 at 40º F
Grade 50* (2 inches and under in thickness)	15 at 40º F
Grade 50W* (2 inches and under in thickness)	15 at 40º F
Grade 50* (Over 2 inches to 4 inches in thickness)	20 at 40º F
Grade 50W* (Over 2 inches to 4 inches in thickness)	20 at 40º F
Grade HPS 50W* (4 inches and under in thickness)	20 at 10º F
Grade HPS 70W (4 inches and under in thickness)	25 at -10º F
Grade 100 ($2^1/_2$ inches and under in thickness)	25 at 0º F
Grade 100W (Over $2^1/_2$ inches to 4 inches in thickness)	35 at 0º F

* If the yield point of the material exceeds 65,000 psi, the temperature for the CVN impact value for acceptability shall be reduced 15º F for each increment of 10,000 psi above 65,000 psi

In Section 55-2.01 replace the Structural Steel Materials table with:

Structural Steel Materials

Material	Specification
Structural steel:	
Carbon steel	ASTM: A 709/A 709M, Grade 36 or {A 36/A 36M}[a]
High strength low alloy columbium vanadium steel	ASTM: A 709/A 709M, Grade 50 or {A 572/A 572M, Grade 50}[a]
High strength low alloy structural steel	ASTM: A 709/A 709M, Grade 50W, Grade HPS 50W, or {A 588/A 588M}[a]
High strength low alloy structural steel plate	ASTM: A 709/A 709M, Grade HPS 70W
High-yield strength, quenched and tempered alloy steel plate suitable for welding	ASTM: A 709/A 709M, Grade 100 and Grade 100W, or {A 514/A 514M}[a]
Steel fastener components for general applications:	
Bolts and studs	ASTM: A 307
Anchor bolts	ASTM: F 1554 or A 307, Grade C
High-strength bolts and studs	ASTM: A 449, Type 1
High-strength threaded rods	ASTM: A 449, Type 1
High-strength nonheaded anchor bolts	ASTM: F 1554, Grade 105, Class 2A
Nuts	ASTM: A 563, including Appendix X1[b]
Washers	ASTM: F 844
Components of high-strength steel fastener assemblies for use in structural steel joints:	
Bolts	ASTM: A 325, Type 1
Tension control bolts	ASTM: F 1852, Type 1
Nuts	ASTM: A 563, including Appendix X1[b]
Hardened washers	ASTM : F 436, Type 1, Circular, including S1 supplementary requirements
Direct tension indicators	ASTM: F 959, Type 325, zinc-coated
Carbon steel for forgings, pins and rollers	ASTM: A 668/A 668M, Class D
Alloy steel for forgings	ASTM: A 668/A 668M, Class G
Pin nuts	ASTM: A 36/A 36M
Carbon-steel castings	ASTM: A 27/A 27M, Grade 65-35, Class 1
Malleable iron castings	ASTM: A 47/A 47M, Grade 32510 (Grade 22010)
Gray iron castings	ASTM: A 48, Class 30B
Carbon steel structural tubing	ASTM: A 500, Grade B or A 501
Steel pipe (Hydrostatic testing will not apply)	ASTM: A 53, Type E or S, Grade B; A 106, Grade B; or A 139, Grade B
Stud connectors	AASHTO/AWS D1.5

a Grades that may be substituted for the equivalent ASTM Designation: A 709 steel, at the Contractor's option, subject to the modifications and additions specified and to the requirements of A 709.

b Zinc-coated nuts that will be tightened beyond snug or wrench tight shall be furnished with a dry lubricant conforming to Supplementary Requirement S2 in ASTM Designation: A 563.

In Section 55-2.04 delete the 1st paragraph.

Delete Section 55-2.05.

In Section 55-3.05 replace the 1st paragraph with:

Surfaces of bearing and base plates and other metal surfaces that are to come in contact with each other or with ground concrete surfaces shall be flat to within 1/32-inch tolerance in 12 inches and to within 1/16-inch tolerance overall. Surfaces of bearing and base plates and other metal bearing surfaces that are to come in contact with preformed fabric pads, elastomeric

bearing pads, or mortar shall be flat to within 1/8-inch tolerance in 12 inches and to within 3/16-inch tolerance overall.

In Section 55-3.07 in the 1st paragraph, replace item B with:

B. The radius of bend measured to the concave face shall conform to the requirements in ASTM Designation: A6/A6M

In Section 55-3.10 in the 1st paragraph, replace item B with:

B. Internal threads shall conform to the requirements in ASTM Designation: A 563.

In Section 55-3.19 replace the 3rd paragraph with:

Immediately before setting bearing assemblies or masonry plates directly on ground concrete surfaces, the Contractor shall thoroughly clean the surfaces of the concrete and the metal to be in contact and shall apply a coating of nonsag polysulfide or polyurethane caulking conforming to the requirements in ASTM Designation: C 920 to contact areas to provide full bedding.

In Section 55-4.01 in the 1st paragraph, replace item D with:

D. To determine the pay quantities of galvanized metal, the weight to be added to the calculated weight of the base metal for the galvanizing will be determined from the table of weights of zinc coatings specified in ASTM Designation: A 153/A 153M.

^^

SECTION 56 SIGNS
(Issued 09-16-11)

In Section 56-1.02A replace the 1st paragraph with:

Bars and plates shall be structural steel complying with one or more of the following:

1. ASTM Designation: A36/A36M
2. ASTM Designation: A709/A709M, Grade 36 or 50
3. ASTM Designation: A572/A572M, Grade 50

Other open shapes shall be structural steel complying with one or more of the following:

1. ASTM Designation: A36/A36M
2. ASTM Designation: A709/A709M, Grade 36 or 50
3. ASTM Designation: A992/A992M

Light fixture mounting channel shall be a continuous slot channel made from one of the following:

1. Steel complying with ASTM Designation: A1011/A1011M, Designation SS, Grade 33
2. Extruded aluminum of alloy 6063-T6 complying with ASTM Designation: B221 or B221M

In Section 56-1.02E replace the 1st paragraph with:

Pipe posts shall be welded or seamless steel pipe conforming to the requirements in ASTM Designation: A 53/A 53M, Grade B; ASTM Designation: A 106/A 106M, Grade B; or API Specification 5L PSL2 Grade B or Grade X42R or Grade X42M. At the option of the Contractor, posts may be fabricated from structural steel conforming to the requirements in ASTM Designation: A 36/A 36M.

Pipe posts shall not be spiral seam welded.

In Section 56-1.02F replace item B of the 1st paragraph with:

B. Material for gratings shall be structural steel conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation CS, Type B or Designation SS, Grade 36, Type 1.

In Section 56-1.03 replace the 5th paragraph with:

Clips, eyes, or removable brackets shall be affixed to all signs and all posts and shall be used to secure the sign during shipping and for lifting and moving during erection as necessary to prevent damage to the finished galvanized or painted surfaces. Brackets on tubular sign structures shall be removed after erection. Details of the devices shall be shown on the working drawings.

In Section 56-1.05 replace the 3rd paragraph with:

Galvanizing shall conform to the provisions in Section 75-1.05, "Galvanizing," except that when permission is granted by the Engineer, surfaces may be coated with zinc by the metalizing process. Metalizing shall be performed in conformance with the AWS requirements. The thickness of the sprayed zinc coat shall be 10 ± 2 mils. The thickness of the sprayed zinc coat on faying surfaces shall not be more than 10 mils.

In Section 56-1.05, add:

Zinc solders or zinc alloys that contain tin shall not be used to repair a damaged galvanized surface.

In Section 56-1.07, add:

Bridge-mounted signs shall not be fastened to concrete elements of bridges or railings before the concrete attains a compressive strength of 2,500 psi.

In Section 56-1.10 replace the 4th paragraph with:

The contract price paid per pound for install sign structure of the type or types designated in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in installing sign structures, complete in place, including installing anchor bolt assemblies, removable sign panel frames, and sign panels and performing any welding, painting or galvanizing required during installation, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

In Section 56-2.03 replace the 4th paragraph with:

Backfill material for metal posts shall consist of minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," and shall contain not less than 463 pounds of cementitious material per cubic yard.

^^

SECTION 59 PAINTING
(Issued 09-16-11)

In Section 59-1.01 add:

Coatings selected for use shall conform to the volatile organic compound limits specified for the air quality district where the project is located.

In Section 59-1.03 replace the 3rd paragraph with:

Painting shall be done in a neat and workmanlike manner. Unless otherwise specified, paint shall be applied by brush, or spray, or roller, or any combination of these methods. Gun extensions shall not be used.

In Section 59-1.03 replace the 5th paragraph with:

Unless otherwise specified, should 7 days elapse between paint applications, the painted surface shall be pressure rinsed prior to the next paint application. Pressure rinsing is defined as a pressurized water rinse with a minimum nozzle pressure of 1,160 psi. During rinsing, the tip of the pressure nozzle shall be placed between 12 inches and 18 inches from the surface to be rinsed. The nozzle shall have a maximum fan tip angle of 30°.

In Section 59-2.01 replace the 2nd paragraph with:

Unless otherwise specified, no painting Contractors or subcontractors will be permitted to perform work without having the following current "SSPC: The Society for Protective Coatings" (formerly the Steel Structures Painting Council) certifications in good standing throughout the duration of the contract:

A. For cleaning and painting structural steel in the field, certification in conformance with the requirements in Qualification Procedure No. 1, "Standard Procedure For Evaluating Painting Contractors (Field Application to Complex Industrial Structures)" (SSPC-QP 1).
B. For removing paint from structural steel, certification in conformance with the requirements in Qualification Procedure No. 2, "Standard Procedure for the Qualification of Painting Contractors (Field Removal of Hazardous Coatings from Complex Structures)" (SSPC-QP 2, Category A).
C. For cleaning and painting structural steel in a permanent painting facility, certification in conformance with the requirements in Qualification Procedure No. 3, "Standard Procedure For Evaluating Qualifications of Shop Painting Applicators" (SSPC-QP 3, Enclosed Shop Facility). The AISC's Sophisticated Paint Endorsement (SPE) quality program, Certification P-1 Enclosed, will be considered equivalent to SSPC-QP 3, Enclosed Shop Facility.

Replace Section 59-2.05 with:

59-2.05 CLEANING PAINTED SURFACES

All previously painted surfaces shall be cleaned by pressure washing or steam cleaning before other cleaning or painting activities are performed. Gloss on the existing paint shall be removed without removing sound paint. Areas of gloss remaining after cleaning shall be roughened using 100 to 200-grit sandpaper. Any paint that becomes loose, curled, lifted, or that loses its bond after cleaning shall be removed to sound paint or metal.

Pressure washing includes cleaning surfaces using a pressure wash system with a nozzle pressure from 2,500 to 5,000 psi and a maximum fan tip angle of 45 degrees.

Steam cleaning includes cleaning dirt, grease, loose chalky paint, and other foreign material from surfaces using steam. The steam temperature at the nozzle shall be from 265 to 375 degrees F. A biodegradable detergent shall be used during steam cleaning. After steam cleaning, cleaned surfaces shall be rinsed clean with fresh water. Steam cleaning shall not be performed more than 2 weeks before painting or other phases of cleaning. Steam-cleaned surfaces shall not be painted until they are thoroughly dry and 24 hours have elapsed after steam cleaning.

In Section 59-2.12 replace the 3rd and 4th paragraphs with:

Contact surfaces of stiffeners, railings, built up members or open seam exceeding 6 mils in width that would retain moisture, shall be caulked with polysulfide or polyurethane sealing compound conforming to the requirements in ASTM Designation: C 920, Type S, Grade NS, Class 25, Use O, or other approved material.

The dry film thickness of the paint will be measured in place with a calibrated Type 2 magnetic film thickness gage in conformance with the requirements in SSPC-PA 2, "Measurement of Dry Coating Thickness with Magnetic Gages," of the "SSPC: The Society for Protective Coatings," except that there shall be no limit to the number or location of spot measurements to verify compliance with specified thickness requirements.

^^

SECTION 63: CAST-IN-PLACE CONCRETE PIPE
(Issued 10-21-11)

Replace Section 63 with:
SECTION 63: (BLANK)

^^

SECTION 64 PLASTIC PIPE
(Issued 06-05-09)

In Section 64-1.02 replace the 5th paragraph with:

HDPE compounds used in the manufacture of corrugated polyethylene pipe and fittings shall comply with AASHTO M 294 except that the mix shall contain not less than 2 nor greater than 4 percent well dispersed carbon black. HDPE compounds used in the manufacture of ribbed profile wall polyethylene pipe shall comply with ASTM F 894 except that Type E ultraviolet stabilizers shall not be allowed and carbon black shall be well dispersed in an amount not less than 2 percent nor greater than 4 percent.

Manufacturers of corrugated polyethylene pipe shall:

1. Participate in the National Transportation Product Evaluation Control Program (NTPEP) for each plant supplying corrugated polyethylene pipe and fittings for the project.
2. Conduct and maintain a quality control program under NTPEP.
3. Submit a copy to the Engineer of manufacturing plant audits and NTPEP test results from the current cycle of NTPEP testing for all pipe diameters supplied.

Type D corrugated polyethylene pipe is not allowed. Corrugated polyethylene pipe greater than 60 inches in nominal diameter is not allowed.

In Section 64-1.05 replace the 1st paragraph with:

Excavation, backfill, and shaped bedding shall comply with Section 19-3, "Structure Excavation and Backfill," except the following:

1. At locations where pipe is to be backfilled with concrete, the backfill shall comply with Section 64-1.06, "Concrete Backfill."
2. Corrugated polyethylene pipe that is greater than 48 inches in nominal diameter but not exceeding 60 inches in nominal diameter shall be backfilled with either controlled low strength material under the special provisions or slurry cement backfill under Section 19-3.062, "Slurry Cement Backfill."
3. Where cementitious or flowable backfill is used for structure backfill, the backfill shall be placed to a level not less than 12 inches above the crown of the pipe.

In Section 64-1.06 replace the 1st paragraph with:

At locations where pipe is to be backfilled with concrete as shown on the plans, the concrete backfill shall be constructed of minor concrete or Class 4 concrete conforming to the provisions in Section 90, "Portland Cement Concrete." Minor concrete shall contain not less than 380 pounds of cementitious material per cubic yard. The concrete to be used will be designated in the contract item or shown on the plans.

In Section 64-1.06 replace the 3rd paragraph with:

The surface of the concrete backfill shall be broomed with a heavy broom to produce a uniform rough surface if hot mix asphalt is to be placed directly thereon.

^^

SECTION 65 REINFORCED CONCRETE PIPE
(Issued 07-01-11)

In Section 65-1.02 replace the 1st paragraph with:

Cementitious material and aggregate shall conform to the provisions in Section 90-2, "Materials" except that grading requirements shall not apply to the aggregate. Use of supplemental cementitious material shall conform to AASHTO Designation: M 170.

In Section 65-1.02A(1) in the 11th paragraph, replace item c with:

c. Cementitious material and aggregate for non-reinforced concrete pipe shall conform to the provisions in Section 65-1.02, "Materials."

In Section 65-1.035 replace the 1st paragraph with:

At locations where pipe is to be backfilled with concrete as shown on the plans, the concrete backfill shall be constructed of minor concrete or Class 4 concrete in conformance with the provisions in Section 90, "Portland Cement Concrete." Minor concrete shall contain not less than 380 pounds of cementitious material per cubic yard. The concrete to be used will be designated in the contract item.

In Section 65-1.035 replace the 3rd paragraph with:

The surface of the concrete backfill shall be broomed with a heavy broom to produce a uniform rough surface if hot mix asphalt is to be placed directly thereon.

Replace Section 65-1.05 with:

65-1.05 (BLANK)

In Section 65-1.06 in the 2nd paragraph, replace the 1st subparagraph with:

Cement Mortar. - Mortar shall be composed of one part cementitious material and 2 parts sand by volume. Supplementary cementitious material will not be required.

^^

SECTION 66 CORRUGATED METAL PIPE
(Issued 07-01-11)

In Section 66-1.045 replace the 1st paragraph with:

At locations where pipe is to be backfilled with concrete as shown on the plans, the concrete backfill shall be constructed of minor concrete or Class 4 concrete conforming to the provisions in Section 90, "Portland Cement Concrete." Minor concrete shall contain not less than 380 pounds of cementitious material per cubic yard. The concrete to be used will be designated in the contract item or shown on the plans.

In Section 66-1.045 replace the 3rd paragraph with:

The surface of the concrete backfill shall be broomed with a heavy broom to produce a uniform rough surface if hot mix asphalt is to be placed directly thereon.

Replace Section 66-3.10 with:

66-3.10 (BLANK)

^^

SECTION 68 SUBSURFACE DRAINS
(Issued 07-31-07)

In Section 68-3.02D replace the 1st and 2nd paragraphs with:

Concrete for splash pads shall be produced from minor concrete conforming to the provisions in Section 90-10, "Minor Concrete." Minor concrete shall contain not less than 470 pounds of cementitious material per cubic yard.

Mortar placed where edge drain outlets and vents connect to drainage pipe and existing drainage inlets shall conform to the provisions in Section 51-1.135, "Mortar."

In Section 68-3.03 replace the 13th paragraph with:

Cement treated permeable material, which is not covered with hot mix asphalt within 12 hours after compaction of the permeable material, shall be cured by either sprinkling the material with a fine spray of water every 4 hours during daylight hours or covering the material with a white polyethylene sheet, not less than 6 mils thick. The above curing requirements shall begin

at 7:00 a.m. on the morning following compaction of the cement treated permeable material and continue for the next 72 hours or until the material is covered with hot mix asphalt, whichever is less. The cement treated permeable material shall not be sprayed with water during the first 12 hours after compacting, but may be covered with the polyethylene sheet during the first 12 hours or prior to the beginning of the cure period.

In Section 68-3.03 replace the 17th and 18th paragraphs with:

Hot mix asphalt for backfilling trenches in existing paved areas shall be produced from commercial quality aggregates and asphalt and mixed at a central mixing plant. The aggregate shall conform to the 3/4 inch grading, or the 1/2 inch grading for Type A and Type B hot mix asphalt specified in Section 39-1.02E, "Aggregate." The amount of asphalt binder to be mixed with the aggregate shall be between 4 percent and 7 percent by weight of the dry aggregate, as determined by the Engineer.

Hot mix asphalt backfill shall be spread and compacted in approximately 2 equal layers by methods that will produce a hot mix asphalt surfacing of uniform smoothness, texture and density. Each layer shall be compacted before the temperature of the mixture drops below 250 ºF. Prior to placing the hot mix asphalt backfill, a tack coat of asphaltic emulsion conforming to the provisions in Section 94, "Asphaltic Emulsions," shall be applied to the vertical edges of existing pavement at an approximate rate of 0.05 gallon per square yard.

In Section 68-3.03 replace the 20th paragraph with:

Type A pavement markers conforming to the details shown on the plans and the provisions in Section 85, "Pavement Markers," shall be placed on paved shoulders or dikes at outlet, vent and cleanout locations as directed by the Engineer. The waiting period for placing pavement markers on new hot mix asphalt surfacing will not apply.

Replace Section 68-3.05 with:

68-3.05 PAYMENT

The contract price paid per linear foot for plastic pipe (edge drain) of the size or sizes shown in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in installing edge drains complete in place, including excavation (and removal of any concrete deposits that may occur along the lower edge of the concrete pavement in Type 1 installations) and hot mix asphalt backfill for Type 1 edge drain installation, tack coat, filter fabric, and treated permeable material, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The contract price paid per linear foot for plastic pipe (edge drain outlet) of the size or sizes shown in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in installing edge drain outlets, vents and cleanouts complete in place, including outlet and vent covers, expansion plugs, pavement markers, concrete splash pads, connecting outlets and vents to drainage facilities, and excavation and backfill [aggregate base, hot mix asphalt, tack coat, and native material] for outlets, vents, and cleanouts to be installed in embankments and existing shoulders, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

^^

SECTION 69 OVERSIDE DRAINS
(Issued 07-31-07)

In Section 69-1.01 replace the 1st paragraph with:

This work shall consist of furnishing and installing entrance tapers, pipe downdrains, tapered inlets, flume downdrains, anchor assemblies, reducers, slip joints and hot mix asphalt overside drains to collect and carry surface drainage down the roadway slopes as shown on the plans or as directed by the Engineer and as specified in these specifications and the special provisions.

Replace Section 69-1.02D with:

69-1.02D Hot Mix Asphalt

Hot mix asphalt for overside drains shall conform to the provisions in Section 39-1.13, "Miscellaneous Areas."

Replace Section 69-1.04 with:

69-1.04 HOT MIX ASPHALT OVERSIDE DRAINS

Hot mix asphalt overside drains shall be constructed as shown on the plans or as directed by the Engineer. The hot mix asphalt shall be placed in conformance with the provisions in Section 39-1.13, "Miscellaneous Areas."

In Section 69-1.06 replace the 2nd paragraph with:

Quantities of hot mix asphalt placed for overside drains will be paid for as provided in Section 39-5, "Measurement and Payment," for hot mix asphalt placed in miscellaneous areas.

^^

SECTION 70 MISCELLANEOUS FACILITIES
(Issued 11-30-10)

In Section 70-1.02C replace the 2nd paragraph with:

Precast concrete flared end sections shall conform to the requirements for Class III Reinforced Concrete Pipe in AASHTO Designation: M 170M. Cementitious materials and aggregate shall conform to the provisions in Section 90-2, "Materials," except that grading requirements shall not apply to the aggregate. Use of supplementary cementitious material shall conform to the requirements in AASHTO Designation: M 170. The area of steel reinforcement per linear foot of flared end section shall be at least equal to the minimum steel requirements for circular reinforcement in circular pipe for the internal diameter of the circular portion of the

flared end section. The basis of acceptance of the precast concrete flared end section shall conform to the requirements of Section 5.1.2 of AASHTO Designation: M 170.

In Section 70-1.02H replace the 1st paragraph with:

Precast concrete pipe risers and pipe reducers, and precast concrete pipe sections, adjustment rings and tapered sections for pipe energy dissipators, pipe inlets and pipe manholes shall conform to the requirements in AASHTO Designation: M 199M/M 199, except that the cementitious material and aggregate shall conform to the provisions in Section 90-2, "Materials," except that grading requirements shall not apply to the aggregate. Use of supplementary cementitious material shall conform to the requirements in AASHTO Designation: M 170.

In Section 70-1.03 replace the 2nd paragraph with:

Cutoff walls for precast concrete flared end sections shall be constructed of minor concrete conforming to the provisions in Section 90-10, "Minor Concrete." Minor concrete shall contain not less than 470 pounds of cementitious material per cubic yard.

^^

SECTION 72 SLOPE PROTECTION
(Issued 03-13-09)

In Section 72-4.04 replace the 6th paragraph with:

Pervious backfill material, if required by the plans, shall be placed as shown. A securely tied sack containing one cubic foot of pervious backfill material shall be placed at each weep hole and drain hole. The sack material shall conform to the requirements for filter fabric in Section 88-1.02, "Filtration."

^^

SECTION 73 CONCRETE CURBS AND SIDEWALKS
(Issued 06-05-09)

In Section 73-1.01 in the 2nd paragraph, replace item 2 with:

2. Minor concrete shall contain not less than 463 pounds of cementitious material per cubic yard except that when extruded or slip-formed curbs are constructed using 3/8-inch maximum size aggregate, minor concrete shall contain not less than 505 pounds of cementitious material per cubic yard.

In Section 73-1.06 replace the 15th paragraph with:

Where hot mix asphalt or portland cement concrete pavements are to be placed around or adjacent to manholes, pipe inlets or other miscellaneous structures in sidewalk, gutter depression, island paving, curb ramps or driveway areas, the structures shall not be constructed to final grade until after the pavements have been constructed for a reasonable distance on each side of the structures.

^^

SECTION 74 PUMPING PLANT EQUIPMENT
(Issued 07-01-08)

In Section 74-1.02 delete the 2nd paragraph.

^^

SECTION 75 MISCELLANEOUS METAL
(Issued 07-01-11)

In Section 75-1.02 replace the 6th paragraph with:

Manhole frames and covers shall conform to AASHTO M 306.

In Section 75-1.02 replace the 10th paragraph with:

Unless otherwise specified, materials shall conform to the following specifications:

Material	Specification
Steel bars, plates and shapes	ASTM Designation: A 36/A 36M or A 575, A 576 (AISI or M Grades 1016 through 1030)
Steel fastener components for general applications:	
Bolts and studs	ASTM Designation: A 307
Headed anchor bolts	ASTM Designation: A 307, Grade B, including S1 supplementary requirements
Nonheaded anchor bolts	ASTM Designation: F 1554 or A 307, Grade C, including S1 supplementary requirements and S1.6 of AASHTO Designation: M 314 supplementary requirements, or AASHTO Designation: M 314, Grade 36 or 55, including S1 supplementary requirements
High-strength bolts and studs, threaded rods, and nonheaded anchor bolts	ASTM Designation: A 449, Type 1
Nuts	ASTM Designation: A 563, including Appendix X1*
Washers	ASTM Designation: F 844
Components of high-strength steel fastener assemblies for use in structural steel joints:	
Bolts	ASTM Designation: A 325, Type 1
Tension control bolts	ASTM Designation: F 1852, Type 1
Nuts	ASTM Designation: A 563, including Appendix X1*
Hardened washers	ASTM Designation: F 436, Type 1, Circular, including S1 supplementary requirements
Direct tension indicators	ASTM Designation: F 959, Type 325, zinc-coated
Stainless steel fasteners (Alloys 304 & 316) for general applications:	
Bolts, screws, studs, threaded rods, and nonheaded anchor bolts	ASTM Designation: F 593 or F 738M
Nuts	ASTM Designation: F 594 or F 836M
Washers	ASTM Designation: A 240/A 240M and ANSI B 18.22M
Carbon-steel castings	ASTM Designation: A 27/A 27M, Grade 65-35, Class 1
Malleable iron castings	ASTM Designation: A 47, Grade 32510 or A 47M, Grade 22010
Gray iron castings Inside a roadbed Outside a roadbed	 AASHTO M 306 AASHTO M306 except only AASHTO M105, Class 35B is allowed
Ductile iron castings	ASTM Designation: A 536, Grade 65-45-12
Cast iron pipe	Commercial quality
Steel pipe	Commercial quality, welded or extruded
Other parts for general applications	Commercial quality

*Zinc-coated nuts that will be tightened beyond snug or wrench tight shall be furnished with a dyed dry lubricant conforming to Supplementary Requirement S2 in ASTM Designation: A 563.

In Section 75-1.03 replace the 13th paragraph with:

Concrete anchorage devices shall be mechanical expansion or resin capsule types installed in drilled holes or cast-in-place insert types. The anchorage devices shall be selected from the Department's Pre-Qualified Products List. The qualification requirements for concrete anchorage devices may be obtained from the Pre-Qualified Products List Web site.

The anchorage devices shall be a complete system, including threaded studs, hex nuts, and cut washers. Thread dimensions for externally threaded concrete anchorage devices prior to zinc coating shall conform to the requirements in ASME Standard: B1.1 having Class 2A tolerances or ASME Standard: B1.13M having Grade 6g tolerances. Thread dimensions for internally threaded concrete anchorage devices shall conform to the requirements in ASTM A 563.

In Section 75-1.03 replace the 18th paragraph with:

Mechanical expansion anchors shall, when installed in accordance with the manufacturer's instructions and these specifications and tested in conformance with the requirements in California Test 681, withstand the application of a sustained tension test load of at least the following values for at least 48 hours with a movement not greater than 0.035 inch:

Stud Diameter (inches)	Sustained Tension Test Load (pounds)
*3/4	5,000
5/8	4,100
1/2	3,200
3/8	2,100
1/4	1,000

* Maximum stud diameter permitted for mechanical expansion anchors.

Resin capsule anchors shall, when installed in accordance with the manufacturer's instructions and these specifications and tested in conformance with the requirements in California Test 681, withstand the application of a sustained tension test load of at least the following values for at least 48 hours with a movement not greater than 0.010 inch:

Stud Diameter (inches)	Sustained Tension Test Load (pounds)
1-1/4	31,000
1	17,900
7/8	14,400
3/4	5,000
5/8	4,100
1/2	3,200
3/8	2,100
1/4	1,000

At least 25 days before use, the Contractor shall submit one sample of each resin capsule anchor per lot to the Transportation Laboratory for testing. A lot of resin capsule anchors is 100 units, or fraction thereof, of the same brand and product name.

In Section 75-1.03 replace the 20th paragraph with:

A Certificate of Compliance for concrete anchorage devices shall be furnished to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance."

In Section 75-1.03 replace the 24th paragraph with:

Sealing compound, for caulking and adhesive sealing, shall be a polysulfide or polyurethane material conforming to the requirements in ASTM Designation: C 920, Type S, Grade NS, Class 25, Use O.

In Section 75-1.035 in the 3rd paragraph, replace the 1st sentence with:

Cables shall be 3/4 inch preformed, 6 x 19, wire strand core or independent wire rope core (IWRC), galvanized in conformance with the requirements in Federal Specification RR-W-410, right regular lay, manufactured of improved plow steel with a minimum breaking strength of 23 tons.

In Section 75-1.035 in the 4th paragraph, replace item C with:

C. Nuts shall conform to the requirements in ASTM Designation: A 563 including Appendix X1, except lubrication is not required.

In Section 75-1.035 replace the 12th paragraph with:

Concrete for filling cable drum units shall conform to the provisions in Section 90-10, "Minor Concrete," or at the option of the Contractor, may be a mix with 3/8-inch maximum size aggregate and not less than 675 pounds of cementitious material per cubic yard.

In Section 75-1.05 replace the 6th paragraph with:

Galvanizing of iron and steel hardware and nuts and bolts, when specified or shown on the plans, shall conform to the requirements in ASTM Designation: A 153/A 153M, except whenever threaded studs, bolts, nuts, and washers are specified to conform to the requirements in ASTM Designation: A 307, A 325, A 449, A 563, F 436, or F 1554 and zinc coating is required, they shall be hot-dip zinc coated or mechanically zinc coated in conformance with the requirements in the ASTM Designations. Unless otherwise specified, galvanizing shall be performed after fabrication.

In Section 75-1.05 replace the 8th paragraph with:

Tapping of nuts or other internally threaded parts to be used with zinc coated bolts, anchor bars or studs shall be done after galvanizing and shall conform to the requirements for thread dimensions and overtapping allowances in ASTM Designation: A 563.

^^

SECTION 80 FENCES
(Issued 01-05-07)

In Section 80-3.01F replace the 4th paragraph with:

Portland cement concrete for metal post and brace footings and for deadmen shall be minor concrete conforming to the provisions in Section 90-10, "Minor Concrete." Minor concrete shall contain not less than 470 pounds of cementitious material per cubic yard.

In Section 80-4.01C replace the 4th paragraph with:

Portland cement concrete for metal post and for deadmen shall be produced from minor concrete conforming to the provisions in Section 90-10, "Minor Concrete." Minor concrete shall contain not less than 470 pounds of cementitious material per cubic yard.

^^

SECTION 83 RAILINGS AND BARRIERS
(Issued 07-01-11)

In Section 83-1.02 replace the 7th paragraph with:

Mortar shall conform to the provisions in Section 51-1.135, "Mortar," and shall consist of one part by volume of cementitious material and 3 parts of clean sand.

In Section 83-1.02B in the 24th paragraph in the 8th subparagraph, replace the 1st sentence with:

Anchor cable shall be 3/4 inch preformed, 6 x 19, wire strand core or independent wire rope core (IWRC), galvanized in conformance with the requirements in Federal Specification RR-W-410, right regular lay, manufactured of improved plow steel with a minimum breaking strength of 23 tons.

In Section 83-1.02E in the 6th paragraph, replace the 2nd sentence with:

Cable shall be galvanized in conformance with the requirements in Federal Specification RR-W-410.

In Section 83-1.02I replace the 5th paragraph with:

Where shown on the plans, cables used in the frame shall be 5/16 inch in diameter, wire rope, with a minimum breaking strength of 5,000 pounds and shall be galvanized in conformance with the requirements in Federal Specification RR-W-410.

In Section 83-1.02I replace the 14th paragraph with:

Chain link fabric shall be 11-gage conforming to one of the following:

1. AASHTO Designation: M181, Type I, Class C
2. AASHTO Designation: M181, Type IV, Class A
3. ASTM F 1345, Class 2

In Section 83-2.02D(1) replace the 5th paragraph with:

When concrete barriers are to be constructed on existing structures, the dowels shall be bonded in holes drilled in the existing concrete. Drilling of holes and bonding of dowels shall conform to the following:

1. The bonding materials shall be either magnesium phosphate concrete, modified high alumina based concrete or portland cement based concrete. Magnesium phosphate concrete shall be either single component (water activated) or dual component (with a prepackaged liquid activator). Modified high alumina based concrete and portland cement based concrete shall be water activated. Bonding materials shall conform to the following requirements:

Property	Test Method	Requirements
Compressive Strength		
at 3 hours, MPa	California Test 551	21 min.
at 24 hours, MPa	California Test 551	35 min.
Flexure Strength		
at 24 hours, MPa	California Test 551	3.5 min.
Bond Strength: at 24 hours		
SSD Concrete, MPa	California Test 551	2.1 min.
Dry Concrete, MPa	California Test 551	2.8 min.
Water Absorption, %	California Test 551	10 max.
Abrasion Resistance		
at 24 hours, grams	California Test 550	25 max.
Drying Shrinkage at 4 days, %	ASTM Designation: C 596	0.13 max.
Soluble Chlorides by weight, %	California Test 422	0.05 max.
Water Soluble Sulfates by weight, %	California Test 417	0.25 max.

2. Magnesium phosphate concrete shall be formulated for minimum initial set time of 15 minutes and minimum final set time of 25 minutes at 70° F. The materials, prior to use, shall be stored in a cool, dry environment.
3. Mix water used with water activated material shall conform to the provisions in Section 90-2.03, "Water."
4. The quantity of water for single component type or liquid activator (for dual component type) to be blended with the dry component, shall be within the limits recommended by the manufacturer and shall be the least amount required to produce a pourable batter.
5. Addition of retarders, when required and approved by the Engineer, shall be in conformance with the manufacturer's recommendations.
6. Before using concrete material that has not been previously approved, a minimum of 45 pounds shall be submitted to the Engineer for testing. The Contractor shall allow 45 days for the testing. Each shipment of concrete material that has been previously approved shall be accompanied by a Certificate of Compliance as provided in Section 6-1.07, "Certificates of Compliance."

7. Magnesium phosphate concrete shall not be mixed in containers or worked with tools containing zinc, cadmium, aluminum or copper metals. Modified high alumina based concrete shall not be mixed in containers or worked with tools containing aluminum.
8. The surface of any dowel coated with zinc or cadmium shall be coated with a colored lacquer before installation of the dowel. The lacquer shall be allowed to dry thoroughly before embedment of the dowels.
9. The holes shall be drilled by methods that will not shatter or damage the concrete adjacent to the hole. The diameter of the drilled hole shall be $^1/_2$ inch larger than the nominal diameter of the dowels.
10. The drilled holes shall be clean and dry at the time of placing the bonding material and the steel dowels. Bonding material and dowel shall completely fill the drilled hole. The surface temperature shall be 40° F or above when the bonding material is placed.
11. After bonding, dowels shall remain undisturbed for a minimum of 3 hours or until the bonding material has reached a strength sufficient to support the dowels. Dowels that are improperly bonded, as determined by the Engineer, shall be removed. The holes shall be cleaned or new holes shall be drilled and the dowels replaced and securely bonded to the concrete. Removing, redrilling and replacing improperly bonded dowels shall be performed at the Contractor's expense. Modified high alumina based concrete and portland cement based concrete shall be cured in conformance with the provisions in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications. Magnesium phosphate concrete shall not be cured.

In Section 83-2.02D(1) replace the 8th paragraph with:

Granular material for backfill between the 2 walls of concrete barrier (Types 50E, 60F, 60GE and 60SF), as shown on the plans, shall be placed without compaction.

In Section 83-2.02D(2) in the 1st paragraph, replace item b with:

b. If the 3/8-inch maximum size aggregate grading is used to construct extruded or slip-formed concrete barriers, the cementitious material content of the minor concrete shall be not less than 675 pounds per cubic yard.

In Section 83-2.02D(2) replace the 3rd paragraph with:

The concrete paving between the tops of the 2 walls of concrete barrier (Types 50E, 60F, 60GE, and 60SF) and the optional concrete slab at the base between the 2 walls of concrete barrier (Types 50E, 60F, 60GE, and 60SF) shall be constructed of minor concrete conforming to the provisions of Section 90-10, "Minor Concrete," except that the minor concrete shall contain not less than 505 pounds of cementitious material per cubic yard.

In Section 83-2.02D(2) replace the 8th paragraph with:

Granular material for backfill between the 2 walls of concrete barrier (Types 50E, 60F, 60GE and 60SF) shall be earthy material suitable for the purpose intended, having no rocks, lumps or clods exceeding1-1/2 inches in greatest dimension.

In Section 83-2.03 replace the 8th and 9th paragraphs with:

Concrete barriers, except Type 50E, Type 60F, Type 60GE, and Type 60SF will be measured along the top of the barrier.

Concrete barriers Type 50E, Type 60F, Type 60GE, and Type 60SF will be measured once along the centerline between the 2 walls of the barrier.

In Section 83-2.04 replace the 3rd paragraph with:

The contract prices paid per linear foot for concrete barrier of the type or types listed in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing the concrete barriers, complete in place, including bar reinforcing steel, steel dowels and drilling and bonding dowels in structures, hardware for steel plate barrier, miscellaneous metal, excavation, backfill (including concrete paving for, and granular material or concrete slab used as backfill in Type 50E, Type 60F, Type 60GE, and Type 60SF concrete barrier), and disposing of surplus material and for furnishing, placing, removing and disposing of the temporary railing for closing the gap between existing barrier and the concrete barrier being constructed, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

^^

SECTION 85 PAVEMENT MARKERS
(Issued 07-31-07)

In Section 85-1.06 replace the 6th paragraph with:

Pavement markers shall not be placed on new hot mix asphalt surfacing or seal coat until the surfacing or seal coat has been opened to public traffic for a period of not less than 7 days when hot melt bituminous adhesive is used, and not less than 14 days when epoxy adhesive is used.

In Section 85-1.06 in the 14th paragraph, replace the 2nd sentence with:

Cleaning shall be done by blast cleaning on all surfaces regardless of age or type, except that blast cleaning of clean, new hot mix asphalt and clean, new seal coat surfaces will not be required when hot melt bituminous adhesive is used.

^^

SECTION 86 SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS
(Issued 09-16-11)

Replace Section 86 with:

SECTION 86 ELECTRICAL SYSTEMS

86-1 GENERAL

86-1.01 DESCRIPTION

Section 86 includes specifications for installing, modifying, and removing:

1. Traffic signal
2. Interconnect system
3. Ramp metering system
4. Flashing beacon system
5. Lighting system
6. Sign illumination system
7. Traffic monitoring station
8. Communication system
9. Electrical equipment in structure
10. Falsework lighting

Comply with Part 4 of the California MUTCD. Nothing in this Section 86 is to be construed as to reduce the minimum standards in this manual.

The locations of electrical system elements are approximate; the Engineer will approve final location.

86-1.015 DEFINITIONS

Definitions pertain only to Section 86, "Electrical Systems."

actuation: As defined in the California MUTCD.

channel: Discrete information path.

controller assembly: Controller unit and auxiliary equipment housed in a rainproof cabinet to control a system's operations.

controller unit: Part of the controller assembly performing the basic timing and logic functions.

detector: As defined in the California MUTCD.

electrolier: Complete assembly of lighting standard and luminaire.

flasher: Device to open and close signal circuits at a repetitive rate.

flashing beacon control assembly: Switches, circuit breakers, terminal blocks, flasher, wiring, and necessary electrical components all housed in a single enclosure to properly operate a beacon.

inductive loop detector: Detector capable of being actuated by inductance change caused by vehicle passing or standing over the loop.

lighting standard: Pole and mast arm supporting the luminaire.

luminaire: Assembly that houses the light source and controls the light emitted from the light source.

magnetic detector: Detector capable of being actuated by induced voltage caused by vehicle passing through the earth's magnetic field.

powder coating: A coating applied electrostatically using UV-stable polymer exterior grade powder.

pre-timed controller assembly: Operates traffic signals under a predetermined cycle length.

signal face: As defined in the California MUTCD.
signal head: As defined in the California MUTCD.
signal indication: As defined in the California MUTCD.
signal section: As defined in the California MUTCD.
signal standard: Pole and mast arm supporting one or more signal faces with or without a luminaire mast arm.
traffic-actuated controller assembly: Operates traffic signals under the varying demands of traffic as registered by detector actuation.
traffic phase: Signal phase as defined in the California MUTCD.
vehicle: As defined in the California Vehicle Code.

86-1.02 REGULATIONS AND CODE Electrical equipment must comply with one or more of the following:

1. ANSI
2. ASTM
3. 8 CA Code of Regs § 2299 et seq.
4. EIA
5. NEMA
6. NETA
7. UL

Materials and workmanship must comply with:

1. FCC
2. ITE
3. NEC
4. NRTL
5. Public Utilities Commission, General Order No. 95, "Rules for Overhead Electrical Line Construction"
6. Public Utilities Commission, General Order No. 128, "Rules for Construction of Underground Electric Supply and Communication Systems"

86-1.03 COST BREAK-DOWN

Determine quantities required to complete work. Submit the quantities as part of the cost breakdown.

The sum of the amounts for the units of work listed in the cost breakdown must equal the contract lump sum price bid for the work. Include overhead and profit for each unit of work listed in the cost breakdown. If mobilization is a bid item, include bond premium, temporary construction facilities, and material plants into the mobilization bid item, otherwise, include in each unit of work listed in the cost breakdown. Do not include costs for traffic control system in the cost breakdown.

The cost breakdown may be used to determine partial payment and to calculate payment adjustments for additional costs incurred due to a change order. If a change order increases or decreases the quantities, payment adjustment may be determined under Section 4-1.03B, "Increased or Decreased Quantities."

The cost breakdown must include type, size, and installation method for:

1. Foundations
2. Standards and poles
3. Conduit
4. Pull boxes
5. Conductors and cables
6. Service equipment enclosures
7. Telephone demarcation cabinet
8. Signal heads and hardware
9. Pedestrian signal heads and hardware
10. Pedestrian push buttons
11. Loop detectors
12. Luminaires and lighting fixtures

86-1.04 EQUIPMENT LIST AND DRAWINGS

Within 15 days of contract approval, submit for review a list of equipment and materials that you propose to install. Comply with Section 5-1.02, "Plans and Working Drawings." The list must include:

1. Name of manufacturer
2. Dimension
3. Item identification number
4. List of components

The list must be supplemented by other data as required, including:

1. Schematic wiring diagrams
2. Scale drawings of cabinets showing location and spacing of shelves, terminal blocks, and equipment, including dimensioning
3. Operation manual

Submit 2 copies of the above data. The Engineer will review within 15 days.

Electrical equipment that is manufactured as detailed on the plans will not require detailed drawings and diagrams.

Furnish 3 sets of computer-generated cabinet schematic wiring diagrams.

The cabinet schematic wiring diagram must be placed in a heavy duty plastic envelope and attached to the inside of the door of each cabinet.

Prepare diagrams, plans, and drawings using graphic symbols in IEEE 315, "Graphic Symbols for Electrical and Electronic Diagrams."

86-1.05 CERTIFICATE OF COMPLIANCE

Submit a Certificate of Compliance for all electrical material and equipment to the Engineer under Section 6-1.07, "Certificates of Compliance."

86-1.06 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS

Keep existing electrical system or approved temporary replacement in working order during the progress of the work. Shutdown is allowed for alteration or removal of the system. Traffic signal shutdown must be limited to normal working hours. Lighting system shutdown must not interfere with the regular lighting schedule.

Notify the Engineer before performing work on the existing system.

Notify the local traffic enforcement agency before traffic signal shutdown.

If existing or temporary system must be modified, work not shown on the plans or specified in the special provisions, but required to keep the system in working order will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The State or local agency will:

1. Continue the operation and maintenance of existing electrical facilities
2. Continue to provide electrical energy to operate existing electrical facilities
3. Repair or replace existing facilities damaged by public traffic
4. Pay for electrical energy to operate existing or new facilities undergoing the functional tests described in Section 86-2.14C, "Functional Testing"

Verify location and depth of existing detectors, conduits, pull boxes, and other electrical facilities before using tools or equipment that may damage those facilities or interfere with an electrical system.

Notify the Engineer immediately if existing facility is damaged by your activities. Repair or replace damaged facility promptly. If you fail to complete the repair or replacement, promptly, the State will repair or replace and deduct the costs.

Damaged detectors must be replaced within 24 hours at your expense. If you fail to complete the repair within 24 hours, the State will repair and deduct the repair costs.

If roadway remains open to traffic while an existing lighting system is modified:

1. Keep existing system in working order
2. Make final connection so the modified circuit is in operation by nightfall

Keep temporary electrical installations in working order until no longer required. Remove temporary installations as specified in Section 86-7, "Removing, Reinstalling or Salvaging Electrical Equipment."

These provisions do not void your responsibilities as specified in Section 7-1.12, "Indemnification and Insurance," and Section 7-1.16, "Contractor's Responsibility for the Work and Materials."

During traffic signal system shutdown, place W3-1a, "STOP AHEAD," and R1-1, "STOP," signs in each direction to direct traffic through the intersection. For 2-lane approaches, place 2 R1-1 signs.

W3-1a and R1-1 signs must comply with Section 12-3.06, "Construction Area Signs." Use a minimum size of 30 inches for the R1-1 sign.

Cover signal faces when the system is shut down overnight. Cover temporary W3-1a and R1-1 signs when the system is turned on.

86-1.07 SCHEDULING OF WORK

Except service installation and service equipment enclosure, do not work above ground until all materials are on hand to complete electrical work at each location. Schedule work to allow each system to be completed and ready for operation before opening the corresponding section of the roadway to traffic.

If street lighting exists or is installed in conjunction with traffic signals, do not turn on the signals until the street lighting is energized.

Traffic signals will not be placed in operation until the roadways to be controlled are open to public traffic.

Lighting and traffic signals, including flashing operation, will not be placed in operation before starting the functional test period specified in Section 86-2.14, "Testing."

Do not pull conductors into conduit until:

1. Pull boxes are set to grade
2. Metallic conduit is bonded

In vehicular undercrossings, soffit lights must be in operation as soon as practicable after falsework has been removed from the structure. Lighting for pedestrian structures must be in operation before opening the structure to pedestrian traffic.

If the Engineer orders soffit lights or lighting for pedestrian structures to be activated before permanent power service is available, the cost of installing and removing temporary power service will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The initial traffic signal turn-on must be made between 9:00 a.m. and 2:00 p.m. Before the initial turn-on, all equipment, including pedestrian signals, pedestrian push buttons, vehicle detectors, lighting, signs, and pavement delineation must be installed and in working order. Direct louvers, visors, and signal faces to maximize visibility.

Start functional tests on any working day except Friday or the day before a legal holiday. You must notify the Engineer 48 hours before the start of functional test.

86-1.08 (BLANK)

86-2 MATERIALS AND INSTALLATION

86-2.01 EXCAVATING AND BACKFILLING

Dispose of surplus excavated material under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."

Backfill as specified in Section 19-3, "Structure Excavation and Backfill." Compact backfill in conduit trenches outside the hinge point of slopes and not under pavement to a minimum relative compaction of 90 percent. Compact backfill within hinge points and in areas where pavement is to be constructed to a minimum relative compaction of 95 percent.

Backfill trenches and restore sidewalk, pavement, and landscaping at one intersection before starting excavation at another intersection.

If excavating on a street or highway, restrict closure to 1 lane at a time.

86-2.02 REMOVING AND REPLACING IMPROVEMENTS

Replace or reconstruct sidewalk, curb, gutter, concrete pavement, asphalt concrete pavement, underlying material, lawn, plant, and other facilities damaged by your activities. Replacement material must be of equal or better quality than the material replaced. Work must be in a serviceable condition.

If a part of a square or slab of concrete sidewalk, curb, gutter, or driveway is broken or damaged, the entire square or slab must be removed and reconstructed.

Cut outline of PCC sidewalk or driveway to be removed:

1. Using a power-driven saw
2. On a neat line
3. To a 0.17-foot minimum depth

86-2.03 FOUNDATIONS

Except for concrete for cast-in-drilled-hole concrete pile foundation, PCC must comply with Section 90-10, "Minor Concrete."

Construct concrete foundation on firm ground.

After each post, standard, and pedestal is properly positioned, place mortar under the base plate. Finish exposed portion to present a neat appearance. Mortar must comply with Section 51-1.135, "Mortar," except mortar must have:

1. 1 part by volume of cementitious material
2. 3 parts by volume of clean sand

Reinforced cast-in-drilled-hole concrete pile foundation must comply with Section 49, "Piling," except:

1. Material resulting from drilling holes must be disposed of as specified in Section 86-2.01, "Excavating and Backfilling"
2. Concrete for cast-in-drilled-hole concrete pile will not be considered as designated by compressive strength

Form exposed portion of the foundation to present a neat appearance and true to line and grade. The top of a foundation for post and standard must be finished to curb or sidewalk grade. Forms must be rigid and securely braced in place. Conduit ends and anchor bolts must be placed at proper height and position. Anchor bolts must be installed a maximum of 1:40 from vertical and held in place by rigid top and bottom templates. Use a steel bottom template at least 1/2 inch thick that provides proper spacing and alignment of anchor bolts near the embedded bottom end. Install bottom template before placing footing concrete.

Provide new foundation and anchor bolts of the proper type and size for relocated standards.

Steel parts must be galvanized as specified in Section 75-1.05, "Galvanizing."

Provide 2 nuts and washers for the upper threaded part of each anchor bolt. Provide 3 nuts and washers for each anchor bar or stud.

Do not weld high-strength steel used for anchor bolt, anchor bar, or stud.

Before placing concrete, moisten forms and ground. Keep forms in place until the concrete sets for at least 24 hours and is strong enough to prevent damage to surface.

Except if located on a structure, construct foundation for post, standard, and pedestal monolithically.

Apply ordinary surface finish as specified in Section 51-1.18A, "Ordinary Surface Finish."

If a foundation must be extended for additional depth, the extension work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Do not erect post, pole, standard, pedestal, or cabinet until the foundation is set for a minimum of 7 days.

The Engineer will choose the plumbing or raking technique for posts, standards, and pedestals. Plumb or rake by adjusting the leveling nuts before tightening nuts. Do not use shims or similar devices. After final adjustments of both top nuts and leveling nuts on anchorage assemblies have been made, and each post, standard, and pedestal on structure is properly positioned, tighten nuts as follows:

1. Tighten leveling nuts and top nuts, following a crisscross pattern, until bearing surfaces of all nuts, washers, and base plates are in firm contact.
2. Use an indelible marker to mark the top nuts and base plate with lines showing relative alignment of the nut to the base plate.
3. Tighten top nuts, following a crisscross pattern, an additional 1/6th of a turn.

In unpaved areas, construct a raised PCC pad in front of each controller cabinet.

Completely remove foundations not to be reused or abandoned.

If abandoning a foundation, remove the top of foundation, anchor bolts, and conduits to a minimum depth of 0.5 foot below sidewalk surface or original ground. Backfill the resulting hole with material equivalent to the surrounding material.

86-2.04 STANDARDS, STEEL PEDESTALS AND POSTS

Bolts, including anchor bolts, nuts, and washers for signal and lighting support structures must comply with Section 55-2, "Materials." Except for bearing-type connection or slip-base, high-strength bolted connection must comply with Section 55-3.14, "Bolted Connections." Welding, nondestructive testing of welds, and acceptance and repair criteria for steel member nondestructive testing must comply with American Welding Society (AWS) D1.1.

Using stainless steel rivets, attach rectangular corrosion-resistant metal identification tag on all standards and poles, except Type 1:

1. Above the hand hole, near the base of standards and poles
2. On the underside of mast arms near the arm plate

The lettering on each identification tag must be depressed or raised, 1/4 inch tall, legible, and include the following information:

1. Name of the manufacturer
2. Date of manufacture
3. Identification number
4. Contract number
5. Unique identification code that is:

    5.1. Assigned by the manufacturer
    5.2. Traceable to a particular contract and the welds on that component
    5.3. Readable after the support structure is coated and installed

Type 1 standard and steel pedestal for controller cabinet must be manufactured of one of the following:

1. 0.12-inch or thicker galvanized steel
2. 4-inch standard weight galvanized steel pipe as specified in ASTM A 53
3. 4-inch Type 1 conduit with the top designed for post-top slip-fitter

Ferrous metal parts of a standard that has a shaft length of 15 feet or longer must comply with the provisions in Section 55-2, "Materials," and the following:

1. Standard must be manufactured from sheet steel of weldable grade having a minimum yield strength of 40,000 psi after manufacturing.
2. Certified test report verifying compliance with minimum yield strength requirements must be submitted. Test report may be the mill test report for the as-received steel or if the as-received steel has a lower yield strength than required you must provide test data assuring that your method of cold forming will consistently increase the tensile properties of the steel to meet the specified minimum yield strength. Test data must include tensile properties of the steel after cold forming for specific heats and thicknesses.
3. If a single-ply 5/16-inch thick pole is specified, a 2-ply pole with equivalent section modulus may be substituted.
4. Standard may be manufactured of full-length sheets or shorter sections. Each section must be manufactured from 1 or 2 pieces of sheet steel. If 2 pieces are used, the longitudinal welded seams must be directly opposite from one another. If the sections are butt-welded together, the longitudinal welded seams of adjacent sections must be placed to form continuous straight seams from base to top of standard.
5. Butt-welded circumferential joints of tubular sections requiring CJP groove welds must be made using a metal sleeve backing ring inside each joint. The sleeve must be 1/8 inch nominal thickness, or thicker, and manufactured from steel having the same chemical composition as the steel in the tubular sections to be joined. If the sections to be joined have different specified minimum yield strengths, the steel in the sleeve must have the same chemical composition as the tubular section having the higher minimum yield strength. The width of the metal sleeve must be consistent with the type of nondestructive testing selected and must be a minimum width of 1 inch. At fitting time, the sleeve must be centered at the joint and in contact with the tubular section at the point of the weld.
6. Welds must be continuous.
7. Weld metal at the transverse joint must extend to the sleeve, making the sleeve an integral part of the joint.
8. During manufacturing, longitudinal seams on vertical tubular members of cantilevered support structures must be centered on and along the side of the pole that the pole plate is located. Longitudinal seams on horizontal tubular members, including signal and luminaire arms, must be within ±45 degrees of the bottom of the arm.
9. Longitudinal seam weld in steel tubular section may be made by the electric resistance welding process.
10. Longitudinal seam weld must have 60 percent minimum penetration, except:

    10.1. Within 6 inches of circumferential weld, longitudinal seam weld must be CJP groove weld.
    10.2. Longitudinal seam weld on lighting support structure having telescopic pole segment splice must be CJP groove weld on the female end for a length on each end equal to the designated slip-fit splice length plus 6 inches.

11. Exposed circumferential weld, except fillet and fatigue-resistant weld, must be ground flush with the base metal before galvanizing or painting. Ground flush is specified as -0, +0.08-inch.
12. Circumferential weld and base plate-to-pole weld may be repaired only one time.
13. Exposed edges of the plates that make up the base assembly must be finished smooth and exposed corners of the plates must be broken. Provide shafts with slip-fitter shaft caps.

14. Surface flatness requirements of ASTM A 6 apply to plates:

    14.1. In contact with concrete, grout, or washers and leveling nuts
    14.2. In high-strength bolted connections
    14.3. In joints, where cap screws are used to secure luminaire and signal arms
    14.4. Used for breakaway slip-base assemblies

15. Standard must be straight with a maximum variation of:

    15.1. 1 inch measured at the midpoint of a 30-foot to 35-foot standard
    15.2. 3/4 inch measured at the midpoint of a 17-foot to 20-foot standard
    15.3. 1 inch measured 15 feet above the base plate for Type 35 and Type 36 standards

16. Zinc-coated nuts used on fastener assemblies having a specified preload obtained by specifying a prescribed tension, torque value, or degree of turn must be provided with a colored lubricant, clean and dry to the touch. The lubricant color must contrast the zinc coating color on the nut so the presence of the lubricant is visually obvious. Lubricant must be insoluble in water or the fastener components must be shipped to the job site in a sealed container.
17. Do not make additional holes in structural members.
18. Standard with an outside diameter of 12 inches or less must be round. Standard with an outside diameter greater than 12 inches must be round or multisided. Multisided standard must be convex with a minimum of 12 sides and have a minimum bend radius of 4 inches.
19. Manufacture mast arm from material specified for standard.
20. Manufacture cast steel option for slip base from material of Grade 70-40, as specified in ASTM A 27/A 27M. Other comparable material may be used if approved by the Engineer. The casting tolerances must comply with the Steel Founders' Society of America's recommendations for green sand molding.
21. One casting from each lot of a maximum of 50 castings must be radiographed as specified in ASTM E 94. Casting must comply with the acceptance criteria for severity level 3 or better for the types and categories of discontinuities in ASTM E 186 and E 446. If the casting fails the inspection, 2 additional castings must be radiographed. If the 2 additional castings fail the inspection, the entire lot will be rejected.
22. Material certification, consisting of physical and chemical properties, and radiographic film of the casting must be filed at the manufacturer's office. Certification and film must be available for inspection.
23. High-strength bolts, nuts, and flat washers used to connect slip-base plate must comply with ASTM A 325 or A 325M and be galvanized as specified in Section 75-1.05, "Galvanizing."
24. Plate washers must be manufactured by saw cutting and drilling steel plate. Steel plate must comply with AISI 1018 and be galvanized as specified in Section 75-1.05, "Galvanizing." Before galvanizing, remove burrs and sharp edges and chamfer both sides of holes to allow the bolt head to make full contact with the washer without tension.
25. High-strength cap screws for attaching arms to standards must comply with ASTM A 325, A 325M, or A 449, and the mechanical requirements in ASTM A 325 or A 325M after galvanizing. Cap screws must be galvanized as specified in Section 75-1.05, "Galvanizing." Coat threads of cap screws with a colored lubricant, clean and dry to the

touch. Lubricant color must contrast the zinc-coating color on the cap screw so the presence of the lubricant is visually obvious. Lubricant must be insoluble in water or the fastener components must be shipped to the job site in a sealed container.

26. Bolted connection attaching signal or luminaire arm to pole must be considered slip critical. Galvanized faying surfaces of plates on luminaire, signal arm, and pole must be roughened by hand using a wire brush before assembly and must comply with requirements for Class C surface conditions for slip-critical connections in "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts," a specification approved by the Research Council on Structural Connections (RCSC). Paint for faying surfaces must be as specified in the RCSC specification for Class B coating.
27. The Engineer will randomly take samples of fastener components from each production lot and submit to the Transportation Laboratory with test reports as specified in ASTM fastener specifications for QA testing and evaluation. The Engineer will determine sample sizes for each fastener component.

Change in mast arm configuration is allowed as long as the mounting height and stability are maintained.

Before manufacturing, details must be adjusted to ensure that cap screw heads can be turned using conventional installation tools. During manufacturing process, to avoid interference with the cap screw heads, the position of the luminaire arm on the arm plate must be properly located.

Configure mast arm as a smooth curving arm.

Push button post, pedestrian barricade, and guard post must comply with ASTM A 53.

Assemble and tighten slip base when pole is on the ground. Threads of heavy hex nuts for each slip-base bolt must be coated with additional lubricant that is clean and dry to the touch. Tighten high strength slip-base bolts to within ±10 foot-pounds of the following:

Slip-Base Bolt-Tightening Requirements

Standard Type	Torque (foot-pounds)
15-SB	150
30	150
31	200
36-20A	165

Hole in shaft of existing standard, due to removal of equipment or mast arms, must be sealed by fastening a galvanized steel disk to cover the hole. Fasten using a single central galvanized steel fastener. Seal edges of disk and hole with polysulfide or polyurethane sealing compound of Type S, Grade NS, Class 25, and Use O, as specified in ASTM C 920.

If existing standard is ordered to be relocated or reused, remove large dents, straighten shafts, and replace parts that are in poor condition. You must furnish anchor bolts or bars and nuts required for relocating or reusing standard. Repair and replacement work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

New nuts, bolts, cap screws, and washers must be provided if:

1. Standard or mast arm is relocated
2. Used standard or mast arm is State furnished

If the standard has a slip base, a new keeper plate must be provided.

86-2.05 CONDUIT

Run conductors in conduit except for overhead and where conductors are run inside poles.

You may use a larger size conduit than specified as long as you use it for the entire length between outlets. Do not use reducing coupling.

New conduit must not pass through existing foundations for standards.

86-2.05A Material

Conduit and conduit fitting must be UL or NRTL listed and comply with the following:

Conduit and Conduit Fitting Requirements

Type 1	Hot-dip galvanized rigid steel conduit and conduit couplings must comply with UL 6 and ANSI C80.1. Zinc coating testing must comply with copper sulfate test requirements in UL 6. Conduit couplings for rigid steel conduit must be electrogalvanized.
Type 2	Hot-dip galvanized rigid steel conduit must comply with requirements for Type 1conduit and be coated with polyvinyl chloride (PVC) or polyethylene. Exterior thermoplastic coating must have a minimum thickness of 35 mils. Internal coating must have a minimum thickness of 2 mils. Coated conduit must comply with UL 6; NEMA RN 1; or NRTL PVC-001.
Type 3	Rigid nonmetallic PVC conduit must comply with UL 651. Type A extruded rigid PVC conduit and extruded rigid HDPE conduit must comply with UL 651A. Coilable, smooth-wall, continuous length HDPE conduits must comply with UL 651B. Install at underground locations only.
Type 4	Waterproof flexible metal conduit must consist of conduit with a waterproof non-metallic sunlight-resistant jacket over an inner flexible metal core. Type4 conduit must be UL listed for use as the grounding conductor.
Type 5	Intermediate steel conduit and conduit couplings must comply with UL 1242 and ANSI C80.6. Zinc coating testing must comply with copper sulfate test requirements in UL 1242. Conduit couplings for intermediate rigid steel conduit must be electrogalvanized. Type 5 conduit must only be used if specified.

Bonding bushings to be installed on metal conduit must be insulated and either galvanized or zinc alloy type.

Fittings for steel conduit and for watertight flexible metal conduit must be UL listed at UL 514B.

86-2.05B Use

Install Type 1 conduit on all exposed surfaces and at the following locations:

1. In concrete structures
2. Between a structure and nearest pull box

Exposed conduit installed on painted structure must be painted the same color as the structure.

Change or extend existing conduit runs using the same material. Install pull box if an underground conduit changes from the metallic type to Type 3.

Minimum trade size of conduit must be:

1. 1-1/2 inches from electrolier to adjacent pull box

2. 1 inch from pedestrian push button post to adjacent pull box
3. 2 inches from signal standard to adjacent pull box
4. 3 inches from controller cabinet to adjacent pull box
5. 2 inches from overhead sign to adjacent pull box
6. 2 inches from service equipment enclosure to adjacent pull box
7. 1-1/2 inches if unspecified

Two conduits must be installed between controller cabinet and adjacent pull box.

86-2.05C Installation

Whether shop or field cut, ream ends of conduit to remove burrs and rough edges. Make cuts square and true. Slip joints and running threads are not allowed for coupling conduit. If a standard coupling cannot be used for coupling metal type conduit, use a threaded union coupling that is UL or NRTL listed. Tighten couplings for metal conduit to maintain a good electrical connection through conduit run.

Cut Type 3 conduit with tools that will not deform the conduit. Use solvent weld for connections.

Cut Type 2 conduit with pipe cutters; do not use hacksaws. Coated conduit must be threaded with standard conduit-threading dies. Tighten conduit into couplings or fittings using strap wrenches or approved groove-joint pliers.

Protect shop-cut threads from corrosion as follows:

Shop-Cut Thread Protection

Steel conduit and conduit couplings	ANSI C80.1
Electrical intermediate metal conduit and conduit couplings	ANSI C80.6

Paint conduits as specified in Section 91, "Paint." Apply 2 coats of approved unthinned zinc-rich primer of organic vehicle type. Do not use aerosol cans. Paint the following parts of conduits:

1. All exposed threads
2. Field-cut threads before installing conduit couplings to steel conduit
3. Damaged surfaces on metal conduit

Do not remove shop-installed conduit couplings.

Damaged Type 2 conduit or conduit coupling must be wrapped with at least 1 layer of 2 inch wide, 20 mil minimum thickness PVC tape, as specified in ASTM D 1000, with a minimum tape overlap of 1/2 inch. Before applying the tape, conduit or fitting must be cleaned and painted with 1 coat of rubber-resin based adhesive as recommended by the tape manufacturer. You may repair damaged spots in the thermoplastic coating by painting over with a brushing type compound supplied by the conduit manufacturer instead of the tape wrap.

The ends of Types 1, 2, or 5 conduit must be threaded and capped with standard pipe caps until wiring is started. The ends of Types 3 and 4 conduit must be capped until wiring is started. If caps are removed, replace with conduit bushings. Fit insulated bonding bushings on the end of metal conduit ending in pull box or foundation. Bell or end bushings for Type 3 conduit must be non-metallic type.

Conduit bends, except factory bends, must have a radius of not less than 6 times the inside diameter of the conduit. If factory bends are not used, bend the conduit without crimping or flattening using the longest radius practicable. Bend conduits as follows:

Conduit-Bending Requirements

Type 1	By methods recommended by the conduit manufacturer and with equipment approved for the purpose.
Type 2	Use standard bending tool designed for use on thermoplastic coated conduit. Conduit must be free of burrs and pits.
Type 3	By methods recommended by the conduit manufacturer and with equipment approved for the purpose. Do not expose conduit to direct flame.
Type 4	--
Type 5	By methods recommended by the conduit manufacturer and with equipment approved for the purpose.

Install pull tape in conduit that is to receive future conductors. The pull tape must be a flat woven lubricated soft-fiber polyester tape with a minimum tensile strength of 1,800 pounds and have printed sequential measurement markings every 3 feet. At least 2 feet of pull tape must be doubled back into the conduit at each end.

Existing underground conduit to be incorporated into a new system must be cleaned with a mandrel or cylindrical wire brush and blown out with compressed air.

Install conduit to a depth of not less than 30 inches below finished grade, except in sidewalk and curbed paved median areas, where it must be at least 18 inches below grade. You may lay conduit on existing pavement within new curbed median.

Conduit coupling must be a minimum of 6 inches from face of foundation.

Place a minimum of 2 inches of sand bedding in the trench before installing Type 2 or Type 3 conduit. Place a minimum of 4 inches of same material over conduit before placing additional backfill material.

Obtain approval from the Engineer before disturbing pavement. If obstruction is encountered, obtain approval from Engineer to cut small holes in the pavement to locate or remove obstruction If jacking or drilling method is used, keep jacking or drilling pit 2 feet away from edge of pavement. Pavement must not be weakened or subgrade softened from excess water use.

Conduit used for drilling or jacking must be removed; install new conduit for completed work. If a hole larger than the conduit is pre-drilled and you install conduit by hand or by method recommended by the conduit manufacturer with equipment approved for purpose, you may install Type 2 or Type 3 conduit under pavement.

If trenching in pavement method is specified, conduit installation under pavement that is not a freeway lane or freeway to freeway connector ramp, must comply with the following:

1. Use Type 3 conduit. Place conduit under pavement in a trench approximately 2 inches wider than the outside diameter of conduit, but not exceeding 6 inches in width. Trench depth must not exceed the greater of 12 inches or conduit trade size plus 10 inches, except that at pull boxes the trench may be hand dug to required depth. The top of the installed conduit must be a minimum of 9 inches below finished grade.
2. Trenching installation must be completed before placing final pavement layer.
3. Cut pavement to be removed with a rock cutting excavator. Minimize shatter outside the removal area.
4. Place conduit in bottom of trench and backfill with minor concrete as specified in Section 90-10, "Minor Concrete.". Minor concrete must contain a minimum of 590 pounds of

cementitious material per cubic yard. If the trench is in asphalt concrete pavement and pavement overlay is not placed, backfill the top 0.10 foot of trench with minor HMA.

5. Before spreading HMA, apply tack coat as specified in Section 39, "Hot Mix Asphalt."
6. Backfill trenches, except for the top 0.10 foot, by the end of each day. The top 0.10 foot must be filled within 3 days after trenching.

Conduit installed beneath railroad tracks must be:

1. Type 1 or 2
2. 1-1/2-inch minimum diameter
3. Placed a minimum depth of 42 inches below bottom of the rail

If jacking or drilling method is used, construct jacking pit to a minimum of 13 feet from the centerline of track at the near side of jacking pit. Cover jacking pit with substantial planking if left overnight.

Conduit ending in standard or pedestal must not extend more than 3 inches vertically above the foundation and must be sloped toward the handhole opening. Conduit entering through the side of non-metallic pull box must end inside the box within 2 inches of the wall and 2 inches above the bottom and be sloped toward the top of box to facilitate pulling of conductors. Conduit entering through the bottom of a pull box must end 2 inches above the bottom and be located near the end walls to leave the major portion of the box clear. At outlet, conduit must enter from the direction of the run.

Underground conduit runs, including under sidewalks, that are adjacent to gasoline service stations or other underground gasoline or diesel storage, piping, or pumps and that lead to a controller cabinet, circuit breaker panel, service, or enclosure where an arc may occur during normal operations must be sealed if the conduit is within the limits specified in the NEC for Class 1, Division 1. Use Type 1 or Type 2 conduit for these runs.

Conduit for future use in structures must be threaded and capped. Conduit leading to soffit, wall, or other lights or fixtures below pull box grade must be sealed and made watertight, except where conduit ends in a No. 9 or No. 9A pull box.

Support for conduit in or on wall or bridge superstructure must comply with the following:

1. Steel hangers, steel brackets, and other fittings must comply with Section 75-1.03, "Miscellaneous Bridge Metal."
2. Construct precast concrete conduit cradles using minor concrete and commercial quality welded wire fabric. Minor concrete must comply with Section 90-10, "Minor Concrete," and contain a minimum of 590 pounds of cementitious material per cubic yard.. The cradles must be moist cured for a minimum of 3 days. Bond precast concrete cradles to structure with epoxy adhesives specified in one of the following:

    2.1. Section 95-2.03, "Epoxy Resin Adhesive for Bonding New Concrete to Old Concrete"
    2.2. Section 95-2.04, "Rapid Set Epoxy Adhesive for Pavement Markers"
    2.3. Section 95-2.05, "Standard Set Epoxy Adhesive for Pavement Markers"

3. Use pipe sleeve or form opening for conduit through bridge superstructure concrete. Sleeve or opening through either prestressed member or conventionally reinforced precast member must be:

3.1. Transverse to the member
3.2. Through the web
3.3. Not more than 3 inches maximum gross opening in concrete

4. Where conduits pass through the abutment concrete, wrap conduit with 2 layers of asphalt-felt building paper securely taped or wired in place. Fill space around conduit that runs through bridge abutment wall with mortar as specified in Section 51-1.135, "Mortar," except the proportion of cementitious material to sand must be 1 to 3. Fill the space around conduits that run through abutments after prestressing is completed.
5. Run surface-mounted conduit straight and true, horizontal or vertical on the wall, and parallel to wall on ceiling or other similar surfaces. Support conduit at a maximum of 5-foot intervals or closer where necessary to prevent vibration or unsightly deflection. The supports must include galvanized malleable iron conduit clamps and clamp backs secured with expansion anchorage devices as specified for concrete anchorage devices in Section 75-1.03, "Miscellaneous Bridge Metal." Threaded studs must be galvanized and be of the largest diameter that will pass through the mounting hole in conduit clamp.
6. Where pull boxes are placed in conduit runs, conduit must be fitted with threaded bushings and bonded.
7. Mark location of conduit end in structure, curb, or wall with a "Y" that is a minimum of 3 inches tall, directly above conduit.

86-2.05D Expansion Fittings

Install expansion fitting where the conduit crosses an expansion joint in structure. Each expansion fitting for metal conduit must include a copper bonding jumper having the ampacity specified in NEC.

Each expansion-deflection fitting for expansion joints of 1-1/2-inch movement rating must be watertight and include a molded neoprene sleeve, a bonding jumper, and 2 silicon bronze or zinc-plated iron hubs. Each fitting must allow a minimum of 3/4-inch expansion, contraction, and lateral deflection.

86-2.06 PULL BOXES

You may use a larger standard size pull box than that shown on the plans or specified. Pull box, cover, and extensions must be of the same material.

86-2.06A Materials

Pull box, cover, and extension for installation in ground or sidewalk area must be precast reinforced PCC or non-PCC material. Non-PCC material must:

1. Be fire resistant with a burn rate no greater than 0.3-inch per minute per 0.1 inch of thickness when tested as specified in ASTM D 635
2. Show no significant change in physical properties with exposure to weather
3. Be dense, free of voids or porosity, and gray or brown in color

Non-PCC pull box must comply with the following:

1. Top dimensions must not exceed the bottom dimensions by more than 1 inch.

2. Extension must be of the same material as the pull box and attached to pull box to maintain the minimum combined depths.
3. Cover must not fail and must not deflect more than 1/4 inch when a vertical force of 1,500 pounds is applied through a 1/2" x 3" x 6" steel plate to a non-PCC cover on a pull box. Center the steel plate on cover with its longitudinal axis coinciding with longitudinal axis of cover.

Non-PCC pull boxes must be of sufficient rigidity that when a designated concentrated force is applied perpendicularly to the midpoint of one of the long sides at the top while the opposite long side is supported by a rigid surface, it must be possible to remove the cover without the use of tools. The designated concentrated force must be 150 pounds for a No. 3-1/2 pull box and must be 100 pounds for a No. 5 or No. 6 pull box.

If a transformer or other device must be placed in a non-metallic pull box, include recesses for hanger.

Secure cover, except ceiling pull box cover, with 3/8-inch hold down bolts, cap screws, or studs, washers, and brass stainless steel or other non-corroding-metal nut. Stainless steel hardware must have an 18 percent chromium content and an 8 percent nickel content.

Galvanize ferrous metal parts as specified in Section 75-1.05, "Galvanizing."

Traffic pull box must be provided with steel cover and special concrete footing. Steel cover must have a embossed non-skid pattern.

Traffic pull box and cover must comply with ASTM C857, "Standard Practice for Minimum Structural Design Loading for Underground Precast Concrete Utility Structures," for H20 loading. You must be able to place the load anywhere on box and cover for 1 minute without causing cracks or permanent deformations.

No. 3-1/2(T) and No. 5(T) traffic pull box must be reinforced with a galvanized Z bar welded frame and cover similar to that shown on the plans for No. 6(T) pull box. Frame must be anchored to box with 1/4" x 2-1/4" concrete anchors. Four concrete anchors must be included for No. 3-1/2(T) pull box; one placed in each corner. Six concrete anchors for must be included for No. 5(T) and No. 6(T) pull boxes; one placed in each corner and one near the middle of each of the longer sides.

Hold down screws must be 3/8 inch hex flange cap screws of Type 316 stainless steel. Nut must be zinc plated carbon steel, vibration resistant, and have a wedge ramp at the root of the thread. Nut must be spot welded to the underside or manufactured with galvanized Z bar pull box frame.

Steel cover must be countersunk approximately 1/4 inch to accommodate bolt head. When tightened, bolt head must not exceed more than 1/8 inch above the top of cover. A 1/4 inch tapped hole and brass bonding screw must be included.

Concrete placed around and under traffic pull box must be minor concrete as specified in Section 90-10, "Minor Concrete."

86-2.06B Cover Marking

Marking must be clearly defined, uniform in depth, and parallel to either the long or short sides of cover.

Marking letters must be between 1 inch to 3 inch high.

Before galvanizing steel or cast iron cover, apply marking by one of the following methods:

1. Use cast iron strip at least 1/4-inch thick with letters raised a minimum of 1/16 inch. Fasten strip to cover with 1/4 inch flathead stainless steel machine bolts and nuts. Peen bolts after tightening.
2. Use sheet steel strip at least 0.027-inch thick with letters raised a minimum of 1/16 inch. Fasten strip to cover by spot welding, tack welding, or brazing, with 1/4 inch stainless steel rivets or 1/4 inch roundhead stainless steel machine bolts and nuts. Peen bolts after tightening.
3. Bead weld the letters on cover so that letters are raised a minimum of 3/32 inch.

86-2.06C Installation and Use

Space pull boxes no more than 200 feet apart. You may install additional pull boxes to facilitate the work.

Pull box in ground or sidewalk area must be installed as follows:

1. Embed bottom of pull box in crushed rock.
2. Place a layer of roofing paper on crushed rock.
3. Place mortar over layer of roofing paper. Mortar must be 0.50 inch to 1 inch thick and be sloped toward the drain hole.
4. Make a 1-inch drain hole in center of pull box through mortar and roofing paper.
5. Place mortar between pull box and pull box extension, and around conduits.

Reconstruct sump of existing pull box if disturbed by your operations. Remove old grout and replace with new if the sump was grouted.

After installation of traffic pull box, install steel cover and keep bolted down when your activities are not in progress at the pull box. When steel cover is placed for final time, cover and Z bar frame must be cleaned of debris and securely tightened.

86-2.07 (BLANK)

86-2.08 CONDUCTORS AND CABLES

Conductor must be copper wire that complies with ASTM B 3 and B 8.

Wire size must comply with the following:

Wire Size Requirements

Conductor usage	Requirement
In loop detector lead-in cable	ASTM B 286
Everywhere except in loop detector lead-in cable	American Wire Gage (AWG)[a]

[a]Except conductor diameter must not be less than 98 percent of specified AWG diameter.

Single conductor and cable, except detector lead-in cable, must have clear, distinctive, and permanent markings on the outer surface throughout its length. The markings must include the manufacturer's name or trademark, insulation type letter designation, conductor size, voltage, and temperature rating, and for cables, it must also include number of conductors.

86-2.08A Conductor Identification

Conductor insulation must be a solid color with a permanent stripe as specified below. The solid color must be homogeneous through the full depth of insulation. Identification stripe must be continuous throughout the length of conductor. For conductor sizes No. 2 and larger, the insulation may be black and the ends of the conductors must be taped for a minimum length of 20 inches with electrical insulating tape of the required color.

Conductor Identification

Circuit	Signal Phase or Function	Identification: Insulation Color[i] Base	Identification: Insulation Color[i] Stripe[a]	Identification: Band Symbols[f]	Size
Vehicle Signals[a,b,d]	2,6	Red, Yel, Brn	Blk	2,6	14
	4,8	Red, Yel, Brn	Ora	4,8	14
	1,5	Red, Yel, Brn	None	1,5	14
	3,7	Red, Yel, Brn	Pur	3,7	14
	Ramp Meter 1	Red, Yel, Brn	None	NBR	14
	Ramp Meter 2	Red, Yel, Brn	Blk	NBR	14
Pedestrian Signals[d]	2p,6p	Red, Brn	Blk	2p,6p	14
	4p,8p	Red, Brn	Ora	4p,8p	14
	1p,5p	Red, Brn	None	1p,5p	14
	3p,7p	Red, Brn	Pur	3p,7p	14
Pedestrian Push Buttons[d]	2p,6p	Blu	Blk	P-2,P-6	14
	4p,8p	Blu	Ora	P-4,P-8	14
	1p,5p	Blu	None	P-1,P-5	14
	3p,7p	Blu	Pur	P-3,P-7	14
Traffic Signal Controller Cabinet	Ungrounded Circuit Conductor	Blk	None	CON-1	6
	Grounded Circuit Conductor	Wht	None	CON-2	6
Highway Lighting Pull Box to Luminaire	Ungrounded-Line 1	Blk	None	NBR	14
	Ungrounded-Line 2	Red	None	NBR	14
	Grounded	Wht	None	NBR	14
Multiple Highway Lighting	Ungrounded-Line 1	Blk	None	ML1	10
	Ungrounded-Line 2	Red	None	ML2	10
Lighting Control	Ungrounded to PEU	Blk	None	C1	14
	Switching leg from PEU unit or SM transformer	Red	None	C2	14
Service	Ungrounded-Line 1 (Signals)	Blk	None	NBR[e]	6
	Ungrounded-Line 2 (Lighting)	Red[h]	None	NBR[e]	8
Sign Lighting	Ungrounded-Line 1	Blk	None	SL-1	10
	Ungrounded-Line 2	Red	None	SL-2	10
Flashing Beacons[g]	Ungrounded between Flasher and Beacons	Red or Yel	None	F-Loc.[c]	14
Grounded and Common	Pedestrian Push Buttons	Wht	Blk	NBR	14
	Signals and Multiple Lighting	Wht	None	NBR	10
	Flashing Beacons and Sign Lighting	Wht	None	NBR	12
	Lighting Control	Wht	None	C-3	14
	Multiple Service	Wht	None	NBR	14
Railroad Preemption		Blk	None	R	14
Spares		Blk	None	NBR	14

NBR = No Band Required PEU=Photoelectric unit
[a]On overlaps, insulation is striped for 1st phase in designation. e.g., phase (2+3) conductor is striped as for phase 2.
[b]Band for overlap and special phases as required.
[c]Flashing beacons having separate service do not require banding.
[d]These requirements do not apply to signal cable.
[e]"S" if circuit is switched on line side of service equipment by utility.
[f]Band conductors in each pull box and near ends of termination points. On signal light circuits, a single band may be placed around 2 or 3 ungrounded conductors comprising a phase.
[g]Ungrounded conductors between service switch and flasher mechanism must be black and banded.
[h]Black acceptable for size No. 2 and larger. Tape ends for 20 inches with indicated color.
[i]Color Code: Yel-Yellow, Brn-Brown, Blu-Blue, Blk-Black, Wht-White, Ora-Orange, Pur-Purple.

86-2.08B Multiple Circuit Conductors

Conductor for multiple circuit must be UL or NRTL listed and rated for 600 V(ac) operation. Insulation for No. 14 to No. 4 conductors must be one of the following:

1. Type TW PVC as specified in ASTM D 2219
2. Type THW PVC
3. Type USE, RHH, or RHW cross-linked polyethylene

Minimum insulation thickness must comply with the following:

Insulation Thickness

Insulation Type	Conductor Size	Insulation Thickness (mils)
USE, RHH, or RHW	No. 14 to No. 10	39
	No. 8 to No. 2	51
THW or TW	No. 14 to No. 10	27
	No. 8	40
	No. 6 to No. 2	54

Insulation for No. 2 and larger conductor must be one of the types listed above or Type THWN.

Conductor for wiring wall and soffit luminaire must be stranded copper with insulation rated for use at temperatures up to 125 °C.

86-2.08C Signal Cable

Signal cable, except for the 28-conductor type, must:

1. Not be spliced
2. Be marked in each pull box with the signal standard information it is connecting to

Signal cable must comply with the following:

1. Cable jacket must be:

    1.1. Black polyethylene with an inner polyester binder sheath
    1.2. Rated for 600 V(ac) and 75 °C

2. Filler material, if used, must be polyethylene material.

3. Conductor must be solid copper with Type THWN insulation as specified in Section 86-2.08, "Conductors and Cables," and ASTM B 286. The minimum thickness of Type THWN insulation must be 12 mils for conductor sizes No. 14 to No. 12 and 16 mils for conductor size No. 10. The minimum thickness of nylon jacket must be 4 mils.

Conductor Signal Cable Requirements

Cable Type[a]	Conductor Quantity and Type	Cable Jacket Thickness (mils)		Maximum Nominal Outside Diameter (inch)	Conductor Color Code	Remarks
		Average	Minimum			
3CSC	3 - No. 14	44	36	0.40	blue/black, blue/orange, white/black stripe	Use for pedestrian push buttons and spare
5CSC	5 - No. 14	44	36	0.50	red, yellow, brown, black, white	
9CSC	8 - No. 14 1 - No. 12	60	48	0.65	No. 12 - white No. 14 - red, yellow, brown, black, and red/black, yellow/black, brown/black, white/black stripe	
12CSC	11 - No. 14 1 - No. 12	60	48	0.80	No. 12 - white No. 14 - see "12CSC Color Code and Functional Connection" table	Use for vehicle signals, pedestrian signals, spares, and signal common
28CSC	27 - No. 14 1 - No. 10	80	64	0.90	No. 10 - white No. 14 - see "28CSC Color Code and Functional Connection" table	Keep signal commons in each cable separate except at the signal controller. Label each cable as "C1" or "C2" in pull box. Use "C1" for signal phases 1, 2, 3, and 4. Use "C2" for phases 5, 6, 7, and 8.

[a]Conductor signal cable description starts with the number of conductors, followed by "CSC". (e.g., a signal cable with 3 conductors is labeled "3CSC.")

12CSC Color Code and Functional Connection

Color Code	Termination	Phase
Red	Vehicle signal red	2, 4, 6, or 8
Yellow	Vehicle signal yellow	2, 4, 6, or 8
Brown	Vehicle signal green	2, 4, 6, or 8
Red/black stripe	Vehicle signal red	1, 3, 5, or 7
Yellow/black stripe	Vehicle signal yellow	1, 3, 5, or 7
Brown/black stripe	Vehicle signal green	1, 3, 5, or 7
Black/red stripe	Spare, or use as required for red or DONT WALK	
Black/white stripe	Spare, or use as required for yellow	
Black	Spare, or use as required for green or WALK	
Red/white stripe	Ped signal DONT WALK	
Brown/white stripe	Ped signal WALK	

28CSC Color Code and Functional Connection

Color Code	Termination	Phase
Red/black stripe	Vehicle signal red	2 or 6
Yellow/black stripe	Vehicle signal yellow	2 or 6
Brown/black stripe	Vehicle signal green	2 or 6
Red/orange stripe	Vehicle signal red	4 or 8
Yellow/orange stripe	Vehicle signal yellow	4 or 8
Brown/orange stripe	Vehicle signal green	4 or 8
Red/silver stripe	Vehicle signal red	1 or 5
Yellow/silver stripe	Vehicle signal yellow	1 or 5
Brown/silver stripe	Vehicle signal green	1 or 5
Red/purple stripe	Vehicle signal red	3 or 7
Yellow/purple stripe	Vehicle signal yellow	3 or 7
Brown/purple stripe	Vehicle signal green	3 or 7
Red/2 black stripes	Ped signal DONT WALK	2 or 6
Brown/2 black stripes	Ped signal WALK	2 or 6
Red/2 orange stripes	Ped signal DONT WALK	4 or 8
Brown/2 orange stripes	Ped signal WALK	4 or 8
Red/2 silver stripes	Overlap A, C red	OLA, OLC
Brown/2 silver stripes	Overlap A, C green	OLA, OLC
Red/2 purple stripes	Overlap B, D red	OLB, OLD
Brown/2 purple stripes	Overlap B, D green	OLB, OLD
Blue/black stripe	Ped push button	2 or 6
Blue/orange stripe	Ped push button	4 or 8
Blue/silver stripe	Overlap A, C yellow	OLA(y), OLC(y)
Blue/purple stripe	Overlap B, D yellow	OLB(y), OLD(y)
White/black stripe	Ped push button common	
Black/red stripe	Railroad preemption	
Black	Spare	

86-2.08D Signal Interconnect Cable (SIC)

Signal interconnect cable must be a 3-pair or 6-pair type with stranded tinned copper No. 20 conductors. Each conductor insulation must be 13 mils minimum nominal thickness, color-coded, polypropylene material. Conductors must be in twisted pairs. Color coding distinguishes each pair. Each pair must be wrapped with an aluminum polyester shield and must have a No. 22 or larger stranded tinned copper drain wire inside the shielded pair.

Cable jacket must be black, high density polyethylene, rated for a minimum of 300 V(ac) and 60 °C, and must have a minimum nominal wall thickness of 40 mils. Cable jacket or moisture-resistant tape directly under the outer jacket must be marked as specified in Section 86-2.08.

You must have a minimum of 6 feet of slack at each controller cabinet. Splicing is allowed only if shown on the plans.

Insulate conductor splice with heat-shrink tubing and overlap at least 0.6 inch. Cover overall cable splice with heat-shrink tubing and overlap the cable jacket at least 1-1/2 inch.

86-2.09 WIRING

Run conductors in conduit, except for overhead and temporary installations and where conductors are run inside poles.

Solder by hot iron, pouring, or dipping method, connectors and terminal lugs for conductor sizes No. 8 and smaller. Do not perform open-flame soldering.

86-2.09A Circuitry

Do not run traffic signal indication conductors to a terminal block on a standard unless connected to a mounted signal head.

Use only 1 conductor to connect to each terminal of a pedestrian push button.

The common for pedestrian push button circuit must be separate from traffic signal circuit grounded conductor.

86-2.09B Installation

Use a UL- or NRTL-listed inert lubricant for placing conductors in conduit.

Pull conductors into conduit by hand using pull tape specified in Section 86-2.05C, "Installation." Do not use winches or other power-actuated pulling equipment.

If adding new conductors or removing existing conductors, remove all conductors, clean conduit as specified in Section 86-2.05C, "Installation," and pull all conductors in conduit as 1 unit.

If traffic signal conductors are run in lighting standard containing street lighting conductors from a different service point, you must encase the traffic signal conductors or the lighting conductors with a flexible or rigid metal conduit for a length until the 2 types of conductors are no longer in the same raceway.

If less than 10 feet above grade, enclose temporary conductors in flexible or rigid metal conduit.

Leave slack for each conductor as follows:

Conductor Slack Requirements

Location	Slack (feet)
Signal standard	1
Lighting standard	1
Signal and lighting standard	1
Pull box	3
Splice	3
Standards with slip base	0

After conductors are installed, seal ends of conduits with an approved sealing compound.

To form a watertight seal, tape ends of spare conductors and conductors ending in pull boxes.

Conductors and cables inside fixture or cabinet must be neatly arranged and tied together by function with self-clinching nylon cable ties or enclosed in plastic tubing or raceway.

Identify conductors for signal overlap phase as specified for vehicle signals in the table titled "Conductor Identification."

Permanently identify conductors by function. Place identification on each conductor, or each group of conductors forming a signal phase, at each pull box and near the end of conductors.

Label, tag, or band conductors by mechanical methods. Identification must not move along the conductors.

86-2.09C Connectors and Terminals

Connectors and terminals must be UL- or NRTL-listed crimp type. Use manufacturer-recommended tool for connectors and terminals to join conductors. Comply with MIL-T-7928.

Terminate stranded conductors smaller than No. 14 in crimp style terminal lugs.

86-2.09D Splicing and Terminations

Splices are allowed for:

1. Grounded conductors in pull box.
2. Pedestrian push button conductors in pull box.
3. Conductors in pull box adjacent to each electrolier or luminaire.
4. Ungrounded traffic signal conductors in pull box, if traffic signals are modified.
5. Ungrounded traffic signal conductors to a terminal compartment or signal head on a standard with conductors of the same phase in the pull box adjacent to the standard.
6. Ungrounded lighting circuit conductors in pull box, if lighting circuits are modified.

86-2.09E Splice Insulation

Splice must function under continuous submersion in water.

Multi-conductor cable must be spliced and insulated to form a watertight joint and to prevent moisture absorption by the cable.

Low-voltage tape must be:

1. UL or NRTL listed
2. Self-fusing, oil and flame-resistant, synthetic rubber
3. PVC, pressure-sensitive adhesive of 6 mils minimum thickness

Insulating pad must be a combination of an 80-mils thick electrical grade PVC laminate and a 120-mils thick butyl splicing compound with removable liner.

Heat-shrink tubing must comply with the following:

1. Be medium or heavy wall thickness, irradiated polyolefin tubing with an adhesive mastic inner wall.
2. Before contraction, minimum wall thickness must be 40 mils.
3. Heating must be as recommended by the manufacturer. Do not perform open-flame heating.
4. When heated, the inner wall must melt and fill crevices and interstices of the covered object and the outer wall must shrink to form a waterproof insulation.
5. After contraction, each end of the heat-shrink tubing or the open end of end cap of heat-shrink tubing must overlap the conductor insulation at least 1-1/2 inches. Coat ends and seams with electrical insulation coating.
6. Comply with requirements for extruded insulated tubing at 600 V(ac) in UL Standard 468D and ANSI C119.1, and the following requirements:

Heat-Shrink Tubing Requirements

Shrinkage Ratio	33 percent, maximum, of supplied diameter when heated to 125 °C and allowed to cool to 25 °C
Dielectric Strength	350 kV per inch, minimum
Resistivity	25^{13} Ω per inch, minimum
Tensile Strength	2,000 psi, minimum
Operating Temperature	-40 °C to 90 °C (135 °C in emergency)
Water Absorption	0.5 percent, maximum

7. If 3 or more conductors are to be enclosed in 1 splice, place mastic around each conductor before placing inside tubing. Use mastic type recommended by heat-shrink tubing manufacturer.

You may use "Method B" as an alternative method for splice insulation. Use at least 2 thicknesses of electrical insulating pad. Apply pad to splice as recommended by manufacturer.

86-2.095 FUSED SPLICE CONNECTORS

Install a fused disconnect splice connector in each ungrounded conductor, between the line and the ballast, in the pull box adjacent to each luminaire. Connector must be accessible in the pull box.

For 240 and 480 V(ac) circuits, each connector must simultaneously disconnect both ungrounded conductors. Connector must not have exposed metal parts, except for the head of stainless steel assembly screw. Recess head of stainless steel assembly screw a minimum of 1/32 inch below top of plastic boss that surrounds the head.

Splice connector must protect fuse from water or weather damage. Contact between fuse and fuseholder must be spring loaded. Splice connector terminals must be:

1. Rigidly crimped, using a tool recommended by manufacturer of fused splice connector, onto ungrounded conductors
2. Insulated
3. Watertight

Fuses must be standard midget ferrule type, with "Non-Time-Delay" feature, and 13/32" x 1-1/2".

86-2.10 BONDING AND GROUNDING

Secure all metallic components, mechanically and electrically, to form a continuous system that is effectively grounded.

Bonding jumper must be copper wire or copper braid of the same cross sectional area as a No. 8 or larger to match the load. Equipment grounding conductors must be color coded as specified in NEC or be bare.

Attach bonding jumper to standard as follows:

Bonding Jumper Attachment

Standard type	Requirements
Standard with handhole and traffic pull box lid cover	Use UL-listed lug and 3/16-inch diameter or larger brass or bronze bolt. Run jumper to conduit or bonding wire in adjacent pull box. Grounding jumper must be visible after the standard is installed and mortar pad is placed on foundation.
Standard without handhole	Use UL-listed ground clamp on each anchor bolt.
Slip-base standard	Use UL-listed ground clamp on each anchor bolt or attach UL-listed lug to bottom slip-base plate with 3/16-inch diameter or larger brass or bronze bolt.

Ground one side of secondary circuit of step-down transformer.

Ground metal conduit, service equipment, and grounded conductor at service point as specified by NEC and service utility, except grounding electrode conductor must be No. 6 or larger.

Equipment bonding and grounding conductors are required in conduit. Run a No. 8 minimum bare copper wire continuously in conduit system. The bonding wire must be sized as specified in the NEC.

Ground electrode must be:

1. 1 piece
2. 10-foot minimum length of one of the following:

    2.1. Galvanized steel rod or pipe not less than 3/4 inch in diameter
    2.2. Copper clad steel rod not less than 5/8 inch in diameter

3. Installed as specified in NEC
4. Bonded to service equipment using one of the following:

    4.1. Ground clamp
    4.2. Exothermic weld
    4.3. No. 6 or larger copper conductor

On wood pole, metallic equipment mounted less than 8 feet above ground surface must be grounded.

Bond metallic conduit in non-metallic pull box using bonding bushing or bonding jumper.

Bond metallic conduit in metal pull box using bonding bushings and bonding jumpers connected to bonding wire running in the conduit system.

86-2.11 SERVICE

Electrical service installation and materials must comply with service utility requirements.

If service equipment is to be installed on utility-owned pole, you must furnish and install conduit, conductors, and other necessary material to complete service installation. Service utility will decide riser and equipment position.

Install service equipment early on to allow service utility to schedule its work before project completion.

Furnish each service with a circuit breaker that simultaneously disconnects all ungrounded service entrance conductors.

Circuit breakers must:

1. Be quick-break on either automatic or manual operation.
2. Have operating mechanism that is enclosed and trip-free from operating handle on overload.
3. Be trip indicating.
4. Have frame size plainly marked.
5. Have trip rating clearly marked on operating handle.
6. Have overload tripping of breakers not influenced by ambient temperature range of -18 °C to 50 °C.
7. Be internal trip type.
8. Be UL or NRTL listed and comply with UL 489 or equal.
9. Have minimum interrupting capacity of 10,000 A, rms, if used as service disconnect.

Service equipment enclosure must be a NEMA 3R enclosure with dead-front panel and a hasp with a 7/16-inch hole for a padlock. Enclosure must be field marked as specified in the NEC to warn qualified persons of potential electric arc flash hazards.

Service equipment enclosure, except Types II and III, must be galvanized or have a factory-applied rust-resistant prime coat and finish coat.

Types II and III service equipment enclosures must be manufactured from one of the following:

1. Galvanized sheet steel
2. Sheet steel plated with zinc or cadmium after manufacturing
3. Aluminum

Manufacture service equipment enclosure as specified in Section 86-3.04A, "Cabinet Construction." Overlapping exterior seams and doors must comply with requirements for NEMA 3R enclosures in the NEMA Enclosure Standards.

If an alternative design is proposed for Type II or III service equipment enclosure, submit plans and shop drawings to the Engineer for approval before manufacturing.

Except for falsework lighting and power for your activities, when you submit a written request, the Engineer will arrange:

1. With the service utility to complete service connections for permanent installations and the Department will pay all costs and fees required by the service utility. Submit request at least 15 days before service connections are required.
2. For furnishing electrical energy. Energy used before contract completion will be charged to you, except cost of energy used for public benefit as ordered by the Engineer will be paid by the Department or local authorities.

Full compensation for furnishing and installing State-owned or permanent service poles, service equipment, conduit, conductors, and pull boxes, including equipment, conduit, and conductors placed on utility-owned poles, is included in the contract item of electrical work involved and no additional compensation will be allowed therefor.

If the service point is indeterminate and is shown on the plans as "approximate location" or "service point not yet established," the labor and materials required for making the connection between the service point, when established, and the nearest pull box shown on the plans will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

86-2.12 WOOD POLES

Wood poles must comply with the following:

1. Class 5 or larger as specified in ANSI O 5.1
2. Less than 180-degree twist in grain over the full length
3. 4-inch or less sweep
4. Beveled top
5. Placed in ground at least 6 feet
6. Length must be:

    6.1. 25 feet for service pole
    6.2. 35 feet for other

After each pole is set in ground, backfill space around pole with selected earth or sand, free of rocks and other deleterious material, placed in 4-inch thick layers. Moisten each layer and thoroughly compact.

Manufacture mast arm from standard pipe, free from burrs. Each mast arm must have an insulated wire inlet and wood pole mounting brackets for mast arm and tie-rod cross arm. Manufacture tie rod from structural steel and pipe.

Mount mast arm for luminaire to provide a 34-foot mounting height for a 200 W high pressure sodium luminaire and 40-foot mounting height for 310 W high pressure sodium luminaire. Traffic signals and flashing beacons on mast arm must provide a minimum vertical clearance of 17 feet from bottom of equipment to pavement.

After manufacturing, pressure-treat pole as specified in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4B, Commodity Specification D.

If specified, treat pole with waterborne wood preservative.

86-2.13 LIGHTING AND SIGN ILLUMINATION CONTROL

Enclosure for the circuit breaker for lighting and sign illumination control must:

1. Be NEMA 3R
2. Be galvanized, cadmium plated, or powder-coated
3. Include dead front panel and a hasp with a 7/16 inch diameter hole for padlock

86-2.14 TESTING

86-2.14A Materials Testing

Deliver material and equipment to be tested to either the Transportation Laboratory or a testing location ordered by the Engineer.

Allow 30 days for acceptance testing from the time material or equipment is delivered to test site. You must pay for all shipping, handling, and related transportation costs associated with testing. If equipment is rejected, you must allow 30 days for retesting. Retesting period starts when corrected equipment is delivered to test site. You must pay for all retesting costs. Delays resulting from submittal of non-compliant materials do not relieve you from executing the contract within the allotted time.

If equipment submitted for testing does not comply with specifications, remove the equipment within 5 business days after notification that the equipment is rejected. If equipment is not removed within that period, it may be shipped to you at your expense.

When testing is complete, you will be notified. You must pick up the equipment at the test site and deliver it to the job site.

Testing and quality control procedures for all other traffic signal controller assemblies must comply with NEMA TS Standards for Traffic Control Systems.

86-2.14B Field Testing

Before starting functional testing, perform the following tests in the presence of the Engineer:

86-2.14B(1) Continuity

Test each circuit for continuity.

86-2.14B(2) Ground

Test each circuit for grounds.

86-2.14B(3) Insulation Resistance

Perform insulation resistance test at 500 V(dc) on each circuit between the circuit and a ground. Insulation resistance must be 10 MΩ minimum on all circuits, except for inductive loop detector circuits that must have an insulation resistance value at least 100 MΩ.

86-2.14C Functional Testing

Test periods must comply with Section 86-1.07, "Scheduling of Work."

Acceptance of new or modified traffic signal will be made only after all traffic signal circuits have been thoroughly tested.

Perform functional test to show that each part of the system functions as specified.

Functional test for each new or modified system must include at least 5 business days of continuous, satisfactory operation. If unsatisfactory performance of the system occurs, the condition must be corrected and the system retested until the 5 business days of continuous, satisfactory operation is obtained.

Except for new or modified parts of existing lighting circuit and sign illumination system, the State or local agency will maintain the system during test period and pay the electrical energy cost. Except for electrical energy, you must pay the cost of necessary maintenance performed by the State or local agency on new circuits or on the portions of existing circuits modified under the contract.

Shutdown of electrical system caused by traffic from a power interruption or from unsatisfactory performance of State-furnished materials does not constitute discontinuity of the functional test.

86-2.15 GALVANIZING

Galvanize as specified in Section 75-1.05, "Galvanizing." Cabinet material may be galvanized before manufacturing as specified in ASTM A 653/653M, Coating Designation G 90.

Steel pipe standard and pipe mast arm must be hot-dip galvanized after manufacturing and must comply with Section 75-1.05, "Galvanizing." . Remove spikes from galvanized surfaces.

A minimum of 10 inches of upper end of anchor bolts, anchor bars or studs, and nuts and washers must be galvanized as specified in Section 75-1.05, "Galvanizing."

After galvanizing, bolt threads must accept galvanized standard nuts without requiring tools or causing removal of protective coatings.

Galvanizing existing materials in an electrical installation will not be required.

86-2.16 PAINTING

Paint electrical equipment and material as specified in Section 59, "Painting," and the following:

1. Use paint material specified in Section 91, "Paint."
2. Factory or shop cleaning methods for metals are acceptable if equal to the methods specified.

3. Instead of temperature and seasonal restrictions for painting as specified in Section 59, "Painting," paint may be applied to equipment and materials for electrical installations if ordered by the Engineer.
4. Ungalvanized ferrous surface to be painted must be cleaned before applying prime coat. Blast cleaning is not required.
5. If an approved prime coat is applied by manufacturer, and in good condition, the 1st primer application is not required.
6. Existing equipment to be painted in the field, including State-furnished equipment, must be washed with a stiff bristle brush using a solution of water containing 2 tablespoons of heavy duty detergent powder per gallon. After rinsing, surface must be wire-brushed with a coarse, cup-shaped, power-driven brush to remove badly bonded paint, rust, scale, corrosion, grease, or dirt. Dust or residue remaining after wire brushing must be removed before priming.
7. Do not paint galvanized metal guard post, galvanized equipment, State-furnished controller cabinet, and wood poles for traffic signal or flashing beacon.
8. New galvanized metal surface to be painted in the field must be cleaned as specified for existing equipment before applying the prime coat. Do not wire brush new galvanized surface.
9. After erection, examine exterior surface for damaged primer, clean, and spot coat with primer.
10. Paint Types II and III steel service equipment enclosures with a polymeric or an enamel coating system matching Color No. 14672, light green, of Federal Standard 595B. Coating must be commercially smooth and free of flow lines, paint washout, streaks, blisters, and other defects that would impair serviceability or detract from general appearance. Coating must comply with the following:

    10.1. Coating hardness - Finish must have pencil lead hardness of HB, minimum, using an Eagle Turquoise pencil.
    10.2. Salt spray resistance - Undercutting coating system's film must not exceed 1/8-inch average, from lines scored diagonally and deep enough to expose the base metal, after 336 hours of exposure in a salt spray cabinet complying with ASTM B 117.
    10.3. Adherence - Must not have coating loss when tested as specified in California Test 645. Perform testing by applying coating to 4" x 8" x 0.024" test specimens of the same material as the cabinet, using the same application method.

11. Finish interior of metal signal visor, louver, and front face of back plates with 2 applications of lusterless black exterior grade latex paint formulated for application to properly prepared metal surface. Good condition factory finish will be acceptable.
12. Finish metal signal section, signal head mounting, brackets and fittings, outside of visor, pedestrian push button housing, pedestrian signal section and visor, and back face of back plate with 2 applications of lusterless black or dark olive green exterior grade latex paint formulated for application to properly prepared metal surface. Match dark olive green color to Color Chip No. 68 filed at the Transportation Laboratory.
13. Prepare and finish conduit and conduit fitting above ground the same as adjacent standard or post.
14. Relocated, reset or modified equipment previously finished as specified in this section, except for previously-finished galvanized standard with traffic signal yellow enamel, must be given a spot finishing application on newly primed areas and 1 finishing

application over the entire surface. If signal face or mounting brackets are required to be painted under this section, all signal faces and mounting brackets on the same mounting must be repainted.

15. Small rusted or repaired areas of relocated or reset galvanized equipment must be cleaned and painted as specified in Section 75-1.05, "Galvanizing," for repairing damaged galvanized surfaces.
16. Stencil equipment number neatly on the standard or adjacent structure. Obtain number from the Engineer.
17. Perform painting neatly. The Engineer reserves the right to require use of brushes if the work performed by paint spraying machine is unsatisfactory.

86-3 CONTROLLER ASSEMBLIES

86-3.01 CONTROLLER ASSEMBLIES

A controller assembly houses a complete mechanism for controlling the operation of traffic signals or other systems.

Model 170 and Model 2070, specified as a Model 170/2070 controller assembly, includes a Model 170, 170E or 2070 controller unit, a wired cabinet, and all auxiliary equipment required to control the system.

86-3.02 (BLANK)

86-3.03 (BLANK)

86-3.04 CONTROLLER CABINETS

Controller cabinets for controller assemblies other than Model 170/2070 must comply with the following:

86-3.04A Cabinet Construction

Cabinet must be rainproof and the top crowned 1/2 inch or slanted toward the back to prevent standing water.

Cabinet and door must be manufactured from one of the following:

1. 0.073-inch minimum thickness cold-rolled steel with continuously-welded exterior seams
2. 0.073-inch minimum thickness stainless steel with overlapping exterior seams complying with Type 4 enclosures of the NEMA Enclosure Standards
3. 0.125-inch minimum thickness aluminum with continuously-welded exterior seams

Exterior welds must be ground smooth and edges filed to a radius of at least 0.03 inch.

Cabinet manufactured from cold-rolled steel must comply with Section 86-2.16, "Painting," and the following:

1. Cabinet manufactured from cold-rolled steel must be finished with a polymeric or an enamel coating system conforming to Color No. 14672 of Federal Standard 595B.
2. Cabinet must not have coating loss when 2 test specimens, 4" x 8", of the same material and coating as the cabinet are tested. Two 9-inch-diagonal scratches exposing bare metal will be made on a specimen. Soak specimen in demineralized water for 192 hours. Tightly affix a 1-inch wide strip of masking tape to the surface and remove with one

quick motion. Specimen showing evidence of blistering, softening, or peeling of paint or coating from the base metal will be rejected. Testing must comply with California Test 645, except passing 180 Degree Bend Test is not required.

3. Metal must be prepared by the 3-step, iron phosphate conversion coating bonderizing technique.
4. Inside walls, doors, and ceiling of the housing must be the same as the outside finish.

Cabinet manufactured from stainless steel must comply with the following:

1. Use annealed or quarter-hard stainless steel that complies with ASTM A 666 for Type 304, Grades A or B.
2. Use gas tungsten arc welding (GTAW) process with bare stainless steel welding electrodes. Electrodes must comply with AWS A5.9 for ER308 chromium-nickel bare arc welding electrodes.
3. Procedures, welder, and welding operator must comply with requirements and practices recommended in AWS C5.5.
4. Ground or brush exposed, exterior surfaces of stainless steel cabinet to a 25 to 50-microinch finish using iron-free abrasives or stainless steel brushes.
5. After grinding or brushing, cabinet must not show rust discoloration when:

    5.1. Exposed for 48 hours in a salt spray cabinet as specified in ASTM B 117
    5.2. Exposed 24 hours in a tap water spray cabinet with the water temperature between 38 °C and 45 °C

6. After the test, cabinet showing rust discoloration anywhere on its surface will be rejected. Rejected cabinets may be cleaned, passivated, and resubmitted for testing.

Cabinet manufactured from aluminum sheet must comply with ASTM B 209 or B 209M for 5052-H32 aluminum sheet, and the following:

1. Use gas metal arc welding (GMAW) process with bare aluminum welding electrodes. Electrodes must comply with AWS A5.10 for ER5356 aluminum alloy bare welding electrodes.
2. Procedures, welder, and welding operator for welding must comply with requirements in AWS B3.0, "Welding Procedure and Performance Qualification," and to practices recommended in AWS C5.6.
3. Surface finish of each aluminum cabinet must comply with MIL-A-8625 for a Type II, Class I coating, except anodic coating must have a minimum thickness of 0.0007 inch and a minimum coating weight of 0.001 ounce per square inch. The anodic coating must be sealed in a 5 percent aqueous solution of nickel acetate, pH 5.0 to 6.5, for 15 minutes at 97 °C. Before applying anodic coating, clean and etch cabinets using the steps below:

    3.1. Clean by immersing into inhibited alkaline cleaner, Oakite 61A, Diversey 909, or equal, 6 to 8 ounces per gallon at 71 °C for 5 minutes.
    3.2. Rinse in cold water.
    3.3. Etch in solution of 1-1/2 ounce of sodium fluoride and 4 to 6 ounces of sodium hydroxide per gallon of distilled water at 60 °C to 65 °C for 5 minutes.
    3.4. Rinse in cold water.

3.5. Immerse in 50 percent by volume nitric acid solution at room temperature for 2 minutes.
3.6. Rinse in cold water.

Cabinet must have:

1. Single front door with:

   1.1. 44-inch maximum door width.
   1.2. Lock, when closed and latched, that is locked.
   1.3. Police panel mounted on door, equipped with a keyed lock and 2 police keys. Each police key must have a shaft at least 1-3/4 inch in length.

2. Dust-tight gasketing on all door openings, permanently bonded to the metal. Mating surface of the gasketing must be covered with silicone lubricant to prevent sticking.
3. Handle that:

   3.1. Allows padlocking in closed position
   3.2. Has a minimum length of 7 inches
   3.3. Has a 5/8-inch, minimum, steel shank
   3.4. Is manufactured of cast aluminum, or zinc-plated or cadmium-plated steel

4. Cabinet door frame with:

   4.1. Latching mechanism that:

      4.1.1. Holds tension on and forms a firm seal between door gasketing and frame.
      4.1.2. Is a 3-point cabinet latch with nylon rollers that have a minimum diameter of 3/4 inch and equipped with ball bearings.
      4.1.3. Has a center catch and a pushrod made of zinc-plated or cadmium-plated steel. Pushrod must be at least 1/4" x 3/4" and turned edgewise at outer supports. Cadmium plating must comply with MIL-QQ-416. Zinc plating must comply with MIL-QQ-325.

   4.2. Hinging that:

      4.2.1. Has 3-bolt butt hinges, each having a stainless steel fixed pin. Hinges must be stainless steel or may be aluminum for aluminum cabinet.
      4.2.2. Is bolted or welded to the cabinet. Hinge pins and bolts must not be accessible when door is closed.
      4.2.3. Has a catch to hold the door open at 90 degrees and 180 degrees, ± 10 degrees, if a door is larger than 22 inches in width or 6 square feet in area. Catch must be at least 3/8-inch diameter, stainless steel plated rod capable of holding door open at 90 degrees in a 60 mph wind at an angle perpendicular to the plane of the door.

5. Lock that:

5.1. Is solid brass, 6-pin tumbler, rim type
5.2. Has rectangular, spring-loaded bolts
5.3. Is left hand and rigidly mounted with stainless steel machine screws approximately 2 inches apart
5.4. Extends 1/8 to 3/8 inch beyond the outside surface of door

6. 2 keys that are removable in the locked and unlocked positions.

Submit alternative design details for review and approval before manufacturing cabinet.
Use metal shelves or brackets that will support controller unit and auxiliary equipment.
Machine screws and bolts must not protrude outside the cabinet wall.

86-3.04B Cabinet Ventilation

Each controller cabinet must have:

1. 8 screened, 1/2-inch diameter or larger, raintight vent holes, in lower side or bottom of cabinet. You may use louvered vents with a permanent metal mesh or 4-ply woven polypropylene air filter held firmly in place, instead.
2. Electric fan with ball or roller bearings and capacity of at least 100 cubic feet per minute. Fan must be thermostatically controlled and manually adjustable to turn on between 32 °C and 65 °C with a differential of not more than 6 °C between automatic turn on and turn off. Fan circuit must be fused at 125 percent of ampacity of installed fan motor.

Fan and cabinet vent holes must be positioned to direct bulk of airflow over controller unit or through ventilating holes of controller unit.

86-3.04C Cabinet Wiring

Conductors used in controller cabinet wiring must:

1. Be neatly arranged and laced, or enclosed in plastic tubing or raceway.
2. End with properly sized captive or spring-spade terminal or be soldered to a through-panel solder lug on the back side of the terminal block. Apply crimp-style connector with proper tool to prevent opening of handle until crimp is completed.

Controller cabinet must have an equipment grounding conductor bus that is grounded to the cabinet and connected to metal conduit system or other approved ground with a No. 8, or larger, grounding conductor.

With all cabinet equipment in place and connected, resistance between grounded conductor terminal bus and equipment grounding conductor bus must be 50 MΩ, minimum, when measured with an applied voltage of 150 V(dc).

If direct current is to be grounded, connect to equipment ground only.

Use two or more terminal blocks for field connection. Install field terminal within 22 inches from front of cabinet and orient for screwdriver operation. Terminal must be a minimum of 5 inches above foundation.

No more than 3 conductors per terminal are allowed. Two flat metal jumpers, straight or U shaped, may be placed under terminal screw. At least 2 full threads of terminal screws must be fully engaged when screw is tightened. Live parts must not extend beyond the barrier.

86-3.05 CABINET ACCESSORIES

86-3.05A Labels

Include permanently printed, engraved, or silk-screened label for equipment and removable items of equipment.

Labeling must match cabinet wiring diagram. Label for shelf-mounted equipment must be on shelf face below item. Label for wall-mounted equipment must be below item.

86-3.05B Convenience Receptacle

Mount convenience receptacle in a readily accessible location inside the cabinet.

Convenience receptacle must be a duplex, 3-prong, NEMA 5-15R grounding type outlet that complies with UL Standard 943.

86-3.05C Surge Arrestor

Surge arrestor must reduce effects of power line voltage transients and have ratings as follows:

Surge Arrestor Requirements

Recurrent peak voltage	184 V(ac)
Energy rating, maximum	20 J
Power dissipation, average	0.85 W
Peak current for pulses less than 7 µs	1,250 A

Standby current must be 1 mA or less for 120 V(ac), 60 Hz sinusoidal input.

86-3.05D Terminal Blocks

Terminal block must be rated 600 V(ac), minimum, and have nickel-, silver-, or cadmium-plated brass binder head screw terminal.

Heavy duty terminal block must be rated at 20 A and have 12 position with No. 10 x 5/16-inch nickel-plated brass binder head screws and nickel-plated brass inserts. Each position must have 2 screw-type terminals. Terminal block must be barrier type with shorting bars in each of the 12 positions, and must have integral type marking strips.

Light duty terminal block must be rated at 5 A and have 12 positions with No. 6 x 1/8 inch binder head screws. Each position must have 1 screw-type terminal.

86-3.06 COMPONENTS

86-3.06A Toggle Switches

Toggle switch must:

1. Have poles as required
2. Be rated at 200 percent of circuit current for circuits of 10 A or less and 125 percent of circuit current for circuits over 10 A

86-3.06B Cartridge Fuses

Install cartridge fuse in panel-mounted fuseholder. Fuse type and rating must be as recommended by the fuse manufacturer for protecting the load.

86-3.06C Circuit Breakers

Circuit breaker must comply with Section 86-2.11, "Service," except breaker must have a minimum interrupting capacity of 5,000 A, rms.

86-3.06D Connectors

Use connector designed to interconnect various parts of circuit together and constructed for the application involved. Design connector for positive connection of circuit and easy insertion and removal of mating contacts. Connector must be permanently keyed to prevent improper connection of circuit.

Connector, or device plugging into connector, must have positive connection to prevent a circuit from breaking due to vibration, a pull on connecting cable, or similar disruptive force.

86-4 TRAFFIC SIGNAL FACES AND FITTINGS

86-4.01 VEHICLE SIGNAL FACES

Each vehicle signal face must:

1. Be adjustable and allow for 360-degree rotation about vertical axis
2. Comply with ITE publication ST-017B, "Vehicle Traffic Control Signal Heads"
3. Comply with California Test 604, except for arrow and "X" faces
4. Have 3 sections arranged vertically: red at top, yellow at center, and green at bottom
5. Be of the same manufacturer and material, if more than 1 is installed at an intersection, except for programmed visibility type
6. Be sealed with neoprene gasket at top opening
7. Be LED modules

86-4.01A Signal Sections

Each signal section must comply with the following:

1. Maximum height must be 10-1/4 inches for an 8-inch section and 14-3/4 inches for a 12-inch section.
2. Housing must:

    2.1. Be either die-cast or permanent mold-cast aluminum, or if specified, be structural plastic.
    2.2. Comply with ITE publication ST-017B if die-cast or permanent mold-cast aluminum is used.
    2.3. Have a 1-piece, hinged, square-shaped door designed to allow access for relamping without the use of tools. Door must be secured to hold the door closed during loading tests. Module or lens must be watertight and mounted in the door.

3. Hinge pins, door latching devices, and other exposed hardware must be Type 304 or 305 stainless steel. Interior screws and fittings must be stainless steel, or steel with a corrosion resistant plating or coating.
4. Opening must be placed on top and bottom to receive 1-1/2-inch pipe. The 8-inch and 12-inch sections of an individual manufacturer must be capable of joining to form a signal face in any combination. This interchangeability is not required between metal and plastic sections.

5. Gaskets must be made of a material that is not affected if installed in a section with metal or plastic housing that is continuously operated for 336 hours.

Structural failure is described as follows:

Signal Section Structural Failure

Signal Section Type	Requirements	Description of Structural Failure
Metal	California Test 666	Fracture within housing assembly or deflection of more than half the lens diameter of signal section during wind load test
Plastic	California Test 605	Fracture within housing assembly or deflection of more than 10 degrees in either the vertical or horizontal plane after wind load has been removed from front of signal face, or deflection of more than 6 degrees in either the vertical or horizontal plane after wind load has been removed from back of signal face

86-4.01A(1) Metal Signal Sections

Each metal signal section must have a metal visor. Metal signal faces requiring backplates must have metal backplates.

86-4.01A(2) Plastic Signal Sections

Housing must be molded in 1 piece, or fabricated from 2 or more pieces and joined into a single piece. Plastic must have ultraviolet stability, be unaffected by lamp heat, and be self-extinguishing. Housing and door must be colored throughout and be black, matching Color No. 17038, 27038, or 37038 of Federal Standard 595B.

Each face section must be joined to adjacent section by one of the following:

1. Minimum of 3 machine screws for 8-inch sections and 4 machine screws for 12-inch sections, installed through holes near front and back of housing. Each screw must be a No. 10 and have a nut, flat washer, and lock washer.
2. Two machine screws, each with a nut, flat washer, and lock washer, installed through holes near the front of the housing, and a fastening through the 1-1/2-inch pipe opening. Fastening must have 2 large flat washers to distribute the load around the pipe opening and 3 carriage bolts, each with a nut and lock washer. Minimum screw size must be No. 10. Minimum carriage bolt size must be 1/4 inch.

Supporting section of each signal face supported only at top or bottom must have reinforcement.

Reinforcement plate must be either sheet aluminum, galvanized steel, or cast aluminum. Each plate must be a minimum of 0.11-inch thick and have a hole concentric with 1-1/2-inch pipe-mounting hole in the housing. Place reinforcement plate as follows:

Reinforcement Plate Placement

Type of Reinforcement Plate	Placement
Sheet aluminum	Inside and outside of housing
Galvanized steel	Inside of housing
Cast aluminum	Outside of housing

Reinforcement plates placed outside of the housing must be finished to match signal housing color and be designed to allow proper serrated coupling between signal face and mounting

hardware. Minimum of 3 No. 10 machine screws must be installed through holes in each plate and matching holes in the housing. Each screw must have a round or binder head, a nut, and lock washer.

If signal face is supported by a Type MAS side attachment slip-fitter inserted between 2 sections, place spacers between the 2 sections. Vertical dimension of spacers must allow proper seating of serrations between the slip-fitter and the 2 sections. In addition to the fastening through the large openings in housing, the 2 sections must join with at least 2 machine screws through holes near the front of housing and the spacers, and through matching holes in a reinforcing plate installed in housing. Machine screws must be No. 10 minimum size. Spacers must be made of same material as signal housing.

If reinforcing webs are used to connect back of housing to top, bottom, and sides, reinforcing plates are not required.

Holes for machine screws must be either cast or drilled during signal section manufacturing. Surround each hole with a 1/8-inch minimum width boss to allow contact between signal sections about axis of hole.

Each plastic signal section must have a plastic or metal visor. Plastic signal faces requiring backplates must have plastic backplates.

Serrated nylon washer must be inserted between each plastic signal section and metal mounting assembly. Each washer must be between 3/16- and 1/4-inch thick. Serrations must match those on signal section and mounting assembly.

86-4.01B Electrical Components

Conductors must be connected to a terminal block mounted inside, at the back of housing. Terminal block must have enough screw type terminals or NEMA type tab connectors to end all field and module or lamp conductors independently. Permanently identify terminal with field conductors attached or color code conductors to facilitate field wiring.

86-4.01C Visors

Include removable visor with each signal section. Comply with ITE publication ST-017B. Visors are classified by lens enclosure as full circle, tunnel or cap. Bottom opens for tunnel type and both, bottom and lower sides open for cap type. Visors must be tunnel type.

Visor must have a downward tilt between 3 and 7 degrees with a length of:

1. 9-1/2-inch minimum for nominal 12-inch round lenses
2. 7 inch for nominal 8-inch round lenses

Metal visor must be formed from 0.050-inch, minimum thickness, aluminum alloy sheet.

Plastic visor must be either formed from sheet plastic or assembled from one or more injection, rotational, or blow-molded plastic sections. Material must be of a black homogeneous color with lusterless finish. Sections must be joined using thermal, chemical, or ultrasonic bonding, or with aluminum rivets and washers permanently colored to match visor.

Secure each visor to its door and prevent removal or permanent deformation when wind load specified in California Test 605 for plastic visors or 666 for metal visors is applied to its side for 24 hours.

If directional louvers are used, fit louvers snuggly into full-circular signal visors. Outside cylinder must be constructed of 0.030-inch nominal thickness, or thicker, sheet steel and vanes must be constructed of 0.016-inch nominal thickness, or thicker, sheet steel, or the cylinder and vanes must be constructed of 5052-H32 aluminum alloy of equal thickness.

86-4.02 (BLANK)

86-4.03 (BLANK)

86-4.04 BACKPLATES

Background light must not be visible between backplate and signal face or between sections.

Plastic backplates must be either formed from sheet plastic or assembled from extruded, molded, or cast sections. Sections must be factory joined using one of the following:

1. Appropriate solvent cement
2. Aluminum rivets and washers painted or permanently colored to match backplate
3. No. 10 machine screws with washers, lock washers, and nuts, painted to match backplate

Backplate material must be of black homogeneous color with a lusterless finish. Secure each plastic backplate to the plastic signal face in a manner that prevents its removal or permanent deformation when the wind-load test is applied to either the front or back of signal face. Permanent deformation of any portion of backplate must not exceed 5 degrees forward or backward after wind loading is applied for 24 hours.

If plastic backplate requires field assembly, join with at least 4 No. 10 machine screws at each field-assembled joint. Each machine screw must have an integral or captive flat washer, a hexagonal head slotted for a standard screwdriver, and either a locking nut or a nut and lockwasher. Machine screws, nuts, and washers must be stainless steel or steel with a zinc or black-oxide finish.

If a metal backplate has 2 or more sections, fasten sections with rivets or aluminum bolts peened after assembly to avoid loosening.

Instead of the screws shown on the plans, you may use self-threading No. 10 steel screws to fasten plastic backplates to plastic signal face. Each screw must have an integral or captive flat washer, a hexagonal head slotted for a standard screwdriver, and is stainless steel or steel with a zinc or black-oxide finish.

86-4.05 PROGRAMMED VISIBILITY VEHICLE SIGNAL FACES

Programmed visibility signal face and its installation must comply with Section 86-4.01, "Vehicle Signal Faces," Section 86-4.04, "Backplates," and Section 86-4.08, "Signal Mounting Assemblies."

Each programmed visibility signal section must:

1. Have a nominal 12-inch diameter circular or arrow indication
2. Comply with ITE publication ST-017B for color and arrow configuration
3. Have a cap visor
4. Have an adjustable connection that provides incremental tilting from 0 to 10 degrees above or below horizontal while maintaining a common vertical axis through couplers and mountings

Terminal connection must allow external adjustment about the mounting axis in 5-degree increments.

Signal must be mountable with ordinary tools and capable of servicing without tools. Preset adjustment at 4 degrees below horizontal.

Visibility of each programmed visibility signal face must be capable of adjustment or programming, within the face. When programmed, each signal face's indication must be visible only in those areas or lanes to be controlled, except that during dusk and darkness a faint glow to each side is allowed.

You must program the head as recommended by the manufacturer.

86-4.06 PEDESTRIAN SIGNAL FACES

Message symbols for pedestrian signal faces must be white "WALKING PERSON" and Portland orange "UPRAISED HAND." Comply with ITE Standards: "Pedestrian Traffic Control Signal Indications" and California MUTCD. Each symbol's height must be at least 10 inches and width must be at least 6-1/2 inches.

Luminance of "UPRAISED HAND" symbol must be 1,100 foot-lamberts, minimum, and luminance of "WALKING PERSON" symbol must be 1,550 foot-lamberts, minimum, when tested as specified in California Test 606.

Uniformity ratio of an illuminated symbol must not exceed 4 to 1 between the highest luminance area and the lowest luminance area.

Luminance difference between a nonilluminated symbol and the background around the symbol must be less than 30 percent when viewed with the visor and front screen in place and at a low sun angle.

Each housing, including front screen, must have maximum overall dimensions of 18-1/2-inch width, 19-inch height, and 11-1/2-inch depth.

All new pedestrian signal faces installed at an intersection must be the same make and type.

86-4.06A Type A

Each Type A pedestrian signal face must include a housing, 1 LED pedestrian signal combo module and a front screen.

86-4.06B Front Screen

Front screen installation for each Type A signal must comply with one of the following:

1. Install, tilting downward, at an angle of 15±2 degrees out from the top, an aluminum honeycomb screen with 0.2-inch cells, 3/8-inch thick, or a plastic screen of 3/8-inch squares, 1/2-inch thick with wall thickness of 1/16-inch. Completely cover message plate. Include a clear front cover of 1/8-inch minimum thickness acrylic plastic sheet or 1/16-inch minimum thickness polycarbonate plastic. Hold screen and cover firmly in place with stainless steel or aluminum clips or stainless steel metal screws.
2. Install a 1-1/2-inch deep eggcrate or Z crate type screen of 1/32-inch nominal thickness polycarbonate. Mount screening in a frame constructed of 0.040-inch minimum thickness aluminum alloy or polycarbonate. Install screen parallel to face of message plate and hold in place with stainless steel screws.

The Department will test screens in a horizontal position with its edges supported. When a 3-inch diameter, 4-pound steel ball is dropped on the screen from a height of 4 feet above, the front screen must not fracture, separate at the welds, or compress more than 1/8-inch. When pedestrian housing is used to support front screen during test, remove message plate from pedestrian signal housing, so there is no back support for the screen.

Screen and frame must be one of the following:

1. Manufactured from aluminum anodized flat black
2. Finished with lusterless black exterior grade latex paint formulated for application to properly prepared metal surfaces
3. Manufactured from flat black plastic

86-4.06C Housing

Pedestrian signal housing must comply with Section 86-4.01A, "Signal Sections."

86-4.06D Finish

Paint exterior of each housing as specified in Section 86-2.16, "Painting."

86-4.06E Control

Pedestrian signals must be controllable by solid-state switching devices specified for traffic signal controller assemblies.

86-4.06F Terminal Blocks

Include light duty terminal block, as specified in Section 86-4.01B, "Electrical Components," with each pedestrian signal face.

86-4.07 (BLANK)

86-4.08 SIGNAL MOUNTING ASSEMBLIES

Signal mounting assembly must include:

1. 1-1/2-inch standard steel pipe or galvanized conduit
2. Pipe fitting made of ductile iron, galvanized steel, aluminum alloy Type AC-84B No. 380, or bronze
3. Mast arm and post top slip-fitters, and terminal compartments made of cast bronze or hot-dip galvanized ductile iron

After installation, clean and paint exposed threads of galvanized conduit brackets and bracket areas damaged by wrench or vise jaws. Use wire brush to clean and apply 2 coats of approved unthinned zinc-rich primer, organic vehicle type, as specified in Section 91, "Paint." Do not use aerosol can.

Fit each terminal compartment with a terminal block having a minimum of 12 positions, each with 2 screw-type terminals. Each terminal must accommodate at least five No. 14 conductors. Include a cover on compartment for ready access to terminal block. Terminal compartment used to bracket mount signals must be bolted securely to pole or standard.

Horizontal dimension of mounting assembly members between vertical centerline of terminal compartment or slip-fitter, and the vertical centerline of each signal face must not exceed 11 inches, except where required for proper signal face alignment or to allow programming of programmed visibility signal faces.

Mounting assembly members must be plumb or level, symmetrically arranged, and securely assembled.

Mounting assembly must be watertight, and free of sharp edges or protrusions that might damage conductor insulation. Include positive locking serrated fittings that, if mated with similar fittings on signal faces, will prevent faces from rotating.

Orient each mounting assembly to allow maximum horizontal clearance to adjacent roadway.

Use slip-fitter for post-top mounting of signals. Fit slip-fitter over a 4-1/2-inch outside diameter pipe or tapered standard end. Include cadmium-plated steel set screws. Include an integral terminal compartment for each slip-fitter used to post-top mount signals with brackets.

Do not install signal faces at an intersection until all other signal equipment, including complete controller assembly, is in place and ready for operation. You may mount signal faces if covered or not directed toward traffic.

86-4.09 FLASHING BEACONS

Flashing beacon must include:

1. Single section traffic signal face with yellow or red LED module indications
2. Backplate
3. Tunnel visor
4. Flashing beacon control assembly

Beacon flasher unit must be independent of intersection flasher unit.

86-4.09A Flashing Beacon Control Assembly

86-4.09A(1) Enclosure

Enclosure must be:

1. NEMA 3R with a dead front panel and a hasp with a 7/16-inch hole for a padlock
2. Powder coated, hot-dip galvanized, or factory-applied rust resistant prime coat and finish coat

86-4.09A(2) Circuit Breakers and Switches

Circuit breakers must comply with Section 86-2.11, "Service."

Switch for manually operating sign lighting circuit must be a single-hole-mounting toggle type with a single pole and throw and rated at 12 A, 120 V(ac). Furnish switch with an indicating nameplate reading "Auto-Test."

86-4.09A(3) Flasher

Comply with Section 8, "Solid-State Flashers," of NEMA Standards publication No. TS 1.

Flasher must be a solid-state device with no contact points or moving parts.

Include 2 output circuits to allow alternate flashing of signal faces. Flasher must be able to carry a minimum of 10 A per circuit at 120 V(ac).

86-4.09A(4) Wiring

Conductors and wiring in the enclosure must comply with Section 86-2.09B(1), "Cabinet and Enclosure Installation."

86-4.09A(5) Terminal Blocks

Terminal blocks must be:

1. Rated 25 A, 600 V(ac)
2. Molded phenolic or nylon material

3. Barrier type with plated brass screw terminals and integral marking strips

86-5 DETECTORS

86-5.01 VEHICLE DETECTORS

Sensor unit and isolator must comply with TEES.

86-5.01A Inductive Loop Detectors

86-5.01A(1) General

Inductive loop detector includes a completely installed loop or group of loops, in the roadway, lead-in cable, and a sensor unit, with power supply installed in a controller cabinet.

86-5.01A(2) (Blank)

86-5.01A(3) Construction Materials

Conductor for each inductive loop detector must be continuous, unspliced, and one of the following:

Conductor Options for Inductive Loop Detector

Option	Specifications
Type 1 loop wire	Type RHW-USE neoprene-jacketed or Type USE cross-linked polyethylene insulated, No. 12, stranded copper wire with a 40 mils minimum thickness at any point.
Type 2 loop wire	Type THWN or Type XHHW, No. 14, stranded copper wire in a plastic tubing. Plastic tubing must be polyethylene or vinyl, rated for use at 105 °C, and resistant to oil and gasoline. Outside diameter of tubing must be 0.27 inch maximum with a wall thickness of 0.028 inch minimum.

Conductor for loop detector lead-in cable must be two No. 16, 19 x 29, stranded, tinned copper wires, comply with the calculated cross sectional area of ASTM B 286, Table 1, and be one of the following:

Conductor Options for Loop Detector Lead-In Cable

Option	Specifications
Type B lead-in cable	Insulated with 20 mils of high-density polyethylene. Conductors must be twisted together with at least 2 turns per foot and the twisted pair must be protected with a copper or aluminum polyester shield. A No. 20, minimum, copper drain wire must be connected to equipment ground within cabinet. Cable must have a high-density polyethylene or high-density polypropylene outer jacket with a nominal thickness of 32 mils. Include an amorphous interior moisture penetration barrier of nonhydroscopic polyethylene or polypropylene fillers.
Type C lead-in cable	Comply with International Municipal Signal Association (IMSA) Specification No. 50-2. A No. 20, minimum, copper drain wire must be connected to equipment ground within cabinet.

86-5.01A(4) Installation Details

Install loop conductors without splices and end in nearest pull box. Seal open end of cable jacket or tubing similar to splicing requirements to prevent water from entering. Do not make final splices between loops and lead-in cable until loop operations under actual traffic conditions is approved.

Splice all loop conductors for each direction of travel for same phase of a traffic signal system, in same pull box, to a detector lead-in cable that runs from pull box adjacent to loop detector to a sensor unit mounted in controller cabinet.

End all loop conductors in a pull box or terminal strip in the cabinet.

Identify and band conductors for inductive loop installations. Band, in pairs, by lane, in the pull box adjacent to the loops and near the end of conductors in the cabinet. Bands must comply with Section 86-2.09, "Wiring."

If HMA surfacing is to be placed, install loop conductors before placing uppermost layer of HMA. Install conductors in compacted layer of HMA immediately below the uppermost layer. Install conductors as shown on the plans, except fill slot with sealant flush to the surface.

When cutting loops:

1. Residue from slot cutting activities must not be allowed to flow across shoulders or lanes occupied by public traffic and must be removed from the pavement surface before residue flows off. Dispose of residue from slot cutting activities under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."
2. Surplus sealant must be removed from adjacent road surface without using solvents before setting.

Sealant for filling slots must comply with one of the following:

Elastomeric Sealant

Polyurethane material that will, within stated shelf life, cure only in the presence of moisture. Sealant must be suitable for use in both HMA and PCC.

The cured sealant must have the following performance characteristics:

Performance Characteristics of Cured Sealant

Specification	ASTM	Requirement
Hardness (indentation) at 25 °C and 50% relative humidity. (Type A, Model 1700 only)	D 2240 Rex.	65-85
Tensile Strength: Pulled at 508 mm per minute	D 412 Die C	3.45 MPa, min.
Elongation: Pulled at 508 mm per minute	D 412 Die C	400%, min.
Flex at -40 °C: 0.6-mm free film bend (180°) over 13-mm mandrel	--	No cracks
Weathering Resistance: Weatherometer 350 h, cured 7 days at 25 °C @ 50% relative humidity	D 822	Slight chalking
Salt Spray Resistance: 28 days at 38 °C with 5% NaCl, Die C & pulled at 508 mm per minute	B 117	3.45 MPa, min. tensile 400%, min. elongation
Dielectric Constant over a temperature range of -30 °C to 50 °C	D 150	Less than 25% change

Asphaltic Emulsion Sealant

Comply with State Specification 8040-41A-15. Use for filling slots in HMA pavement that are a maximum of 5/8 inch in width. Do not use where the slope causes the material to run from the slot. Material must not be thinned beyond manufacturer's recommendations. Place material when air temperature is at least 7 °C.

Hot-Melt Rubberized Asphalt Sealant

Hot-melt rubberized asphalt must be:

1. In solid form at room temperature and fluid at application temperature of 190 °C to 205 °C. Fumes must be non-toxic.
2. Suitable for use in both HMA and PCC.
3. Melted in a jacketed, double-boiler type melting unit. Temperature of heat transfer medium must not exceed 245 °C.
4. Applied with a pressure feed applicator or pour pot, when the pavement surface temperature is greater than 4 °C.
5. Packaged in containers clearly marked "Detector Loop Sealant" and specifying manufacturer's batch and lot number.

The cured sealant must have the following performance characteristics:

Performance Characteristics of Cured Sealant

Specification	ASTM	Requirement
Cone Penetration, 25 °C, 150 g, 5 s	D 5329, Sec. 6	3.5 mm, max
Flow, 60 °C	D 5329, Sec. 8	5 mm, max
Resilience, 25 °C	D 5329, Sec. 12	25%, min
Softening Point	D 36	82 °C, min
Ductility, 25 °C, 50 mm/min	D 113	300 mm, min
Flash Point, COC, °C	D 92	288 °C, min
Viscosity, Brookfield Thermosel, No. 27 Spindle, 20 rpm, 190 °C	D 150	Less than 25% change

86-5.01B Magnetic Detectors

Cable from pull box, adjacent to magnetic detector sensing element, to the field terminals in the controller cabinet must be the type specified for inductive loop detectors.

86-5.02 PEDESTRIAN PUSH BUTTON ASSEMBLIES

Housing must be either die-cast or permanent mold-cast aluminum, or ultraviolet stabilized, self-extinguishing structural plastic, if specified. Plastic housing must be black matching Color No. 17038, 27038 or 37038 of Federal Standard 595B, and colored throughout. Assembly must be rainproof and shockproof in any weather condition.

Switch must be a single-pole, double-throw, switching unit, with screw type terminals, rated 15 A at 125 V(ac), and must have:

1. Plunger actuator and a U frame to allow recessed mounting in push button housing
2. Operating force of 3.5 pounds
3. 1/64-inch maximum pretravel
4. 7/32-inch minimum overtravel
5. 0.0004- to 0.002-inch differential travel
6. 2-inch minimum diameter actuator

Where pedestrian push button is attached to a pole, shape housing to fit the pole curvature and secure. Include saddles to make a neat fit if needed.

Where a pedestrian push button is mounted on top of a 2-1/2-inch diameter post, fit housing with a slip-fitter and use screws for securing rigidly to post.

Pedestrian push button signs must be porcelain enameled metal or structural plastic.

Install push button and sign on crosswalk side of pole.

Point arrows on push button signs in the same direction as the corresponding crosswalk.

Attach sign on Type B push button assembly.

For Type C pedestrian push button assembly, mount instruction sign on the same standard as the push button assembly, using 2 straps and saddle brackets. Straps and saddle brackets must be corrosion-resisting chromium nickel steel and comply with ASTM A 167, Type 302B. Theft-proof bolts must be stainless steel with a chromium content of at least 17 percent and a nickel content of at least 8 percent.

86-6 LIGHTING

86-6.01 HIGH PRESSURE SODIUM LUMINAIRES

High pressure sodium luminaires must be the enclosed cutoff type.

Housing must be manufactured from aluminum. Painted or powder-coated housing must withstand a 1,000-hour salt spray test as specified in ASTM B 117.

Other metal parts must be corrosion resistant.

Each housing must include a slip-fitter that can be mounted on a 2-inch pipe tenon and can be adjusted 5 degrees from the axis of the tenon. Clamping brackets of slip-fitter must not bottom out on housing bosses when adjusted within the ±5 degree range.

The slip-fitter mounting bracket must not permanently set in excess of 0.020-inch when the 3/8-inch diameter cap screw used for mounting is tightened to 10 foot-pounds.

Luminaire to be mounted horizontally on mast arm, when tested as specified in California Test 611, must be capable of withstanding cyclic loading for a minimum of 2 million cycles without failure of any luminaire parts as follows:

Cyclic Loading

Plane	Internal Ballast	Minimum Peak Acceleration Level[a]
Vertical	Removed	3.0 G peak-to-peak sinusoidal loading (same as 1.5 G peak)
Horizontal[b]	Installed	1.5 G peak-to-peak sinusoidal loading (same as 0.75 G peak)
Vertical	Installed	1.0 G peak-to-peak sinusoidal loading (same as 0.5 G peak)

[a]G = Acceleration of gravity

[b]Perpendicular to direction of mast arm

If a photoelectric unit receptacle is included, a raintight shorting cap must be installed. If luminaire housing has a hole for the receptacle, hole must be permanently closed, covered, and sealed with weatherproof material.

Optical system must be in a sealed chamber and include:

1. Reflector shaped so that a minimum of light is reflected through the arc tube of the lamp. Reflector surface must be specular and protected by either an anodized finish or a silicate film on its specular surface.
2. Refractor or lens mounted in a door frame that is hinged to the housing and secured with a spring-loaded latch. Refractor must be made of glass or polycarbonate plastic. Lens must be made of heat- and impact-resistant glass.
3. Lamp socket that is a porcelain enclosed mogul-multiple type. Shell must include integral lamp grips to assure electrical contact under conditions of normal vibration. Socket must be mounted in the luminaire to allow presetting a variety of specified light distribution patterns. Socket must be rated for 1,500 W and 600 V(ac), and a 4 kV pulse.

4. Lamp.

Sealing must be provided by a gasket between the reflector and:

1. Refractor or lens
2. Lamp socket

Chamber must allow for filtered flow of air in and out of the chamber from lamp heat. Filtering must be accomplished by either a separate filter or a filtering gasket.

If components are mounted on a down-opening door, door must be hinged and secured to luminaire housing separately from refractor or flat lens frame. Door must be easily removable and replaceable, and secured to housing to prevent accidental opening when refractor or flat lens frame is opened.

Field wires connected to luminaire must terminate on a barrier-type terminal block secured to the housing. Terminal screws must be captive and equipped with wire grips for conductors up to No. 6. Each terminal positions must be clearly identified.

Minimum light distribution for each luminaire must meet the isolux diagrams.

Maximum brightness of each cutoff luminaire, with the lamp indicated, must be as follows:

Cutoff Type

Lamp ANSI Code No.	Lamp Wattage	Maximum Brightness foot-lamberts
S55	150	40
S66	200	40
S50	250	50
S67	310	60
S51	400	75

Brightness readings will be taken using a brightness meter with an acceptance angle of 1.5 degrees. When measured on the 90-degree and 270-degree lateral angle line, maximum brightness must not exceed above specified brightness when meter is located at a horizontal distance of 120 feet and a vertical distance of 7.5 feet between luminaire and meter, or at an angle of 3 degrees 35 minutes from the horizontal to the line between luminaire and meter. Measurements must be made from 90-degree line and 270-degree line, and averaged. Lamp used for each test must operate at wattage necessary to produce the following light output:

Light Output

Lamp Wattage	Lumens
150	16,000
200	22,000
250	27,000
310	37,000
400	50,000

86-6.01A High Pressure Sodium Lamp Ballasts

Each ballast must:

1. Operate the lamp for its rated characteristics and wattage
2. Continuously operate at ambient air temperatures from -20 °C to 25 °C without reduction in ballast life

3. Operate for at least 180 cycles of 12 hours on and 12 hours off, with the lamp circuit in an open or short-circuited condition and without measurable reduction in operating requirements
4. Have a design life of not less than 60,000 hours
5. Provide proper starting and operating waveforms, voltage, and current
6. Provide reliable lamp starting and operation at ambient temperature down to -20 °C for the rated life of lamp

Ballast must be tested as specified in ANSI C82.6-1980, "Methods of Measurement of High-Intensity-Discharge Lamp Ballasts."

Starting aids for ballast of a given lamp wattage must be interchangeable between ballasts of same wattage and manufacturer, without adjustment.

Each integral ballast must consist of separate components that can be easily replaced. An encapsulated starting aid will be counted as a single component. Each component must include screw terminals, NEMA tab connectors, or a single multi-circuit connector. Conductors and terminals must be identified.

Mount heat-generating component so as to use the portion of the luminaire it is mounted to as a heat sink. Place capacitor a maximum practicable distance from heat-generating components or thermally shield to limit the case temperature to 75 °C.

Transformer and inductor must be resin-impregnated for protection against moisture. Capacitors, except those in starting aids, must be metal cased and hermetically sealed.

The Department will test high-pressure sodium lamp ballast. High-pressure sodium lamp ballast must have a characteristic curve that will intersect both of the lamp-voltage limit lines between the wattage limit lines and remain between the wattage limit lines throughout the full range of lamp voltage. This requirement must be met at the rated input voltage of the ballast and at the lowest and highest rated input voltage of the ballast.

Throughout the lifetime of the lamp, ballast curve must fall within the specified limits of the lamp voltage and wattage.

Ballast for luminaires must be located in the luminaire housing.

86-6.01A(1) Regulator Type Ballasts

Regulator type ballast must comply with the following:

1. For nominal input voltage and lamp voltage, ballast design center must not vary more than 7.5 percent from rated lamp wattage.
2. Ballast must be designed for a capacitance variance of ±6 percent that will not cause more than ±8 percent variation in lamp wattage regulation during rated lamp life.
3. Lamp current crest factor must not exceed 1.8 for input voltage variation of ±10 percent at any lamp voltage during lamp life.

Regulator-type ballast must be one of the following:

Regulator-Type Ballast

Ballast Type	Power Factor	Lamp Regulation
Lag-type[a]	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 18 percent for ±10 percent input voltage variation from nominal through life
Lead-type[b]	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 30 percent for ±10 percent input voltage variation from nominal through life

[a]Primary and secondary windings must be electrically isolated
[b]Constant wattage autoregulator (CWA)

86-6.01A(2) Nonregulator Type Ballasts

Each nonregulator type ballast must comply with the following:

1. For nominal input voltage and lamp voltage, ballast design center must not vary more than 7.5 percent from rated lamp wattage.
2. Lamp current crest factor must not exceed 1.8 for input voltage variation of ±5 percent at any lamp voltage during lamp life.

Nonregulator-Type Ballast

Ballast Type	Power Factor	Lamp Regulation
Autotransformer or High-Reactance	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 25 percent for ±5 percent input voltage variation from nominal through life

86-6.01B High Pressure Sodium Lamps

High pressure sodium lamps must comply with ANSI C 78.42, "High Pressure Sodium Lamps," when tested as specified in ANSI C 78.389, "American National Standard for Electric Lamps - High Intensity Discharge-Methods of Measuring Characteristics." High pressure sodium lamps must have a minimum average rated life of 24,000 hours.

86-6.02 LOW PRESSURE SODIUM LUMINAIRES

Each low pressure sodium luminaire must be completely assembled with a lamp and ballast, and must:

1. Be the enclosed type, either semi-cutoff or cutoff type.
2. Include housing, reflector, refractor or lens, lamp socket, integral ballast, removable ballast tray, lamp support, terminal strip, capacitor, and slip fitter. Reflector may be an integral part of the housing.

Luminaire housing must be minimum 1/16-inch thick, corrosion resistant die cast aluminum sheet and plate with concealed continuous welds, or minimum nominal wall thickness of 3/32-thick acrylonitrile-butadiene-styrene sheet material, on a cast aluminum frame that provides mounting for all electrical components and slip fitter. Housing must be divided into optical and

power compartments that are individually accessible for service and maintenance. Position and clamp luminaire to pipe tenon by tightening mounting bolts.

Painted exterior surface of luminaire must be finished with a fused coating of electrostatically applied polyester powder paint or other ultraviolet inhibiting film. Color must be aluminum gray.

High temperature neoprene, or equal, sealing ring must be installed in pipe tenon opening to prevent entry of water and insects into power and optical compartments.

Access to power unit assembly must be through a weathertight hinged cover, secured with spring type latches or captive screws, to luminaire housing.

Hardware must be stainless steel or cadmium plated. Use machine screws or bolts to secure removable components. Do not use sheet metal screws.

Semi-cutoff luminaires and molded refractor style cutoff luminaires must include a refractor. Other cutoff luminaires must include a flat lens.

Refractor must be 1-piece injection molded polycarbonate of 3/32 inch minimum thickness, or 1-piece injection molded acrylic of 1/8 inch minimum thickness. Flat lens must be 1-piece polycarbonate of 3/32 inch minimum thickness, mounted to metal frame. Refractor assembly and flat lens assembly must be constructed to rigidly maintain its shape, and hinged and secured with spring type latches to luminaire housing. Alternate methods of manufacturing refractor may be approved provided minimum specified thicknesses are maintained.

Lamp socket must be high temperature, flame retardant thermoset material with self-wiping contacts or equivalent. Socket must be rated for 660 W and 1,000 V(ac). Position of socket and support must maintain the lamp in correct relationship with reflector and refractor for designed distribution pattern.

Isofootcandle distribution must be ANSI Type III, short or Type IV, medium distribution, for cutoff or semi-cutoff luminaires.

With a 40-foot mounting height, each type of luminaire must maintain a minimum of 0.2 footcandle at least 60 feet each side, along the longitudinal roadway line below the luminaire, and a minimum of 0.35 footcandle at a transverse roadway distance from luminaire location equal to 1.5 times the luminaire mounting height.

Certified luminaire performance data must be provided. This data must include complete photometric test data in isofootcandle charts at a scale of 1 inch equals 20 feet, for the luminaire and lamp sizes shown on the plans.

Alternate data may be in horizontal footcandle values recorded on a 15' x 15' area extending 90 feet longitudinally each side of the light source, and 15 feet behind and 90 feet in front of the light source, for luminaire and lamp sizes, and mounting height shown on the plans. Horizontal footcandle levels in data submitted must equal or exceed levels specified. Failure to meet referenced values will be justification for rejection of the luminaires.

Photometric testing must be performed and certified by an independent and recognized testing laboratory.

Low pressure sodium lamps must:

1. Be 180 W, single-ended, bayonet base, tubular gas discharge lamp
2. Maintain a minimum of 93 percent of initial lumens during rated life and must comply with the following minimum performance requirements:

Performance Requirements

Lamp Designation	ANSI L74-RF-180
Initial Lumens	33,000 lumens
Rated Ave. Life (@ 10 hrs/Start)	18,000 hours
Operating Position	Horizontal ±20 degrees

3. Reach 80 percent of light output within 10 minutes and must restrike within 1 minute after an outage due to power interruption or voltage drop at the lamp socket
4. Identify the month and year of installation.
5. Have an autotransformer or high-reactance type ballast. The ballast must comply with the following:

    5.1. Lamp current crest factor must not exceed 1.8 at nominal line voltage
    5.2. Ballast loss must not exceed 24 percent for 180 W ballast at nominal line voltage

Autotransformer or High-Reactance Type Ballast

Ballast Type	Power Factor	Lamp Operation
Autotransformer or High-Reactance	Not less than 90 percent when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than ±6 percent for ±10 percent input voltage variation from nominal through life

A multi-circuit connector must be included for quick disconnection of ballast tray.

86-6.03 SOFFIT AND WALL LUMINAIRES

Soffit and wall luminaire must be weatherproof and corrosion resistant.

Each flush-mounted soffit luminaire must consist of:

1. Metal body with two 1-inch minimum conduit hubs and provisions for anchoring into concrete
2. Prismatic refractor made of heat-resistant polycarbonate mounted in a door frame and clearly identified as to street side
3. Specular anodized aluminum reflector
4. Ballast located either within housing or in a ceiling pull box as shown on the plans
5. Lamp socket

The door frame assembly must be hinged, gasketed, and secured to body by at least 3 machine screws.

Each pendant soffit luminaire must be enclosed and gasketed, have an aluminum finish, and include:

1. Reflector with a specular anodized aluminum finish
2. Refractor made of heat-resistant polycarbonate
3. Optical assembly hinged and latched for lamp access and a device to prevent dropping
4. Ballast designed for operation in a raintight enclosure
5. Galvanized metal box with a gasketed cover, 2 captive screws, and 2 chains to prevent dropping and for luminaire mounting

Each wall-mounted luminaire must consist of:

1. Cast metal body
2. Prismatic refractor, made of glass, mounted in a door frame
3. Aluminum reflector with a specular anodized finish
4. Integral ballast
5. Lamp socket
6. Gasket between refractor and body
7. At least two 5/16-inch minimum diameter mounting bolts

Cast-aluminum bodies to be cast into or mounted against concrete must have a thick application of alkali-resistant bituminous paint on all surfaces to be in contact with concrete.

Each soffit luminaire and wall luminaire must include a 70 W high-pressure sodium lamp with a minimum average rated life of 24,000 hours. Each lamp socket must be positioned to locate the light center of the lamp within 1/2 inch of light center location of the luminaire design.

Ballast must comply with Section 86-6.01A, "High Pressure Sodium Lamp Ballasts." Wall luminaire ballast must be located in luminaire housing or, if shown on the plans, in a pull box adjacent to luminaire.

86-6.04 PEDESTRIAN CROSSING FIXTURES

Before starting fixture manufacturing, submit fixture design for approval. If requested, submit 1 complete prototype fixture for approval at least 30 days before manufacturing the fixtures. The prototype fixture will be returned to you, and if permitted, the fixture may be installed in the work.

Lens unit in door section must be formed of 1-1/2-inch methyl methacrylate rod cut and fire-glazed for a clear finish or a cast unit with equivalent tolerances and finish.

Lens must be secured to door section with an extruded lens retainer of 6063-T5 aluminum alloy that fits the lens shape. Lens retainer must fit the full length of lens on both sides. Continuous lens retainer for the full length of 3 lenses is allowed. Z bars of 5052-H32 or 5005-H14 aluminum alloy, 1/16 inch minimum thickness may be substituted for extruded lens retainer.

A captive positive-keyed screw-type latching device requiring a special socket wrench must be installed at upper edge to secure door in the closed position as shown on the plans. Furnish 2 special wrenches to the Engineer.

Each fixture must include a F48T12/CW rapid start fluorescent lamp with recessed, double contact base installed on back side of door directly behind lens.

Each lampholder must be UL listed for outdoor use without an enclosure and with 1,500 mA rapid start fluorescent lamp. Lampholder must be spring-loaded type.

For each lamp, the distance from face of lampholder to the lamp must be designed to provide a compression of at least 0.10-inch on the spring-type lampholder when lamp is in place. Lamp must have positive mechanical and electrical contact when lamp is in place. Socket on spring-type lampholder must have enough travel to allow lamp installation. Spring must not be a part of current-carrying circuit.

Ballast must be high-power-factor type with weatherproof leads for operation of one 48-inch rapid-start lamp. Ballast must be UL listed for outdoor operation on 110 to 125 V(ac) 60 Hz circuit and rated at 1,500 mA.

Conductors from ballast leads to lampholder must be minimum size of No. 16, stranded, and UL-listed copper AWM. Splicing of lampholder conductors to ballast leads must be performed by using mechanically secure connectors.

Conductors in fixture except ballast leads and entrance line conductors, must be UL-listed AWM.

Provide sufficient slack in the conductors to allow the fixture door to fully open.

Circuit conductors entering the fixture must be terminated on molded phenolic barrier-type terminal blocks rated at 15 A and 600 V(ac) and must have integral-type white waterproof-marking strips. Current-carrying parts of terminal blocks must be insulated from fixture with integral plugs or strips to provide protection from line-to-ground flashover voltage. Terminal blocks must be attached to wireway cover in top section. If you use sectionalized terminal blocks, each section must include an integral barrier on each side and be capable of rigid mounting and alignment.

Exposed surfaces of fixture must be uniform in appearance and free from significant defects, including improper fit, dents, deep scratches and abrasions, burrs, roughness, off-square ends, holes off-center or jagged, and surface irregularities. Screws for attaching components to fixture door, including Z bars, ballasts, and terminal block, must be tapped into door from the inside only. Screwheads, nuts, or other fasteners must not be removable from the outside.

86-6.04A Pedestrian Undercrossing Fixtures

Fixture shell must be cast aluminum alloy, industrial type or Federal Class 18 aluminum of 1/4 inch minimum thickness.

Door must be 1 piece of 6061-T6 aluminum alloy of 1/8 inch minimum thickness.

Continuous piano hinge must be Type 1100 aluminum alloy. The piano hinge must be welded or riveted to door section with 1/8 inch aluminum rivets. Matching holes must be drilled in the hinge and lower edge of fixture. After shell is in place, door assembly must be attached by minimum 3/8-inch No. 8 stainless steel self-tapping screws.

A neoprene gasket must be attached to frame to provide a cushion between the shell and the door.

Chain or other device must be included to prevent the door, when fully opened, from coming in contact with the undercrossing wall.

Fixture must be held in place by three 3/8" x 8" anchor bolts with 2 nuts each.

Fixture surfaces in contact with concrete, and with anchor bolts and nuts must be painted with a thick application of alkali-resistant bituminous paint. Paint must comply with MIL-P-6883.

Circuit conductor entering the fixture must be terminated on 2-position terminal blocks.

Both ends of fixture must have holes for 1-inch conduit. Unused holes must be plugged with pressed metal closures.

86-6.04B Pedestrian Overcrossing Fixtures

Fixture shell must consist of:

1. Top section and a door section of extruded 6063-T5 aluminum alloy, each with a nominal 1/8 inch wall thickness
2. 2 cast-end sections of 319 aluminum alloy
3. Internal wireway cover of 505-H32 aluminum alloy

Top section and door section must be joined together on one side by a continuous hinge formed as part of the 2 extrusions and must overlay to allow locking on the other side. Hinge must be treated with a silicone grease that will prevent the entrance of water by capillary action.

Wireway cover with 3/16 inch hemmed ends up and terminal blocks and circuit conductors must be inserted before welding end sections and must provide clearance at both ends for conductors. Cover must be fastened by at least two 1/4 inch No. 4 self-threading sheet metal

screws with binding head and blunt point. You may substitute blind rivets of equivalent strength.

One or more bronze sash chains or other device must be included to prevent door from opening to an extent that will damage the hinge.

Lampholder must include heat-resistant circular cross section neoprene sealing gasket, silver-coated contacts, and waterproofed lead entrance for use with a 1,500 mA rapid start fluorescent lamp.

Ballast must be at most 13-1/4 inches long.

Circuit conductors entering the fixture must be terminated on 3-position terminal blocks.

Electrical system of pedestrian overcrossing must be grounded by a No. 8 copper wire installed in conduit from fixture to fixture, from end fixture to conduit fitting on end post and from conduit fitting on end post to grounding bushing in nearest pull box.

Ground wire must be secured to inside of telescoping sleeve end casting where conductors are carried and to the inside of Type LB conduit fitting on end post by a connecting lug and a No. 8 self-threading pan screw.

Lamp, lampholder, ballast, and fixture wire, must be attached to door section. Terminal blocks must be attached to top section or wireway cover.

Three No. 10, solid copper circuit conductors must be installed between terminal blocks as part of each completed fixture.

Before shipment to job site, fixture must be completely manufactured and assembled in the shop.

86-6.05 INDUCTION SIGN LIGHTING FIXTURES

Each induction sign lighting fixture must include housing with door, reflector, refractor or lens, lamp, power coupler, high frequency generator, socket assembly, fuse block, and fuses.

Each induction sign lighting fixture must:

1. Be designed for mounting near the bottom of sign panel on an overhead sign structure.
2. Be an enclosed design and be raintight and corrosion resistant.
3. Have a minimum average rating of 60,000 hours.
4. Be for a wattage of 87 W, 120/240 V(ac).
5. Have a power factor greater than 90 percent and total harmonic distortion less than 10 percent.
6. Be UL approved for wet locations and be FCC Class A-listed.
7. Not exceed 44 pounds in weight.
8. Include the manufacturer's brand name, trademark, model number, serial number, and date of manufacture on packaged assembly. Same information must be permanently marked on the outside and inside of housing.
9. Comply with minimum horizontal footcandle requirement shown on the plans.
10. Be a maximum height of 12 inches above the top of the mounting rails.

If fixture is located so that the light center of the lamp is 55 inches in front of, 1 foot below, and centered on a 10-foot high by 20-foot wide sign panel, the ratio of maximum to minimum illuminance level on the panel must not exceed 12 to 1 in 95 percent of the points measured. Illuminance gradient must not exceed 2 to 1 and is defined as the ratio of minimum illuminance on a 1-foot square of panel to that on an adjacent 1-foot square of panel.

Each fixture must have a mounting assembly that will allow fixture to be mounted on continuous slot channels. Mounting assembly must be either cast aluminum, hot-dip galvanized

steel plate, or steel plate that has been galvanized and finished with a polymeric coating system or same finish that is used for housing.

Housing must have a door designed to hold a refractor or lens, and to open without the use of special tools. Housing and door must be manufactured of sheet or cast aluminum, and have a powder coat or polyester paint finish of a gray color resembling unfinished manufacturing. Sheet aluminum must comply with ASTM B 209 or B 209M for 5052-H32 aluminum sheet. External bolts, screws, hinges, hinge pins, and door closure devices must be corrosion resistant.

Housing must include weep holes.

Door must be hinged to housing on side of fixture away from the sign panel and include 2 captive latch bolts or other latching device. Door must be designed to lock in the open position, 50 degrees minimum from the plane of the door opening, with an 85-mph 3-second-wind-gust load striking the door from either side.

Door and housing must be gasketed to be raintight and dusttight. Thickness of gasket must be 1/4 inch, minimum.

Fixture height must be less than 12 inches above the top of mounting rails.

Reflector must be 1 piece, made from specularly finished aluminum protected with an electrochemically applied anodized finish or a chemically applied silicate film, and designed so deposited water due to condensation will drain away. Reflector must be secured to housing with a minimum of 2 screws and removable without removing any fixture parts. Do not attach reflectors to outside of housing.

Refractor or lens must have a smooth exterior and must be manufactured from the material as follows:

Refractor and Lens Material Requirements

Component	Manufactured From
Flat lens	Heat-resistant glass
Convex lens	Heat resistant, high-impact resistant tempered glass
Refractor	Borosilicate heat resistant glass

Refractor and convex lens must be designed or shielded so no fixture luminance is visible if fixture is approached directly from the rear and viewing level is the bottom of the fixture. If a shield is used, it must be an integral part of the door casting.

Each fixture must include an 85 W induction lamp with an interior wall that is fluorescent phosphor-coated. Light output must be at least 70 percent at 60,000 hours. Lamp must have a minimum color-rendering index of 80, be rated at a color temperature of 4,000K and be removable without the use of tools.

Lamp socket must be a porcelain enclosed mogul type with a shell that contains integral lamp grips to assure electrical contact under normal vibration conditions. Center contact must be spring-loaded. Shell and center contact must be nickel-plated brass. Socket must be rated for 1,500 W and 600 V(ac).

Power coupler must include a construction base with antenna, heat sink, and electrical connection cable, and be designed so it can be removed with common hand tools.

High frequency generator must:

1. Start and operate lamps at an ambient temperature of -25 °C or greater for the rated life of the lamp

2. Operate continuously at ambient air temperatures from -25 °C to 25 °C without reduction in generator life
3. Have a design life of at least 100,000 hours at 55 °C
4. Have an output frequency of 2.65 MHz ± 10 percent
5. Have radio frequency interference that complies with FCC Title 47, Part 18, regulations regarding harmful interference
6. Be replaceable with common hand tools
7. Mounted so the fixture can be used as a heat sink

Conductor terminal must be identified by the component terminal the conductor connects to.

Submit a copy of the high frequency generator test methods and results from the manufacturer with each lot of fixtures.

Each fixture must include a barrier-type fuse block for terminating field connections. Fuse block must:

1. Be secured to housing and be accessible without removal of any fixture parts
2. Be mounted to leave a minimum of 1/2 inch air space from sidewalls of housing
3. Be designed for easy removal of fuses with a fuse puller, be rated at 600 V(ac), and have box terminals.

Fuses must be 13/32-inch diameter, 1-1/2 inch long ferrule type and UL or NRTL listed. For 120 V(ac) input fixture, only the ungrounded conductor must be fused and there must be a solid link between the neutral and the high frequency generator.

If shown on the plans, include a wire guard to prevent damage to the refractor or lens. Guard must be constructed of 1/4-inch minimum diameter galvanized steel wire, and either hot-dip galvanized or electroplated-zinc coated as specified in ASTM B 633, Service Condition SC4 with a clear chromate dip treatment. Guard elements must be spaced to prevent rocks larger than 1-1/2-inch diameter from passing through.

86-6.06 SIGN LIGHTING FIXTURES FOR FLASHING BEACON

Sign lighting fixture must:

1. Be UL or NRTL listed for outdoor installation
2. Include a hood with side outlet tapped for conduit, a symmetrical 10-inch steel reflector with a white porcelain-enamel finish, and a medium base socket
3. Be rated at 150 W minimum

86-6.07 INTERNALLY ILLUMINATED STREET NAME SIGNS

Sign fixture must be:

1. Designed and constructed to prevent deformation or failure when subjected to an 85 mph 3-second-wind-gust load as specified in AASHTO publication, "Standard Specifications for Structural Supports of Highway Signs, Luminaires and Traffic Signals," and its interim revisions
2. Manufactured from all new material and all ferrous parts must be galvanized or cadmium-plated
3. Type A or B signs

Top and bottom must be formed or extruded aluminum and must be attached to formed or cast aluminum end fittings. Housing must be designed for continuous sealing between top and bottom assemblies, and end fittings, and be constructed to resist torsional twist and warp. Opening or removing 1 panel must allow access to the interior of the sign for lamp, ballast, and fuse replacement.

Photoelectric unit sockets are not allowed.

For Type A sign, both sides must be hinged at the top to allow installation or removal of sign panel, and to allow access to interior of sign.

For Type B sign, sign panel must be slide-mounted into housing.

Reflectors may be used to obtain required sign brightness. Reflectors must be formed aluminum with acrylic baked white enamel surface having a minimum reflectance of 0.85.

Sign panel must be slide-mounted or rigid-mounted in a frame, with white legend, symbols, arrows, and border on each face. Background must be green.

Sign panels surface must be evenly illuminated. Average of brightness readings for letters must be 150 foot-lamberts, minimum. Light transmission factor of sign panel must provide a letter to background brightness ratio between 10 to 1 and 20 to 1. Background luminance must not vary by more than 40 percent from the average background brightness reading. Luminance of letters, symbols, and arrows must not vary by more than 20 percent from their average brightness readings.

Sign panels must be translucent, high impact, resistant plastic panels of one of the following:

1. Glass fiber reinforced acrylated resin
2. Polycarbonate resin
3. Cellulose acetate butyrate plastic

Paint on the outside of plastic must be protected by a plastic film that seals the front surface of panel and filters out ultraviolet radiation. Paint must be acrylic plastic type.

Surface must be free of blemishes in the plastic or coating that may impair the serviceability or detract from the general appearance and color matching of sign.

White or green color must not fade or darken when sign is exposed to an accelerated test of ultraviolet light equivalent to 2 years of outdoor exposure. Green color of sign, when not illuminated, must match Color No. 14109 of Federal Standard 595B.

Sign panel must not crack or shatter when a 1-inch diameter, steel ball with a weight of 2.4 ounces is dropped from a height of 8.5 feet above the sign panel to any point of sign panel. For this test, sign panel must be lying in a horizontal position and supported within its frame.

For Type A sign, gasket must be installed between sign panel frame and fixture housing to prevent water entry between frame and fixture housing. Gasket must be uniform and even-textured, and be the closed-cell, sponge-neoprene type, designed for use at temperatures between -20 °C and +74 °C.

Gasket must be neatly applied to thoroughly degreased, clean surface with a suitable heat-resistant adhesive that will not allow the gasket to slip at temperatures between -20 °C and +74 °C.

Ballast must be high power factor type and capable of starting the lamp at -20 °C and above.

Ballast for Type A sign must be rated at 200 mA. Ballasts for Type B sign must be rated at 430 mA. Ballast must be UL or NRTL listed for operation on 110 to 125 V(ac), 60 Hz circuits, and comply with ANSI C 82.1 and ANSI C 82.2.

Lampholder must be UL or NRTL listed for outdoor use and of the spring-loaded type. Lampholder must have silver-coated contacts and waterproofed entrance leads for use with a

rapid-start fluorescent lamp. Removal of lamp from socket must de-energize the primary of ballast. Each lampholder must include heat-resistant, circular cross section, partially-recessed neoprene ring to seal against lamp ends and protect electrical contacts from moisture, dirt or other injurious elements.

Distance between face of lampholders must be designed to provide compression of at least 0.10 inch on the spring-type lampholder when lamp is in place. Lamp must have positive mechanical and electrical contact when lamp is in place. Socket on spring-type lampholder must have sufficient travel to allow lamp installation. Spring must not be a part of current carrying circuit. Lampholder must match lamp requirements and must not increase cathode filament circuit resistance by more than 0.10 Ω.

Lamp must comply with ANSI C 78.

Wiring connections in fixture must be terminated on molded, phenolic, barrier-type, terminal blocks rated at 15 A, 1,000 V(ac), and must have integral-type white waterproof-marking strips. Current carrying parts of terminal blocks must be insulated from fixture with integral plugs or strips to provide protection from line-to-ground flashover voltage. If you choose to use sectionalized terminal blocks, each section must include an integral barrier on each side and be capable of rigid mounting and alignment. Terminal screws must be No. 10, minimum.

Fuses must be Type 3AG, miniature, slow-blowing type with appropriate current and voltage ratings.

Fuseholder must be a panel-mounting type with threaded or bayonet-type knob that grips the fuse tightly for extraction. Use a separate fuse for each ballast.

Screened weep holes must be constructed at strategic locations in members subject to moisture collection.

Fasteners, screws, and hardware must be passive stainless steel, Type 302 or 304, or aluminum Type 6060-T6.

Top of fixture housing must have 2 free-swinging mounting brackets. Each bracket must be adjustable vertically for leveling the sign to either a straight or curved mast arm. Bracket assembly must allow fixture to swing perpendicular to the sign panel.

Hinge pins for the free-swinging brackets must have a minimum diameter of 1/4 inch.

Message, as shown on the plans, must be displayed on both sign panels.

If not shown on the plans, the message and the size of symbols or arrows will be given by the Engineer at your request. Letters must be 8-inch upper case and 6-inch lower case, Series E.

Fixture conductors must be UL- or NRTL-listed AWM stranded copper wire with 28 mils, minimum, thermoplastic insulation, rated at 1,000 V(ac) and rated for use at 90 °C. Conductors must be No. 16 minimum and must match color coding of ballast leads.

Conductors within the fixture must be secured with easily removable spring cross straps, not clamped, in the chassis or fixture. Straps must be installed 12 inches apart or less.

Stranded copper conductors connected to screw-type terminals must terminate in approved crimp-type ring connectors.

Splices are not allowed within fixture.

Submit shop drawings showing the message for each sign, including size of letters, symbols or arrows, as shown on the plans. If requested, you must supply, without cost to the State, sufficient samples of materials to be used in the manufacturing of the sign or a complete sign assembly, to allow adequate testing and evaluation of compliance to specified requirements.

86-6.08 PHOTOELECTRIC CONTROLS

Photoelectric controls must be capable of directly switching multiple lighting systems.

86-6.08A Types

Photoelectric control type must comply with the following:

Photoelectric Control Types

Type I	Includes a remote photoelectric unit and a test switch housed in an enclosure.
Type II	Includes a remote photoelectric unit, a separate contactor located in a service equipment enclosure, and a test switch located in service equipment enclosure.
Type III	Includes a remote photoelectric unit, a separate contactor, and a test switch housed in an enclosure.
Type IV	Includes a photoelectric unit that plugs into an EEI-NEMA twist-lock receptacle integral with the luminaire.
Type V	Includes a photoelectric unit, contactor, and test switch located in service equipment enclosure.

A switch to allow manual operation of lighting circuit must be included for each Type I, Type II, Type III, and Type V photoelectric control. Switches must be single-hole mounting toggle type, single-pole, single-throw, rated at 12 A with a voltage rating that matches the circuit. Switches must have an indicating nameplate reading "Auto-Test" and be connected in parallel with the load contacts of the photoelectric unit. Test switches must not have an "OFF" position.

Photoelectric unit for Types I, II, and III photoelectric controls, must be pole-top mounted.

86-6.08B Equipment Details

86-6.08B(1) Photoelectric Unit

Photoelectric unit must:

1. Have an output in response to changing light levels. Response level must remain stable throughout life of control unit.
2. Have a "turn-on" between 1 and 5 footcandles, and a "turn-off" between 1.5 and 5 times "turn-on." Measurements must be made by procedures in EEI-NEMA standards for physical and electrical interchangeability of light-sensitive control devices used in the control of roadway lighting.
3. Have a EEI-NEMA type receptacle. Mounting brackets must be used where pole-top mounting is not possible. Photoelectric controls must be installed at locations show on the plans and oriented.
4. Be screened to prevent artificial light from causing cycling.
5. Have a supply voltage rating of 60 Hz, 105-130 V(ac), 210-240 V(ac), or 105-240 V(ac), as specified.
6. Have a load rating of 800 W minimum, incandescent, high intensity discharge, or fluorescent.
7. Operate at a temperature range of -20 °C to 55 °C.
8. Have a power consumption less than 10 W.
9. Be housed in a weatherproof enclosure.
10. Have a base with a 3-prong, EEI-NEMA standard, twist-lock plug mounting.
11. Have a "fail-on" feature.

Unit components must not require periodic replacement.

Photoelectric controls, except Type IV and Type V, must include a 4-inch minimum inside diameter, pole-top mounting adaptor containing a terminal block, and cable supports or clamps to support pole wires.

For switching 480 V(ac), 60 Hz circuits, a 100 VA, minimum, 480/120 V(ac) transformer must be installed in the contactor enclosure to allow 120 V(ac) for the photoelectric control unit. If more than 1 photoelectric unit is to be installed at a location, a single transformer with a volt-ampere rating capable of handling the total controlled load, may be used.

86-6.08B(2) Contactor

Contactor must:

1. Have contacts rated to switch the specified lighting load
2. Be normally open
3. Be the mechanical armature type with contacts of fine silver, silver alloy, or superior alternative material

86-6.08B(3) Enclosure

Enclosure for Type I and Type III photoelectric controls must be NEMA 3R. Enclosure must be supplied with a factory-applied rust-resistant prime coat and finish coat. Two applications of paint to match the color of the standard must be applied as specified in Section 86-2.16, "Painting." Enclosure may be hot-dip galvanized instead of painting. A minimum of 2-1/2 inches must be provided between contactor terminals and end of enclosure for wiring connections. Enclosure must be mounted on the same standard as the photoelectric unit at a height of about 6 feet above finished grade.

86-6.08B(4) Terminal Blocks

Terminal blocks must be rated at 25 A, 600 V(ac), molded from phenolic or nylon material, and of the barrier type with plated-brass screw terminals and integral-type marking strips.

86-6.09 TRANSFORMERS

Multiple-to-multiple transformers must be single-phase dry type designed for operation on a 60 Hz supply.

86-6.09A Electrical Requirements

Transformers must have a decal showing a connection diagram. Diagram must show either color-coding or wire-tagging with primary (H1, H2) or secondary (X1, X2) markers, and the primary and secondary voltage and volt-ampere rating. Transformers must comply with the following:

Transformer Electrical Requirements

Transformer Characteristic	Multiple-to-Multiple Unit
Rating	120/480 V(ac), 240/480 V(ac), or 480/120 V(ac)
Efficiency	Exceed 95 percent
Secondary Voltage Regulation and Tolerance	±3 percent from half load to full load

Secondary 480 V(ac) windings must be center-tapped.

86-6.09B Physical Requirements

External leads for multiple-to-multiple secondary connections must be Type USE, No. 10, rated 600 V(ac).

Transformer leads must extend a minimum of 12 inches from the case.

Transformer insulation must be NEMA 185 C or better.

Multiple-to-multiple transformers must withstand the application of 2,200 V(ac) from core to coils and from coil to coil for a 1-minute period.

The above tests must be made immediately after operation of transformer at full load for 24 hours.

Non-submersible transformers must include metal half-shell coil protection, have moisture resistant synthetic varnish impregnated windings, and be suitable for outdoor operation in a raintight enclosure.

Each transformer to be installed in a pull box must be the submersible type and include a handle and a hanger.

86-6.09C Submersible Type Transformers

Submersible type transformers must be securely encased in a rugged corrosion resistant, watertight case and must withstand a 5-day test submerged in 2 feet of salt water, 2 percent salt by weight, with 12-hour on and off periods. The operating periods must be at full load.

Leads of submersible transformers must be brought out through one or more sealed hubs and secured to withstand a 100 pound static pull without loosening or leaking.

86-6.10 (BLANK)

86-6.11 FALSEWORK LIGHTING

86-6.11A General

Falsework lighting must include lighting to illuminate the pavement, portals, and pedestrian walkways at or under openings in the falsework required for traffic.

Lighting for pedestrian walkway illumination must be installed at all pedestrian openings through or under falsework.

Before starting falsework opening construction, you must submit a plan of proposed lighting installations for review and obtain approval. Approval will be made as specified in Section 5-1.02, "Plans and Working Drawings."

You must design falsework lighting so that required maintenance can be performed with a minimum of inconvenience to public traffic. Closing of traffic lanes for routine maintenance will not be permitted on roadways with posted speed limits greater than 25 mph.

Pavement under falsework with portals less than 150 feet apart and falsework portals must be illuminated only during the hours of darkness as defined in Division 1, Section 280, of the California Vehicle Code. Photoelectric switches must be used to control falsework lighting systems. Pavement under falsework with portals 150 feet or more apart and all pedestrian openings through falsework must be illuminated 24 hours per day.

Lighting fixtures must be aimed to avoid glare to oncoming motorists.

Type NMC cable with No. 12 minimum conductors, with ground wire, must be used. Fasten cable to supporting structure at sufficient intervals to adequately support cable and within 12 inches from every box or fitting. Conductors within 8 feet of ground must be enclosed in a 1/2 inch or larger metal conduit.

Each illumination system must be on a minimum of 1 separate branch circuit at each bridge location. Each branch circuit must be fused, not to exceed 20 A.

For falsework lighting, you must arrange with the serving utility to complete service connections. You must pay for energy, line extension, service, and service hookup costs.

At completion of project or when ordered by the Engineer, falsework lighting equipment will become your property and you must remove it from the job site.

You may propose a lighting plan that fulfills light intensity requirements to the systems specified herein. You must supply sufficient data to allow evaluation of alternative methods.

86-6.11B Pavement Illumination

Illumination of pavement at vehicular openings through falsework must comply with the following:

1. Fixture must include R/FL commercial type floodlamp holder with protective covers.
2. Fixture must be fully adjustable with brackets and locking screws, and allow mounting directly to a standard metal junction box.
3. Lamp must be medium-base 120 V(ac), 120 W, minimum, PAR-38 quartz-halogen floodlamp.
4. A continuous row of fixture types required must be installed at locations and spacing specified. Fixtures must be installed beneath falsework structure, with the end fixtures not further than 10 feet inside portal faces. Fixtures must be installed and energized immediately after the members supporting them have been erected.
5. Fixtures along the sides of the opening must be placed not more than 4 feet behind or 2 feet in front of the roadway face of the temporary railing. Mounting heights of fixtures must be between 12 and 16 feet above the roadway surface and must present an unobstructed light pattern on the pavement.

86-6.11C Portal Illumination

Illumination of falsework portals must comply with the following:

1. On each side of each entrance portal, plywood sheet clearance guides, 4 feet wide by 8 feet high, must be fastened vertically, facing traffic, with the bottom of the panel 3 feet to 4 feet above the roadway. The center of the panel must be located approximately 3 feet horizontally behind the roadway face of the railing. Panels must be freshly painted for each installation with not less than 2 applications of flat white paint. Paint testing will not be required.
2. If ordered by the Engineer, in order to improve the general appearance of the painted surfaces, you must repaint designated areas and that painting will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."
3. Falsework portals must be illuminated on the side facing traffic with 150 W, minimum, PAR reflector floodlamps mounted on the structure directly over each vertical support adjacent to the traveled way, as needed to uniformly illuminate the exterior falsework beam, the clearance guides, and the overhead clearance sign. Each lamp must be supported approximately 16 feet above the pavement and approximately 6 feet in front of the portal face.
4. Portal lighting and clearance guides must be installed on the day that vertical members are erected.

86-6.11D Pedestrian Walkway Illumination

Illumination of pedestrian openings through or under falsework must comply with the following:

1. Fixtures must be flush-mounted in the overhead protection shield and equipped with a damage-resistant clear polycarbonate diffuser lens. Lamps must be standard incandescent 100 W, 120 V(ac).
2. Fixtures must be centered over the passageway at intervals of not more than 15 feet with the end fixtures not more than 7 feet inside the end of the pedestrian openings.
3. Pedestrian passageway light systems must be installed immediately after the overhead protection shield is erected.

86-7 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT

86-7.01 REMOVING ELECTRICAL EQUIPMENT

Existing electrical equipment, pull boxes, and conduits, to be removed and not reused or salvaged, become your property and you must dispose of it under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way." Unused underground conduit may be abandoned in place after all conductors have been removed, except that conduit terminations from conduit to be abandoned must be removed from pull boxes to remain.

Exercise care in salvaging equipment so that it will not be damaged or destroyed. Mast arms must be removed from standards. Luminaires, signal heads, and signal mounting assemblies must be removed from standards and mast arms.

Holes resulting from removing pull boxes must be filled with material equivalent to the surrounding material.

86-7.02 REINSTALLING REMOVED ELECTRICAL EQUIPMENT

If removed electrical equipment is to be reinstalled, you must supply all necessary materials and equipment, including signal mounting assemblies, anchor bolts, nuts, washers, and concrete as required to complete the new installation.

Luminaires to be reinstalled must be cleaned and relamped.

Existing materials required to be reused and found to be unsatisfactory by the Engineer must be replaced with new material and the replacement cost will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

86-8 PAYMENT

86-8.01 PAYMENT

The contract lump sum price or prices paid for signal, ramp metering, flashing beacon, lighting, sign illumination, traffic monitoring station, highway advisory radio systems, closed circuit television systems, or combinations thereof; for modifying or removing those systems; for temporary systems; or the lump sum or unit prices paid for various units of those systems; or the lump sum or per foot price paid for conduit of the various sizes, types, and installation methods listed in the Engineer's Estimate include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in furnishing and installing, modifying, or removing the systems, combinations or units thereof, including any necessary pull boxes (except if the type required is shown as a separate contract item); excavation and backfill; concrete foundations (except if shown as a separate contract item); pedestrian barricades; furnishing and installing illuminated street name signs; installing sign panels on pedestrian

barricades, on flashing beacon standards, and on traffic signal mast arms; restoring sidewalk, pavement and appurtenances damaged or destroyed during construction; salvaging existing materials; and making all required tests, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If poles for electrical systems are manufactured from a source located more than 300 air-line miles from Sacramento and Los Angeles, the Department will deduct $5,000 for inspection costs for each inspection site. If poles for electrical systems are manufactured from a source located more than 3,000 air-line miles from Sacramento and Los Angeles, the Department will deduct $8,000 for inspection costs for each inspection site.

Full compensation for all additional materials and labor, not shown on the plans or specified, that are necessary to complete the installation of the various systems, is included in the prices paid for the systems, or units thereof, except as provided in Section 86-1.06, "Maintaining Existing and Temporary Electrical Systems," and no additional compensation will be allowed therefor.

If shown as a contract item, the contract price paid per foot for cast-in-drilled-hole concrete pile (signal foundation) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing reinforced concrete pile foundations of the size shown on the Engineer's Estimate, including drilling holes, disposing of the material resulting from drilling holes, furnishing and placing anchor bolt assemblies and reinforcing steel, complete in place, as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer.

If shown as a contract item, non-reinforced PCC foundations will be measured and paid for by the cubic yard for foundation concrete in the same manner as specified for minor concrete (minor structure) in Section 51, "Concrete Structures."

If shown as a separate contract item by the lump sum or per foot, interconnection conduit and cable includes all interconnection conductors, and conduit and pull boxes containing interconnection cable and no other conductors. The quantity of interconnection conduit and cable to be paid for by the foot is the length of that conduit. Compensation for conduit containing interconnection cable and other conductors is included in the contract price paid for the item requiring the other conductors.

Full compensation for furnishing, installing, maintaining, and removing falsework lighting equipment is included in the contract prices paid for the items of work involved in the structure that requires the falsework lighting and no additional compensation will be allowed therefor.

^^

SECTION 88 ENGINEERING FABRICS
(Issued 06-05-09)

Replace Section 88 with:

SECTION 88 GEOSYNTHETICS

88-1.01 GENERAL

88-1.01A Summary

Section 88 includes specifications for geosynthetics. Geosynthetics are used for:

1. Filtration
2. Drainage
3. Reinforcement
4. Water pollution control
5. Channel and shore protection
6. Pavement interlayer
7. Separation and stabilization

88-1.01B Submittals

Submit:

1. Certificate of Compliance under Section 6-1.07, "Certificates of Compliance"
2. Samples representing each lot
3. Minimum average roll values (MARV)

Label submittals with the manufacturer's name and product information.

88-1.01C Quality Control and Assurance

Treat geosynthetics to resist degradation from exposure to sunlight. Using covers, protect geosynthetics from moisture, sunlight, and shipping and storage damage.

88-1.02 FILTRATION

88-1.02A Filter Fabric

Geosynthetics used for filter fabric must be permeable and nonwoven. Filter fabric must consist of 1 of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Filter fabric must comply with:

Filter Fabric

Property	ASTM	Specification		
		Class A	Class B	Class C
Grab breaking load, 1-inch grip, lb minimum in each direction	D 4632	157		
Apparent elongation, percent minimum in each direction	D 4632	50		
Hydraulic bursting strength, psi minimum	D 3786	210		
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr	D 4355	70		
Permittivity, sec^{-1} minimum	D 4491	0.5	0.2	0.1
Apparent opening size, average roll value, U.S. Standard sieve size maximum	D 4751	40	60	70

88-1.03 DRAINAGE

88-1.03A Geocomposite Wall Drain

Geocomposite wall drain must consist of a polymeric core with filter fabric integrally bonded to 1 or both sides of the core creating a stable drainage void.

Filter fabric must comply with Section 88-1.02, "Filtration."

Geocomposite wall drain must comply with:

Geocomposite Wall Drain

Property	ASTM	Specification
Thickness with fabric, inches maximum	--	2
Transmissivity, gradient = 1.0, normal stress = 5,000 psf, gal/min/ft	D 4716	4

88-1.04 REINFORCEMENT

88-1.04A Geotechnical Subsurface Reinforcement

General

Geosynthetic used for geotechnical subsurface reinforcement must be either of the following:

1. Geotextile
2. Geogrid

Geotextile permittivity must be at least 0.05 sec^{-1} determined under ASTM D 4491.

Geogrid must have a regular and defined open area. The open area must be from 50 to 90 percent of the total grid area.

Long Term Design Strength

Long Term Design Strength (LTDS) of geosynthetic reinforcement is the ultimate tensile strength in the primary strength direction divided by reduction factors. Calculate the LTDS from the guidelines in Geosynthetic Research Institute (GRI) Standard Practice GG4a, GRI GG4b, or GRI GT7.

The product of the appropriate reduction factors must be at least 1.30. Determine the reduction factor for creep using a 75-year design life for permanent applications and a 5-year design life for temporary applications. Determine the installation damage reduction factor based on the characteristics of the backfill materials used.

If test data is not available, use default values of reduction factors in the GRI Standard Practice to calculate LTDS.

Submit the LTDS and its supporting calculations at least 15 days before placing geosynthetic reinforcement. Do not install before the Engineer's approval. The LTDS must be signed by an engineer who is registered as a civil engineer in the State.

88-1.05 WATER POLLUTION CONTROL

Geosynthetics used for water pollution control must comply with:

Water Pollution Control Geosynthetics

Property	ASTM	Application				
		Silt Fence		Sediment Filter Bag	Gravel-Filled Bags	Temporary Cover
		Woven	Non-woven			
Grab breaking load, 1-inch grip, lb minimum in each direction	D 4632	120	120	255	205	200
Apparent elongation, percent minimum, in each direction	D 4632	15	50	--	--	50
Water flow rate, gallons per minute/square foot minimum and maximum average roll value	D 4491	10 - 100	100 - 150	80 - 200	80 - 150	75 - 120
Permittivity, sec^{-1} minimum	D 4491	0.1	1.1	1.0	0.2	1.0
Apparent opening size, inches maximum average roll value	D 4751	0.023	0.023	0.033	0.016	0.007
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr.	D 4355	70	70	70	70	70

88-1.06 CHANNEL AND SHORE PROTECTION

88-1.06A Rock Slope Protection

Rock slope protection (RSP) fabric must be a permeable, nonwoven, needle-punched geotextile. RSP fabric consists of 1 of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Polymers must be either virgin compounds or clean reworked material. Do not subject virgin compounds to use or processing other than required for initial manufacture. Clean reworked material must be previously processed material from the processor's own production that has been reground, pelletized, or solvated. RSP fabric must not consist of more than 20 percent by weight of clean reworked material. Do not use recycled materials from either post-consumer or post-industrial sources.

Class 8 or Class 10 RSP fabric must comply with:

Rock Slope Protection Fabric

Property	ASTM	Specification	
		Class 8	Class 10
Weight, oz/yd^2 minimum	D 5261	7.5	9.5
Grab breaking load, lb 1-inch grip, min. in each direction	D 4632	200	250
Apparent elongation, percent min., in each direction	D 4632	50	50
Permittivity, sec^{-1}, minimum	D 4491	1.0	0.70
Apparent opening size, U.S. Standard sieve size minimum and maximum	D 4751	70 - 100	70 - 100
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr.	D4355	70	70

88-1.07 PAVEMENT INTERLAYER

88-1.07A Paving Fabric

Geosynthetics used for paving fabric must be nonwoven. Paving fabric must comply with:

Geosynthetic Paving Fabric

Property	ASTM	Specification
Mass per unit area, oz/yd^2 minimum	D 5261	4.1
Grab breaking load, lb 1-inch grip, minimum, in each direction	D 4632	100
Apparent elongation, percent minimum in each direction	D 4632	50
Hydraulic bursting strength, psi minimum	D 3786	200
Melting point, °F minimum	D 276	325
Asphalt retention, gal/yd^2 minimum	D 6140	0.2

88-1.07B Paving Mat

Geosynthetics used for paving mat must be a nonwoven fiberglass and polyester hybrid material. Paving mat must comply with:

Geosynthetic Paving Mat

Property	ASTM	Specification
Breaking force, lb/2 inches minimum	D 5035	45
Ultimate elongation, percent maximum	D 5035	5
Mass per unit area, oz/ sq yd minimum	D 5261	3.7
Melting point, °F minimum	D 276	400
Asphalt retention, gal/yd^2 minimum	D 6140	0.10

88-1.07C Paving Grid

Geosynthetics used for paving grid must be a geopolymer material formed into a grid of integrally connected elements with openings. Paving grid must comply with:

Geosynthetic Paving Grid

Property	Test	Specification		
		Class I	Class II	Class III
Tensile strength at ultimate, lb/in [a] minimum	ASTM D 6637	560 x 1,120	560	280
Aperture size, inch minimum	Calipered	0.5	0.5	0.5
Elongation, % maximum	ASTM D 6637	12	12	12
Mass per area, oz / sqyd minimum	ASTM D 5261	16	10	5.5
Melting point, °F minimum	ASTM D 276	325	325	325

Note:
[a] For Class I, machine direction x cross direction. For Class II and Class III, both directions.

88-1.07D Paving Geocomposite Grid

Paving geocomposite grid consists of paving grid specified under Section 88-1.07C, "Paving Grid," bonded or integrated with paving fabric specified under Section 88-1.07A, "Paving Fabric."

Paving geocomposite grid must have a peel strength of at least 10 pounds per foot determined under ASTM D 413.

88-1.07E Geocomposite Strip Membrane

Geocomposite strip membrane must consist of various widths of strips manufactured from of asphaltic rubber and geosynthetics. Geocomposite strip membrane must comply with:

Geocomposite Strip Membrane

Property	ASTM	Specification
Strip tensile strength, lbs/inch minimum	D 882	50
Elongation at break, % minimum	D 882	50
Resistance to puncture, lbs. minimum	E 154	200
Permeance, perms maximum	E 96/E 96M	0.10
Pliability, 1/4 inch mandrel with sample conditioned at 25 °F	D 146	No cracks in fabric or bitumen
Melting point, °F	D 276	325

88-1.08 SEPARATION AND STABILIZATION

88-1.08A Subgrade Enhancement Geotextile

Subgrade enhancement geotextile must consist of either of the following:

1. Polyester
2. Polypropylene

Subgrade enhancement geotextile must comply with:

Subgrade Enhancement Geotextile

Property	ASTM	Specification [a]				
		Class A1	Class A2	Class B1	Class B2	Class B3
Elongation at break, %	D 4632	<50	≥50	<50	<50	≥50
Grab tensile strength, lb minimum	D4632	250	160	--	320	200
Wide width tensile strength at 5% strain, lb/ft minimum	D 4595	--	--	2,000	--	--
Wide width tensile strength at ultimate strength, lb/ft minimum	D 4595	--	--	4,800	--	--
Tear strength, lb minimum	D 4533	90	60	--	120	80
Puncture strength, lb minimum	D 6241	500	310	620	620	430
Permittivity, sec^{-1} minimum	D 4491	0.05	0.05	0.20	0.20	0.20
Apparent opening size, inches maximum	D 4751	0.012	0.012	0.024	0.012	0.012
Ultraviolet stability (retained strength after 500 hrs exposure), % minimum	D 4355	70	70	70	70	70

Notes:
[a] Specifications are based on minimum average roll value in the weaker principle direction except apparent opening size is based on maximum average roll value.

88-1.09 PAYMENT

The Department measures and pays for geosynthetics under the specifications requiring their use.

^^

SECTION 90 PORTLAND CEMENT CONCRETE
(Issued 08-05-11)

Replace Section 90 with:

SECTION 90 PORTLAND CEMENT CONCRETE

90-1 GENERAL

90-1.01 DESCRIPTION

Portland cement concrete shall be composed of cementitious material, fine aggregate, coarse aggregate, admixtures if used, and water, proportioned and mixed as specified in these specifications.

The Contractor shall determine the mix proportions for concrete in conformance with these specifications.

Minor concrete shall contain not less than 505 pounds of cementitious material per cubic yard unless otherwise specified in these specifications or the special provisions.

Unless otherwise designated on the plans or specified in these specifications or the special provisions, the amount of cementitious material used per cubic yard of concrete in structures or portions of structures shall conform to the following:

Use	Cementitious Material Content (Pounds/CY)
Concrete designated by compressive strength:	
Deck slabs and slab spans of bridges	675 min., 800 max.
Roof sections of exposed top box culverts	675 min., 800 max.
Other portions of structures	590 min., 800 max.
Concrete not designated by compressive strength:	
Deck slabs and slab spans of bridges	675 min.
Roof sections of exposed top box culverts	675 min.
Prestressed members	675 min.
Seal courses	675 min.
Other portions of structures	590 min.
Concrete for precast members	590 min., 925 max.

Except for minor structures, the minimum required compressive strength for concrete in structures or portions of structures shall be the strength specified, or 3600 pounds per square inch at 28 days, whichever is greater.

Except for when a modulus of rupture is specified, the minimum required compressive strength for concrete shall be the strength specified, or 2,500 pounds per square inch, whichever is greater. Concrete shall be proportioned such that the concrete will attain the minimum required compressive strength.

If the specified 28-day compressive strength is 3,600 pounds per square inch or greater, the concrete is designated by compressive strength. For concrete with a 28-day compressive

strength greater than 3,600 pounds per square inch, 42 days will be allowed to obtain the specified strength.

For concrete not designated by compressive strength, the Engineer may test the concrete for compressive strength. The concrete will be accepted if the compressive strength at 28 days attains 85 percent or more of the minimum required compressive strength.

Concrete shall be proportioned to conform to the following shrinkage limitations when tested in conformance with the requirements of AASHTO Designation: T 160, modified as follows:

Condition	Maximum Shrinkage of Laboratory Cast Specimens at 28 days Drying (average of 3, %)
Paving and approach slab concrete	0.050
Bridge deck concrete	0.045

Note: Shrinkage requirement is waived for concrete that is used for precast elements.

Shrinkage tests shall be either:

A. Performed by a laboratory accredited to perform AASHTO Designation: T 160, or
B. Performed by a laboratory that maintains a current rating of 3 or better for the Cement and Concrete Reference Laboratory (CCRL) concrete proficiency sample program.

Laboratory cast specimens shall have a 4" x 4" cross section. Specimens shall be removed from the molds 23 ± 1 hours after mixing the concrete and placed in lime water at 73 ± 3 °F to 7 days age. A comparator reading shall be taken at 7 days age and recorded as the initial reading. Specimens then shall be stored in a humidity controlled room maintained at 73 ± 3 °F and 50 ± 4 percent relative humidity for the remainder of the test. Subsequent readings shall be taken at 7, 14, 21, and 28 days drying.

Test data verifying conformance to the shrinkage limitations shall be submitted with the mix design. Shrinkage testing data accepted by the Engineer no more than 3 years prior to the first working day of this contract will be acceptable for this entire contract, provided the data was for concrete with similar proportions and the same materials and material sources to be used on this contract. Concrete shall be considered to have similar proportions if, when compared to concrete to be used on this project, no more than 2 mix design elements are varied. Varied mix design elements shall fall within the tolerances in the following table:

Mix Design Element	Tolerance (±)
Water to cementitious material ratio	0.03
Total water content	5 %
Coarse aggregate (weight per cubic yard)	10 %
Fine aggregate (weight per cubic yard)	10 %
Supplementary cementitious material content	5 %
Admixture (as originally dosed)	25 %

Note: Admixtures must be of the same brand.

Before using concrete or in advance of revising the mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design.

Compliance with cementitious material content requirements will be verified in conformance with procedures described in California Test 518 for cement content. For testing purposes, supplementary cementitious material (SCM) shall be considered to be cement. Batch proportions shall be adjusted as necessary to produce concrete having the specified cementitious material content.

If any concrete has a cementitious material, portland cement, or SCM content that is less than the minimum required, the concrete shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place and the Contractor shall pay to the State $0.25 for each pound of cementitious material, portland cement, or SCM that is less than the minimum required. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract. The deductions will not be made unless the difference between the contents required and those actually provided exceeds the batching tolerances permitted by Section 90-5, "Proportioning." No deductions will be made based on the results of California Test 518.

The requirements of the preceding paragraph shall not apply to minor concrete.

90-2 MATERIALS

90-2.01 CEMENTITIOUS MATERIALS

Unless otherwise specified, cementitious material shall be either a combination of Type II or Type V portland cement and SCM, or a blended cement. No cementitious material shall be used in the work unless it is on the Department's Pre-Qualified Products List at the time of mix design submittal. Information regarding cementitious material qualification and placement on the Department's approved list can be obtained at the Transportation Laboratory.

Cementitious materials used in cast-in-place concrete for exposed surfaces of like elements of a structure shall be from the same sources and of the same proportions.

Cementitious materials shall be protected from moisture until used. Sacked cementitious materials shall be piled to permit access for tallying, inspecting, and identifying each shipment.

Facilities shall be provided to ensure that the various cementitious materials meeting this Section 90-2.01 are kept separate from each other and from other cementitious materials. A storage silo containing a cementitous material shall be emptied before using that silo for a different cementitious material. Blended cements with a percentage of SCM differing by more than 2 percentage points are considered different cementitious materials. Sampling cementitious materials shall be in conformance with California Test 125.

The Contractor shall furnish a Certificate of Compliance for cementitious materials in conformance with the provisions in Section 6-1.07, "Certificates of Compliance." The Certificate of Compliance shall indicate the source by name and location (including country, state, and city). If cementitious material is delivered directly to the job site, the Certificate of Compliance shall be signed by the cementitious material supplier. If the cementitious material is used in ready-mixed concrete or in precast concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product. If blended cement is used, the Certificate of Compliance shall include a statement signed by the blended cement supplier that indicates the actual percentage, by weight, of SCM in the blend. Weight of SCM shall be by weighing device conforming to Section 9-1.01, "Measurement of Quantities," or as determined by chemical analysis.

90-2.01A Cement

Portland cement shall conform to the requirements in ASTM Designation: C 150 except the C_3S content of Type II cement shall not exceed 65 percent.

Blended cement shall conform to the requirements for Portland Blast-Furnace Slag Cement, Type IS (MS) or Portland-Pozzolan Cement, Type IP (MS) in AASHTO Designation: M 240, except that the maximum limits on the pozzolan content shall not apply. Blended cement shall be comprised of Type II or Type V cement and SCM produced by intergrinding portland cement clinker and granulated blast furnace slag, ground granulated blast furnace slag (GGBFS), or

pozzolan; by blending portland cement and either GGBFS or finely divided pozzolan; or by a combination of intergrinding and blending.

In addition, Type II portland cement and Type V portland cement shall conform to the following requirements:

A. The cement shall not contain more than 0.60-percent by mass of alkalies, calculated as the percentage of Na_2O plus 0.658 times the percentage of K_2O, when determined by methods as required in AASHTO Designation: T 105; and
B. The autoclave expansion shall not exceed 0.50-percent

Type III portland cement shall be used only as specified or with the approval of the Engineer. Type III portland cement shall conform to the additional requirements listed above for Type II portland cement. The Contractor may use Type III portland cement in the manufacturing of precast concrete.

90-2.01B Supplementary Cementitious Materials

Each supplementary cementitious material shall conform to one of the following:

A. Fly ash conforming to the requirements in AASHTO Designation: M 295, Class F, and these specifications. The available alkali, as sodium oxide equivalent, shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311 or the total alkali, as sodium oxide equivalent, shall not exceed 5.0 percent when determined in conformance with the requirements in AASHTO Designation: T 105.
B. Ultra fine fly ash (UFFA) conforming to the requirements in AASHTO Designation: M 295, Class F, and the following chemical and physical requirements:

Chemical Requirements	Percent
Sulfur Trioxide (SO_3)	1.5 max.
Loss on ignition	1.2 max.
Available Alkalies (as Na_2O) equivalent	1.5 max.

Physical Requirements	Percent
Particle size distribution	
Less than 3.5 microns	50
Less than 9.0 microns	90
Strength Activity Index with portland cement	
7 days	95 (minimum % of control)
28 days	110 (minimum % of control)
Expansion at 16 days when testing job materials in conformance with ASTM C 1567*	0.10 max.

* In the test mix, Type II or Type V portland cement shall be replaced with at least 12% UFFA by weight.

C. Raw or calcined natural pozzolans conforming to the requirements in AASHTO Designation: M 295, Class N. and the following requirements and these specifications. The available alkali, as sodium oxide equivalent, shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311 or the total alkali, as sodium oxide equivalent, shall not exceed 5.0 percent when determined in conformance with the requirements in AASHTO Designation: T 105.

D. Metakaolin conforming to the requirements in AASHTO Designation: M 295, Class N, and the following chemical and physical requirements:

Chemical Requirements	Percent
Silicon Dioxide (SiO_2) + Aluminum Oxide (Al_2O_3)	92.0 min.
Calcium Oxide (CaO)	1.0 max
Sulfur Trioxide (SO_3)	1.0 max.
Loss on ignition	1.2 max.
Available Alkalies (as Na_2O) equivalent	1.0 max.

Physical Requirements	Percent
Particle size distribution Less than 45 microns	95
Strength Activity Index with portland cement 7 days 28 days	 100 (minimum % of control) 100 (minimum % of control)

E. Ground Granulated Blast Furnace Slag (GGBFS) conforming to the requirements in AASHTO Designation: M 302, Grade 100 or Grade 120.
F. Silica Fume conforming to the requirements of AASHTO Designation: M 307, with reduction in mortar expansion of 80 percent, minimum, using the cement from the proposed mix design.

Commingling of fly ash from different sources at uncontrolled ratios is permissible only if the following criteria are satisfied:

A. Sources of fly ash to be commingled shall each produce fly ash that conforms to the requirements in AASHTO Designation: M 295, Class F.
B. Testing of the commingled product is the responsibility of the fly ash supplier.
C. Each fly ash's running average of relative density shall not differ from any other by more than 0.25 at the time of commingling.
D. Each fly ash's running average of loss on ignition shall not differ from any other by more than one percent at the time of commingling.
E. The final product of commingled fly ash shall conform to the requirements in AASHTO Designation: M 295, Class F.

90-2.01C Required Use Of Supplementary Cementitious Materials

General

The amount of portland cement and SCM used in portland cement concrete shall conform to the minimum cementitious material content provisions in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," and these specifications.

The SCM content in portland cement concrete shall conform to one of the following:

A. Any combination of portland cement and at least one SCM, satisfying Equations (1) and (2):

Equation (1)

$$\frac{(25 \times UF) + (12 \times FA) + (10 \times FB) + (6 \times SL)}{MC} \geq X$$

Where:

UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard.
FA = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 10 percent, including the amount in blended cement, pounds per cubic yard.
FB = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content greater than 10 percent and up to 15 percent, including the amount in blended cement, pounds per cubic yard.
SL = GGBFS, including the amount in blended cement, pounds per cubic yard.
MC = Minimum amount of cementitious material specified, pounds per cubic yard.
X = 1.8 for innocuous aggregate, 3.0 for all other aggregate.

Equation (2)

$$MC - MSCM - PC \geq 0$$

Where:

MC = Minimum amount of cementitious material specified, pounds per cubic yard.
MSCM = The minimum sum of SCMs that satisfies Equation (1) above, pounds per cubic yard.
PC = The amount of portland cement, including the amount in blended cement, pounds per cubic yard.

B. 15 percent of Class F fly ash with at least 48 ounces of $LiNO_3$ solution added per 100 pounds of portland cement. CaO content of the fly ash shall not exceed 15 percent.

Precast Concrete

The SCM content in precast portland cement concrete shall conform to one of the following:

A. Any combination of portland cement and SCM, satisfying the following equation:

Equation (3)

$$\frac{(25 \times UF) + (12 \times FA) + (10 \times FB) + (6 \times SL)}{TC} \geq X$$

Where:

UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard.

FA = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 10 percent, including the amount in blended cement, pounds per cubic yard.

FB = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content greater than 10 percent and up to 15 percent, including the amount in blended cement, pounds per cubic yard.

SL = GGBFS, including the amount in blended cement, pounds per cubic yard.

TC = Total amount of cementitious material used in the mix, pounds per cubic yard.

X = 0.0 if precast members are constructed with portland cement concrete using aggregate that is "innocuous" in conformance with the provisions in Section 90-2.02, "Aggregates."

X = 3.0 for all other aggregate.

B. 15 percent of Class F fly ash with at least 48 ounces of $LiNO_3$ solution added per 100 pounds of portland cement. CaO content of the fly ash shall not exceed 15 percent.

C. Any combination of supplementary cementitious material and portland cement may be used if the expansion of cementitious material and aggregate does not exceed 0.10 percent when tested in conformance with the requirements in ASTM C 1567. Test data shall be submitted with each mix design. Test data accepted by the Engineer no more than 3 years prior to the first working day of this contract will be acceptable for this entire contract, provided the data was for the same concrete mix and the same materials and material sources to be used on this contract.

90-2.02 AGGREGATES

To be considered innocuous, aggregate must be on the Department's approved list, "Innocuous Aggregates for use in Concrete." Information regarding aggregate qualification and placement on the Department's approved list can be obtained at the Transportation Laboratory.

Both coarse and fine aggregate must be on the approved list for the aggregate used in concrete to be considered innocuous.

Aggregates shall be free from deleterious coatings, clay balls, roots, bark, sticks, rags, and other extraneous material.

The Contractor shall provide safe and suitable facilities, including necessary splitting devices for obtaining samples of aggregates, in conformance with California Test 125.

Aggregates shall be of such character that it will be possible to produce workable concrete within the limits of water content provided in Section 90-6.06, "Amount of Water and Penetration."

Aggregates shall have not more than 10 percent loss when tested for soundness in conformance with the requirements in California Test 214. The soundness requirement for fine aggregate will be waived, provided that the durability index, D_f, of the fine aggregate is 60 or greater when tested for durability in conformance with California Test 229.

If the results of any one or more of the Cleanness Value, Sand Equivalent, or aggregate grading tests do not meet the requirements specified for "Operating Range" but all meet the "Contract Compliance" requirements, the placement of concrete shall be suspended at the completion of the current pour until tests or other information indicate that the next material to be used in the work will comply with the requirements specified for "Operating Range."

If the results of either or both the Cleanness Value and coarse aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete that is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally

adequate, the concrete may remain in place, and the Contractor shall pay to the State $3.50 per cubic yard for paving concrete and $5.50 per cubic yard for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.

If the results of either or both the Sand Equivalent and fine aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete which is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State $3.50 per cubic yard for paving concrete and $5.50 per cubic yard for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.

The 2 preceding paragraphs apply individually to the "Contract Compliance" requirements for coarse aggregate and fine aggregate. When both coarse aggregate and fine aggregate do not conform to the "Contract Compliance" requirements, both paragraphs shall apply. The payments specified in those paragraphs are in addition to any payments made in conformance with the provisions in Section 90-1.01, "Description."

No single Cleanness Value, Sand Equivalent, or aggregate grading test shall represent more than 300 cubic yards of concrete or one day's pour, whichever is smaller.

When the source of an aggregate is changed, the Contractor shall adjust the mix proportions and submit in writing to the Engineer a copy of the mix design before using the aggregates.

90-2.02A Coarse Aggregate

Coarse aggregate shall consist of gravel, crushed gravel, crushed rock, reclaimed aggregate, crushed air-cooled iron blast furnace slag or combinations thereof. Crushed air-cooled blast furnace slag shall not be used in reinforced or prestressed concrete.

Reclaimed aggregate is aggregate that has been recovered from plastic concrete by washing away the cementitious material. Reclaimed aggregate shall conform to all aggregate requirements.

Coarse aggregate shall conform to the following quality requirements:

Tests	California Test	Requirements
Loss in Los Angeles Rattler (after 500 revolutions)	211	45% max.
Cleanness Value		
Operating Range	227	75 min.
Contract Compliance	227	71 min.

In lieu of the above Cleanness Value requirements, a Cleanness Value "Operating Range" limit of 71, minimum, and a Cleanness Value "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the coarse aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

A. Coarse aggregate sampled at the completion of processing at the aggregate production plant had a Cleanness Value of not less than 82 when tested in conformance with the requirements in California Test 227; and
B. Prequalification tests performed in conformance with the requirements in California Test 549 indicated that the aggregate would develop a relative strength of not less than 95

percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

90-2.02B Fine Aggregate

Fine aggregate shall consist of natural sand, manufactured sand produced from larger aggregate or a combination thereof. Manufactured sand shall be well graded.

Fine aggregate shall conform to the following quality requirements:

Test	California Test	Requirements
Organic Impurities	213	Satisfactory[a]
Sand Equivalent:		
Operating Range	217	75, min.
Contract Compliance	217	71, min.

[a] Fine aggregate developing a color darker than the reference standard color may be accepted if 95% relative mortar strength is achieved when tested in conformance with ASTM C87.

In lieu of the above Sand Equivalent requirements, a Sand Equivalent "Operating Range" limit of 71, minimum, and a Sand Equivalent "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the fine aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

A. Fine aggregate sampled at the completion of processing at the aggregate production plant had a Sand Equivalent value of not less than 82 when tested by California Test 217; and
B. Prequalification tests performed in conformance with California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

90-2.03 WATER

In conventionally reinforced concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 1,000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1,300 parts per million of sulfates as SO_4, when tested in conformance with California Test 417. In prestressed concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 650 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1,300 parts per million of sulfates as SO_4, when tested in conformance with California Test 417. In no case shall the water contain an amount of impurities that will cause either of the following results when compared to the same test using distilled or deionized water: 1) a change in the setting time of cement of more than 25 percent when tested in conformance with the requirements in ASTM Designation: C 191 or ASTM Designation: C 266 or 2) a reduction in the compressive strength of mortar at 14 days of more than 5 percent, when tested in conformance with the requirements in ASTM Designation: C 109.

In nonreinforced concrete work, the water for curing, for washing aggregates and for mixing shall be free from oil and shall not contain more than 2,000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, or more than 1,500 parts per million of sulfates as SO_4, when tested in conformance with California Test 417.

In addition to the above provisions, water for curing concrete shall not contain impurities in a sufficient amount to cause discoloration of the concrete or produce etching of the surface.

Water reclaimed from mixer wash-out operations may be used in mixing concrete. The water shall not contain coloring agents or more than 300 parts per million of alkalis (Na_2O + 0.658 K_2O) as determined on the filtrate. The specific gravity of the water shall not exceed 1.03 and shall not vary more than ±0.010 during a day's operations.

90-2.04 Admixture Materials

Admixture materials shall be stored and dispensed in liquid form and conform to the following requirements:

A. Chemical Admixtures—ASTM Designation: C 494.
B. Air-entraining Admixtures—ASTM Designation: C 260.
C. Lithium Nitrate shall be in an aqueous solution conforming to the following:

1. Lithium Nitrate ($LiNO_3$) must be 30 percent +/- 0.5 percent by weight
2. Sulfate (SO_4) must be less than 1000 ppm
3. Chloride (Cl) must be less than 1000 ppm
4. Alkalis (Na_2O + 0.658 K_2O) must be less than 1000 ppm

90-3 AGGREGATE GRADINGS

90-3.01 GENERAL

Before beginning concrete work, the Contractor shall submit in writing to the Engineer the gradation of the primary aggregate nominal sizes that the Contractor proposes to furnish. If a primary coarse aggregate or the fine aggregate is separated into 2 or more sizes, the proposed gradation shall consist of the gradation for each individual size, and the proposed proportions of each individual size, combined mathematically to indicate one proposed gradation. The proposed gradation shall meet the grading requirements shown in the table in this section, and shall show the percentage passing each of the sieve sizes used in determining the end result.

The Engineer may waive, in writing, the gradation requirements in this Section 90-3.01 and in Sections 90-3.02, "Coarse Aggregate Grading," 90-3.03, "Fine Aggregate Grading," and 90-3.04, "Combined Aggregate Gradings," if, in the Engineer's opinion, furnishing the gradation is not necessary for the type or amount of concrete work to be constructed.

Gradations proposed by the Contractor shall be within the following percentage passing limits:

Primary Aggregate Nominal Size	Sieve Size	Limits of Proposed Gradation
1-1/2" x 3/4"	1"	19 - 41
1" x No. 4	3/4"	52 - 85
1" x No. 4	3/8"	15 - 38
1/2" x No. 4	3/8"	40 - 78
3/8" x No. 8	3/8"	50 - 85
Fine Aggregate	No. 16	55 - 75
Fine Aggregate	No. 30	34 - 46
Fine Aggregate	No. 50	16 - 29

Should the Contractor change the source of supply, the Contractor shall submit in writing to the Engineer the new gradations before their intended use.

90-3.02 COARSE AGGREGATE GRADING

The grading requirements for coarse aggregates are shown in the following table for each size of coarse aggregate:

Sieve Sizes	Percentage Passing Primary Aggregate Nominal Sizes							
	1-1/2" x 3/4"		1" x No. 4		1/2" x No. 4		3/8" x No. 8	
	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance
2"	100	100	—	—	—	—	—	—
1-1/2"	88 - 100	85 - 100	100	100	—	—	—	—
1"	X ±18	X ±25	88 - 100	86 - 100	—	—	—	—
3/4"	0 - 17	0 - 20	X ±15	X ±22	100	100	—	—
1/2"	—	—	—	—	82 - 100	80 - 100	100	100
3/8"	0 - 7	0 - 9	X ±15	X ±22	X ±15	X ±22	X ±15	X ±20
No. 4	—	—	0 - 16	0 - 18	0 - 15	0 - 18	0 - 25	0 - 28
No. 8	—	—	0 - 6	0 - 7	0 - 6	0 - 7	0 - 6	0 - 7

In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."

Coarse aggregate for the 1-1/2 inch, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," shall be furnished in 2 or more primary aggregate nominal sizes. Each primary aggregate nominal size may be separated into 2 sizes and stored separately, provided that the combined material conforms to the grading requirements for that particular primary aggregate nominal size.

When the one inch, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," is to be used, the coarse aggregate may be separated into 2 sizes and stored separately, provided that the combined material shall conform to the grading requirements for the 1" x No. 4 primary aggregate nominal size.

90-3.03 FINE AGGREGATE GRADING

Fine aggregate shall be graded within the following limits:

Sieve Sizes	Percentage Passing	
	Operating Range	Contract Compliance
3/8"	100	100
No. 4	95 - 100	93 - 100
No. 8	65 - 95	61 - 99
No. 16	X ±10	X ±13
No. 30	X ±9	X ±12
No. 50	X ±6	X ±9
No. 100	2 - 12	1 - 15
No. 200	0 - 8	0 - 10

In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."

In addition to the above required grading analysis, the distribution of the fine aggregate sizes shall be such that the difference between the total percentage passing the No. 16 sieve and the total percentage passing the No. 30 sieve shall be between 10 and 40, and the difference between the percentage passing the No. 30 and No. 50 sieves shall be between 10 and 40.

Fine aggregate may be separated into 2 or more sizes and stored separately, provided that the combined material conforms to the grading requirements specified in this Section 90-3.03.

90-3.04 COMBINED AGGREGATE GRADINGS

Combined aggregate grading limits shall be used only for the design of concrete mixes. Concrete mixes shall be designed so that aggregates are combined in proportions that shall produce a mixture within the grading limits for combined aggregates as specified herein.

The combined aggregate grading, except when otherwise specified in these specifications or the special provisions, shall be either the 1-1/2 inch, maximum grading, or the 1 inch, maximum grading, at the option of the Contractor.

Grading Limits of Combined Aggregates

Sieve Sizes	Percentage Passing			
	1-1/2" Max.	1" Max.	1/2" Max.	3/8" Max.
2"	100	—	—	—
1-1/2"	90 - 100	100	—	—
1"	50 - 86	90 - 100	—	—
3/4"	45 - 75	55 - 100	100	—
1/2"	—	—	90 - 100	100
3/8"	38 - 55	45 - 75	55 - 86	50 - 100
No. 4	30 - 45	35 - 60	45 - 63	45 - 63
No. 8	23 - 38	27 - 45	35 - 49	35 - 49
No. 16	17 - 33	20 - 35	25 - 37	25 - 37
No. 30	10 - 22	12 - 25	15 - 25	15 - 25
No. 50	4 - 10	5 - 15	5 - 15	5 - 15
No. 100	1 - 6	1 - 8	1 - 8	1 - 8
No. 200	0 - 3	0 - 4	0 - 4	0 - 4

Changes from one grading to another shall not be made during the progress of the work unless permitted by the Engineer.

90-4 ADMIXTURES

90-4.01 GENERAL

Admixtures used in portland cement concrete shall conform to and be used in conformance with the provisions in this Section 90-4 and the special provisions. Admixtures shall be used when specified or ordered by the Engineer and may be used at the Contractor's option as provided herein.

Chemical admixtures and air-entraining admixtures containing chlorides as Cl in excess of one percent by weight of admixture, as determined by California Test 415, shall not be used.

Admixtures shall be uniform in properties throughout their use in the work. Should it be found that an admixture as furnished is not uniform in properties, its use shall be discontinued.

If more than one admixture is used, the admixtures shall be compatible with each other so that the desirable effects of all admixtures used will be realized.

Chemical admixtures shall be used in conformance with the manufacturer's written recommendations. The manufacturer's written recommendations shall include a statement that the admixtures are compatible with the types and amounts of SCMs used.

90-4.02 MATERIALS

Admixture materials shall conform to the provisions in Section 90-2.04, "Admixture Materials."

90-4.03 ADMIXTURE APPROVAL

No admixture brand shall be used in the work unless it is on the Department's current list of approved brands for the type of admixture involved. Information regarding admixture qualification and placement on the Department's list can be obtained at the Transportation Laboratory.

If the Contractor proposes to use an admixture of a brand and type on the current list of approved admixture brands, the Contractor shall furnish a Certificate of Compliance from the manufacturer, as provided in Section 6-1.07, "Certificates of Compliance," certifying that the admixture furnished is the same as that previously approved. If a previously approved admixture is not accompanied by a Certificate of Compliance, the admixture shall not be used in the work until the Engineer has had sufficient time to make the appropriate tests and has approved the admixture for use. The Engineer may take samples for testing at any time, whether or not the admixture has been accompanied by a Certificate of Compliance.

90-4.04 REQUIRED USE OF CHEMICAL ADMIXTURES

If the use of a chemical admixture is specified, the admixture shall be used at the dosage specified, except that if no dosage is specified, the admixture shall be used at the dosage normally recommended by the manufacturer of the admixture.

90-4.05 OPTIONAL USE OF CHEMICAL ADMIXTURES

The Contractor may use Type A or F, water-reducing; Type B, retarding; or Type D or G, water-reducing and retarding admixtures as described in ASTM Designation: C 494 to conserve cementitious material or to facilitate any concrete construction application subject to the following conditions:

A. If a water-reducing admixture or a water-reducing and retarding admixture is used, the cementitious material content specified or ordered may be reduced by a maximum of 5 percent by weight, except that the resultant cementitious material content shall be not less than 505 pounds per cubic yard; and
B. When a reduction in cementitious material content is made, the dosage of admixture used shall be no less than the dosage used in determining approval of the admixture.

The Contractor may use Type S admixtures conforming to the requirements in ASTM Designation: C 494.

Unless otherwise specified, a Type C accelerating chemical admixture conforming to the requirements in ASTM Designation: C 494, may be used in portland cement concrete. Inclusion in the mix design submitted for approval will not be required provided that the admixture is added to counteract changing conditions that contribute to delayed setting of the portland cement concrete, and the use or change in dosage of the admixture is approved in writing by the Engineer.

90-4.06 REQUIRED USE OF AIR-ENTRAINING ADMIXTURES

When air-entrainment is specified or ordered by the Engineer, the air-entraining admixture shall be used in amounts to produce a concrete having the specified air content as determined by California Test 504.

90-4.07 OPTIONAL USE OF AIR-ENTRAINING ADMIXTURES

When air-entrainment has not been specified or ordered by the Engineer, the Contractor will be permitted to use an air-entraining admixture to facilitate the use of any construction procedure or equipment provided that the average air content, as determined by California Test 504, of 3 successive tests does not exceed 4 percent, and no single test value exceeds 5.5 percent. If the Contractor elects to use an air-entraining admixture in concrete for pavement, the Contractor shall so indicate at the time the Contractor designates the source of aggregate.

90-4.08 BLANK

90-4.09 BLANK

90-4.10 PROPORTIONING AND DISPENSING LIQUID ADMIXTURES

Chemical admixtures and air-entraining admixtures shall be dispensed in liquid form. Dispensers for liquid admixtures shall have sufficient capacity to measure at one time the prescribed quantity required for each batch of concrete. Each dispenser shall include a graduated measuring unit into which liquid admixtures are measured to within ±5 percent of the prescribed quantity for each batch. Dispensers shall be located and maintained so that the graduations can be accurately read from the point at which proportioning operations are controlled to permit a visual check of batching accuracy prior to discharge. Each measuring unit shall be clearly marked for the type and quantity of admixture.

Each liquid admixture dispensing system shall be equipped with a sampling device consisting of a valve located in a safe and readily accessible position such that a sample of the admixture may be withdrawn slowly by the Engineer.

If more than one liquid admixture is used in the concrete mix, each liquid admixture shall have a separate measuring unit and shall be dispensed by injecting equipment located in such a manner that the admixtures are not mixed at high concentrations and do not interfere with the effectiveness of each other. When air-entraining admixtures are used in conjunction with other liquid admixtures, the air-entraining admixture shall be the first to be incorporated into the mix, unless it is demonstrated that a different sequence improves performance.

When automatic proportioning devices are used, dispensers for liquid admixtures shall operate automatically with the batching control equipment. The dispensers shall be equipped with an automatic warning system in good operating condition that will provide a visible or audible signal at the point at which proportioning operations are controlled when the quantity of admixture measured for each batch of concrete varies from the preselected dosage by more than 5 percent, or when the entire contents of the measuring unit are not emptied from the dispenser into each batch of concrete.

Unless liquid admixtures are added to premeasured water for the batch, their discharge into the batch shall be arranged to flow into the stream of water so that the admixtures are well dispersed throughout the batch, except that air-entraining admixtures may be dispensed directly into moist sand in the batching bins provided that adequate control of the air content of the concrete can be maintained.

Liquid admixtures requiring dosages greater than one-half gallon per cubic yard shall be considered to be water when determining the total amount of free water as specified in Section 90-6.06, "Amount of Water and Penetration."

90-4.11 BLANK

90-5 PROPORTIONING

90-5.01 STORAGE OF AGGREGATES

Aggregates shall be stored or stockpiled in such a manner that separation of coarse and fine particles of each size shall be avoided and the various sizes shall not become intermixed before proportioning.

Aggregates shall be stored or stockpiled and handled in a manner that prevent contamination by foreign materials. In addition, storage of aggregates at batching or mixing facilities that are erected subsequent to the award of the contract and that furnish concrete to the project shall conform to the following:

A. Intermingling of the different sizes of aggregates shall be positively prevented. The Contractor shall take the necessary measures to prevent intermingling. The preventive measures may include, but are not necessarily limited to, physical separation of stockpiles or construction of bulkheads of adequate length and height; and
B. Contamination of aggregates by contact with the ground shall be positively prevented. The Contractor shall take the necessary measures to prevent contamination. The preventive measures shall include, but are not necessarily limited to, placing aggregates on wooden platforms or on hardened surfaces consisting of portland cement concrete, asphalt concrete, or cement treated material.

In placing aggregates in storage or in moving the aggregates from storage to the weigh hopper of the batching plant, any method that may cause segregation, degradation, or the combining of materials of different gradings that will result in any size of aggregate at the weigh hopper failing to meet the grading requirements, shall be discontinued. Any method of handling aggregates that results in excessive breakage of particles shall be discontinued. The use of suitable devices to reduce impact of falling aggregates may be required by the Engineer.

90-5.02 PROPORTIONING DEVICES

Weighing, measuring, or metering devices used for proportioning materials shall conform to the requirements in Section 9-1.01, "Measurement of Quantities," and this Section 90-5.02. In addition, automatic weighing systems shall comply with the requirements for automatic proportioning devices in Section 90-5.03A, "Automatic Proportioning." Automatic devices shall be automatic to the extent that the only manual operation required for proportioning the aggregates, cement, and SCM for one batch of concrete is a single operation of a switch or starter.

For concrete pavement, aggregate and bulk cementitious material must be proportioned by weight by means of automatic proportioning devices.

Proportioning devices shall be tested as frequently as the Engineer may deem necessary to ensure their accuracy.

Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the plant is in operation, the weight of each batch of material shall not vary from the weight designated by the Engineer by more than the tolerances specified herein.

Equipment for cumulative weighing of aggregate shall have a zero tolerance of ±0.5 percent of the designated total batch weight of the aggregate. For systems with individual weigh hoppers for the various sizes of aggregate, the zero tolerance shall be ±0.5 percent of the individual batch

weight designated for each size of aggregate. Equipment for cumulative weighing of cement and SCM shall have a zero tolerance of ±0.5 percent of the designated total batch weight of the cement and SCM. Equipment for weighing cement or SCM separately shall have a zero tolerance of ±0.5 percent of their designated individual batch weights. Equipment for measuring water shall have a zero tolerance of ±0.5 percent of its designated weight or volume.

The weight indicated for any batch of material shall not vary from the preselected scale setting by more than the following:

A. Aggregate weighed cumulatively shall be within 1.0 percent of the designated total batch weight of the aggregate. Aggregates weighed individually shall be within 1.5 percent of their respective designated batch weights; and
B. Cement shall be 99 to 102 percent of its designated batch weight. When weighed individually, SCM shall be 99 to 102 percent of its designated batch weight. When SCM and cement are permitted to be weighed cumulatively, cement shall be weighed first to 99 to 102 percent of its designated batch weight, and the total for cement and SCM shall be 99 to 102 percent of the sum of their designated batch weights When a blended cement is used, the percentages of cement and SCM used for calculating batch weights shall be based on the percentage of SCM indicated in the Certificate of Compliance from the blended cement supplier; and
C. Water shall be within 1.5 percent of its designated weight or volume.

Each scale graduation shall be approximately 0.001 of the total capacity of the scale. The capacity of scales for weighing cement, SCM, or cement plus SCM and aggregates shall not exceed that of commercially available scales having single graduations indicating a weight not exceeding the maximum permissible weight variation above, except that no scale shall be required having a capacity of less than 1,000 pounds, with one pound graduations.

90-5.03 PROPORTIONING

Proportioning shall consist of dividing the aggregates into the specified sizes, each stored in a separate bin, and combining them with cementitious material and water as provided in these specifications. Aggregates shall be proportioned by weight.

At the time of batching, aggregates shall have been dried or drained sufficiently to result in a stable moisture content such that no visible separation of water from aggregate will take place during transportation from the proportioning plant to the point of mixing. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry weight.

Should separate supplies of aggregate material of the same size group, but of different moisture content or specific gravity or surface characteristics affecting workability, be available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting upon another.

Bulk Type IP (MS) or Type IS (MS) cement shall be weighed in an individual hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer.

Bulk cement and SCM may be weighed in separate, individual weigh hoppers or may be weighed in the same weigh hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer. If the cement and SCM are weighed cumulatively, the cement shall be weighed first.

If cement and SCM are weighed in separate weigh hoppers, the weigh systems for the proportioning of the aggregate, the cement, and the SCM shall be individual and distinct from all other weigh systems. Each weigh system shall be equipped with a hopper, a lever system, and an indicator to constitute an individual and independent material-weighing device. The cement and the SCM shall be discharged into the mixer simultaneously with the aggregate.

The scales and weigh hoppers for bulk weighing cement, SCM, or cement plus SCM shall be separate and distinct from the aggregate weighing equipment.

For batches of one cubic yard or more, the batching equipment shall conform to one of the following combinations:

A. Separate boxes and separate scale and indicator for weighing each size of aggregate.
B. Single box and scale indicator for all aggregates.
C. Single box or separate boxes and automatic weighing mechanism for all aggregates.

In order to check the accuracy of batch weights, the gross weight and tare weight of batch trucks, truck mixers, truck agitators, and non-agitating hauling equipment shall be determined when ordered by the Engineer. The equipment shall be weighed on scales designated by the Engineer.

90-5.03A Automatic Proportioning

Automatic proportioning devices shall be authorized by the Department.

For concrete pavement, the Contractor shall install and maintain in operating condition an electronically actuated moisture meter that will indicate, on a readily visible scale, changes in the moisture content of the fine aggregate as it is batched within a sensitivity of 0.5 percent by weight of the fine aggregate.

The batching of cement, SCM, or cement plus SCM and aggregate shall be interlocked so that a new batch cannot be started until all weigh hoppers are empty, the proportioning devices are within zero tolerance, and the discharge gates are closed. The interlock shall permit no part of the batch to be discharged until all aggregate hoppers and the cement and SCM hoppers or the cement plus SCM hopper are charged with weights that are within the tolerances specified in Section 90-5.02, "Proportioning Devices."

If interlocks are required for cement and SCM charging mechanisms and cement and SCM are weighed cumulatively, their charging mechanisms shall be interlocked to prevent the introduction of SCM until the weight of cement in the cement weigh hopper is within the tolerances specified in Section 90-5.02, "Proportioning Devices."

If concrete is completely mixed in stationary mixers, the SCMs shall be weighed in a separate weigh hopper and the SCM and cement shall be introduced simultaneously into the mixer proportionately with the aggregate. If the Contractor provides certification that the stationary mixer is capable of mixing the cement, SCM, aggregates, and water uniformly before discharge, weighing the SCM cumulatively with the cement is permitted. Certification shall contain the following:

A. Test results for 2 compressive strength test cylinders of concrete taken within the first one-third and 2 compressive strength test cylinders of concrete taken within the last one-third of the concrete discharged from a single batch from the stationary mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength";

B. Calculations demonstrating that the difference in the averages of 2 compressive strengths taken in the first one-third is no greater than 7.5 percent different than the averages of 2 compressive strengths taken in the last one-third of the concrete discharged from a single batch from the stationary mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;" and
C. The mixer rotation speed and time of mixing before discharge that are required to produce a mix that meets the requirements above.

The discharge gate on the cement and SCM hoppers or the cement plus SCM hopper shall be designed to permit regulating the flow of cement, SCM, or cement plus SCM into the aggregate as directed by the Engineer.

If separate weigh boxes are used for each size of aggregate, the discharge gates shall permit regulating the flow of each size of aggregate as directed by the Engineer.

Material discharged from the several bins shall be controlled by gates or by mechanical conveyors. The means of withdrawal from the several bins, and of discharge from the weigh box, shall be interlocked so that not more than one bin can discharge at a time, and so that the weigh box cannot be tripped until the required quantity from each of the several bins has been deposited therein. Should a separate weigh box be used for each size of aggregate, all may be operated and discharged simultaneously.

If the discharge from the several bins is controlled by gates, each gate shall be actuated automatically so that the required weight is discharged into the weigh box, after which the gate shall automatically close and lock.

The automatic weighing system shall be designed so that all proportions required may be set on the weighing controller at the same time.

90-6 MIXING AND TRANSPORTING

90-6.01 GENERAL

Concrete shall be mixed in mechanically operated mixers, except that when permitted by the Engineer, batches not exceeding 1/3 cubic yard may be mixed by hand methods in conformance with the provisions in Section 90-6.05, "Hand-Mixing."

Equipment having components made of aluminum or magnesium alloys that would have contact with plastic concrete during mixing, transporting, or pumping of portland cement concrete shall not be used.

Concrete shall be homogeneous and thoroughly mixed, and there shall be no lumps or evidence of undispersed cementitious material.

Uniformity of concrete mixtures will be determined by differences in penetration as determined by California Test 533, or slump as determined by ASTM Designation: C 143, and by variations in the proportion of coarse aggregate as determined by California Test 529.

When the mix design specifies a penetration value, the difference in penetration, determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed 1/2 inch. When the mix design specifies a slump value, the difference in slump, determined by comparing slump tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed the values given in the table below. Variation in the proportion of coarse aggregate will be determined by comparing the results of tests of 2 samples of mixed concrete from the same batch or truck mixer load and the difference between the 2 results shall not exceed 170 pounds per cubic yard of concrete.

Average Slump	Maximum Permissible Difference
Less than 4"	1"
4" to 6"	1-1/2"
Greater than 6" to 9"	2"

The Contractor shall furnish samples of the freshly mixed concrete and provide satisfactory facilities for obtaining the samples.

90-6.02 MACHINE MIXING

Concrete mixers may be of the revolving drum or the revolving blade type, and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer. Mixers and agitators that have an accumulation of hard concrete or mortar shall not be used.

The temperature of mixed concrete, immediately before placing, shall be not less than 50 °F or more than 90 °F. Aggregates and water shall be heated or cooled as necessary to produce concrete within these temperature limits. Neither aggregates nor mixing water shall be heated to exceed 150 °F. If ice is used to cool the concrete, discharge of the mixer will not be permitted until all ice is melted.

The batch shall be so charged into the mixer that some water will enter in advance of cementitious materials and aggregates. All water shall be in the drum by the end of the first one-fourth of the specified mixing time. When concrete is delivered in a truck mixer, a portion of the mixing water may be withheld and, if allowed by the Engineer, may be added at the point of delivery as specified under Section 90-6.03, "Transporting Mixed Concrete."

Cementitious materials shall be batched and charged into the mixer by means that will not result either in loss of cementitious materials due to the effect of wind, in accumulation of cementitious materials on surfaces of conveyors or hoppers, or in other conditions that reduce or vary the required quantity of cementitious material in the concrete mixture.

Stationary mixers shall be operated with an automatic timing device. The timing device and discharge mechanism shall be interlocked so that during normal operation no part of the batch will be discharged until the specified mixing time has elapsed.

The total elapsed time between the intermingling of damp aggregates and all cementitious materials and the start of mixing shall not exceed 30 minutes.

The size of batch shall not exceed the manufacturer's guaranteed capacity.

When producing concrete for pavement or base, suitable batch counters shall be installed and maintained in good operating condition at job site batching plants and stationary mixers. The batch counters shall indicate the exact number of batches proportioned and mixed.

Concrete shall be mixed and delivered to the job site by means of one of the following combinations of operations:

A. Mixed completely in a stationary mixer and the mixed concrete transported to the point of delivery in truck agitators or in nonagitating hauling equipment (central-mixed concrete).
B. Mixed partially in a stationary mixer, and the mixing completed in a truck mixer (shrink-mixed concrete).
C. Mixed completely in a truck mixer (transit-mixed concrete).

Agitators may be truck mixers operating at agitating speed or truck agitators. Each mixer and agitator shall have attached thereto in a prominent place a metal plate or plates on which is plainly marked the various uses for which the equipment is designed, the manufacturer's

guaranteed capacity of the drum or container in terms of the volume of mixed concrete and the speed of rotation of the mixing drum or blades.

Truck mixers shall be equipped with electrically or mechanically actuated revolution counters by which the number of revolutions of the drum or blades may readily be verified.

When shrink-mixed concrete is furnished, concrete that has been partially mixed at a central plant shall be transferred to a truck mixer and all requirements for transit-mixed concrete shall apply. No credit in the number of revolutions at mixing speed will be allowed for partial mixing in a central plant.

90-6.03 TRANSPORTING MIXED CONCRETE

Mixed concrete may be transported to the delivery point in truck agitators or truck mixers operating at the speed designated by the manufacturer of the equipment as agitating speed, or in non-agitating hauling equipment, provided the consistency and workability of the mixed concrete upon discharge at the delivery point is suitable for adequate placement and consolidation in place, and provided the mixed concrete after hauling to the delivery point conforms to the provisions in Section 90-6.01, "General."

Truck agitators shall be loaded not to exceed the manufacturer's guaranteed capacity and shall maintain the mixed concrete in a thoroughly mixed and uniform mass during hauling.

Bodies of nonagitating hauling equipment shall be constructed so that leakage of the concrete mix, or any part thereof, will not occur at any time.

Concrete hauled in open-top vehicles shall be protected during hauling against rain or against exposure to the sun for more than 20 minutes when the ambient temperature exceeds 75 °F.

No water in excess of that in the approved mix design shall be incorporated into the concrete. If approved by the Engineer, water withheld during batching may be added to the concrete at the delivery point in one operation before the discharge of more than 1/4 cubic yard. Equipment for supplying the water shall conform to Section 90-6.06, "Amount of Water and Penetration." When water is added at the point of delivery, the drum shall be revolved not less than 30 revolutions at mixing speed after the water is added and before discharged is commenced.

The rate of discharge of mixed concrete from a truck mixer or agitator shall be controlled by the speed of rotation of the drum in the discharge direction with the discharge gate fully open.

If a truck mixer or agitator is used for transporting concrete to the delivery point, discharge shall be completed within 1.5 hours or before 250 revolutions of the drum or blades, whichever occurs first, after the introduction of the cementitious materials to the aggregates. Under conditions contributing to quick stiffening of the concrete, or if the temperature of the concrete is 85 °F or above, the time allowed may be less than 1.5 hours. If an admixture is used to retard the set time, the temperature of the concrete shall not exceed 85 °F, the time limit shall be 2 hours, and the revolution limitation shall be 300.

If nonagitating hauling equipment is used for transporting concrete to the delivery point, discharge shall be completed within one hour after the addition of the cementitious materials to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 85 °F or above, the time between the introduction of cementitious materials to the aggregates and discharge shall not exceed 45 minutes.

Each load of concrete delivered at the job site shall be accompanied by a weighmaster certificate showing the mix identification number, nonrepeating load number, date and time at which the materials were batched, the total amount of water added to the load, and for transit-mixed concrete, the reading of the revolution counter at the time the truck mixer is charged with cement. This weighmaster certificate shall also show the actual scale weights (pounds) for the

ingredients batched. Theoretical or target batch weights shall not be used as a substitute for actual scale weights.

Weighmaster certificates shall be provided in printed form, or if approved by the Engineer, the data may be submitted in electronic media. Electronic media shall be presented in a tab-delimited format on a CD or DVD. Captured data, for the ingredients represented by each batch shall be "line feed, carriage return" (LFCR) and "one line, separate record" with allowances for sufficient fields to satisfy the amount of data required by these specifications.

The Contractor may furnish a weighmaster certificate accompanied by a separate certificate that lists the actual batch weights or measurements for a load of concrete provided that both certificates are imprinted with the same nonrepeating load number that is unique to the contract and delivered to the jobsite with the load.

Weighmaster certificates furnished by the Contractor shall conform to the provisions in Section 9-1.01, "Measurement of Quantities."

90-6.04 TIME OR AMOUNT OF MIXING

Mixing of concrete in stationary mixers shall continue for the required mixing time after all ingredients, except water and admixture, if added with the water, are in the mixing compartment of the mixer before any part of the batch is released. Transfer time in multiple drum mixers shall not be counted as part of the required mixing time.

The required mixing time, in stationary mixers, of concrete used for concrete structures, except minor structures, shall be not less than 90 seconds or more than 5 minutes, except that when directed by the Engineer in writing, the requirements of the following paragraph shall apply.

The required mixing time in stationary mixers, except as provided in the preceding paragraph, shall be not less than 50 seconds or more than 5 minutes.

The minimum required revolutions at the mixing speed for transit-mixed concrete shall not be less than that recommended by the mixer manufacturer, but in no case shall the number of revolutions be less than that required to consistently produce concrete conforming to the provisions for uniformity in Section 90-6.01, "General."

When a high range water-reducing admixture is added to the concrete at the job site, the total number of revolutions shall not exceed 300.

90-6.05 HAND-MIXING

Hand-mixed concrete shall be made in batches of not more than 1/3 cubic yard and shall be mixed on a watertight, level platform. The proper amount of coarse aggregate shall be measured in measuring boxes and spread on the platform and the fine aggregate shall be spread on this layer, the 2 layers being not more than one foot in total depth. On this mixture shall be spread the dry cementitious materials and the whole mass turned no fewer than 2 times dry; then sufficient clean water shall be added, evenly distributed, and the whole mass again turned no fewer than 3 times, not including placing in the carriers or forms.

90-6.06 AMOUNT OF WATER AND PENETRATION

The amount of water used in concrete mixes shall be regulated so that the penetration of the concrete as determined by California Test 533 or the slump of the concrete as determined by ASTM Designation: C 143 is within the nominal values shown in the following table. When the penetration or slump of the concrete is found to exceed the nominal values listed, the mixture of subsequent batches shall be adjusted to reduce the penetration or slump to a value within the nominal range shown. Batches of concrete with a penetration or slump exceeding the maximum

values listed shall not be used in the work. If Type F or Type G chemical admixtures are added to the mix, the penetration requirements shall not apply and the slump shall not exceed 9 inches after the chemical admixtures are added.

Type of Work	Nominal		Maximum	
	Penetration (inches)	Slump (inches)	Penetration (inches)	Slump (inches)
Concrete Pavement	0 - 1	—	1-1/2	—
Non-reinforced concrete facilities	0 – 1-1/2	—	2	—
Reinforced concrete structures				
Sections over 12 inches thick	0 – 1-1/2	—	2-1/2	—
Sections 12 inches thick or less	0 - 2	—	3	—
Concrete placed under water	—	6 - 8	—	9
Cast-in-place concrete piles	2-1/2 – 3-1/2	5 - 7	4	8

The amount of free water used in concrete shall not exceed 310 pounds per cubic yard, plus 20 pounds for each required 100 pounds of cementitious material in excess of 550 pounds per cubic yard.

The term free water is defined as the total water in the mixture minus the water absorbed by the aggregates in reaching a saturated surface-dry condition.

If there are adverse or difficult conditions that affect the placing of concrete, the above specified penetration and free water content limitations may be exceeded providing the Contractor is granted permission by the Engineer in writing to increase the cementitious material content per cubic yard of concrete. The increase in water and cementitious material shall be at a ratio not to exceed 30 pounds of water per added 100 pounds of cementitious material per cubic yard. Full compensation for additional cementitious material and water added under these conditions shall be considered as included in the contract price paid for the concrete work involved and no additional compensation will be allowed therefor.

The equipment for supplying water to the mixer shall be constructed and arranged so that the amount of water added can be measured accurately. Any method of discharging water into the mixer for a batch shall be accurate within 1.5 percent of the quantity of water required to be added to the mix for any position of the mixer. Tanks used to measure water shall be designed so that water cannot enter while water is being discharged into the mixer and discharge into the mixer shall be made rapidly in one operation without dribbling. All equipment shall be arranged so as to permit checking the amount of water delivered by discharging into measured containers.

90-7 CURING CONCRETE

90-7.01 METHODS OF CURING

Newly placed concrete shall be cured by the methods specified in this Section 90-7.01 and the special provisions.

90-7.01A Water Method

The concrete shall be kept continuously wet by the application of water for a minimum curing period of 7 days after the concrete has been placed.

Cotton mats, rugs, carpets, or earth or sand blankets may be used as a curing medium to retain the moisture during the curing period.

If a curing medium consisting of cotton mats, rugs, carpets, polyethylene sheeting, polyethylene sheeting on burlap, or earth or sand blankets is to be used to retain the moisture, the entire surface of the concrete shall be kept damp by applying water with a nozzle that so

atomizes the flow that a mist and not a spray is formed, until the surface of the concrete is covered with the curing medium. The moisture from the nozzle shall not be applied under pressure directly upon the concrete and shall not be allowed to accumulate on the concrete in a quantity sufficient to cause a flow or wash the surface. At the expiration of the curing period, the concrete surfaces shall be cleared of all curing media.

At the option of the Contractor, a curing medium consisting of white opaque polyethylene sheeting extruded onto burlap may be used to cure concrete structures. The polyethylene sheeting shall have a minimum thickness of 4-mil, and shall be extruded onto 10-ounce burlap.

At the option of the Contractor, a curing medium consisting of polyethylene sheeting may be used to cure concrete columns. The polyethylene sheeting shall have a minimum thickness of 10-mil achieved in a single layer of material.

If the Contractor chooses to use polyethylene sheeting or polyethylene sheeting on burlap as a curing medium, these media and any joints therein shall be secured as necessary to provide moisture retention and shall be within 3 inches of the concrete at all points along the surface being cured. When these media are used, the temperature of the concrete shall be monitored during curing. If the temperature of the concrete cannot be maintained below 140° F, use of these curing media shall be disallowed.

When concrete bridge decks and flat slabs are to be cured without the use of a curing medium, the entire surface of the bridge deck or slab shall be kept damp by the application of water with an atomizing nozzle as specified above, until the concrete has set, after which the entire surface of the concrete shall be sprinkled continuously with water for a period of not less than 7 days.

90-7.01B Curing Compound Method

Surfaces of the concrete that are exposed to the air shall be sprayed uniformly with a curing compound.

Curing compounds to be used shall be as follows:

1. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B, except the resin type shall be poly-alpha-methylstyrene.
2. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B.
3. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class A.
4. Nonpigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class B.
5. Nonpigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class A.
6. Nonpigmented curing compound with fugitive dye conforming to the requirements in ASTM Designation: C 309, Type 1-D, Class A.

The infrared scan for the dried vehicle from curing compound (1) shall match the infrared scan on file at the Transportation Laboratory.

The loss of water for each type of curing compound, when tested in conformance with the requirements in California Test 534, shall not be more than 0.28 pounds per square yard in 24 hours.

The curing compound to be used will be specified elsewhere in these specifications or in the special provisions.

If the use of curing compound is required or permitted elsewhere in these specifications or in the special provisions and no specific kind is specified, any of the curing compounds listed above may be used.

Curing compound shall be applied at a nominal rate of one gallon per 150 square feet, unless otherwise specified.

At any point, the application rate shall be within ±50 square feet per gallon of the nominal rate specified, and the average application rate shall be within ±25 square feet per gallon of the nominal rate specified when tested in conformance with the requirements in California Test 535. Runs, sags, thin areas, skips, or holidays in the applied curing compound shall be evidence that the application is not satisfactory.

Curing compounds shall be applied using power operated spray equipment. The power operated spraying equipment shall be equipped with an operational pressure gage and a means of controlling the pressure. Hand spraying of small and irregular areas that are not reasonably accessible to mechanical spraying equipment, in the opinion of the Engineer, may be permitted.

The curing compound shall be applied to the concrete following the surface finishing operation, immediately before the moisture sheen disappears from the surface, but before any drying shrinkage or craze cracks begin to appear. In the event of any drying or cracking of the surface, application of water with an atomizing nozzle as specified in Section 90-7.01A, "Water Method," shall be started immediately and shall be continued until application of the compound is resumed or started; however, the compound shall not be applied over any resulting freestanding water. Should the film of compound be damaged from any cause before the expiration of 7 days after the concrete is placed in the case of structures and 72 hours in the case of pavement, the damaged portion shall be repaired immediately with additional compound.

At the time of use, compounds containing pigments shall be in a thoroughly mixed condition with the pigment uniformly dispersed throughout the vehicle. A paddle shall be used to loosen all settled pigment from the bottom of the container, and a power driven agitator shall be used to disperse the pigment uniformly throughout the vehicle.

Agitation shall not introduce air or other foreign substance into the curing compound.

The manufacturer shall include in the curing compound the necessary additives for control of sagging, pigment settling, leveling, de-emulsification, or other requisite qualities of a satisfactory working material. Pigmented curing compounds shall be manufactured so that the pigment does not settle badly, does not cake or thicken in the container, and does not become granular or curdled. Settlement of pigment shall be a thoroughly wetted, soft, mushy mass permitting the complete and easy vertical penetration of a paddle. Settled pigment shall be easily redispersed, with minimum resistance to the sideways manual motion of the paddle across the bottom of the container, to form a smooth uniform product of the proper consistency.

Curing compounds shall remain sprayable at temperatures above 40 °F and shall not be diluted or altered after manufacture.

The curing compound shall be packaged in clean 274-gallon totes, 55-gallon barrels or 5-gallon pails shall be supplied from a suitable storage tank located at the jobsite. The containers shall comply with "Title 49, Code of Federal Regulations, Hazardous Materials Regulations." The 274-gallon totes and the 55-gallon barrels shall have removable lids and airtight fasteners. The 5-gallon pails shall be round and have standard full open head and bail. Lids with bungholes will not be permitted. Settling or separation of solids in containers, except tanks, must be completely redispersed with low speed mixing prior to use, in conformance with these specifications and the manufacturer's recommendations. Mixing shall be accomplished either

manually by use of a paddle or by use of a mixing blade driven by a drill motor, at low speed. Mixing blades shall be the type used for mixing paint. On-site storage tanks shall be kept clean and free of contaminants. Each tank shall have a permanent system designed to completely redisperse settled material without introducing air or other foreign substances.

Steel containers and lids shall be lined with a coating that will prevent destructive action by the compound or chemical agents in the air space above the compound. The coating shall not come off the container or lid as skins. Containers shall be filled in a manner that will prevent skinning. Plastic containers shall not react with the compound.

Each container shall be labeled with the manufacturer's name, kind of curing compound, batch number, volume, date of manufacture, and volatile organic compound (VOC) content. The label shall also warn that the curing compound containing pigment shall be well stirred before use. Precautions concerning the handling and the application of curing compound shall be shown on the label of the curing compound containers in conformance with the Construction Safety Orders and General Industry Safety Orders of the State.

Containers of curing compound shall be labeled to indicate that the contents fully comply with the rules and regulations concerning air pollution control in the State.

When the curing compound is shipped in tanks or tank trucks, a shipping invoice shall accompany each load. The invoice shall contain the same information as that required herein for container labels.

Curing compound will be sampled by the Engineer at the source of supply, at the job site, or at both locations.

Curing compound shall be formulated so as to maintain the specified properties for a minimum of one year. The Engineer may require additional testing before use to determine compliance with these specifications if the compound has not been used within one year or whenever the Engineer has reason to believe the compound is no longer satisfactory.

Tests will be conducted in conformance with the latest ASTM test methods and methods in use by the Transportation Laboratory.

90-7.01C Waterproof Membrane Method

The exposed finished surfaces of concrete shall be sprayed with water, using a nozzle that so atomizes the flow that a mist and not a spray is formed, until the concrete has set, after which the curing membrane, shall be placed. The curing membrane shall remain in place for a period of not less than 72 hours.

Sheeting material for curing concrete shall conform to the requirements in AASHTO Designation: M 171 for white reflective materials.

The sheeting material shall be fabricated into sheets of such width as to provide a complete cover for the entire concrete surface. Joints in the sheets shall be securely cemented together in such a manner as to provide a waterproof joint. The joint seams shall have a minimum lap of 0.33 foot.

The sheets shall be securely weighted down by placing a bank of earth on the edges of the sheets or by other means satisfactory to the Engineer.

Should any portion of the sheets be broken or damaged before the expiration of 72 hours after being placed, the broken or damaged portions shall be immediately repaired with new sheets properly cemented into place.

Sections of membrane that have lost their waterproof qualities or have been damaged to such an extent as to render them unfit for curing the concrete shall not be used.

90-7.01D Forms-In-Place Method

Formed surfaces of concrete may be cured by retaining the forms in place. The forms shall remain in place for a minimum period of 7 days after the concrete has been placed, except that for members over 20 inches in least dimension the forms shall remain in place for a minimum period of 5 days.

Joints in the forms and the joints between the end of forms and concrete shall be kept moisture tight during the curing period. Cracks in the forms and cracks between the forms and the concrete shall be resealed by methods subject to the approval of the Engineer.

90-7.02 BLANK

90-7.03 CURING STRUCTURES

Newly placed concrete for cast-in-place structures, other than highway bridge decks, shall be cured by the water method, the forms-in-place method, or, as permitted herein, by the curing compound method, in conformance with the provisions in Section 90-7.01, "Methods of Curing."

The curing compound method using a pigmented curing compound may be used on concrete surfaces of construction joints, surfaces that are to be buried underground, and surfaces where only ordinary surface finish is to be applied and on which a uniform color is not required and that will not be visible from a public traveled way. If the Contractor elects to use the curing compound method on the bottom slab of box girder spans, the curing compound shall be curing compound (1).

The top surface of highway bridge decks shall be cured by both the curing compound method and the water method. The curing compound shall be curing compound (1).

Concrete surfaces of minor structures, as defined in Section 51-1.02, "Minor Structures," shall be cured by the water method, the forms-in-place method or the curing compound method.

When deemed necessary by the Engineer during periods of hot weather, water shall be applied to concrete surfaces being cured by the curing compound method or by the forms-in-place method, until the Engineer determines that a cooling effect is no longer required. Application of water for this purpose will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

90-7.04 CURING PRECAST CONCRETE MEMBERS

Precast concrete members shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing." Curing shall be provided for the minimum time specified for each method or until the concrete reaches its design strength, whichever is less. Steam curing may also be used for precast members and shall conform to the following provisions:

A. After placement of the concrete, members shall be held for a minimum 4-hour presteaming period. If the ambient air temperature is below 50 °F, steam shall be applied during the presteaming period to hold the air surrounding the member at a temperature between 50 °F and 90 °F.
B. To prevent moisture loss on exposed surfaces during the presteaming period, members shall be covered as soon as possible after casting or the exposed surfaces shall be kept wet by fog spray or wet blankets.
C. Enclosures for steam curing shall allow free circulation of steam about the member and shall be constructed to contain the live steam with a minimum moisture loss. The use of

tarpaulins or similar flexible covers will be permitted, provided they are kept in good repair and secured in such a manner as to prevent the loss of steam and moisture.

D. Steam at the jets shall be at low pressure and in a saturated condition. Steam jets shall not impinge directly on the concrete, test cylinders, or forms. During application of the steam, the temperature rise within the enclosure shall not exceed 40 °F per hour. The curing temperature throughout the enclosure shall not exceed 150 °F and shall be maintained at a constant level for a sufficient time necessary to develop the required transfer strength. Control cylinders shall be covered to prevent moisture loss and shall be placed in a location where temperature is representative of the average temperature of the enclosure.

E. Temperature recording devices that will provide an accurate, continuous, permanent record of the curing temperature shall be provided. A minimum of one temperature recording device per 200 feet of continuous bed length will be required for checking temperature.

F. Members in pretension beds shall be detensioned immediately after the termination of steam curing while the concrete and forms are still warm, or the temperature under the enclosure shall be maintained above 60 °F until the stress is transferred to the concrete.

G. Curing of precast concrete will be considered completed after termination of the steam curing cycle.

90-7.05 CURING PRECAST PRESTRESSED CONCRETE PILES

Newly placed concrete for precast prestressed concrete piles shall be cured in conformance with the provisions in Section 90-7.04, "Curing Precast Concrete Members," except that piles in a corrosive environment shall be cured as follows:

A. Piles shall be either steam cured or water cured. If water curing is used, the piles shall be kept continuously wet by the application of water in conformance with the provisions in Section 90-7.01A, "Water Method."

B. If steam curing is used, the steam curing provisions in Section 90-7.04, "Curing Precast Concrete Members," shall apply except that the piles shall be kept continuously wet for their entire length for a period of not less than 3 days, including the holding and steam curing periods.

90-7.06 CURING SLOPE PROTECTION

Concrete slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

Concreted-rock slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing," with a blanket of earth kept wet for 72 hours, or by sprinkling with a fine spray of water every 2 hours during the daytime for a period of 3 days.

90-7.07 CURING MISCELLANEOUS CONCRETE WORK

Exposed surfaces of curbs shall be cured by pigmented curing compounds as specified in Section 90-7.01B, "Curing Compound Method."

Concrete sidewalks, gutter depressions, island paving, curb ramps, driveways, and other miscellaneous concrete areas shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

Shotcrete shall be cured for at least 72 hours by spraying with water, by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

Mortar and grout shall be cured by keeping the surface damp for 3 days.

After placing, the exposed surfaces of sign structure foundations, including pedestal portions, if constructed, shall be cured for at least 72 hours by spraying with water, by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

90-8 PROTECTING CONCRETE

90-8.01 GENERAL

In addition to the provisions in Section 7-1.16, "Contractor's Responsibility for the Work and Materials," the Contractor shall protect concrete as provided in this Section 90-8. If required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

The Contractor shall protect concrete from damage from any cause, which shall include, but not be limited to: rain, heat, cold, wind, Contractor's actions, and actions of others.

Concrete shall not be placed on frozen or ice-coated ground or subgrade nor on ice-coated forms, reinforcing steel, structural steel, conduits, precast members, or construction joints.

Under rainy conditions, placing of concrete shall be stopped before the quantity of surface water is sufficient to damage surface mortar or cause a flow or wash of the concrete surface, unless the Contractor provides adequate protection against damage.

Concrete that has been frozen or damaged by other causes, as determined by the Engineer, shall be removed and replaced by the Contractor at the Contractor's expense.

90-8.02 PROTECTING CONCRETE STRUCTURES

Structure concrete and shotcrete used as structure concrete shall be maintained at a temperature of not less than 45 °F for 72 hours after placing and at not less than 40 °F for an additional 4 days.

90-9 COMPRESSIVE STRENGTH

90-9.01 GENERAL

Concrete compressive strength requirements consist of a minimum strength that shall be attained before various loads or stresses are applied to the concrete and, for concrete designated by compressive strength, a minimum strength at the age of 28 days or at the age otherwise allowed in Section 90-1.01, "Description." The various strengths required are specified in these specifications or the special provisions or are shown on the plans.

The compressive strength of concrete will be determined from test cylinders that have been fabricated from concrete sampled in conformance with the requirements of California Test 539. Test cylinders will be molded and initially field cured in conformance with California Test 540. Test cylinders will be cured and tested after receipt at the testing laboratory in conformance with the requirements of California Test 521. A strength test shall consist of the average strength of 2 cylinders fabricated from material taken from a single load of concrete, except that, if any cylinder should show evidence of improper sampling, molding, or testing, that cylinder shall be discarded and the strength test shall consist of the strength of the remaining cylinder.

When concrete compressive strength is specified as a prerequisite to applying loads or stresses to a concrete structure or member, test cylinders for other than steam cured concrete will be cured in conformance with Method 1 of California Test 540. The compressive strength of concrete determined for these purposes will be evaluated on the basis of individual tests.

When concrete is designated by compressive strength rather than by cementitious material content, the concrete strength to be used as a basis for acceptance of other than steam cured concrete will be determined from cylinders cured in conformance with Method 1 of California Test 540. If the result of a single compressive strength test at the maximum age specified or allowed is below the specified strength but is 95 percent or more of the specified strength, the Contractor shall make corrective changes, subject to approval of the Engineer, in the mix proportions or in the concrete fabrication procedures, before placing additional concrete, and shall pay to the State $10 for each in-place cubic yard of concrete represented by the deficient test. If the result of a single compressive strength test at the maximum age specified or allowed is below 95 percent of the specified strength, but is 85 percent or more of the specified strength, the Contractor shall make the corrective changes specified above, and shall pay to the State $15 for each in-place cubic yard of concrete represented by the deficient test. In addition, such corrective changes shall be made when the compressive strength of concrete tested at 7 days indicates, in the judgment of the Engineer, that the concrete will not attain the required compressive strength at the maximum age specified or allowed. Concrete represented by a single test that indicates a compressive strength of less than 85 percent of the specified 28-day compressive strength will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials."

If the test result indicates that the compressive strength at the maximum age specified or allowed is below the specified strength, but is 85 percent or more of the specified strength, payments to the State as required above shall be made, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength of the concrete placed in the work meets or exceeds the specified 28-day compressive strength. If the test result indicates a compressive strength at the maximum age specified or allowed below 85 percent, the concrete represented by that test will be rejected, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength of the concrete placed in the work is at least 85 percent of the specified strength. If the evidence consists of tests made on cores taken from the work, the cores shall be obtained and tested in conformance with the requirements in ASTM Designation: C 42.

No single compressive strength test shall represent more than 320 cubic yards.

If a precast concrete member is steam cured, the compressive strength of the concrete will be determined from test cylinders that have been handled and stored in conformance with Method 3 of California Test 540. The compressive strength of steam cured concrete will be evaluated on the basis of individual tests representing specific portions of production. If the concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete shall be considered to be acceptable whenever its compressive strength reaches the specified 28-day compressive strength provided that strength is reached in not more than the maximum number of days specified or allowed after the member is cast.

When concrete has a specified 28-day compressive strength greater than 3,600 pounds per square inch or when prequalification is specified, prequalification of materials, mix proportions, mixing equipment, and procedures proposed for use will be required prior to placement of the concrete. Prequalification shall be accomplished by the submission of acceptable certified test data or trial batch reports by the Contractor. Prequalification data shall be based on the use of materials, mix proportions, mixing equipment, procedures, and size of batch proposed for use in the work.

Certified test data, in order to be acceptable, shall indicate that not less than 90 percent of at least 20 consecutive tests exceed the specified strength at the maximum number of days specified or allowed, and none of those tests are less than 95 percent of specified strength. Strength tests

included in the data shall be the most recent tests made on concrete of the proposed mix design and all shall have been made within one year of the proposed use of the concrete.

Trial batch test reports, in order to be acceptable, shall indicate that the average compressive strength of 5 consecutive concrete cylinders, taken from a single batch, at not more than 28 days (or the maximum age allowed) after molding shall be at least 600 pounds per square inch greater than the specified 28-day compressive strength, and no individual cylinder shall have a strength less than the specified strength at the maximum age specified or allowed. Data contained in the report shall be from trial batches that were produced within one year of the proposed use of specified strength concrete in the project. Whenever air-entrainment is required, the air content of trial batches shall be equal to or greater than the air content specified for the concrete without reduction due to tolerances.

Tests shall be performed in conformance with either the appropriate California Test methods or the comparable ASTM test methods. Equipment employed in testing shall be in good condition and shall be properly calibrated. If the tests are performed during the life of the contract, the Engineer shall be notified sufficiently in advance of performing the tests in order to witness the test procedures.

The certified test data and trial batch test reports shall include the following information:

A. Date of mixing.
B. Mixing equipment and procedures used.
C. The size of batch in cubic yards and the weight, type, and source of all ingredients used.
D. Penetration or slump (if the concrete will be placed under water or placed in cast-in-place concrete piles) of the concrete.
E. The air content of the concrete if an air-entraining admixture is used.
F. The age at time of testing and strength of all concrete cylinders tested.

Certified test data and trial batch test reports shall be signed by an official of the firm that performed the tests.

When approved by the Engineer, concrete from trial batches may be used in the work at locations where concrete of a lower quality is required and the concrete will be paid for as the type of concrete required at that location.

After materials, mix proportions, mixing equipment, and procedures for concrete have been prequalified for use, additional prequalification by testing of trial batches will be required prior to making changes that, in the judgment of the Engineer, could result in a strength of concrete below that specified.

The Contractor's attention is directed to the time required to test trial batches and the Contractor shall be responsible for production of trial batches at a sufficiently early date so that the progress of the work is not delayed.

When precast concrete members are manufactured at the plant of an established manufacturer of precast concrete members, the mix proportions of the concrete shall be determined by the Contractor, and a trial batch and prequalification of the materials, mix proportions, mixing equipment, and procedures will not be required.

90-10 MINOR CONCRETE

90-10.01 GENERAL

Concrete for minor structures, slope paving, curbs, sidewalks and other concrete work, when designated as minor concrete on the plans, in the specifications, or in the contract item, shall conform to the provisions specified herein.

The Engineer, at the Engineer's discretion, will inspect and test the facilities, materials and methods for producing the concrete to ensure that minor concrete of the quality suitable for use in the work is obtained.

Before using minor concrete or in advance of revising the mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design. When required by the following table, the Contractor shall include compressive strength test results verifying the minimum specified compressive strength:

SCM	Test Submittal Required
Fly Ash used alone	When portland cement content<350 lbs/cy
GGBFS used alone	When portland cement content <250 lbs/cy
Natural Pozzolan used alone	When portland cement content <350 lbs/cy
More than 1 SCM	Always

Tests shall be performed by an ACI certified technician.

90-10.02 MATERIALS

Minor concrete shall conform to the following requirements:

90-10.02A Cementitious Material

Cementitious material shall conform to the provisions in Section 90-1.01, "Description," and 90-2, "Materials."

90-10.02B Aggregate

Aggregate shall be clean and free from deleterious coatings, clay balls, roots, and other extraneous materials.

Use of crushed concrete or reclaimed aggregate is acceptable only if the aggregate satisfies all aggregate requirements.

The Contractor shall submit to the Engineer for approval, a grading of the combined aggregate proposed for use in the minor concrete. After acceptance of the grading, aggregate furnished for minor concrete shall conform to that grading, unless a change is authorized in writing by the Engineer.

The Engineer may require the Contractor to furnish periodic test reports of the aggregate grading furnished. The maximum size of aggregate used shall be at the option of the Contractor, but in no case shall the maximum size be larger than 1-1/2-inch or smaller than 3/4 inch.

The Engineer may waive, in writing, the gradation requirements in this Section 90-10.02B, if, in the Engineer's opinion, the furnishing of the gradation is not necessary for the type or amount of concrete work to be constructed.

90-10.02C Water

Water used for washing, mixing, and curing shall be free from oil, salts, and other impurities that would discolor or etch the surface or have an adverse affect on the quality of the concrete.

90-10.02D Admixtures

The use of admixtures shall conform to the provisions in Section 90-4, "Admixtures."

90-10.03 PRODUCTION

Cementitious material, water, aggregate, and admixtures shall be stored, proportioned, mixed, transported, and discharged in conformance with recognized standards of good practice that will result in concrete that is thoroughly and uniformly mixed, that is suitable for the use intended, and that conforms to requirements specified herein. Recognized standards of good practice are outlined in various industry publications such as are issued by American Concrete Institute, AASHTO, or the Department.

The cementitious material content of minor concrete shall conform to the provisions in Section 90-1.01, "Description."

The amount of water used shall result in a consistency of concrete conforming to the provisions in Section 90-6.06, "Amount of Water and Penetration." Additional mixing water shall not be incorporated into the concrete during hauling or after arrival at the delivery point, unless allowed by the Engineer.

Discharge of ready-mixed concrete from the transporting vehicle shall be made while the concrete is still plastic and before stiffening occurs. An elapsed time of 1.5 hours (one hour in non-agitating hauling equipment), or more than 250 revolutions of the drum or blades, after the introduction of the cementitious material to the aggregates, or a temperature of concrete of more than 90 °F will be considered conditions contributing to the quick stiffening of concrete. The Contractor shall take whatever action is necessary to eliminate quick stiffening, except that the addition of water will not be permitted.

The required mixing time in stationary mixers shall be not less than 50 seconds or more than 5 minutes.

The minimum required revolutions at mixing speed for transit-mixed concrete shall be not less than that recommended by the mixer manufacturer, and shall be increased, if necessary, to produce thoroughly and uniformly mixed concrete.

When a high range water-reducing admixture is added to the concrete at the job site, the total number of revolutions shall not exceed 300.

Each load of ready-mixed concrete shall be accompanied by a weighmaster certificate that shall be delivered to the Engineer at the discharge location of the concrete, unless otherwise directed by the Engineer. The weighmaster certificate shall be clearly marked with the date and time of day when the load left the batching plant and, if hauled in truck mixers or agitators, the time the mixing cycle started.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished to the Engineer, prior to placing minor concrete from a source not previously used on the contract, stating that minor concrete to be furnished meets contract requirements, including minimum cementitious material content specified.

90-10.04 CURING MINOR CONCRETE

Curing minor concrete shall conform to the provisions in Section 90-7, "Curing Concrete."

90-10.05 PROTECTING MINOR CONCRETE

Protecting minor concrete shall conform to the provisions in Section 90-8, "Protecting Concrete," except the concrete shall be maintained at a temperature of not less than 40 °F for 72 hours after placing.

90-10.06 MEASUREMENT AND PAYMENT

Minor concrete will be measured and paid for in conformance with the provisions specified in the various sections of these specifications covering concrete construction when minor concrete is specified in the specifications, shown on the plans, or indicated by contract item in the Engineer's Estimate.

90-11 MEASUREMENT AND PAYMENT

90-11.01 MEASUREMENT

Portland cement concrete will be measured in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.

For concrete measured at the mixer, the volume in cubic feet shall be computed as the total weight of the batch in pounds divided by the density of the concrete in pounds per cubic foot. The total weight of the batch shall be calculated as the sum of all materials, including water, entering the batch. The density of the concrete will be determined in conformance with the requirements in California Test 518.

90-11.02 PAYMENT

Portland cement concrete will be paid for in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.

Full compensation for furnishing and incorporating admixtures required by these specifications or the special provisions will be considered as included in the contract prices paid for the concrete involved and no additional compensation will be allowed therefor.

Should the Engineer order the Contractor to incorporate any admixtures in the concrete when their use is not required by these specifications or the special provisions, furnishing the admixtures and adding them to the concrete will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

Should the Contractor use admixtures in conformance with the provisions in Section 90-4.05, "Optional Use of Chemical Admixtures," or Section 90-4.07, "Optional Use of Air-entraining Admixtures," or should the Contractor request and obtain permission to use other admixtures for the Contractor's benefit, the Contractor shall furnish those admixtures and incorporate them into the concrete at the Contractor's expense and no additional compensation will be allowed therefor.

^^

SECTION 91 PAINT

(Issued 05-1-06)

Replace Section 91-3 with:

91-3 PAINTS FOR TIMBER

91-3.01 WOOD PRIMER, LATEX-BASE

Classification:

This specification covers a ready-mixed priming paint for use on unpainted wood or exterior woodwork. It shall conform with the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for exterior wood primers, and be listed on the Exterior Latex Wood Primer MPI List Number 6.

91-3.02 PAINT; LATEX-BASE FOR EXTERIOR WOOD, WHITE AND TINTS

Classification:

This specification covers a ready-mixed paint for use on wood surfaces subject to outside exposures. This paint shall conform to the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for Paint, Latex, Exterior, and shall be listed on the following MPI Approved Products List:

A. Exterior Latex, Flat MPI Gloss Level 1, MPI List Number 10.
B. Exterior Latex, Semi-Gloss, MPI Gloss Level 5, MPI List Number 11.
C. Exterior Latex, Gloss, MPI Gloss Level 6, MPI List Number 119.

Unpainted wood shall first be primed with wood primer conforming to the provisions in Section 91-3.01, "Wood Primer, Latex-Base."

Replace Section 91-4 with:

91-4 MISCELLANEOUS PAINTS

91-4.01 THROUGH 91-4.04 (BLANK)

91-4.05 PAINT; ACRYLIC EMULSION, EXTERIOR WHITE AND LIGHT AND MEDIUM TINTS

Classification:

This specification covers an acrylic emulsion paint designed for use on exterior masonry. This paint shall conform to the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for Paint, Latex, Exterior, and shall be listed on the following MPI Approved Products Lists:

A. Exterior Latex, Flat MPI Gloss Level 1, MPI List Number 10.
B. Exterior Latex, Semi-Gloss, MPI Gloss Level 5, MPI List Number 11.
C. Exterior Latex, Gloss, MPI Gloss Level 6, MPI List Number 119.

This paint may be tinted by using "universal" or "all purpose" concentrates.

^^

SECTION 92 ASPHALTS
(Issued 03-21-08)

Replace Section 92 with:

SECTION 92 ASPHALTS

92-1.01 DESCRIPTION

Asphalt is refined petroleum or a mixture of refined liquid asphalt and refined solid asphalt that are prepared from crude petroleum. Asphalt is:

1. Free from residues caused by the artificial distillation of coal, coal tar, or paraffin
2. Free from water
3. Homogeneous

92-1.02 MATERIALS

GENERAL

Furnish asphalt under the Department's "Certification Program for Suppliers of Asphalt." The Department maintains the program requirements, procedures, and a list of approved suppliers at:

http://www.dot.ca.gov/hq/esc/Translab/fpm/fpmcoc.htm

Transport, store, use, and dispose of asphalt safely.

Prevent the formation of carbonized particles caused by overheating asphalt during manufacturing or construction.

GRADES

Performance graded (PG) asphalt binder is:

Performance Graded Asphalt Binder

Property	AASHTO Test Method	Specification Grade				
		PG 58-22 [a]	PG 64-10	PG 64-16	PG 64-28	PG 70-10
Original Binder						
Flash Point, Minimum °C	T 48	230	230	230	230	230
Solubility, Minimum % [b]	T 44	99	99	99	99	99
Viscosity at 135°C, [c] Maximum, Pa·s	T 316	3.0	3.0	3.0	3.0	3.0
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 1.00	64 1.00	64 1.00	64 1.00	70 1.00
RTFO Test, [e] Mass Loss, Maximum, %	T 240	1.00	1.00	1.00	1.00	1.00
RTFO Test Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 2.20	64 2.20	64 2.20	64 2.20	70 2.20
Ductility at 25°C Minimum, cm	T 51	75	75	75	75	75
PAV [f] Aging, Temperature, °C	R 28	100	100	100	100	110
RTFO Test and PAV Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum G*sin(delta), kPa	T 315	22 [d] 5000	31 [d] 5000	28 [d] 5000	22 [d] 5000	34 [d] 5000
Creep Stiffness, Test Temperature, °C Maximum S-value, Mpa Minimum M-value	T 313	-12 300 0.300	0 300 0.300	-6 300 0.300	-18 300 0.300	0 300 0.300

Notes:

a. Use as asphalt rubber base stock for high mountain and high desert area.

b. The Engineer waives this specification if the supplier is a Quality Supplier as defined by the Department's "Certification Program for Suppliers of Asphalt."

c. The Engineer waives this specification if the supplier certifies the asphalt binder can be adequately pumped and mixed at temperatures meeting applicable safety standards.

d. Test the sample at 3°C higher if it fails at the specified test temperature. G*sin(delta) remains 5000 kPa maximum.

e. "RTFO Test" means the asphaltic residue obtained using the Rolling Thin Film Oven Test, AASHTO Test Method T 240 or ASTM Designation: D 2872. The residue from mass change determination may be used for other tests.

f. "PAV" means Pressurized Aging Vessel.

Performance graded polymer modified asphalt binder (PG Polymer Modified) is:

Performance Graded Polymer Modified Asphalt Binder [a]

Property	AASHTO Test Method	Specification Grade		
		PG 58-34 PM	PG 64-28 PM	PG 76-22 PM
Original Binder				
Flash Point, Minimum °C	T 48	230	230	230
Solubility, Minimum % [b]	T 44[c]	98.5	98.5	98.5
Viscosity at 135°C, [d] Maximum, Pa·s	T 316	3.0	3.0	3.0
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 1.00	64 1.00	76 1.00
RTFO Test , Mass Loss, Maximum, %	T 240	1.00	1.00	1.00
RTFO Test Aged Binder				
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 2.20	64 2.20	76 2.20
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum (delta), %	T 315	Note e 80	Note e 80	Note e 80
Elastic Recovery[f], Test Temp., °C Minimum recovery, %	T 301	25 75	25 75	25 65
PAV[g] Aging, Temperature, °C	R 28	100	100	110
RTFO Test and PAV Aged Binder				
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum G*sin(delta), kPa	T 315	16 5000	22 5000	31 5000
Creep Stiffness, Test Temperature, °C Maximum S-value, MPa Minimum M-value	T 313	-24 300 0.300	-18 300 0.300	-12 300 0.300

Notes:

a. Do not modify PG Polymer Modified using acid modification.

b. The Engineer waives this specification if the supplier is a Quality Supplier as defined by the Department's "Certification Program for Suppliers of Asphalt."

c. The Department allows ASTM D 5546 instead of AASHTO T 44

d. The Engineer waives this specification if the supplier certifies the asphalt binder can be adequately pumped and mixed at temperatures meeting applicable safety standards.

e. Test temperature is the temperature at which G*/sin(delta) is 2.2 kPa. A graph of log G*/sin(delta) plotted against temperature may be used to determine the test temperature when G*/sin(delta) is 2.2 kPa. A graph of (delta) versus temperature may be used to determine delta at the temperature when G*/sin(delta) is 2.2 kPa. The Engineer also accepts direct measurement of (delta) at the temperature when G*/sin(delta) is 2.2 kPa.

f. Tests without a force ductility clamp may be performed.

g. "PAV" means Pressurized Aging Vessel.

SAMPLING

Provide a sampling device in the asphalt feed line connecting the plant storage tanks to the asphalt weighing system or spray bar. Make the sampling device accessible between 24 and 30 inches above the platform. Provide a receptacle for flushing the sampling device.

Include with the sampling device a valve:

1. Between 1/2 and 3/4 inch in diameter
2. Manufactured in a manner that a one-quart sample may be taken slowly at any time during plant operations
3. Maintained in good condition

Replace failed valves.

In the Engineer's presence, take 2 one-quart samples per operating day. Provide round, friction top, one-quart containers for storing samples.

92-1.03 EXECUTION

If asphalt is applied, you must comply with the heating and application specifications for liquid asphalt in Section 93, "Liquid Asphalts."

92-1.04 MEASUREMENT

If the contract work item for asphalt is paid by weight, the Department measures asphalt tons by complying with the specifications for weight determination of liquid asphalt in Section 93, "Liquid Asphalts."

The Engineer determines the asphalt weight from volumetric measurements if you:

1. Use a partial asphalt load
2. Use asphalt at a location other than a mixing plant and no scales within 20 miles are available and suitable
3. Deliver asphalt in either of the following:

    3.1. A calibrated truck with each tank accompanied by its measuring stick and calibration card

    3.2. A truck equipped with a calibrated thermometer that determines the asphalt temperature at the delivery time and with a vehicle tank meter complying with the specifications for weighing, measuring, and metering devices in Section 9-1.01, "Measurement of Quantities"

If you furnish hot mix asphalt from a mixing plant producing material for only one project, the Engineer determines the asphalt quantity by measuring the volume in the tank at the project's start and end provided the tank is calibrated and equipped with its measuring stick and calibration card.

The Engineer determines pay quantities from volumetric measurements as follows:

1. Before converting the volume to weight, the Engineer reduces the measured volume to that which the asphalt would occupy at 60 °F.
2. The Engineer uses 235 gallons per ton and 8.51 pounds per gallon for the average weight and volume for PG and PG Polymer Modified asphalt grades at 60 °F.
3. The Engineer uses the Conversion Table in Section 93, "Liquid Asphalts."

^^

SECTION 93 LIQUID ASPHALTS
(Issued 11-03-06)

In Section 93-1.04 replace the 9th paragraph with:

The following Legend and Conversion Table is to be used for converting volumes of liquid asphalt products, Grades 70 to 3000, inclusive, and paving asphalt Grades PG 58-22, PG 64-10, PG 64-16, PG 64-28, and PG 70-10, and Grades PG 58-34 PM, PG 64-28 PM, and PG 76-22 PM.

^^

SECTION 95 EPOXY
(Issued 06-05-09)

Replace the table in Section 95-2.11 with:

Characteristics of Adhesive:

Test[a]	California Test	Requirement
Brookfield Viscosity, No. 3 Spindle at 20 rpm, Poise at 77°F	434, Part 4	0.9 max.
Gel time, minutes	434, Part 1	2 to 15
Slant Shear Strength on Dry Concrete, psi, after 4 days of cure in air at 77° F ±2° F	434, Part 5[b]	3,000 min.
Slant Shear Strength on Wet Concrete, psi, after 4 days of cure in air at 77° F ±2° F	434, Part 5[b]	1,700 min.
Tensile Strength, psi	434, Part 7, except test after 4 days of cure at 77° F ±2° F	4,500 min.
Elongation, %	434, Part 7, except test after 4 days of cure at 77° F ±2° F	10 max.

[a] The mixing ratio used will be that recommended by the manufacturer.
[b] For slant shear strength on concrete, delete Sections B-1 and B-5 of California Test 434, Part 5. For dry concrete, use Step "2" below only. For wet concrete, use both Steps "1" & "2":

1. Soak blocks in water for 24 hours at 77° F ±2° F. Remove and wipe off excess water.
2. Mix epoxy as described in California Test 434, Part 1, and apply a coat approximately 0.010-inch thick to each diagonal surface. Place four 0.125-inch square pieces of shim stock 0.012-inch thick on one block to control final film thickness. Before pressing the coated surfaces together, leave the blocks so that the coated surfaces are horizontal until the epoxy reacts slightly to prevent excessive flow.

(Blank)

IV. PERMITS

(Blank)

STATE OF CALIFORNIA – CALIFORNIA NATURAL RESOURCES AGENCY ARNOLD SCHWARZENEGGER, GOVERNOR

CENTRAL VALLEY FLOOD PROTECTION BOARD
3310 El Camino Ave., Rm. 151
SACRAMENTO, CA 95821
(916) 574-0609 FAX: (916) 574-0682
PERMITS: (916) 574-0685 FAX: (916) 574-0682

RECEIVED
NOV 05 2010
CITY OF CHICO
BDSD / CPSD

NOV 4 2010

Permit No. 18632 BD

City of Chico
PO Box 3420
c/o Bob Greenlaw
Chico, California 95927

Enclosed is your approved Central Valley Flood Protection Board Encroachment Permit Conditions.

Under the Standard General Condition Four (4) of the permit, you are required to accomplish the work under direction and supervision of the Department of Water Resources; therefore, you must advise the Department at 3310 El Camino Avenue, Sacramento, California 95821, attention Lorraine Pendlebury, telephone (916) 574-0609, at least ten days prior to starting your project. An addressed postcard is enclosed for your convenience.

Please note that the permit grants the work proposed in your application. This permit, in addition to the twelve (12) standard conditions, includes special conditions, which may place limitations on or require modifications to your project. You are advised to read all conditions prior to starting the project. Commencing any work under this permit shall constitute an acceptance of the provisions of the permit and an agreement to perform accordingly. This permit does not relieve you from the responsibility for obtaining authorization from any State, local, or federal agencies for your proposed project.

Please refer to your permit number when communicating with this office. For further information, contact Michael Petersen at (916) 574-0685.

Sincerely,

Gary Lemon, Acting Chief
Floodway Protection Section
Central Valley Flood Protection Board

Enclosure

STATE OF CALIFORNIA
THE RESOURCES AGENCY

THE CENTRAL VALLEY FLOOD PROTECTION BOARD

PERMIT NO. 18632 BD

This Permit is issued to:

City of Chico
PO Box 3420
c/o Bob Greenlaw
Chico, California 95927

To widen existing bridge by 49-feet to the north side, for a total width of 81-feet, the new section will be approximately 124-feet-long supported by two abutments and 3 piers, each consisting of 10 rows of 15-inch-diameter pre-stressed driven piles across Dead Horse Slough. The project is located in Chico on State Route 32 just east of Forest Avenue (Section 19&30, T22N, R2E, MDB&M, Dead Horse Slough, Butte County).

NOTE: Special Conditions have been incorporated herein which may place limitations on and/or require modification of your proposed project as described above.

(SEAL)

Dated: NOV 4 2010

Jay S. Punia
Executive Officer

GENERAL CONDITIONS:

ONE: This permit is issued under the provisions of Sections 8700 – 8723 of the Water Code.

TWO: Only work described in the subject application is authorized hereby.

THREE: This permit does not grant a right to use or construct works on land owned by the Sacramento and San Joaquin Drainage District or on any other land.

FOUR: The approved work shall be accomplished under the direction and supervision of the State Department of Water Resources, and the permittee shall conform to all requirements of the Department and The Central Valley Flood Protection Board.

FIVE: Unless the work herein contemplated shall have been commenced within one year after issuance of this permit, the Board reserves the right to change any conditions in this permit as may be consistent with current flood control standards and policies of The Central Valley Flood Protection

DWR 3784 (Rev. 9/85)

CVFP-2

Board.

SIX: This permit shall remain in effect until revoked. In the event any conditions in this permit are not complied with, it may be revoked on 15 days' notice.

SEVEN: It is understood and agreed to by the permittee that the start of any work under this permit shall constitute an acceptance of the conditions in this permit and an agreement to perform work in accordance therewith.

EIGHT: This permit does not establish any precedent with respect to any other application received by The Central Valley Flood Protection Board.

NINE: The permittee shall, when required by law, secure the written order or consent from all other public agencies having jurisdiction.

TEN: The permittee is responsible for all personal liability and property damage which may arise out of failure on the permittee's part to perform the obligations under this permit. If any claim of liability is made against the State of California, or any departments thereof, the United States of America, a local district or other maintaining agencies and the officers, agents or employees thereof, the permittee shall defend and shall hold each of them harmless from each claim.

ELEVEN: The permittee shall exercise reasonable care to operate and maintain any work authorized herein to preclude injury to or damage to any works necessary to any plan of flood control adopted by the Board or the Legislature, or interfere with the successful execution, functioning or operation of any plan of flood control adopted by the Board or the Legislature.

TWELVE: Should any of the work not conform to the conditions of this permit, the permittee, upon order of The Central Valley Flood Protection Board, shall in the manner prescribed by the Board be responsible for the cost and expense to remove, alter, relocate, or reconstruct all or any part of the work herein approved.

SPECIAL CONDITIONS FOR PERMIT NO. 18632 BD

THIRTEEN: All work approved by this permit shall be in accordance with the submitted drawings and specifications except as modified by special permit conditions herein. No further work, other than that approved by this permit, shall be done in the area without prior approval of the Central Valley Flood Protection Board.

FOURTEEN: The permittee shall maintain the permitted encroachment(s) and the project works within the utilized area in the manner required and as requested by the authorized representative of the Department of Water Resources or any other agency responsible for maintenance.

FIFTEEN: The permittee shall contact the Department of Water Resources by telephone, (916) 574-0609, and submit the enclosed postcard to schedule a preconstruction conference. Failure to do so at least 10 working days prior to start of work may result in delay of the project.

SIXTEEN: The permittee shall provide supervision and inspection services acceptable to the Central Valley Flood Protection Board. A professional engineer registered in the State of California shall certify that all work was inspected and performed in accordance with submitted drawings, specifications, and permit conditions.

SEVENTEEN: Upon completion of the project, the permittee shall submit as-built drawings to: Department of Water Resources, Flood Project Inspection Section, 3310 El Camino Avenue, Suite LL30, Sacramento, California 95821.

EIGHTEEN: The Central Valley Flood Protection Board and Department of Water Resources shall not be held liable for any damages to the permitted encroachment(s) resulting from flood fight, operation, maintenance, inspection, or emergency repair.

NINETEEN: The permittee may be required, at permittee's cost and expense, to remove, alter, relocate, or reconstruct all or any part of the permitted encroachment(s) if removal, alteration, relocation, or reconstruction is necessary as part of or in conjunction with any present or future flood control plan or project or if damaged by any cause. If the permittee does not comply, the Central Valley Flood Protection Board may remove the encroachment(s) at the permittee's expense.

TWENTY: The permittee should contact the U.S. Army Corps of Engineers, Sacramento District, Regulatory Branch, 1325 J Street, Sacramento, California 95814, telephone (916) 557-5250, as compliance with Section 10 of the Rivers and Harbors Act and/or Section 404 of the Clean Water Act may be required.

TWENTY-ONE: The permittee shall be responsible for repair of any damages to the project levee and other flood control facilities due to construction, operation, or maintenance of the proposed project.

TWENTY-TWO: The permittee is responsible for all liability associated with construction, operation, and maintenance of the permitted facilities and shall defend, indemnify, and hold the Central Valley Flood Protection Board and the State of California; including its agencies, departments, boards, commissions, and their respective officers, agents, employees, successors and assigns (collectively, the "State"), safe and harmless, of and from all claims and damages arising from the project undertaken pursuant to this permit, all to the extent allowed by law. The State expressly reserves the right to supplement or take over its defense, in its sole discretion

TWENTY-THREE: The permittee shall defend, indemnify, and hold the Central Valley Flood Protection Board and the State of California, including its agencies, departments, boards, commissions, and their respective officers, agents, employees, successors and assigns (collectively, the "State"), safe and harmless, of and from all claims and damages related to the Central Valley Flood Protection Board's approval of this permit, including but not limited to claims filed pursuant to the California Environmental Quality Act. The State expressly reserves the right to supplement or take over its defense, in its sole discretion.

TWENTY-FOUR: If the project, or any portion thereof, is to be abandoned in the future, the permittee or successor shall abandon the project under direction of the Central Valley Flood Protection Board and Department of Water Resources, at the permittee's or successor's cost and expense.

TWENTY-FIVE: No construction work of any kind shall be done during the flood season from November 1 to April 15 without prior approval of the Central Valley Flood Protection Board.

TWENTY-SIX: All cleared trees and brush shall be completely burned or removed from the floodway, and downed trees or brush shall not remain in the floodway during the flood season from November 1 to April 15.

TWENTY-SEVEN: No material stockpiles, temporary buildings, or equipment shall remain in the floodway during the flood season from November 1 to April 15.

TWENTY-EIGHT: The new bridge shall have at least the same waterway area and vertical clearance as the replaced bridge.

TWENTY-NINE: The soffit of the bridge shall be no lower than that of the replaced bridge.

THIRTY: Bridge piers and bents placed within the floodway to support a widened portion of an existing bridge shall be constructed in line with the existing bents and piers.

THIRTY-ONE: Temporary staging, formwork, stockpiled material, equipment, and temporary buildings shall not remain in the floodway during the flood season from November 1 to April 15.

THIRTY-TWO: Trees, brush, sediment, and other debris shall be kept cleared from the bridge site and disposed of outside the floodway to maintain the design flow capacity and flowage area.

THIRTY-THREE: All fencing, gates and signs removed during construction of this project shall be replaced in kind and at the original locations. If it is necessary to relocate any fence, gate or sign, the permittee is required to obtain written approval from the Central Valley Flood Protection Board prior to installation at a new location.

THIRTY-FOUR: All temporary fencing, gates and signs shall be removed upon completion of the project.

THIRTY-FIVE: Backfill material for excavations shall be placed in 4- to 6-inch layers and compacted to at least the density of the adjacent, firm, undisturbed material.

THIRTY-SIX: Density tests by a certified materials laboratory will be required to verify compaction of backfill within the floodway and channel banks.

THIRTY-SEVEN: The permittee shall be responsible for all damages due to settlement, consolidation, or heave from any construction-induced activities.

THIRTY-EIGHT: In the event existing revetment on the channel banks is disturbed or displaced, it shall be restored to its original condition upon completion of the proposed installation.

THIRTY-NINE: All debris generated by this project shall be disposed of outside the floodway.

FORTY: The work area shall be restored to the condition that existed prior to start of work.

FORTY-ONE: In the event that bank erosion or channel scour injurious to the adopted plan of flood control occurs at or adjacent to the permitted encroachment(s), the permittee shall repair the eroded area and propose measures, to be approved by the Central Valley Flood Protection Board, to prevent further erosion.

FORTY-TWO: If the permitted encroachments result(s) in an adverse hydraulic impact, the permittee shall provide appropriate mitigation measures, to be approved by the Central Valley Flood Protection Board, prior to implementation of mitigation measures.

FORTY-THREE: The mitigation measures approved by the CEQA lead agency and the permittee are found in its Mitigation Monitoring Program (MMP) adopted by the CEQA lead agency. The permittee shall implement all such mitigation measures.

FORTY-FOUR: A letter from the Department of the Army dated September 24, 2010, which is

attached to this permit as Exhibit A, is in reference to this project.

EXHIBIT A

DEPARTMENT OF THE ARMY
U.S. Army Engineer District, Sacramento
Corps of Engineers
1325 J Street
Sacramento, California 95814-2922

REPLY TO
ATTENTION OF

Flood Protection and Navigation Section (18632)

SEP 24 2010

Mr. Jay Punia, Executive Officer
Central Valley Flood Protection Board
3310 El Camino Avenue, Room 151
Sacramento, California 95821

Dear Mr. Punia:

We have reviewed a permit application by the City of Chico (application number 18632). This project includes widening an existing bridge by 49 feet to the north side, for a total width of 81 feet. The new section will be approximately 124 feet long, supported by two abutments and 30 pre-stressed 15 inch diameter piles across Dead Horse Slough. The proposed project is located in Chico, on State Route 32 just east of Forest Avenue, at 39.7397°N 121.8030°W NAD83, Butte County, California.

The District Engineer has no comments or recommendations regarding flood control because the proposed work does not affect a federally constructed project.

A file (SPK-2010-01115) has been opened because a Section10 and/or Section 404 permit may be required. Please advise the applicant to contact the U.S. Army Corps of Engineers, Sacramento District, Regulatory Division, 1325 J Street, Sacramento, California 95814, telephone (916) 557-5250.

A copy of this letter is being furnished to Mr. Don Rasmussen, Chief, Flood Project Integrity and Inspection Branch, 3310 El Camino Avenue, Suite LL30, Sacramento, CA 95821.

Sincerely,

Meegan G. Nagy, P.E.
Chief, Flood Protection and Navigation Section

State Inspector should contact:

Permittee's Name _____ Telephone _____

Address _____

I am requesting a pre-construction meeting with an inspector under the approved Permit No. _____. I am also requesting a start date of _____ for the work under this permit.

_____ _____

Applicant's Signature Date

PLACE
STAMP
HERE

DWR
DIV OF FLOOD MGMT
FPIS CHIEF
3310 EL CAMINO AVE. STE 200
SACRAMENTO CA 95821-6340

(Blank)

State of California – The Natural Resources Agency
DEPARTMENT OF FISH AND GAME
North Central Region
1701 Nimbus Road, Suite A
Rancho Cordova, CA 95670-4599
916-358-2900
http://www.dfg.ca.gov

***ARNOLD SCHWARZENEGGER**, Governor*
***JOHN McCAMMON,** Acting Director*

RECEIVED
SEP 30 2010
CITY OF CHICO
BDSD / CPSD

September 23, 2010

City of Chico
Bob Greenlaw
411 Main Street, 2nd Floor
Chico, CA 95927

Subject: Final Lake or Streambed Alteration Agreement
Notification No. 1600-2010-0122 -R2
State Route 32 Road Widening Project

Dear Mr. Greenlaw:

Enclosed is the final Streambed Alteration Agreement ("Agreement") for the State Route 32 Road Widening Project ("Project"). Before the Department of Fish and Game ("Department") may issue an Agreement, it must comply with the California Environmental Quality Act ("CEQA"). In this case, the Department, acting as a responsible agency, filed a notice of determination ("NOD") on the same date it signed the Agreement. The NOD was based on information contained in the State Route 32 Road Widening Project Final Environmental Impact Report the City of Chico (lead agency) prepared for the Project.

Under CEQA, filing a NOD starts a 30-day period within which a party may challenge the filing agency's approval of the project. You may begin your project before the 30-day period expires if you have obtained all necessary local, state, and federal permits or other authorizations. However, if you elect to do so, it will be at your own risk.

If you have any questions regarding this matter, please contact Gary Hobgood, Staff Environmental Scientist at 916-983-6920 or ghobgood@dfg.ca.gov.

Sincerely,

Jeff Burzen

for Kent Smith
Regional Manager

ec: Brooks Taylor
Gallaway Consulting, Inc.

btaylor@gallawayconsulting.net

Gary Hobgood

ghobgood@dfg.ca.gov

Conserving California's Wildlife Since 1870

CALIFORNIA DEPARTMENT OF FISH AND GAME
NORTH CENTRAL REGION
1701 NIMBUS ROAD, SUITE A
RANCHO CORDOVA, CA 95670

Streambed Alteration Agreement
Notification No. 1600-2010-0122 -R2
Dead Horse Slough, South Fork Dead Horse Slough
City of Chico, Capital Project Services Department
State Route 32 Road Widening Project

This Streambed Alteration Agreement (Agreement) is entered into between the California Department of Fish and Game (DFG) and City of Chico (Permittee) as represented by Bob Greenlaw.

RECITALS

WHEREAS, pursuant to Fish and Game Code (FGC) section 1602, Permittee notified DFG on July 28, 2010 that Permittee intends to complete the project described herein.

WHEREAS, pursuant to FGC section 1603, DFG has determined that the project could substantially adversely affect existing fish or wildlife resources and has included measures in the Agreement necessary to protect those resources.

WHEREAS, Permittee has reviewed the Agreement and accepts its terms and conditions, including the measures to protect fish and wildlife resources.

NOW THEREFORE, Permittee agrees to complete the project in accordance with the Agreement.

PROJECT LOCATION

The project is located at Dead Horse Slough, South Fork Dead Horse Slough and four unnamed ephermal streams, in the County of Butte, State of California; Latitude 39.737182, Longitude -122.8169069.

PROJECT DESCRIPTION

The proposed project will widen and improve approximately 2.6 miles of SR 32, beginning at the southbound SR 99 ramps at the west end of the project corridor and extending 1,400 feet east past Yosemite Drive. State Route 32 will be widened from two to three lanes in each direction from the east side of the SR 99 interchange to just east of Fir Street. The roadway will then be widened from two to four lanes (two in each direction) from Fir Street to 1,400 ft east of Yosemite Drive, where the roadway width will transition down from four lanes to the existing two lanes.

The existing structure at Dead Horse Slough will be widened to the north to accommodate the additional traffic lanes and widened shoulders. The existing structure is a four span reinforced concrete slab that is 123.5 feet long and 32.5 feet wide. The

structure will be widened by 49 feet; the new structure width will be 81.5 feet. The railings on the existing structure will be upgraded to current standards. The structure widening will be constructed in one phase, with the new bridge constructed to the north and joined to the existing structure with a closure pour. Both the existing and proposed abutments will be protected from scour with rock slope protection. A Location Hydraulic Study has been completed, and the existing bridge exceeds Caltrans freeboard requirements. If there is water present within the channel, dewatering will be required when the concrete is poured for the piles. However, the bridge will be constructed in the summer months when the channel will be dry.

The existing 6 ft x 8 ft box culvert on South Fork Dead Horse Slough just east of Bruce Road will either be lengthened or replaced to accommodate the roadway widening. Additionally, four smaller culverts which support unnamed ephemeral streams will be lengthened to accommodate the road widening.

A detailed project description is provided in the notification materials submitted to DFG. The notification, together with all supporting documents submitted with the notification, including the 65% construction plan set, the **State Route 32 Widening Project Final Environmental Impact Report** (including the Mitigation Monitoring Program), dated May 2010, the **State Route 32 Widening Project Natural Environment Study**, dated November 2006, the State Route Mitigation sales agreement, **California Regional Water Quality Control Board Central Valley Region - Section 401 Water Quality Certification Application Form**, dated July 12, 2010, the **Biological Opinion** (Service file No. 81420-2008-F-0104-2) issued by the U.S. Fish and Wildlife Service and the **California Endangered Species Act Consistency Determination No. 2080-2010-039-02** is hereby incorporated into this agreement to describe the location, features, avoidance measures and mitigation measures of the proposed project.

PROJECT IMPACTS

Existing fish or wildlife resources the project could substantially adversely affect include: Butte County meadowfoam, vernal pool invertebrates, giant garter snake, vallley elderberry longhorn beetle, Chinook salmon, Central Valley Steelhead trout, Western Pond Turtle; cliff swallows; warm water fish species, amphibians, and other aquatic and terrestrial plant and wildlife species.

The adverse effects the project could have on the fish or wildlife resources identified above include: loss of natural bed or bank; relocation of stream channel; change in contour of bed, channel or bank; change in gradient of bed, channel or bank; change in channel cross-section (confinement or widening); loss of bank stability during construction; increase of bank erosion during construction; change in composition of channel materials (Large Woody Debris or substrate particle size); soil compaction or other disturbance to soil layer; debris transport impedance (from culverts and bridges); increased turbidity; short-term release of contaminants (e.g., incidental from construction); loss or decline of riparian and/or emergent marsh habitat; loss or decline of instream woody material; change to, or loss or decline of natural bed substrate; construction pits and trenches that can capture terrestrial organisms; disruption to

nesting birds and other wildlife: direct take of terrestrial species; disturbance from project activity; to migration corridors, loss of wildlife connectivity to water source; loss or impediment of terrestrial animal species travel routes due to permanent structures; or loss or impediment of terrestrial animal species travel routes due to temporary structures (e.g., survey tape, sandbags, erosion protection materials etc.).

STREAM ZONE DEFINED

The Stream Zone comprises all components of a stream, including the channel, bed, banks, and floodplains. The Stream Zone is the land, including vegetation, that bounds a lake or the channel of a stream and that defines the lateral extent of their waters.

MEASURES TO PROTECT FISH AND WILDLIFE RESOURCES

1. Administrative Measures

Permittee shall meet each administrative requirement described below.

1.1 Documentation at Project Site. Permittee shall make the Agreement, any extensions and amendments to the Agreement, and all related notification materials and California Environmental Quality Act (CEQA) documents, readily available at the project site at all times and shall be presented to DFG personnel, or personnel from another state, federal, or local agency upon request.

1.2 Providing Agreement to Persons at Project Site. Permittee shall provide copies of the Agreement and any extensions and amendments to the Agreement to all persons who will be working on the project at the project site on behalf of Permittee, including but not limited to contractors, subcontractors, inspectors, and monitors.

1.3 Notification of Conflicting Provisions. Permittee shall notify DFG if Permittee determines or learns that a provision in the Agreement might conflict with a provision imposed on the project by another local, state, or federal agency. In that event, DFG shall contact Permittee to resolve any conflict.

1.4 Project Site Entry. Permittee agrees that DFG personnel may enter the project site to verify compliance with the Agreement. DFG personnel may only enter the project site when it is safe to do so. When appropriate, DFG personnel shall contact the Permittee prior to entering the construction area.

1.5 Authorized Work. The notification, together with all supporting documents submitted with the notification, is hereby incorporated into this agreement to describe the location and features of the proposed project. The Permittee agrees that all work shall be done as described in the notification and supporting documents, incorporating all project modifications, wildlife resource protection features, mitigation measures, and provisions as described in this agreement.

Where apparent conflicts exist between the notification and the provisions listed in this agreement, the Permittee shall comply with the provisions listed in this agreement. The Permittee further agrees to notify DFG of any modifications made to the project plans submitted to DFG. At the discretion of DFG, this agreement will be amended to accommodate modifications to the project plans submitted to DFG and/or new project activities.

2. Avoidance and Minimization Measures

To avoid or minimize adverse impacts to fish and wildlife resources identified above, Permittee shall implement each measure listed below.

2.1 Work Period. Except as provided below, the time period for completing the work within the stream zone shall be restricted to periods of low stream flow and dry weather and shall be confined to the period of May 1 to October 1. Construction activities shall be timed with awareness of precipitation forecasts and likely increases in stream flow. Construction activities within the stream zone shall cease until all reasonable erosion control measures, inside and outside of the stream zone, have been implemented prior to all storm events. Revegetation, restoration and erosion control work is not confined to this time period. This provision does not apply to work on the roadway and the bridge deck above the stream zone. The work period may be extended as conditioned in provision 2.2 below.

2.2 Work Period Extensions. At DFG's discretion, the work period may be extended based on the extent of the work remaining, on site conditions and reasonably anticipated future conditions. If the Permittee finds more time is needed to complete the authorized activity, the Permittee shall submit a written request for a work period time extension to DFG. The work period extension request shall provide the following information: 1) Describe the extent of work already completed; 2) Provide specific detail of the activities that remain to be completed within the stream zone; and 3) Detail the actual time required to complete each of the remaining activities within the stream zone. The work period extension request should consider the effects of increased stream conditions, rain delays, increased erosion control measures, limited access due to saturated soil conditions, and limited growth of erosion control grasses due to cool weather. Photographs of the work completed and the proposed work areas are helpful in assisting DFG in its evaluation. Time extensions are issued at the discretion of DFG. DFG will have ten calendar days to approve the proposed work period extension. DFG reserves the right to require additional measures designed to protect natural resources.

2.3 Stream Diversions / Dewatering. Work in the flowing stream is not anticipated. If work in the flowing stream is required, the Permittee must submit a "clean water" diversion plan to DFG. DFG will review the proposed water diversion method. DFG will have ten calendar days to approve the plan or provide the requirements for that approval. If DFG does not respond within 10 days, the plan shall be automatically approved.

2.4 Bird Nests. It is unlawful to take, possess, or needlessly destroy the nest or eggs of any bird except as otherwise provided by the Fish and Game Code. No trees that contain active nests of birds shall be disturbed until all eggs have hatched and young birds have fledged without prior consultation and approval of a Department representative. It is recommended that the trees that are identified for removal, be removed during the non-nesting period of September 16 to February 28. If tree removal must occur during the period of March 1 and September 15, a qualified biologist shall conduct a pre-construction survey for bird nests or nesting activity within 500 feet of the project area. If any active nests or nesting behaviors are found, the Department must be notified prior to further action. The Permittee may be required to create exclusion zones of 75 to 500 feet depending on the species observed. The exclusion zone must be maintained until birds have fledged or nest is abandoned. The survey results shall be provided to the Department prior to removing any trees.

2.5 Cliff Swallows. No active cliff swallow nests shall be disturbed until all eggs have hatched and young birds have fledged without prior consultation and approval of a Department representative. If swallow nesting is likely, the Permittee shall submit for review and approval a Cliff Swallow Management Plan. The Cliff Swallow Management plan should be submitted for review well before the start of swallow breeding activity (mid-March). The Cliff Swallow Management plan should consider the use of netting and/or daily removal of nest material with high-pressure water spray. DFG will have ten calendar days to approve the Cliff Swallow Management plan. If DFG does not reply within ten days, the Cliff Swallow Management plan shall be implemented as submitted.

2.6 Vegetation Removal. Disturbance or removal of vegetation shall not exceed the minimum necessary to complete operations. Except for the trees specifically identified for removal in the notification, no native trees with a trunk diameter at breast height (DBH) in excess of four (4) inches shall be removed or damaged without prior consultation and approval of a Department representative. Using hand tools (clippers, chain saw, etc.), trees may be trimmed to the extent necessary to gain access to the work sites. All cleared material/vegetation shall be removed out of the riparian/stream zone.

2.7 Butte County Meadowfoam, Minimization, Mitigation, and Monitoring Measures.

Permittee shall install visible protective wildlife safe construction fencing to protect environmentally protected area on the project site where construction equipment and personnel shall be excluded to protect vernal pool habitat. The fencing shall be monitored daily and kept in good working condition for the duration of the Project;

Permittee has purchased 0.917 acres of BCM mitigation credits, from the Dove Ridge Mitigation Bank, Butte County, for temporary impacts to 0.183 acre of indirect impacts and 0.0001 acre of direct impacts (1 plant) to BCM;

Following construction, Permittee shall return each site to pre-Project conditions, remove all construction debris (including protective fencing, barriers, flagging, and construction mats), and reseed each site with an approved erosion control seed mix as needed as prescribed in a Service and DFG-approved plan.

2.8 Sediment Control. Precautions to minimize turbidity/siltation shall be taken into account during project planning and implementation. This may require the placement of silt fencing, coir logs, coir rolls, straw bale dikes, or other siltation barriers so that silt and/or other deleterious materials are not allowed to pass to downstream reaches. Passage of sediment beyond the sediment barrier(s) is prohibited. If any sediment barrier fails to retain sediment, corrective measures shall be taken. The sediment barrier(s) shall be maintained in good operating condition throughout the construction period and the following rainy season. Maintenance includes, but is not limited to, removal of accumulated silt and/or replacement of damaged silt fencing, coir logs, coir rolls, and/or straw bale dikes. The Permittee is responsible for the removal of non-biodegradable silt barriers (such as plastic silt fencing) after the disturbed areas have been stabilized with erosion control vegetation (usually after the first growing season). Upon Department determination that turbidity/siltation levels resulting from project related activities constitute a threat to aquatic life, activities associated with the turbidity/siltation shall be halted until effective Department approved control devices are installed or abatement procedures are initiated.

2.9 Pollution Control. Utilize Best Management Practices (BMPs) to prevent spills and leaks into water bodies. If maintenance or refueling of vehicles or equipment must occur on-site, use a designated area and/or a secondary containment, located away from drainage courses to prevent the runoff of storm water and the runoff of spills. Ensure that all vehicles and equipment are in good working order (no leaks). Place drip pans or absorbent materials under vehicles and equipment when not in use. Ensure that all construction areas have proper spill clean up materials (absorbent pads, sealed containers, booms, etc.) to contain the movement of any spilled substances. Any other substances which could be hazardous to aquatic life, resulting from project related activities, shall be prevented from contaminating the soil and/or entering the waters of the state. Any of these materials, placed within or where they may enter a stream or lake by the Applicant or any party working under contract or with the permission of the Permittee, shall be removed immediately. DFG shall be notified immediately by the Permittee of any spills and shall be consulted regarding clean-up procedures.

3. Compensatory Measures

To compensate for adverse impacts to fish and wildlife resources identified above that cannot be avoided or minimized, Permittee shall implement each measure listed below.

3.1 Site Restoration. All exposed/disturbed areas and access points within the stream zone left barren of vegetation as a result of the construction activities shall be

restored using locally native grass seeds, locally native grass plugs and/or a mix of quick growing sterile non-native grass with locally native grass seeds. Seeded areas shall be covered with broadcast straw and/or jut netted (monofilament erosion blankets are not authorized).

4. Reporting Measures

Permittee shall meet each reporting requirement described below.

4.1 The Permittee shall notify DFG within two working days of beginning work within the stream zone of Dead Horse Slough, South Fork Dead Horse Slough and four unnamed ephermal streams. Notification shall be submitted as instructed in Contact Information section below. Email notification is preferred.

4.2 Upon completion of the project activities described in this agreement, the work area within the stream zone shall be digitally photographed. Photographs shall be submitted to DFG within two days of completion. Photographs and project commencement notification shall be submitted as instructed in Contact Information section below. Email submittal is preferred.

CONTACT INFORMATION

Any communication that Permittee or DFG submits to the other shall be in writing and any communication or documentation shall be delivered to the address below by U.S. mail, fax, or email, or to such other address as Permittee or DFG specifies by written notice to the other. Refer to the project's Notification Number when submitting documents to DFG.

To Permittee:

City of Chico
Bob Greenlaw
411 Main Street, 2nd Floor
Chico, CA 95927

bgreenla@ci.chico.ca.us

To DFG:

Department of Fish and Game
North Central Region
1701 Nimbus Road, Suite A
Rancho Cordova, CA 95670
Attn: Lake and Streambed Alteration Program – Gary L. Hobgood
Notification #1600-2010-0122 R2
Fax: 916-358-2912
ghobgood@dfg.ca.gov

LIABILITY

Permittee shall be solely liable for any violations of the Agreement, whether committed by Permittee or any person acting on behalf of Permittee, including its officers, employees, representatives, agents or contractors and subcontractors, to complete the project or any activity related to it that the Agreement authorizes.

This Agreement does not constitute DFG's endorsement of, or require Permittee to proceed with the project. The decision to proceed with the project is Permittee's alone.

SUSPENSION AND REVOCATION

DFG may suspend or revoke in its entirety the Agreement if it determines that Permittee or any person acting on behalf of Permittee, including its officers, employees, representatives, agents, or contractors and subcontractors, is not in compliance with the Agreement.

Before DFG suspends or revokes the Agreement, it shall provide Permittee written notice by certified or registered mail that it intends to suspend or revoke. The notice shall state the reason(s) for the proposed suspension or revocation, provide Permittee an opportunity to correct any deficiency before DFG suspends or revokes the Agreement, and include instructions to Permittee, if necessary, including but not limited to a directive to immediately cease the specific activity or activities that caused DFG to issue the notice.

ENFORCEMENT

Nothing in the Agreement precludes DFG from pursuing an enforcement action against Permittee instead of, or in addition to, suspending or revoking the Agreement.

Nothing in the Agreement limits or otherwise affects DFG's enforcement authority or that of its enforcement personnel.

OTHER LEGAL OBLIGATIONS

This Agreement does not relieve Permittee or any person acting on behalf of Permittee, including its officers, employees, representatives, agents, or contractors and subcontractors, from obtaining any other permits or authorizations that might be required under other federal, state, or local laws or regulations before beginning the project or an activity related to it.

This Agreement does not relieve Permittee or any person acting on behalf of Permittee, including its officers, employees, representatives, agents, or contractors and subcontractors, from complying with other applicable statutes in the FGC including, but not limited to, FGC sections 2050 et seq. (threatened and endangered species), 3503 (bird nests and eggs), 3503.5 (birds of prey), 5650 (water pollution), 5652 (refuse

disposal into water), 5901 (fish passage), 5937 (sufficient water for fish), and 5948 (obstruction of stream).

The Permittee shall notify DFG where conflicts exist between the provisions of this agreement and those imposed by other regulatory agencies. Unless otherwise notified, the Permittee shall comply with the provision that offers the greatest protection to water quality, species of special concern and/or critical habitat.

Nothing in the Agreement authorizes Permittee or any person acting on behalf of Permittee, including its officers, employees, representatives, agents, or contractors and subcontractors, to trespass.

AMENDMENT

DFG may amend the Agreement at any time during its term, provided the amendment is mutually agreed to in writing by Permittee and DFG.

Permittee may amend the Agreement at any time during its term, provided the amendment is mutually agreed to in writing by DFG and Permittee. To request an amendment, Permittee shall submit to DFG a completed DFG "Request to Amend Lake or Streambed Alteration" form and include with the completed form payment of the corresponding amendment fee identified in DFG's current fee schedule (see Cal. Code Regs., tit. 14, § 699.5).

TRANSFER AND ASSIGNMENT

This Agreement may not be transferred or assigned to another entity, and any purported transfer or assignment of the Agreement to another entity shall not be valid or effective, unless the transfer or assignment is requested by Permittee in writing, as specified below, and thereafter DFG approves the transfer or assignment in writing.

The transfer or assignment of the Agreement to another entity shall constitute a minor amendment, and therefore to request a transfer or assignment, Permittee shall submit to DFG a completed DFG "Request to Amend Lake or Streambed Alteration" form and include with the completed form payment of the minor amendment fee identified in DFG's current fee schedule (see Cal. Code Regs., tit. 14, § 699.5).

EXTENSIONS

In accordance with FGC section 1605(b), Permittee may request one extension of the Agreement, provided the request is made prior to the expiration of the Agreement's term. To request an extension, Permittee shall submit to DFG a completed DFG "Request to Extend Lake or Streambed Alteration" form and include with the completed form payment of the extension fee identified in DFG's current fee schedule (see Cal. Code Regs., tit. 14, § 699.5). DFG shall process the extension request in accordance with FGC 1605(b) through (e).

If Permittee fails to submit a request to extend the Agreement prior to its expiration, Permittee must submit a new notification and notification fee before beginning or continuing the project the Agreement covers (Fish & G. Code, § 1605, subd. (f)). .

EFFECTIVE DATE

The Agreement becomes effective on the date of DFG's signature, which shall be: 1) after Permittee's signature; 2) after DFG complies with all applicable requirements under the California Environmental Quality Act (CEQA); and 3) after payment of the applicable FGC section 711.4 filing fee listed at http://www.dfg.ca.gov/habcon/ceqa/ceqa_changes.html.

TERM

This Agreement shall expire 5 years from the date the agreement has been signed by both parties, unless it is terminated or extended before then. All provisions in the Agreement shall remain in force throughout its term. Permittee shall remain responsible for implementing any provisions specified herein to protect fish and wildlife resources after the Agreement expires or is terminated, as FGC section 1605(a)(2) requires.

AUTHORITY

If the person signing the Agreement (signatory) is doing so as a representative of Permittee, the signatory hereby acknowledges that he or she is doing so on Permittee's behalf and represents and warrants that he or she has the authority to legally bind Permittee to the provisions herein.

AUTHORIZATION

This Agreement authorizes only the project described herein. If Permittee begins or completes a project different from the project the Agreement authorizes, Permittee may be subject to civil or criminal prosecution for failing to notify DFG in accordance with FGC section 1602.

CONCURRENCE

The undersigned accepts and agrees to comply with all provisions contained herein.

FOR CITY OF CHICO

Bob Greenlaw — Date: 9/21/10

FOR DEPARTMENT OF FISH AND GAME

Kent Smith
Regional Manager — Date: 9/27/10

Prepared by: Gary L. Hobgood
Staff Environmental Scientist

California Regional Water Quality Control Board
Central Valley Region
Katherine Hart, Chair

415 Knollcrest Drive, Suite 100, Redding, California 96002
(530) 224-4845 • Fax (530) 224-4857

Linda S. Adams
Secretary for Environmental Protection

Arnold Schwarzenegger
Governor

7 October 2010

RECEIVED
OCT 11 2010
CITY OF CHICO
BDSD / CPSD

Mr. Bob Greenlaw
City of Chico
P.O. Box 3420
Chico, CA 95927

CLEAN WATER ACT §401 TECHNICALLY CONDITIONED WATER QUALITY CERTIFICATION FOR DISCHARGE OF DREDGED AND/OR FILL MATERIALS FOR THE STATE ROUTE 32 ROAD WIDENING PROJECT (WDID#5A04CR00193), CHICO, BUTTE COUNTY

ACTION:

1. ☐ Order for Standard Certification
2. ■ Order for Technically-conditioned Certification
3. ☐ Order for Denial of Certification

WATER QUALITY CERTIFICATION STANDARD CONDITIONS:

1. This certification action is subject to modification or revocation upon administrative or judicial review, including review and amendment pursuant to §13330 of the California Water Code and §3867 of Title 23 of the California Code of Regulations (23 CCR).

2. This certification action is not intended and shall not be construed to apply to any discharge from any activity involving a hydroelectric facility requiring a Federal Energy Regulatory Commission (FERC) license or an amendment to a FERC license unless the pertinent certification application was filed pursuant to 23 CCR subsection 3855(b) and the application specifically identified that a FERC license or amendment to a FERC license for a hydroelectric facility was being sought.

3. The validity of any non-denial certification action shall be conditioned upon total payment of the full fee required under 23 CCR §3833, unless otherwise stated in writing by the certifying agency.

4. Certification is valid for the duration of the described project. City of Chico shall notify the Central Valley Water Board in writing within 7 days of project completion.

ADDITIONAL TECHNICALLY CONDITIONED CERTIFICATION CONDITIONS:

In addition to the four standard conditions, City of Chico shall satisfy the following:

1. City of Chico shall notify the Central Valley Water Board in writing 7 days in advance of the start of any in-water activities.

2. Except for activities permitted by the U.S. Army Corps under §404 of the Clean Water Act, soil, silt, or other organic materials shall not be placed where such materials could pass into surface water or surface water drainage courses.

3. All areas disturbed by project activities shall be protected from washout or erosion.

4. City of Chico shall maintain a copy of this Certification and supporting documentation (Project Information Sheet) at the Project site during construction for review by site personnel and agencies. All personnel (employees, contractors, and subcontractors) performing work on the proposed project shall be adequately informed and trained regarding the conditions of this Certification.

5. An effective combination of erosion and sediment control Best Management Practices (BMPs) must be implemented and adequately working during all phases of construction.

6. All temporarily affected areas will be restored to pre-construction contours and conditions upon completion of construction activities.

7. City of Chico shall perform surface water sampling: 1) When performing any in-water work; 2) In the event that project activities result in any materials reaching surface waters or; 3) When any activities result in the creation of a visible plume in surface waters. The following monitoring shall be conducted immediately upstream out of the influence of the project and 300 feet downstream of the active work area. Sampling results shall be submitted to this office within two weeks of initiation of sampling and every two weeks thereafter. The sampling frequency may be modified for certain projects with written permission from the Central Valley Water Board.

Parameter	Unit	Type of Sample	Frequency of Sample
Turbidity	NTU	Grab	Every 4 hours during in water work
Settleable Material	ml/l	Grab	Same as above.
Visible construction related pollutants	Observations	Visible Inspections	Continuous throughout the construction period

8. Activities shall not cause turbidity increases in surface water to exceed:

   (a) where natural turbidity is less than 1 Nephelometric Turbidity Units (NTUs), controllable factors shall not cause downstream turbidity to exceed 2 NTU;
   (b) where natural turbidity is between 1 and 5 NTUs, increases shall not exceed 1 NTU;
   (c) where natural turbidity is between 5 and 50 NTUs, increases shall not exceed 20 percent;
   (d) where natural turbidity is between 50 and 100 NTUs, increases shall not exceed 10 NTUs;
   (e) where natural turbidity is greater than 100 NTUs, increases shall not exceed 10 percent.

   Except that these limits will be eased during in-water working periods to allow a turbidity increase of 15 NTU over background turbidity as measured in surface waters 300 feet downstream from the working area. In determining compliance with the above limits, appropriate averaging periods may be applied provided that beneficial uses will be fully protected. Averaging periods may only be assessed by prior permission of the Central Valley Water Board.

9. Activities shall not cause settleable matter to exceed 0.1 ml/l in surface waters as measured in surface waters 300 feet downstream from the project.

10. The discharge of petroleum products or other excavated materials to surface water is prohibited. Activities shall not cause visible oil, grease, or foam in the work area or downstream. City of Chico shall notify the Central Valley Water Board immediately of any spill of petroleum products or other organic or earthen materials.

11. City of Chico shall notify the Central Valley Water Board immediately if the above criteria for turbidity, settleable matter, oil/grease, or foam are exceeded.

12. City of Chico shall comply with all Department of Fish and Game 1600 requirements for the project.

13. City of Chico must obtain coverage under the NPDES General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities issued by the State Water Resources Control Board for any project disturbing an area of 1 acre or greater.

14. The Conditions in this water quality certification are based on the information in the attached "Project Information." If the information in the attached Project Information is modified or the project changes, this water quality certification is no longer valid until amended by the Central Valley Water Board.

15. In the event of any violation or threatened violation of the conditions of this Order, the violation or threatened violation shall be subject to any remedies, penalties, process, or sanctions as provided for under State law and section 401 (d) of the federal Clean Water Act. The applicability of any State law authorizing remedies, penalties, process, or sanctions for the violation or threatened violation constitutes a limitation necessary to ensure compliance into this Order.

a. If City of Chico or a duly authorized representative of the project fails or refuses to furnish technical or monitoring reports, as required under this Order, or falsifies any information provided in the monitoring reports, the applicant is subject to civil, for each day of violation, or criminal liability.

b. In response to a suspected violation of any condition of this Order, the Central Valley Water Board may require City of Chico to furnish, under penalty of perjury, any technical or monitoring reports the Central Valley Water Board deems appropriate, provided that the burden, including cost of the reports, shall be in reasonable relationship to the need for the reports and the benefits to be obtained from the reports.

c. City of Chico shall allow the staff(s) of the Central Valley Water Board, or an authorized representative(s), upon the presentation of credentials and other documents, as may be required by law, to enter the project premises for inspection, including taking photographs and securing copies of project-related records, for the purpose of assuring compliance with this certification and determining the ecological success of the project.

ADDITIONAL STORM WATER QUALITY CONDITIONS:

City of Chico shall also satisfy the following additional storm water quality conditions:

1. During the construction phase, City of Chico must employ strategies to minimize erosion and the introduction of pollutants into storm water runoff. These strategies must include the following:

   (a) the Storm Water Pollution Prevention Plan (SWPPP) must be prepared during the project planning and design phases and before construction;
   (b) an effective combination of erosion and sediment control Best Management Practices (BMPs) must be implemented and adequately working prior to the rainy season and during all phases of construction.

2. City of Chico must minimize the short and long-term impacts on receiving water quality from the State Route 32 Road Widening Project by implementing the following post-construction storm water management practices:

   (a) minimize the amount of impervious surface;
   (b) reduce peak runoff flows;
   (c) provide treatment BMPs to reduce pollutants in runoff;
   (d) ensure existing waters of the State (e.g., wetlands, vernal pools, or creeks) are not used as pollutant source controls and/or treatment controls;
   (e) preserve and, where possible, create or restore areas that provide important water quality benefits, such as riparian corridors, wetlands, and buffer zones;
   (f) limit disturbances of natural water bodies and natural drainage systems caused by development (including development of roads, highways, and bridges);
   (g) use existing drainage master plans or studies to estimate increases in pollutant loads and flows resulting form projected future development and require incorporation of structural and non-structural BMPs to mitigate the projected pollutant load increases in surface water runoff;

(h) identify and avoid development in areas that are particularly susceptible to erosion and sediment loss, or establish development guidance that protects areas from erosion/ sediment loss;
(i) control post-development peak storm water run-off discharge rates and velocities to prevent or reduce downstream erosion, and to protect stream habitat.

3. City of Chico must ensure that all development within the project provides verification of maintenance provisions for post-construction structural and treatment control BMPs. Verification shall include one or more of the following, as applicable:

(a) the developer's signed statement accepting responsibility for maintenance until the maintenance responsibility is legally transferred to another party; or
(b) written conditions in the sales or lease agreement that require the recipient to assume responsibility for maintenance; or
(c) written text in project conditions, covenants and restrictions for residential properties assigning maintenance responsibilities to a home owner's association, or other appropriate group, for maintenance of structural and treatment control BMPs; or
(d) any other legally enforceable agreement that assigns responsibility for storm water BMP maintenance.

4. Staff of the Central Valley Water Board has prepared total maximum daily load (TMDL) allocations that, once approved, would limit methylmercury in storm water discharges to the Sacramento-San Joaquin Delta. The Central Valley Water Board has scheduled these proposed allocations to be considered for adoption. When the Central Valley Water Board adopts the TMDL and once approved by the Environmental Protection Agency, the discharge of methylmercury may be limited from the proposed project. The purpose of this condition is to provide notice to City of Chico that methylmercury discharge limitations and monitoring requirements may apply to this project in the future and also to provide notice of the Central Valley Water Board's TMDL process and that elements of the planned construction may be subject to a TMDL allocation.

REGIONAL WATER QUALITY CONTROL BOARD CONTACT PERSON:

Scott A. Zaitz, R.E.H.S., Redding Branch Office, 415 Knollcrest Drive, Suite 100, Redding, California 96002, szaitz@waterboards.ca.gov, (530) 224-4784

WATER QUALITY CERTIFICATION:

I hereby issue an order certifying that any discharge from City of Chico, State Route 32 Road Widening Project (WDID# 5A04CR00193) will comply with the applicable provisions of §301 ("Effluent Limitations"), §302 ("Water Quality Related Effluent Limitations"), §303 ("Water Quality Standards and Implementation Plans"), §306 ("National Standards of Performance"), and §307 ("Toxic and Pretreatment Effluent Standards") of the Clean Water Act. This discharge is also regulated under State Water Resources Control Board Water Quality Order No. 2003-0017 DWQ "Statewide General Waste Discharge Requirements For Dredged Or Fill Discharges That Have Received State Water Quality Certification (General WDRs)".

Except insofar as may be modified by any preceding conditions, all certification actions are contingent on (a) the discharge being limited and all proposed mitigation being completed in strict compliance with City of Chico's project description and the attached Project Information Sheet, and (b) compliance with all applicable requirements of the Regional Water Quality Control Board's Water Quality Control Plan (Basin Plan).

(for) PAMELA C. CREEDON
Executive Officer

SAZ: knr

Enclosure: Project Information

cc: Mr. Brian Vierria, U.S. Army Corp of Engineers, Sacramento
U.S. Fish and Wildlife Service, Sacramento
Department of Fish and Game, Region 2, Rancho Cordova
Mr. Bill Jennings, CALSPA, Stockton
Mr. Brooks Taylor, Gallaway Consulting, Chico

cc by email: Mr. Dave Smith, U.S. EPA, Region 9, San Francisco
Mr. Bill Orme, SWRCB, Certification Unit, Sacramento

U:\Clerical\Storm_water\SZaitz\2010\401 SR32 Road Widening Project (5A04CR00193).doc

PROJECT INFORMATION

Application Date: 23 July 2010

Applicant: City of Chico, Attn: Mr. Bob Greenlaw

Applicant Representatives: Gallaway Consulting, Attn: Mr. Brooks Taylor

Project Name: State Route 32 Road Widening Project

Application Number: WDID No. 5A04CR00193

U.S. Army Corps File Number: Nationwide Permit No. 14 (Linear Transportation Projects)

Type of Project: Widening of State Route 32 Bridge

Project Location: Section 25, Township 22 North, Range 01 East, MDB&M.
Latitude: 39°44'14" and Longitude: -121°49'01"

County: Butte County

Receiving Water(s) (hydrologic unit): Dead Horse Slough, which is tributary to Sacramento River. Colusa Basin Hydrologic Unit-Butte Basin Hydrologic Area No. 520.40

Water Body Type: Wetlands, Riparian, Streambed

Designated Beneficial Uses: The Basin Plan for the Central Valley Water Board has designated beneficial uses for surface and ground waters within the region. Beneficial uses that could be impacted by the project include: Agricultural Supply (AGR); Groundwater Recharge, Water Contact Recreation (REC-1); Warm Freshwater Habitat (WARM); Cold Freshwater Habitat (COLD); Warm Freshwater Spawning (SPWN); Cold Freshwater Migration (MIGR); and Wildlife Habitat (WILD).

Project Description (purpose/goal): The State Route 32 Road Widening Project consists of widening the existing structure at Dead Horse Slough (Bridge No. 12-0135) to accommodate the additional traffic lanes and widened shoulders. The existing structure is a four span reinforced concrete slab that is 123.5 feet long and 32.5 feet wide. The structure will be widened by 49 feet; the new structure width will be 81.5 feet. The railings on the existing structure will be upgraded to current standards. The structure widening will be constructed in one phase, with the new bridge constructed to the north and joined to the existing structure with a closure pour. Both the existing structure and proposed abutments will be protected from scour with rock slope protection.

The existing 6' X 8' box culvert on South Fork Dead Horse Slough just east of Bruce Road will either be lengthened or replaced to accommodate the roadway widening. Additionally, four smaller culverts that support unnamed ephemeral streams will be lengthened to accommodate the road widening.

Preliminary Water Quality Concerns: Construction activities may impact surface waters with increased turbidity and settleable matter.

Proposed Mitigation to Address Concerns: City of Chico will implement Best Management Practices (BMPs) to control sedimentation and erosion. All temporary affected areas will be restored to pre-construction contours and conditions upon completion of construction activities. City of Chico will conduct turbidity and settleable matter testing during in-water work, stopping work if Basin Plan criteria are exceeded or are observed.

Fill/Excavation Area: Project implementation will permanently impact 0.276 acres of jurisdictional wetlands, 0.202 acres of riparian, and 0.013 acres of un-vegetated streambed. Project implementation will temporarily impact 0.01 acres of un-vegetated streambed.

Dredge Volume: Not Applicable

U.S. Army Corps of Engineers Permit Number: Nationwide Permit # 14

Department of Fish and Game Streambed Alteration Agreement: City of Chico applied for a Streambed Alteration Agreement on 23 September 2010.

Possible Listed Species: Based on the habitat suitability assessment conducted by ICF International, the following Federal Threatened or Endangered species have potential to occur in the project area: giant garter snake, vernal pool fairy shrimp, valley elderberry longhorn beetle (VELB) and vernal pool tadpole shrimp.

Status of CEQA Compliance: The City of Chico issued a final Notice of Determination approving a Mitigated Negative Declaration on 7 July 2010 in compliance with Section 21108 or 21152 of the Public Resources Code. A mitigation-monitoring program was adopted for this project, along with a statement of Overriding Consideration. Mitigation measures were made a condition of approval. (State Clearinghouse Number 2007022045).

Compensatory Mitigation: City of Chico paid fees required by U.S. Army Corps of Engineers and purchased 0.493 acres of vernal pool creation credits from Stillwater Plains Mitigation Bank, Inc. at a cost of $73,950. The City of Chico purchased 2.34 acres of vernal pool preservation credits on 4 January 2010, from Dove Ridge Mitigation Bank at a cost of $222,300. In addition the City of Chico purchased 4.836 acres of giant garter snake habitat preservation from Gilsizer Slough South GGS Conservation Bank, in Sutter County for the purchase price of $145,080.

Impacts to Valley Elderberry Longhorn Beetle will be mitigated for through the transplantation of 11 elderberry shrubs to the River Ranch VELB Conservation Bank mitigation bank at a cost of $38,500.

Application Fee Provided: Total fees of $5,534 have been submitted as required by 23 CCR §3833b(3)(A) and by 23 CCR §2200(e).

STATE WATER RESOURCES CONTROL BOARD

WATER QUALITY ORDER NO. 2003 - 0017 - DWQ

STATEWIDE GENERAL WASTE DISCHARGE REQUIREMENTS FOR DREDGED OR FILL DISCHARGES THAT HAVE RECEIVED STATE WATER QUALITY CERTIFICATION (GENERAL WDRs)

The State Water Resources Control Board (SWRCB) finds that:

1. Discharges eligible for coverage under these General WDRs are discharges of dredged or fill material that have received State Water Quality Certification (Certification) pursuant to federal Clean Water Act (CWA) section 401.

2. Discharges of dredged or fill material are commonly associated with port development, stream channelization, utility crossing land development, transportation water resource, and flood control projects. Other activities, such as land clearing, may also involve discharges of dredged or fill materials (e.g., soil) into waters of the United States.

3. CWA section 404 establishes a permit program under which the U.S. Army Corps of Engineers (ACOE) regulates the discharge of dredged or fill material into waters of the United States.

4. CWA section 401 requires every applicant for a federal permit or license for an activity that may result in a discharge of pollutants to a water of the United States (including permits under section 404) to obtain Certification that the proposed activity will comply with State water quality standards. In California, Certifications are issued by the Regional Water Quality Control Boards (RWQCB) or for multi-Region discharges, the SWRCB, in accordance with the requirements of California Code of Regulations (CCR) section 3830 et seq. The SWRCB's water quality regulations do not authorize the SWRCB or RWQCBs to waive certification, and therefore, these General WDRs do not apply to any discharge authorized by federal license or permit that was issued based on a determination by the issuing agency that certification has been waived. Certifications are issued by the RWQCB or SWRCB before the ACOE may issue CWA section 404 permits. Any conditions set forth in a Certification become conditions of the federal permit or license if and when it is ultimately issued.

5. Article 4, of Chapter 4 of Division 7 of the California Water Code (CWC), commencing with section 13260(a), requires that any person discharging or proposing to discharge waste, other than to a community sewer system, that could affect the quality of the waters of the State,[1] file a report of waste discharge (ROWD). Pursuant to Article 4, the RWQCBs are required to prescribe waste discharge requirements (WDRs) for any proposed or existing discharge unless WDRs are waived pursuant to CWC section 13269. These General WDRs fulfill the requirements of Article 4 for proposed dredge or fill discharges to waters of the United States that are regulated under the State's CWA section 401 authority.

---

[1] "Waters of the State" as defined in CWC Section 13050(e)

6. These General WDRs require compliance with all conditions of Certification orders to ensure that water quality standards are met.

7. The U.S. Supreme Court decision of *Solid Waste Agency of Northern Cook County v. U.S. Army Corps of Engineers*, 531 U.S. 159 (2001) (the *SWANCC* decision) called into question the extent to which certain "isolated" waters are subject to federal jurisdiction. The SWRCB believes that a Certification is a valid and enforceable order of the SWRCB or RWQCBs irrespective of whether the water body in question is subsequently determined not to be federally jurisdictional. Nonetheless, it is the intent of the SWRCB that all Certification conditions be incorporated into these General WDRs and enforceable hereunder even if the federal permit is subsequently deemed invalid because the water is not deemed subject to federal jurisdiction.

8. The beneficial uses for the waters of the State include, but are not limited to, domestic and municipal supply, agricultural and industrial supply, power generation, recreation, aesthetic enjoyment, navigation, and preservation and enhancement of fish, wildlife, and other aquatic resources.

9. Projects covered by these General WDRs shall be assessed a fee pursuant to Title 23, CCR section 3833.

10. These General WDRs are exempt from the California Environmental Quality Act (CEQA) because (a) they are not a "project" within the meaning of CEQA, since a "project" results in a direct or indirect physical change in the environment (Title 14, CCR section 15378); and (b) the term "project" does not mean each separate governmental approval (Title 14, CCR section 15378(c)). These WDRs do not authorize any specific project. They recognize that dredge and fill discharges that need a federal license or permit must be regulated under CWA section 401 Certification, pursuant to CWA section 401 and Title 23, CCR section 3855, et seq. Certification and issuance of waste discharge requirements are overlapping regulatory processes, which are both administered by the SWRCB and RWQCBs. Each project subject to Certification requires independent compliance with CEQA and is regulated through the Certification process in the context of its specific characteristics. Any effects on the environment will therefore be as a result of the certification process, not from these General WDRs. (Title 14, CCR section 15061(b)(3)).

11. Potential dischargers and other known interested parties have been notified of the intent to adopt these General WDRs by public hearing notice.

12. All comments pertaining to the proposed discharges have been heard and considered at the November 4, 2003 SWRCB Workshop Session.

13. The RWQCBs retain discretion to impose individual or general WDRs or waivers of WDRs in lieu of these General WDRs whenever they deem it appropriate. Furthermore, these General WDRs are not intended to supersede any existing WDRs or waivers of WDRs issued by a RWQCB.

IT IS HEREBY ORDERED that WDRs are issued to all persons proposing to discharge dredged or fill material to waters of the United States where such discharge is also subject to the water quality certification requirements of CWA section 401 of the federal Clean Water Act (Title 33 United States Code section 1341), and such certification has been issued by the applicable RWQCB or the SWRCB, unless the applicable RWQCB notifies the applicant that its discharge will be regulated through WDRs or waivers of WDRs issued by the RWQCB. In order to meet the provisions contained in Division 7 of CWC and regulations adopted thereunder, dischargers shall comply with the following:

1. Dischargers shall implement all the terms and conditions of the applicable CWA section 401 Certification issued for the discharge. This provision shall apply irrespective of whether the federal license or permit for which the Certification was obtained is subsequently deemed invalid because the water body subject to the discharge has been deemed outside of federal jurisdiction.

2. Dischargers are prohibited from discharging dredged of fill material to waters of the United States without first obtaining Certification from the applicable RWQCB or SWRCB.

CERTIFICATION

The undersigned, Clerk to the Board, does hereby certify that the foregoing is a full, true, and correct copy of an order duly and regularly adopted at a meeting of the State Water Resources Control Board held on November 19, 2003.

AYE: Arthur G. Baggett, Jr.
Peter S. Silva
Richard Katz
Gary M. Carlton
Nancy H. Sutley

NO: None.

ABSENT: None.

ABSTAIN: None.

Debbie Irvin
Clerk to the Board

(Blank)

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

SECTION 401 WATER QUALITY CERTIFICATION
APPLICATION FORM

A minimum of $640.00 processing fee is required however additional fees in accordance with Title 23 CCR § 2200 (a)(2) may also be required. Please use the fee calculator at http://www.waterboards.ca.gov/water_issues/programs/cwa401/docs/dredgefillfeecalculator.xls to determine the total fee. Please include a check payable to the **State Water Resources Control Board.** Attach additional sheets as necessary. Submit the complete form to the appropriate Regional Board office.

1. APPLICANT INFORMATION	2. AGENT INFORMATION*
Applicant: City of Chico,	Agent*Gallaway Consulting
Contact Name: Bob Greenlaw	Contact Name:Brooks Taylor
Address: 411 Main Street, 2nd Floor	Address: 111 Mission Ranch Blvd., Suite 100
Chico, CA, 95927	Chico, CA 95926
Phone No: 530-879-6900	Phone No: 530-343-8327
Fax No:	Fax No: 530-342-1882

*Complete only if applicable

3. PROJECT DESCRIPTION

a) Project Title: State Route 32 Road Widening

b) Project Location: The proposed project will occur, beginning at the southbound State Route 99 (SR 99) ramps at the west end of the project corridor and extending to1400 feet east past Yosemite Drive.

County: Butte Section: 25 Township: 22N Range: 1E

Latitude: 39.7371823009085 Longitude: -121.816906958653

*Attach site map with "waters" clearly indicated (e.g. USGS 7 ½ quadrangle map)

c) Project Description: *(include purpose and final goal)*:

The existing structure at Dead Horse Slough (Bridge No. 12-0135) will be widened to the north to accommodate the additional traffic lanes and widened shoulders. The existing structure is a four span reinforced concrete slab that is 123.5 feet long and 32.5 feet wide. The structure will be widened by 49 feet; the new structure width will be 81.5 feet. The railings on the existing structure will be upgraded to current standards. The structure widening will be constructed in one phase, with the new bridge constructed to the north and joined to the existing structure with a closure pour. Both the existing and proposed abutments will be protected from scour with rock slope protection.
The existing 6 ft x 8 ft box culvert on South Fork Dead Horse Slough just east of Bruce Road will either be lengthened or replaced to accommodate the roadway widening.
Additionally, four smaller culverts which support unnamed ephemeral streams will be lengthened to accommodate the road widening.

d) Proposed Schedule: *(start-up, duration, and completion dates)*:August 1, 2010- October 1, 2012

e) Total Project size: *(clearing, grading, other construction activities)*
_____acres 13728 linear feet *(if appropriate)*

4. IMPACTED WATER BODIES

a) Name*(s)* of Receiving Water Body*(ies)*:Dead Horse Slough, South Fork Dead Horse Slough

b) Anticipated potential stream flow during project activity: Dry

c) Describe potential impacts to water quality:

d) Indicate in ACRES and LINEAR FEET *(where appropriate)* the proposed **waters of the United States** to be impacted by any discharge other than dredging, and identify the impacts*(s)* as permanent and/or temporary for each water body type listed below:

Water Body Type	Permanent Impacts		Temporary Impacts	
	(acres)	(linear feet)	(acres)	(linear feet)
Jurisdictional Wetland	0.276			
Riparian	0.202			
Streambed un-vegetated	0.013	277	0.01	224
Lake/Reservoir				

c) Indicate the volume of the dredged material (cubic yards) to be discharged to waters of the United States:

d) Indicate type(s) of material proposed to be discharged to waters of the United States: Galvanized culverts, pre-cast concrete box culverts, concrete bridge pilings.

5. COMPENSATORY MITIGATION

a) Indicate in ACRES and LINEAR FEET *(where appropriate)* the total quantity of **waters of the United States** proposed to be Created, Restored and/or Enhanced for purposes of providing Compensatory Mitigation:

Water Body Type	Created		Restored		Enhanced	
	(acres)	(linear ft)	(acres)	(linear ft)	(acres)	(linear ft)
Jurisdictional Wetland						
Riparian						
Streambed						
Lake/Reservoir						

b) If contributing to a Mitigation or Conservation Bank, indicate the agency, dollar amount, acreage, and water body type *(if applicable)*:

Conservation Agency See Below

$_____ for_____ acres of _____ *(water body type)*

How many acres of this mitigation area qualify as waters of the United States?

_____

Per the USACE authorization permit number 2007-01149 and the USFWS Biological Opinion number 81420-2008-F-0104-4, The City of Chico (City) has agreed to purchase 0.493 acres of vernal pool creation credits from Stillwater Mitigation Bank at the cost of $73,950.00. The City has purchased 2.305 acres of vernal pool preservation credits from the Dove Ridge Mitigation Bank at the cost of $222,300.00. It addition to these purchases the City has agreed to purchase 4.84 acres of Giant Garter Snake habitat preservation from Gilsizer Slough South GGS Conservation Bank at an estimated cost of $145,080.00.

Impacts to Valley Elderberry Longhorn Beetle will be mitigated for through the transplantation of 11 elderberry shrubs to a the River Ranch VELB Conservation Bank mitigation bank, additionally 34 elderberry shrubs and 68 associated riparian species will be planted at the aforementioned mitigation bank. The total estimated costs for VELB mitigation is $44,010.00

c) Other Mitigation *(omit if not applicable)*:

See attached Mitigation Explanation

How many acres of this mitigation area qualify as waters of the United States?_____

d) Location of Compensatory Mitigation Site*(s) (attach map of suitable quality and detail)*:

See attached Mitigation Explanation

City of Area _____ County _____

Longitude/Latitude _____ Township/Range _____

6. OTHER ACTIONS/BEST MANAGEMENT PRACTICES (BMPs)

Briefly describe other actions/BMPs to be implemented to Avoid and/or Minimize impacts to waters of the United States, including preservations of habitats, erosion control measures, project scheduling, flow diversions, etc.

7. OTHER PERMITS/AGREEMENTS/ETC

a) U.S. Army Corps of Engineers Permit
Indicate the type of ACOE permit *(check one)*
Nationwide Permit No(s)_____ Individual Permit No*(s)*: X_____ Regional Permit No*(s)*:___

Have you notified ACOE of project? Yes

Have you reviewed the General Conditions for your ACOE permit? Yes

Have you attached a copy of the application/notification to ACOE? Yes

b) California Department of Fish and Game Lake or Streambed Alteration Agreement

Date of Application: 7/23/2010

Have you attached a copy of the application? Yes

Has the Agreement been issued? No if so, list Agreement number:_____

8. CALIFORNIA ENVIRONMENTAL QUALITY ACT (CEQA)

a) Indicate the type of CEQA Document required for project and Lead Agency:

Categorical Exemption __ Negative Declaration __ Environmental Impact Report _x____

Has the document been certified/approved, or has a Notice of Exemption been filed? Yes

If yes date of approval/filing 7/6/2010 If no, expected approval/filing date:_____

Lead Agency City of Chico
Submit final or draft copy if available*

b) Threatened or Endangered Species impacted by this project *(list potential)*:
Butte County meadowfoam, vernal pool invertebrates, giant garter snake, valley elderberry longhorn beetle.

9. PAST/FUTURE PROPOSALS BY THE APPLICANT

Briefly list/describe any projects carried out in the last 5 years or planned for implementation in the next 5 years that are in any way related to the proposed activity or may impact the same receiving body of water. Include the estimated adverse impacts from the past or future projects.

10. CERTIFICATION

"I certify under penalty of law that this document, including all attachments and supplemental information, were prepared under my direction and supervision in accordance with a system designed to assure that qualified personnel property gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment."

Print Name: Tracy R. Bettencourt Title: Senior Planner

Signature: Tracy R Bettencourt Date: 7/12/10

(Blank)

DEPARTMENT OF THE ARMY
U.S. ARMY ENGINEER DISTRICT, SACRAMENTO
CORPS OF ENGINEERS
1325 J STREET
SACRAMENTO CA 95814-2922

REPLY TO
ATTENTION OF

July 13, 2009

Regulatory Division (SPK-2007-01149)

Mr. Bob Greenlaw
City of Chico
Capital Project Services Department
Engineering Division
411 Main Street/P.O. Box 3420
Chico, CA 95927

Dear Mr. Greenlaw:

We are responding to your consultants March 23, 2009 request for a Department of the Army permit for the State Route 32 (SR32) Widening project. This approximately 115-acre project involves activities, including the discharge of dredged or fill material, into waters of the United States to widen and improve approximately 2.6 miles of SR 32. The site is located on or near Deadhorse Slough in Section 25, Township 22 North, Range 1 East and Sections 19, 20, and 30, Township 22 North, Range 2 East, MDB&M Survey, Latitude 39° 44′ 11.7″, Longitude 121° 49′ 5.71″, Butte County, California.

Based on the information you provided, the proposed activity in approximately 1.409-acres of waters of the United States is authorized by Nationwide Permit Number 14, Linear Transportation Projects. The proposed impacts associated with this work include; approximately 0.493-acre of permanent impacts, 0.01-acre of temporary impacts, and 0.906-acre of indirect impacts to waters of the United States. However, until Section 401 Water Quality Certification for the activity has been issued or waived, our authorization is denied without prejudice. Once you have provided us evidence of water quality certification, the activity is authorized and the work may proceed subject to the conditions of certification and the Nationwide Permit. Your work must comply with the general terms and conditions listed on the enclosed Nationwide Permit information sheets and the following special conditions:

1. To mitigate for the loss of 0.493-acre of permanent impacts to wetlands, you shall purchase 0.493-acre of vernal pool creation credits at Stillwater Plain Mitigation Bank. Evidence of this purchase shall be provided to this office prior to proceeding with any activity otherwise authorized by this permit.

2. To mitigate for the loss of 0.906-acre of indirect impacts to wetlands, you shall purchase 1.812-acre of vernal pool preservation credits at Dove Ridge Mitigation Bank. Evidence of this purchase shall be provided to this office prior to proceeding with any activity otherwise authorized by this permit.

3. To compensate for the temporary loss of 0.010-acre of other waters of the United States, you shall restore at least 0.010-acre of seasonal ditches and culverts adjacent to the modified roadway. The ditches and culverts shall be designed to the approximate current dimensions and shall be vegetated with native seed mix.

4. To mitigate project impacts to the aquatic resources and associated habitats, you shall employ protective mats or other barriers under heavy equipment, while operating in wetlands, mudflats, and vernal pools. You shall implement all other measures necessary, in order to protect the topography, hydrology, and vegetation in such habitats.

5. This Corps permit does not authorize you to take an endangered species, in particular giant garter snake (Thamnophis gigas), vernal pool fairy shrimp (Branchinecta lynchi), vernal pool tadpole shrimp (Lepidurus packardi), valley elderberry longhorn beetle (Desmocerus californicus dimorphus), Butte County meadowfoam (Limnathes floccose ssp. Californica), or designated critical habitat. In order to legally take a listed species, you must have separate authorization under the Endangered Species Act (e.g., an Endangered Species Act Section 10 permit, or a Biological Opinion under Endangered Species Act Section 7, with "incidental take" provisions with which you must comply). The enclosed Fish and Wildlife Service Biological Opinion (Number 81420-2008-F-0104-2, dated February 3, 2009), contains mandatory terms and conditions to implement the reasonable and prudent measures that are associated with "incidental take" that is also specified in the Biological Opinion. Your authorization under this Corps permit is conditional upon your compliance with all of the mandatory terms and conditions associated with "incidental take" of the attached Biological Opinion, which terms and conditions are incorporated by reference in this permit. Failure to comply with the terms and conditions associated with incidental take of the Biological Opinion, where a take of the listed species occurs, would constitute an unauthorized take, and it would also constitute non-compliance with your Corps permit. The Fish and Wildlife Service is the appropriate authority to determine compliance with the terms and conditions of its Biological Opinion, and with the Endangered Species Act. The permittee must comply with all conditions of this Biological Opinion, including those ascribed to the Corps.

6. You shall have a qualified biologist, who is aware of the locations of all waters of the United States within the project boundary monitor construction activities. The monitor shall ensure no unauthorized activities occur within avoided waters. The monitor shall have the authority to stop work immediately if any unauthorized fill occurs in waters of the United States, including wetlands. In the event of an unauthorized fill, our office shall be contacted immediately.

7. You shall follow the specifications and standards described in the Storm Water Pollution Prevention Plan (SWPPP) and/or Water Pollution Control Plan (WPCP), to prevent erosion and sedimentation during and after construction. Construction work within Deadhorse Slough and associated wetlands shall be conducted during periods of low flow (typically June 1-October 30), outside the rainy season work window.

8. You shall employ Best Management Practices (BMP's) to avoid and minimize environmental impacts. Temporary fills must be removed in their entirety and the affected areas returned to preconstruction elevations and conditions. The affected areas must be re-vegetated with a native seed mix.

9. You shall design and construct all crossings of waters of the United States to retain a natural substrate, and to accommodate all reasonably foreseeable expected high flows.

10. All equipment staging, including Temporary Construction Areas (TCA's), shall take place within approved areas within the project boundary. Prior to construction implementation, you shall ensure all equipment staging, TCA's, demolition and disposal, excavation, off pavement detours, and borrow and fill areas, have been evaluated under National Environmental Policy Act (NEPA), Section 401 and 404 of the Clean Water Act, Section 7 of the Endangered Species Act and Section 106 of the National Historical Preservation Act and all required permits have been obtained.

11. If you discover any previously unknown historic or archeological remains while accomplishing the activity authorized by this permit, you must immediately notify this office of what you have found. We will initiate the federal and state coordination required to determine if the remains warrant a recovery effort or if the site is eligible for listing in the National Register.

12. You must allow representatives from the Corps of Engineers to inspect the authorized activity and any avoidance areas at any time deemed necessary to ensure that it is being or has been accomplished in accordance with the terms and conditions of your permit.

13. To document pre-and post-project construction conditions, you shall submit numbered and dated photos of the waters (including both the temporary and permanently impacted areas) within the project site prior to project implementation and post-construction photos of the same areas within 30 days after project completion.

14. To prevent unauthorized fills and unforeseen impacts, you shall, prior to proceeding with any activity otherwise authorized by this permit, install fencing and appropriate signage around the entire perimeter of avoided waters of the U.S. within the project area. All fencing surrounding avoidance areas shall allow unrestricted visibility of these areas to discourage vandalism, destruction or disturbance. An example of fencing includes chain link or similar type.

15. You must sign the enclosed Compliance Certification and return it to this office within 30 days after completion of the authorized work.

This verification is valid for two years from the date of this letter or until the Nationwide Permit is modified, reissued, or revoked, whichever comes first. Failure to comply with the General Conditions of this Nationwide Permit, or the project-specific Special Conditions of this authorization, may result in the suspension or revocation of your authorization.

We appreciate your feedback. At your earliest convenience, please tell us how we are doing by completing the customer survey on our website at http://per2.nwp.usace.army.mil/survey.html.

Please refer to identification number SPK-2007-01149 in any correspondence concerning this project. If you have any questions, please contact Ms. Leah Fisher at our California North Branch Office, 1325 J Street, Room 1480, Sacramento, California 95814-2922 email leah.m.fisher@usace.army.mil, or telephone 916-557-6639. You may also use our website: www.spk.usace.army.mil/regulatory.html.

Sincerely,

ORIGINAL SIGNED

Nancy A. Haley
Chief, California North Branch

Enclosures

Copy Furnished without enclosures:

Mr. Peter Cross, U.S. Fish and Wildlife Service, Endangered Species Division, 2800 Cottage Way, Suite W2605, Sacramento, California 95825-3901
Ms. Sandy Morey, California Department of Fish and Game, 1701 Nimbus Road, Rancho Cordova, California 95670-4504
Mr. Bill Orme, Water Quality Certification Unit, State Water Resources Control Board, 1001 I Street, Sacramento, California 95814-2828
Mr. Jay Punia, Central Valley Flood Protection Board, 3310 El Camino Avenue, Room LL40, Sacramento, California 95821

FISHER/dd

HALEY

COMPLIANCE CERTIFICATION

Permit File Number: SPK-2007-01149, SR32 Widening Project

Nationwide Permit Number: 14, Linear Transportation Projects

Permittee:
Mr. Bob Greenlaw
City of Chico
Capital Project Services Department
Engineering Division
411 Main Street, P.O. Box 3420
Chico, CA 95927

County: Yuba

Date of Verification: July 6, 2009

Within 30 days after completion of the activity authorized by this permit, sign this certification and return it to the following address:

U.S. Army Corps of Engineers
Regulatory Division
California North Branch
1325 J Street, Room 1480
Sacramento, California 95814-2922
FAX 916-557-6877

Please note that your permitted activity is subject to a compliance inspection by a U.S. Army Corps of Engineers representative. If you fail to comply with the terms and conditions of the permit your authorization may be suspended, modified, or revoked. If you have any questions about this certification, please contact the Corps of Engineers.

* * * * * * * * *

I hereby certify that the work authorized by the above-referenced permit, including all the required mitigation, was completed in accordance with the terms and conditions of the permit verification.

_____ _____
Signature of Permittee Date

DEPARTMENT OF THE ARMY
U.S. ARMY ENGINEER DISTRICT, SACRAMENTO
CORPS OF ENGINEERS
1325 J STREET
SACRAMENTO CA 95814-2922

RECEIVED
AUG 16 2011

REPLY TO
ATTENTION OF

August 10, 2011

Regulatory Division (SPK-2007-01149)

Mr. Bob Greenlaw
City of Chico
411 Main Street, Second Floor
Chico, California 95928-5439

Dear Mr. Greenlaw:

We are responding to your March 24, 2011, request for a Department of the Army permit to continue the phases of the State Route 32 Widening project. This approximately115-acre project involves activities, including discharges of dredged or fill material, in waters of the United States to widen and improve approximately 2.6 miles of State Route 32. The project is located on or near Deadhorse Slough, Section 25, Township 22 North, Range 1 East, Mount Diablo Meridian, Latitude 39.7379554371563°, Longitude -121.812371670664°, Butte County, California.

Based on the information you provided, the proposed activity in approximately 1.409-acres of waters of the United States is authorized by Nationwide Permit Number 14, Linear Transportation Projects. The proposed impacts associated with this work include; approximately 0.493-acre of permanent impacts, 0.01-acre of temporary impacts, and 0.906-acre of indirect impacts to waters of the United States. Your work must comply with the general terms and conditions listed on the enclosed Nationwide Permit information sheets and the following special conditions:

1. To mitigate for the loss of 0.493-acre of permanent impacts to wetlands, you shall purchase 0.493-acre of vernal pool creation credits at Stillwater Plain Mitigation Bank. Evidence of this purchase shall be provided to this office prior to proceeding with any activity otherwise authorized by this permit.

2. To mitigate for the loss of 0.906-acre of indirect impacts to wetlands, you shall purchase 1.812-acre of vernal pool preservation credits at Dove Ridge Mitigation Bank. Evidence of this purchase shall be provided to this office prior to proceeding with any activity otherwise authorized by this permit.

3. To compensate for the temporary loss of 0.010-acre of other waters of the United States, you shall restore at least 0.010-acre of seasonal ditches and culverts adjacent to the modified roadway. The ditches and culverts shall be designed to the approximate current dimensions and shall be vegetated with native seed mix.

4. To mitigate project impacts to the aquatic resources and associated habitats, you shall employ protective mats or other barriers under heavy equipment, while operating in wetlands, mudflats, and vernal pools. You shall implement all other measures necessary, in order to protect the topography, hydrology, and vegetation in such habitats.

5. This Corps permit does not authorize you to take an endangered species, in particular giant garter snake (Thamnophis gigas), vernal pool fairy shrimp (Branchinecta lynchi), vernal pool tadpole shrimp (Lepidurus packardi), valley elderberry longhorn beetle (Desmocerus californicus dimorphus), Butte County meadowfoam (Limnathes floccose ssp. Californica), or designated critical habitat. In order to legally take a listed species, you must have separate authorization under the Endangered Species Act (e.g., an Endangered Species Act Section 10 permit, or a Biological Opinion under Endangered Species Act Section 7, with "incidental take" provisions with which you must comply). The enclosed Fish and Wildlife Service Biological Opinion (Number 81420-2008-F-0104-2, dated February 3, 2009), contains mandatory terms and conditions to implement the reasonable and prudent measures that are associated with "incidental take" that is also specified in the Biological Opinion. Your authorization under this Corps permit is conditional upon your compliance with all of the mandatory terms and conditions associated with "incidental take" of the attached Biological Opinion, which terms and conditions are incorporated by reference in this permit. Failure to comply with the terms and conditions associated with incidental take of the Biological Opinion, where a take of the listed species occurs, would constitute an unauthorized take, and it would also constitute non-compliance with your Corps permit. The Fish and Wildlife Service is the appropriate authority to determine compliance with the terms and conditions of its Biological Opinion, and with the Endangered Species Act. The permittee must comply with all conditions of this Biological Opinion, including those ascribed to the Corps.

6. You shall have a qualified biologist, who is aware of the locations of all waters of the United States within the project boundary monitor construction activities. The monitor shall ensure no unauthorized activities occur within avoided waters. The monitor shall have the authority to stop work immediately if any unauthorized fill occurs in waters of the United States, including wetlands. In the event of an unauthorized fill, our office shall be contacted immediately.

7. You shall follow the specifications and standards described in the Storm Water Pollution Prevention Plan (SWPPP) and/or Water Pollution Control Plan (WPCP), to prevent erosion and sedimentation during and after construction. Construction work within Deadhorse Slough and associated wetlands shall be conducted during periods of low flow (typically June 1-October 30), outside the rainy season work window.

8. You shall employ Best Management Practices (BMP's) to avoid and minimize environmental impacts. Temporary fills must be removed in their entirety and the affected areas returned to preconstruction elevations and conditions. The affected areas must be re-vegetated with a native seed mix.

9. You shall design and construct all crossings of waters of the United States to retain a natural substrate, and to accommodate all reasonably foreseeable expected high flows.

10. All equipment staging, including Temporary Construction Areas (TCA's), shall take place within approved areas within the project boundary. Prior to construction implementation, you shall ensure all equipment staging, TCA's, demolition and disposal, excavation, off pavement detours, and borrow and fill areas, have been evaluated under National Environmental Policy Act (NEPA), Section 401 and 404 of the Clean Water Act, Section 7 of the Endangered Species Act and Section 106 of the National Historical Preservation Act and all required permits have been obtained.

11. If you discover any previously unknown historic or archeological remains while accomplishing the activity authorized by this permit, you must immediately notify this office of what you have found. We will initiate the federal and state coordination required to determine if the remains warrant a recovery effort or if the site is eligible for listing in the National Register.

12. You must allow representatives from the Corps of Engineers to inspect the authorized activity and any avoidance areas at any time deemed necessary to ensure that it is being or has been accomplished in accordance with the terms and conditions of your permit.

13. To document pre-and post-project construction conditions, you shall submit numbered and dated photos of the waters (including both the temporary and permanently impacted areas) within the project site prior to project implementation and post-construction photos of the same areas within 30 days after project completion.

14. To prevent unauthorized fills and unforeseen impacts, you shall, prior to proceeding with any activity otherwise authorized by this permit, install fencing and appropriate signage around the entire perimeter of avoided waters of the U.S. within the project area. All fencing surrounding avoidance areas shall allow unrestricted visibility of these areas to discourage vandalism, destruction or disturbance. An example of fencing includes chain link or similar type.

15. You must sign the enclosed Compliance Certification and return it to this office within 30 days after completion of the authorized work.

This verification is valid until March 18, 2012, when the existing Nationwide Permits are scheduled to be modified, reissued, or revoked. It is incumbent upon you to remain informed of changes to the NWPs. We will issue a public notice when the NWPs are reissued. Furthermore, if you commence or are under contract to commence this activity before the date that the relevant NWP is modified or revoked, you will have twelve (12) months from the date of the modification or revocation of the NWP to complete the activity under the present terms and conditions of this nationwide permit. Failure to comply with the General Conditions of this Nationwide Permit, or the project-specific Special Conditions of this authorization, may result in the suspension or revocation of your authorization.

We appreciate your feedback. At your earliest convenience, please tell us how we are doing by completing the customer survey on our website under *Customer Service Survey*.

Please refer to identification number SPK-2007-01149 in any correspondence concerning this project. If you have any questions, please contact Eileen Imamura at 650 Capitol Mall, Suite 5-200, Sacramento, California 95814-4708, email *Eileen.R.Imamura@usace.army.mil*, or telephone 916-557-5262. For more information regarding our program, please visit our website at *www.spk.usace.army.mil/regulatory.html*.

Sincerely,

ORIGINAL SIGNED

Nancy A. Haley
Chief, California North Branch

Enclosures

Copy furnished without enclosures:

7 Ms. Christy Dawson, Senior Regulatory Biologist, Gallaway Consulting, 111 Mission Ranch Blvd, Suite 100, Chico, California 95926-2267
Mr. Peter Cross, U.S. Fish and Wildlife Service, Endangered Species Division, 2800 Cottage Way, Suite W2605, Sacramento, California 95825-3901
Ms. Sandy Morey, California Department of Fish and Game, 1701 Nimbus Road, Rancho Cordova, California 95670-4504
Mr. Bill Orme, Water Quality Certification Unit, State Water Resources Control Board, 1001 I Street, Sacramento, California 95814-2828
Mr. Jay Punia, Central Valley Flood Protection Board, 3310 El Camino Avenue, Room LL40, Sacramento, California 95821-6340

(Blank)

2005-072

United States Department of the Interior

FISH AND WILDLIFE SERVICE
Sacramento Fish and Wildlife Office
2800 Cottage Way, Room W-2605
Sacramento, California 95825-1846

In reply refer to:
81420-2008-F-0104-2

FEB 03 2009

Ms. Nancy Haley
Chief, California, North Section
U.S. Army Corps of Engineers
1325 J Street, Room 1480
Sacramento, California 95814-2922

Subject: Review of the Proposed State Route 32 Widening Project (Corps File Number 200600254), Sacramento County, California, for Inclusion with the Vernal Pool Crustaceans Programmatic Consultation (Service file no. 1-1-96-F-001), the Programmatic Consultation for U.S. Army Corps of Engineers 404 Permitted Projects with Relatively Small Effects on the Giant Garter Snake (1-1-F-97-149), and the Valley Elderberry Longhorn Beetle Programmatic Consultation (Service File Number 1-1-96-F-0066).

Dear Ms. Haley:

This letter is in response to your October 2, 2007, letter and supporting documentation requesting section 7 consultation for the Proposed State Route (SR) 32 Widening project (proposed project), in Butte County, California. Your request was received by the U.S. Fish and Wildlife Service (Service) on October 12, 2007. At issue are potential adverse effects to the threatened vernal pool fairy shrimp (*Branchinecta lynchi*), endangered vernal pool tadpole shrimp (*Lepidurus packardi*) (collectively referred to as the vernal pool crustaceans), the threatened valley elderberry longhorn beetle (*Desmocerus californicus dimorphus*) (beetle), the threatened giant garter snake (*Thamnophis gigas*) (snake), and the endangered Butte County meadowfoam (*Limnathes floccose* ssp. *Californica*) (meadowfoam). The proposed project is adjacent to critical habitat for the vernal pool fairy shrimp (unit 9), vernal pool tadpole shrimp (unit 4A), and Butte County meadowfoam (unit 3). This response has been prepared in accordance with section 7 of the Endangered Species Act of 1973, as amended (16 U.S.C. 1531 *et seq.*) (Act).

The proposed project is adjacent to critical habitat for the vernal pool fairy shrimp (unit 9), vernal pool tadpole shrimp (unit 4A), and Butte County meadowfoam (unit 3). The proposed project is within the Doe Mill Core Recovery Area within the Northeastern Sacramento Valley Vernal Pool Region, as described in the *Recovery Plan for Vernal Pool Ecosystems of California and*

Southern Oregon (Service 2005). Critical habitat has not been designated for the snake, and therefore, none would be adversely affected. Critical habitat has been designated for the valley elderberry longhorn beetle; however, the proposed project is not within critical habitat for this species. Therefore, the proposed project will not destroy or adversely modify critical habitat for the snake or the beetle.

The Service does not concur with your determination that the proposed project is not likely to adversely affect the meadowfoam, the vernal pool crustaceans, and the snake. The Service has determined that the proposed project is likely to adversely affect the meadowfoam, the vernal pool crustaceans, the snake, and the beetle. New information was received on October 21, 2008, in which an elderberry (*Sambucus* sp.) shrub was identified within the proposed project. Therefore, the Service believes the proposed project is likely to adversely affect the beetle. The proposed project is also likely to adversely affect critical habitat for the meadowfoam, and the vernal pool crustaceans. Surveys were conducted for meadowfoam in the right-of-way during the 2004, 2005, and 2008 seasons. This species was detected within the proposed project area during these surveys and from data from surveys from different projects. Guideline-level surveys for vernal pool crustacean species have not been performed; however, vernal pool tadpole shrimp were detected in previous surveys and are assumed to occur within the action area. The project applicant is assuming presence of vernal pool crustaceans and suitable habitat is present onsite for these species. Suitable habitat also occurs within the proposed project site for both the beetle and the snake.

The Service has determined that it is appropriate to append the proposed project to the Service's September 19, 1996, *Programmatic Formal Consultation Permitting Projects with Relatively Small Effects on the Valley Elderberry Longhorn Beetle* (Beetle Programmatic Consultation) (Service file number 1-1-96-F-0066), the February 28, 1996, *Programmatic Formal Endangered Species Act Consultation on Issuance of 404 Permits for Projects with Relatively Small Effects on Listed Vernal Pool Crustaceans Within the Jurisdiction of the Sacramento Field Office, California* (Vernal Pool Programmatic) *(Service file number 1-1-96-F-001)*, and the November 13, 1997, *Programmatic Consultation for U.S. Army Corps of Engineers 404 Permitted Projects with Relatively Small Effects on the Giant Garter Snake* (Snake Programmatic Consultation) (Service file number 1-1-97-F-0149). This document contains programmatic biological opinions for the beetle, vernal pool crustaceans, and the snake, and a separate biological opinion for the meadowfoam.

This consultation is based on the following: (1) phone and electronic mail correspondence between the Service and Gallaway Consulting Inc. between June 2005 through January 2009; (2) the *November 2006, Biological Assessment for the State Route 32 Widening Project*; (3) June 23, 2005 and June 6, 2008, site visits from Service representatives and Gallaway Consulting Inc.; (4) the Corps' October 2, 2007, consultation initiation letter; (5) the October 21, 2008, request from the Service for information for the State Route 32 Widening Project; and (6) other information available to the Service. A complete administrative record of this consultation is on file at the Sacramento Fish and Wildlife Office.

Consultation History

June 23, 2005: Representatives from the Service and representatives from Gallaway Consulting Inc. attended a site visit.

October 12, 2007: The Service received a letter from the Corps, dated October 2, 2007, requesting initiation of formal consultation on the Proposed State Route 32 Widening Project. the November 2006, *Biological Assessment for the State Route 32 Widening Project, City of Chico, Butte County, California was included with the initiation.*

June 6, 2008: Representatives from the Service and representatives from Gallaway Consulting Inc. attended a site visit.

October 21, 2008 The Service received an addendum to the Biological Assessment from Gallaway Consulting Inc.

BIOLOGICAL OPINION

Description of the Proposed Action

The proposed project will widen and improve approximately 2.6 miles of SR 32 (encompassing approximately 45 acres), beginning at the southbound SR 99 ramps at the west end of the project corridor and extending east past Yosemite Drive. State Route 32 will be widened from two to three lanes in each direction from the east side of the SR 99 interchange to just east of Fir Street. The roadway will then be widened from two to four lanes (two in each direction) from Fir Street to 1,400 ft east of Yosemite Drive, where the roadway width will transition down from four lanes to the existing two lanes. The project will consist of modifications to the ramp terminal intersections and the couplet at the SR 99/SR 32 interchange. The intersections of SR 32 with Forest Avenue, El Monte Avenue, Bruce Road, and Yosemite Drive will be improved to include turn pockets. The City and Caltrans evaluated two alternatives: signalized intersection improvements (Alternative 1) or a roundabout at Bruce Road (Alternative 2). Alternative 1 was selected. The intersections of SR 32 with Fir Street and Yosemite Drive will be widened and new traffic signals will be installed. The signals at Forest Avenue and El Monte Avenue will be modified. The project includes construction of the south leg of the Yosemite Drive intersection. A more detailed description of the proposed project can be found in the November 2006, *Biological Assessment for the State Route 32 Widening Project.*

The proposed project will permanently destroy 0.265 acre of vernal pool crustacean habitat and indirectly affect 0.906 acre of vernal pool crustacean habitat. The proposed project would also directly affect 0.0001 acre (one individual located in the uplands on the south side of SR 32) of meadowfoam. The proposed project would also indirectly affect 0.183 acre of meadowfoam habitat which is located on the parcel south of SR 32 between Humboldt Road and Bruce Road.

There is one elderberry cluster within the proposed project. This shrub cluster will be adversely

affected by activities within 20 feet. The applicant has proposed to compensate for this shrub cluster, and this shrub shall be transplanted according to the Service's July 9, 1999, *Conservation Guidelines for the Valley Elderberry Longhorn Beetle.*

The City of Chico (The City) has also proposed to compensate for the permanent and temporary loss of snake habitat. Construction will occur during the snake's active season (May 1 – October 1). If it appears that construction activity may go beyond October 1, the project proponents shall contact the Service as soon as possible, but not later than July 15, to determine if additional measures are necessary to minimize take. The project will permanently destroy 0.093 acre of aquatic habitat and 1.519 acres of upland snake habitat. The applicant has proposed to compensate for the direct impacts by purchasing credits at a Service approved conservation bank within the service area of the proposed project. The applicant will also restore the temporary aquatic impacts of 0.227 acre of habitat for the snake to pre-project conditions within the same season, or at most, the same calendar year.

Conservation Measures

1. The City shall include a copy of the project BO within its construction documents making the primary contractor responsible for implementing all requirements and obligations included within the biological opinion, and to educate and inform all other contractors involved in the project as to the requirements of the biological opinion. A copy of the contract documents containing the biological opinion also will be provided to the Chief of Endangered Species (Central Valley) at the Sacramento Fish and Wildlife Service.

2. The contractor will be responsible for providing a Worker Environmental Awareness Training Program for construction personnel. This shall be conducted by a Service-approved biologist for all construction workers, including contractors, prior to the commencement of construction activities. The program shall provide workers with information on their responsibilities with regard to meadowfoam, snake and vernal pool crustaceans, an overview of the life history of these species, information on take prohibitions, protections afforded these species under the Act, and an explanation of the relevant terms and conditions of the biological opinion. Written documentation of the training must be submitted to the Sacramento Fish and Wildlife Service within 30 days of the completion of training. As needed, training shall be conducted in Spanish for Spanish language speakers.

3. The contractor will be responsible for hiring a qualified biologist to inspect construction-related activities at the proposed construction area to ensure that no unauthorized take of federally-listed species or destruction of their habitat occurs. The biologist shall be available for monitoring throughout all phases of construction that may result in adverse effects to meadowfoam, vernal pool invertebrates, or the snake.

4. The contractor will be responsible for understanding and following the guidelines set forth in the Section 404 permit, Section 401 water quality certification, and Section 1602 streambed alteration agreement.

5. The contractor will prepare a site-specific Storm Water Pollution Prevention Plan (SWPPP) for the project to protect receiving waters from pollution. The SWPPP will include standard sediment and erosion control measures which will include limiting soil disturbances during the winter rainfall season. Given the site-specific conditions of the construction area, the SWPPP for this project will generally include limiting soil disturbances during the winter rainfall season of October 15 through April 15 and fully stabilizing disturbed areas prior to December 1. Standard sediment erosion control measures, such as silt fencing, straw bale barriers, sediment traps, or other measures could also directly reduce the offsite transport of sediment from disturbed slopes. Existing vegetation that can be preserved will be identified and flagged or fenced to avoid disturbance. Erosion in disturbed areas will be controlled through the use of grading operations that eliminate direct routes for conveying runoff to drainage channels and use of soil stabilization Best Management Practices (BMPs), such as mulching, erosion control fabrics, and/or reseeding with grass or other plants where necessary. Standard staging area practices for sediment tracking reduction also will be identified where necessary including vehicle washing and street sweeping. Temporary concentrated flow conveyance systems also will be considered, such as berms, ditches, and outlet flow-velocity dissipation devices to reduce erosion from newly disturbed slopes.

6. The biological monitor will regularly inspect and maintain the BMPs in good working order.

7. The City will incorporate permanent post-construction BMPs in the project design to avoid or minimize long-term water quality impacts, pursuant to the National Pollutant Discharge Elimintation System (NPDES) storm water permit. Appropriate BMPs for the construction area could include stabilization measures such as preservation of existing vegetation, concentrated flow conveyance systems (ditches, berms, drains, flared culvert end sections, outlet protection, and flow-velocity dissipation), and slope roughening or terracing for new cut-and-fill slopes as deemed necessary by the project engineer. Slope protection measures will be implemented to control erosion such as reducing the length of disturbed slopes, reducing the gradient of slopes, and preventing concentrated flow over slope soils. The City will be responsible for long-term inspection and maintenance of the permanent BMPs to ensure that they are maintained in good working order.

8. The contractor will be responsible for complying with all work windows in regards to special-status species. Work windows for this project include:

    i. Working in Dead Horse Slough and South Fork Dead Horse Slough during the dry season (generally June 1 through October 30; however, work may start earlier if the creek is dry) when no habitat is present for anadromous fish.

This window also encompasses the snakes active period who hibernate during the colder months of the year and are not able to escape danger from heavy machinery crushing their winter dens.

ii. Prohibiting the removal of trees during the raptor nesting season (generally March 1 through September 15), or removing necessary trees prior to the nesting season after a pre-construction raptor survey. And no construction will occur within 250 feet of active raptor nests.

9. Prior to the commencement of construction activities, a qualified biologist hired by the contractor will determine the location of high visibility fencing, which will be erected around the habitats of the federally listed species to identify and protect these sensitive areas from encroachment by personnel and equipment. These areas will be avoided by all construction personnel. The fencing shall be inspected before the start of each work day and maintained by the contractor until completion of the project. The fencing may be removed only when the construction of the project is completed.

   i. Fencing will be established 2 feet from the edge of pavement or a minimum distance of 50 feet from the suitable vernal pool crustacean habitat.
   ii. Fencing will be established 2 feet from the edge of the pavement from the suitable meadowfoam habitat.
   iii. Fencing will be established around Dead Horse Slough and South Fork Dead Horse Slough to minimize the amount of disturbance (heavy equipment movement, vehicle movement) to the creek channel.

10. During construction operations, the number of access routes, number and size of staging areas, and the total area of the proposed project activity will be limited to the minimum necessary. Routes and boundaries will be clearly demarcated. Movement of heavy equipment to and from the construction area will be restricted to established roadways to minimize habitat disturbance.
11. During construction operations, stockpiling of construction materials, portable equipment, vehicles and supplies will be restricted to the designated construction staging areas and exclusive of the sensitive areas.
12. After construction activities are complete, any temporary fill or construction debris shall be removed and disturbed areas restored and revegetated to their pre-project conditions. An area subject to "temporary" disturbance includes any area that is disturbed during the project, but that, after project completion, will not be subject to further disturbance and has the potential to be re-vegetated.
13. The contractor shall ensure that activities that are inconsistent with the maintenance of the suitability of vernal pool crustacean habitat and the associated on-site watershed are prohibited. These include, but are not limited to:
    i. the alteration of existing topography that may alter hydrology into habitat for vernal pool crustaceans;
    ii. the placement of any equipment within suitable habitat;

iii. dumping, burning, and/or burying of rubbish, garbage, or any other wastes and fill materials; and

iv. the use of pesticides or other toxic chemicals.

n. The contractor will develop and implement a spill prevention and control program to minimize the potential for—and effects from—spills of hazardous, toxic, or petroleum substances during construction of the project. The program will be a component of the SWPPP. If a spill is reportable under federal, state, or local regulations, the contractor will notify the City, Butte County Environmental Health and California Department of Toxic Substances Control, which has spill response and cleanup ordinances to govern emergency spill response. A written description of reportable releases will be submitted to the Regional Water Quality Control Board. This submittal will include a description of the release, including the type of material and an estimate of the amount spilled; the date of the release; an explanation of why the spill occurred; and a description of the steps taken to prevent and control future releases. The releases will be documented on a spill report form.

Action Area

The action area is defined in 50 CFR § 402.02 as, "all areas to be affected directly or indirectly by the Federal action and not merely the immediate area involved in the action." For the State Route 32 Widening Project, the action area for the project is limited to the project footprint itself, and a 250 foot buffer outside the project footprint.

Evaluations under Programmatic Consultations

Vernal Pool Crustaceans

This letter is an agreement by the Service to append the proposed project to the *February 28, 1996, Programmatic Formal Endangered Species Act Consultation on Issuance of 404 Permits for Projects with Relatively Small Effects on Listed Vernal Pool Crustaceans Within the Jurisdiction of the Sacramento Field Office, California (1-1-96-F-001),* and represents the Service's biological opinion on the effects of the proposed action. Conservation measures for projects appended to the Programmatic Consultation involve the use of creation and preservation banks in combination with on-site conservation options where such options are appropriate.

The conservation measures identified in the Programmatic Consultation include:

Preservation component. For every acre of vernal pool habitat directly or indirectly affected, at least two vernal pool acres will be dedicated within a Service-approved vernal pool preservation bank; or, based on Service evaluation of site-specific conservation values, three acres of vernal pool habitat may be preserved on the project site or another non-bank as approved by the Service.

Creation component. For every acre of habitat directly affected, at least one vernal pool creation credit will be dedicated within a Service-approved vernal pool conservation bank; or, based on Service evaluation of site-specific conservation values, two acres of vernal pool habitat will be created and monitored on the project site or on another non-bank site as approved by the Service.

The proposed project will result in direct effects to 0.265 acres of habitat for vernal pool crustaceans. The proposed project will also result in indirect effects to 0.906 acres of habitat for vernal pool crustaceans. Both will be compensated at a 2:1 preservation ratio.

The agreed upon conservation responsibilities of the applicant are as follows:

1. Prior to the start of construction, the project applicant will purchase vernal pool preservation credits sufficient to preserve 2.34 acres (0.265 direct +0.906 indirect * 2) at a Service-approved vernal pool conservation bank within a service area covering the project.

2. Prior to the start of construction, the project applicant will purchase vernal pool creation credits sufficient to restore/create 0.265 acre at a Service-approved vernal pool conservation bank within a service area covering the project.

3. The applicant shall also adhere to the avoidance and minimization measures as described in the November 2006, *Biological Assessment for the State Route 32 Widening Project,* and the terms and conditions of the Vernal Pool Programmatic Consultation.

Giant Garter Snake

The Service is tracking losses of habitat within the range of the snake permitted under the *November 13, 1997, Programmatic Formal Consultation for U.S. Army Corps of Engineers 404 Permitted Projects with Relatively Small Effects on the Giant Garter Snake within Butte, Colusa, Glenn, Fresno, Merced, Sacramento, San Joaquin, Solano, Stanislaus, Sutter and Yolo Counties, California (1-1-F-97-149)*, and compensation for those losses, in each county under the jurisdiction of the Sacramento Fish and Wildlife Office. The Service reevaluates the effectiveness of this Snake Programmatic Consultation annually to ensure that continued implementation will not result in unacceptable impacts to the snake or the habitats upon which it depends.

The Snake Programmatic Consultation identifies three levels of project impacts and appropriate conservation measures for each impact level (below). It is the Service's intent that following these Guidelines and Avoidance Measures will reduce habitat degradation while increasing the protected habitat areas across the species' range. These measures include the following:

1. Avoidance of take and disturbance of habitat (Levels 1, 2, and 3);

2. Minimization of disturbance and habitat loss (Levels 1, 2, and 3);

3. Restoration of temporary habitat disturbance and associated impacts to snake habitat (Levels 1 and 2);

4. Replacement of permanent and temporal habitat loss (Levels 2 and 3);

5. Management and monitoring of restored and replacement habitat (Levels 1, 2, and 3); and

6. A management plan for the long-term protection of the restored and replaced habitat area(s) to protect the area(s) in perpetuity as habitat for the snake (Levels 2 and 3).

The proposed project site provides suitable snake habitat including both upland and aquatic habitats. The snake is assumed to occur in Dead Horse Slough, and because of the presence of suitable habitat, the Service believes that the snake is reasonably certain to occur within the proposed project's action area and, therefore, the proposed project is likely to adversely affect the snake through temporary loss of 0.227 acres of potential aquatic habitat and permanently destroy 1.519 acres of upland habitat and 0.093 acres of aquatic habitat.

The agreed upon conservation responsibilities of the applicant are as follows:

1. Construction activities associated with the proposed project will result in temporary loss of 0.227 acre of habitat for the snake (Level 1 Effects). The project applicant will follow the Level 1 project impact mitigation as a result of the temporary loss of habitat. The applicant will restore the temporarily impacted 0.227 acre of habitat for the snake to pre-project conditions within the same season, or at most, the same calendar year. The applicant will also monitor the restored areas with a photo documentation report due 1 year from the implementation of the restoration showing pre-and post project area photos. Construction activities associated with the proposed project will also result in permanent loss of 1.612 acres of habitat for the snake (Level 3 Effects). The project applicant will follow the Level 3 project impact mitigation as a result of the permanent loss of habitat. The applicant will purchase credits at a Service approved conservation bank at a ratio of 3:1 for a total of 4.836 acres.

2. The applicant shall also adhere to the avoidance and minimization measures as described in the November 2006, *Biological Assessment for the State Route 32 Widening Project,* and the terms and conditions of the Snake Programmatic Consultation.

<u>Valley Elderberry Longhorn Beetle</u>

This letter is an agreement by the Service to append the proposed project to the *March 11, 1997, Programmatic Formal Consultation Permitting Projects with Relatively Small Effects on the Valley Elderberry Longhorn Beetle* (Programmatic Consultation) (Service file number 1-1-96-F-0066). The project applicant has proposed to plant elderberry seedlings and associated native riparian species in accordance with the Service's 1999 Conservation Guidelines (Table 1).

Table 1: Proposed compensation ratios for the valley elderberry longhorn beetle for the proposed project.

Location	Stems (maximum diameter at ground level)	Exit Holes	# of Stems	Elderberry Seedling Ratio	# Elderberry Seedlings required	Associated Native Ratio	# Associated Natives required
Non-Riparian	1-3 inches	Yes	6	2:1	12	2:1	24
Non-Riparian	3-5 inches	Yes	4	4:1	16	2:1	32
Non-Riparian	> 5 inches	Yes	1	6:1	6	2:1	12
Total			**11**		**34**		**68**

Therefore, prior to any ground disturbing activities associated with the proposed project, the project applicant shall fulfill the following conservation measures:

1. The project applicant will purchase credits sufficient to plant 34 elderberry shrub seedlings and 68 associated riparian native species at a Service-approved valley elderberry longhorn beetle conservation bank.

2. There is one elderberry cluster within the proposed project. The single elderberry cluster which will be adversely affected will be transplanted as outlined in the Service's 1999 Conservation Guidelines.

Biological Opinion
(Butte County Meadowfoam and vernal pool critical habitat)

Project Description

A general summary of the proposed project is provided on pages 3-4 of this biological opinion. A more in depth description of the proposed action is available in the November 2006 *State Route 32 Widening Project, Chico, Butte County, California.*

Butte County Meadowfoam

The proposed project would directly affect 0.0001 acre of meadowfoam habitat. This impact would occur to an individual plant which was identified and found located in an upland area adjacent to the highway west of Bruce Road. The proposed project would also indirectly affect

0.183 acre. Table 2 summarizes the agreed upon acreage amounts of meadowfoam habitat to be preserved to offset habitat loss resulting from the proposed project.

Table 2: Butte County meadowfoam impacted habitat and proposed conservation measures to offset habitat loss.

Direct Effects (Acres)	Indirect Effects (Acres)	Total Required Preservation	Total Required Creation/Restoration
Butte County Meadowfoam			
0.0001 acre (19:1)	0.183 acre (5:1)	0.917 acre (0.002 + 0.915)	N/A

In addition to the proposed conservation measures described on pages (pages 4-7), the project applicant has also proposed these additional conservation measures:

1. To minimize the adverse effects of the proposed project on meadowfoam, the applicant will purchase a total of 0.917 acre of meadowfoam habitat. The applicant has proposed the following three preservation options:
   i. Purchase 0.917 acre of meadowfoam credits (if available at the time of purchase) from Dove Ridge Mitigation Bank. The actual fee paid will be that in effect at the time of payment.
   ii. Preserve and/or create 0.917 acre of meadowfoam habitat at the proposed Bidwell Ranch conservation area. As part of the mitigation plan for the Chico Municipal Airport project, Bidwell Ranch has been identified by the Service as a suitable meadowfoam conservation area; however, a final management plan has not been developed at this time. A final management plan will be developed by the City prior to the start of construction on SR 32.
   iii. Establish 0.917 acre of new meadowfoam preserve within a Service approved off-site location. The City will be responsible for developing a monitoring plan, placing the property in a USFWS conservation easement, and assuring an endowment fund will be available to protect the property for perpetuity.

Status and Baseline

Butte County Meadowfoam

Butte County meadowfoam was listed as endangered on June 8, 1992 (Service 1992). The final rule to designate critical habitat for 15 vernal pool species, including Butte County meadowfoam, was published on August 6, 2003 (Service 2003). The most recent final rule for critical habitat was published on February 10, 2006 (Service 2006).

Butte County meadowfoam is a small annual with erect stems less than 9.8 inches tall. The stem and leaves are densely pubescent. The alternate leaves are pinnately compound, up to 3.1 inches long, and consist of 5 to 11 leaflets on a long petiole. The individual leaflets are approximately 0.4 inch long and vary from narrow to egg-shaped; their margins may be smooth, toothed, or lobed. A single flower arises in the axil of each upper leaf. The fragrant flowers are cup- or bowl-shaped and consist of 5 petals, 5 sepals, 5 pistils, and 10 stamens on a long flower stalk. The petals are 0.31 to 0.39 inch long, white with yellow veins, and have two rows of hairs at the base. The sepals are about the same length as the petals and are densely pubescent on both their inner and outer surfaces. Although the sepals are not fused, the dense hairs hold them together, preventing the flower from opening fully. The pistils are separate at the base, but the upper parts are fused. Each pistil is capable of producing a nutlet; the nutlets are egg-shaped, 0.12 to 0.18 inch long, and covered with cone-shaped tubercles. As the nutlets mature, the petals turn inward, and at maturity the entire flower, including the nutlets, falls off the plant as a unit. The diploid chromosome number for all *Limnanthes* species is 10 (Mason 1952, Arroyo 1973, McNeill and Brown 1979, Ornduff 1993).

Butte County meadowfoam is found primarily in vernal swales and to a lesser extent on the margins of vernal pools (Arroyo 1973, Dole 1988, Jokerst 1989, BioSystems Analysis, Inc. 1993). Butte County meadowfoam has always been confined to the Northeastern Sacramento Valley Vernal Pool Region. Butte County meadowfoam is believed to occur in five natural centers of concentration, totaling 21 naturally occurring populations (CNDDB 2006). The southernmost area of concentration is the Shippee Road area between Chico and Oroville. Three other centers of concentration are within the City of Chico at the Chico Municipal Airport, Bidwell Ranch, and the vicinity of the Humboldt Road and SR 32 intersection. In addition, a fifth location was found in 2005, on North Table Mountain east of the intersection of Highways 149 and 70. In addition to the 21 natural occurrences, an experimental population of Butte County meadowfoam has been introduced on the Tuscan Preserve in northwestern Butte County (Kelley *et al.* 1994). The introduction site was just outside of the known historical range of the taxon and thus marginally increased its range.

Butte County meadowfoam seeds germinate in the late fall after the rainy season begins. Butte County meadowfoam typically begins flowering in February, reaches peak flowering in March, and may continue into April, if conditions are suitable. Nutlets are produced in March and April, and the plants die back by early May (Jokerst 1989, Dole and Sun 1992). Nutlets of Butte County meadowfoam are apparently dispersed by water and can remain afloat for up to 3 days (Hauptli *et al.* 1978). However, most meadowfoam nutlets are dispersed only short distances. Thus, Butte County meadowfoam nutlets would not be expected to disperse beyond their pool or swale of origin. Birds and livestock are potential sources of long-distance seed dispersal, but specific instances of such dispersal have not been documented (Jain 1978).

Several races of Butte County meadowfoam exist. Jokerst (1989) identified "north" and "south" races of Butte County meadowfoam in the Chico "sphere of influence" based on morphology. Later, in studies of enzyme systems, Dole and Sun (1992) confirmed that these races differed genetically. They also identified genetically distinct races that they called "northeast" and "southwest," with the latter referring to the type locality.

Critical Habitat for the vernal pool crustaceans

There are 35 critical habitat units designated for the vernal pool fairy shrimp, totaling 597,821 acres. There are 18 critical habitat units designated for the vernal pool tadpole shrimp, totaling 228,785 acres (Service 2006). The proposed project is adjacent to unit 9 for the vernal pool fairy shrimp and unit 4A for the vernal pool tadpole shrimp, which was designated on February 10, 2006 (Service 2006). Both units 9 and 4A have the same boundary and are approximately 433 acres in size. Units 9 and 4A contain occurrences of the vernal pool fairy shrimp and vernal pool tadpole shrimp and are considered essential for the conservation of the two species. The proposed project will have indirect affects to 0.09 acres of suitable habitat within Critical Habitat units 9 and 4A.

Critical habitat units 9 and 4A for the vernal pool fairy shrimp and the vernal pool tadpole shrimp contain primary constituent elements that support vernal pool crustacean feeding, growth, breeding, reproduction, and dispersal. These primary constituent elements of critical habitat provide for the physiological, behavioral, and ecological requirements of the vernal pool fairy shrimp.

The first primary constituent element is that vernal pools, swales, and other ephemeral wetlands and depressions are of appropriate sizes and depths so that they typically become inundated during winter rains and hold water for sufficient lengths of time necessary for incubation, reproduction, dispersal, feeding, and sheltering, but which are dry during the summer and do not necessarily fill with water every year. This primary constituent element provides the aquatic environment required for cyst incubation and hatching, growth and maturation, reproduction, feeding, sheltering, and dispersal, and the appropriate periods of dessication for cyst dormancy and to eliminate predators such as bullfrogs, fish, and other aquatic predators that depend on year round inundation of wetland habitats to survive.

The second primary constituent element of the critical habitat for the vernal pool fairy shrimp and the vernal pool tadpole shrimp is to maintain the aquatic phase of the vernal pool habitat. The entire vernal pool complex, including the pools swales, and associated uplands, is essential to support the aquatic functions of the vernal pool habitat. Although the uplands are not actually occupied by vernal pool crustaceans, they nevertheless are essential to the conservation of vernal pool habitat and crustaceans because they are needed to maintain the aquatic phase of vernal pools and swales. Associated uplands are also essential to provide nutrients that form the basis of the vernal pool food chain, including a primary food source for the vernal pool crustaceans.

The third primary constituent element is the geographic, topographic, and edaphic features that support aggregations or systems of hydrologically interconnected pools, swales, and other ephemeral wetlands and depressions within a matrix of surrounding uplands that together form hydrologically and ecologically functional units called vernal pool complexes. These features contribute to the filling and drying of the vernal pool, and maintain suitable periods of pool inundation, water quality, and soil moisture for vernal pool crustacean hatching, growth and reproduction, and dispersal, but not necessarily every year. All of the above described primary

constituent elements do not have to occur simultaneously within a unit for the unit to constitute critical habitat for one of these two species.

Critical Habitat for the Butte County Meadowfoam

There are 4 critical habitat units designated for meadowfoam, totaling 16,636 acres (Service 2006). Critical habitat was designated for meadowfoam on February 10, 2006 (Service 2006). This unit contains occurrences of the meadowfoam and is considered essential for the conservation of the species. The proposed project lies adjacent to Critical habitat unit 3. The acreage amount of this unit totals 1,484 acres. The proposed project will have indirect affects to 0.09 acres of suitable habitat within Critical Habitat unit 3.

Critical habitat unit 3 for meadowfoam contains primary constituent elements that support the growth, reproduction, and dispersal of this species. These primary constituent elements of critical habitat provide for the ecological requirements of meadowfoam. The first primary constituent element of meadowfoam critical habitat is vernal pools, swales, and other ephemeral wetlands and depressions of appropriate sizes and depths that typically become inundated during winter rains and hold water for sufficient lengths of time necessary for growth and reproduction of this species, but which are dry during the summer and do not necessarily fill with water every year.

The second primary constituent element of the critical habitat for the meadowfoam is to maintain the aquatic phase of the vernal pool habitat. The entire vernal pool complex, including the pools swales, and associated uplands, is essential to support the aquatic functions of the vernal pool habitat. Although the uplands are not actually occupied by meadowfoam, they nevertheless are essential to the conservation of vernal pool habitat and listed vernal pool species because they are needed to maintain the aquatic phase of vernal pools and swales.

The third primary constituent element is the geographic, topographic, and edaphic features that support aggregations or systems of hydrologically interconnected pools, swales, and other ephemeral wetlands and depressions within a matrix of surrounding uplands that together form hydrologically and ecologically functional units called vernal pool complexes. These features contribute to the filling and drying of the vernal pool, and maintain suitable periods of pool inundation, water quality, and soil moisture for meadowfoam growth, reproduction, and dispersal, but not necessarily every year. All of the above described primary constituent elements do not have to occur simultaneously within a unit for the unit to constitute critical habitat for meadowfoam.

Effects of the Proposed Action

Effects to Butte County Meadowfoam

Direct Effects

Direct effects would occur to the one isolated meadowfoam plant located within the uplands

where by the proposed project would grade and pave over this existing plant. The proposed action would directly affect Butte County meadowfoam through the destruction of 0.0001 acre to account for this individual.

Indirect Effects

The proposed highway widening would take place within 250 feet of meadowfoam habitat; however, a raised berm located on the southside of Bruce Road would greatly reduce the potential for indirect effects to occur over the entire parcel in which meadowfoam is known to occur. However, the Service believes that indirect effects could occur to Butte County meadowfoam within the parcel where the berm would not protect the known occurrences from increases in run-off,non-native invasive plants, loss of pollinator species, changes in land use patterns (i.e., urbanization), and increases in human intrusion as a result of the expansion and reconstruction of the road. The total indirect impacts to meadowfoam would be 0.183 acre.

Effects to Critical Habitat

This biological opinion on the critical habitat for both meadowfoam and vernal pool crustaceans does not rely on the regulatory definition of "destruction or adverse modification" of critical habitat at 50 CFR § 402.02. Instead, we have relied upon the statute and the August 6, 2004, Ninth Circuit Court of Appeals decision in *Gifford Pinchot Task Force v. U.S. Fish and Wildlife Service* (No. 03-35279) to complete the following analysis with respect to the critical habitat.

Critical Habitat for Vernal Pool Crustaceans and Meadowfoam

The proposed project is adjacent to critical habitat unit 9 for the vernal pool fairy shrimp, unit 4A for the vernal pool tadpole shrimp, and unit 3 for the meadowfoam. The proposed action is not expected to appreciably diminish the value of the proposed critical habitat for the vernal pool crustaceans and meadowfoam, or prevent the critical habitat from sustaining its role in the conservation and recovery of these species. The proposed project would only indirectly affect 0.09 acre of vernal pool habitat within the critical habitat boundary for these species. Adverse effects to the species primary constituent elements will only occur on a small level, therefore the Service believes the proposed project is likely to adversely affect critical habitat but is not significant enough to adversely modify critical habitat for the three vernal pool species.

Cumulative Effects

Cumulative effects include the effects of future State, Tribal, local, or private actions that are reasonably certain to occur in the action area considered in this biological opinion. Future Federal actions that are unrelated to the proposed project are not considered in this section, because they require separate consultation pursuant to section 7 of the Act. An undetermined number of future land use conversions and routine agricultural practices are not subject to Federal authorization or funding and may alter the habitat or increase incidental take of the vernal pool crustaceans and Butte County meadowfoam, and are, therefore, cumulative to the proposed project.

Conclusion

After reviewing the current status of the meadowfoam, the environmental baseline for the action area, the effects of the proposed action and the cumulative effects, it is the Service's biological opinion that the State Route 32 project, as proposed, is not likely to jeopardize the continued existence of meadowfoam. The proposed project would also not result in the adverse modification of critical habitat for meadowfoam, or the vernal pool crustaceans because the adverse affects to the species primary constituent elements will occur on a small level and critical habitat for these species will remain functional and retain the ability for the remaining primary constituent elements to serve the intended conservation role for these three species.

INCIDENTAL TAKE STATEMENT

Sections (7)(4) and 7(o)(2) of the Act, which refer to terms and conditions and exemptions on taking listed fish and wildlife species, do not apply to listed plant species. However, section 9(a)(2) of the Act prohibits removal, reduction to possession, and malicious damage or destruction of listed plant species on lands under Federal jurisdiction and the removal, cutting, digging up, or damaging or destroying such species in a knowing violation of any State law or regulation, including State criminal trespass law. Actions funded, authorized or implemented by a Federal agency that could incidentally result in the damage or destruction of such species on Federal lands are not a violation of the Act, provided the Service determines in a biological opinion that the actions are unlikely to jeopardize the continued existence of the species. The California Native Plant Protection Act prohibits the take of State-listed plants.

Reporting Requirements

The Sacramento Fish and Wildlife Office is to be notified within one (1) working day of the finding of any dead federally-listed species or any unanticipated harm to the species addressed in this biological opinion. The Service contact person for this is the Chief, Endangered Species Division at (916) 414-6620 and the Resident Agent-in-Charge of the Service's Law Enforcement Division at (916) 414-6660.

The Corps must require the applicant to report to the Service immediately any information about take or suspected take of federally-listed species not authorized in this biological opinion. The Corps must notify the Service within one (1) working day of receiving such information. Notification must include the date, time, and location of the incident or of the finding of a dead or injured animal. The Service contact is the Resident Agent-in-Charge of the Service's Law Enforcement Division at (916) 414-6660.

Any contractor or employee, who during routine operations and maintenance activities, inadvertently kills or injures a State-listed species must immediately report the incident to their representative. This representative must contact the California Department of Fish and Game immediately in the case of a dead or injured listed species. The California Department of Fish and Game contact for immediate assistance is State Dispatch at (916) 445-0045.

Conservation Recommendations

Section 7(a)(1) of the Act directs Federal agencies to utilize their authorities to further the purposes of the Act by carrying out conservation programs for the benefit of endangered and threatened species. Conservation recommendations are discretionary agency activities that can be implemented to further the purposes of the Act, such as preservation of endangered species habitat, implementation of recovery actions, or development of information and data bases.

1. The Corps should assist the Service in their implementation of the Services' 2005 *Recovery Plan for Vernal Pool Ecosystems of California and Southern Oregon.*

2. The Corps should work with Butte County, BCAG, the Service, city governments, and other stakeholders to implement a multi-species HCP in Butte County to further the conservation of special-status species.

In order for the Service to be kept informed of actions that conserve listed species or their habitats, the Service requests notification of the implementation of any conservation recommendations.

REINITIATION–CLOSING STATEMENT

This concludes formal consultation on the proposed State Route 32 Widening Project. As provided in 50 CFR §402.16, reinitiation of formal consultation is required where discretionary Federal agency involvement or control over the action has been maintained (or is authorized by law) and if: (1) the amount or extent of incidental take is exceeded; (2) new information reveals effects of the agency action that may affect listed species or critical habitat in a manner or to an extent not considered in this opinion; (3) the agency action is subsequently modified in a manner that causes an effect to the listed species or critical habitat that was not considered in this opinion; or, (4) a new species is listed or critical habitat designated that may be affected by the action. In instances where the amount or extent of incidental take is exceeded, any operations causing such take must cease pending reinitiation.

If you have any questions regarding this biological opinion, please contact Jason Hanni, Staff Biologist, or Jana Milliken, the Sacramento Valley Branch Chief, at (916) 414-6645.

Sincerely,

FOR Susan K. Moore
Field Supervisor

cc:Clif Sellers, City of Chico, Chico, California
Jody Gallaway, Gallaway Consulting Inc., Chico, California

Literature Cited

Arroyo, M.T.K. 1973. A taximetric study of infraspecific variation in autogamous *Limnanthes floccosa*. Brittonia 25:177-191.

BioSystems Analysis, Inc. 1993. Floristic inventory Butte 149 project. Unpublished report to the California Department of Transportation, Marysville. 69 pages + appendices.

California Natural Diversity Data Base. 2006. California Natural Heritage Division. California Fish and Game, Sacramento, California.

Dole, J.A. 1988. Results of a field survey for the Butte County meadowfoam in the vicinity of the City of Chico, California. Unpublished report to the Chico Community Services Department, Chico, California, 36 pp.

Dole, J.A., and M. Sun. 1992. Field and genetic survey of the endangered Butte County meadowfoam--*Limnanthes floccosa* subsp. *californica* (Limnanthaceae). Conservation Biology 6:549-558.

Jain, S. K. 1978. Local dispersal of *Limnanthes* nutlets: an experiment with artificial vernal pools. Canadian Journal of Botany 56:1995-1997.

Jokerst, J.D. 1989. A draft plan for the conservation of Butte County meadowfoam in the City of Chico. *Limnanthes floccosa* ssp. *californica*. Unpublished report to the City of Chico, California, 128 pp.

Kelly and Associates. 1992a. Biological report on Butte County meadowfoam (*Limnanthes floccosa* ssp. *californica*) for Farm Credit Project, Bruce and Warfield Roads, Chico, Butte County, California. Revised version with 1992 data. Davis, California. Unpublished report, 11 pp. + maps.

_____ 1992b. Memorandum [re: mitigation agreement on preservation plan, B.R.U.S.A. project, Butte County meadowfoam (*Limnanthes floccosa* ssp. *californica*)] to Tom Lando, City of Chico, California, and California Department of Fish and Game, Sacramento, California. 5 pages + attachments.

Mason, C.T., Jr. 1952. A systematic study of the genus *Limnanthes* R. Br. University of California Publications in Botany 25(6):455-512.

McNeill, C., and C. Brown. 1979. Rare plant status report: *Limnanthes floccosa* Howell ssp. *californica* Arroyo. California Native Plant Society, Sacramento, California, 3 pp.

Ornduff, R. 1993. Limnanthaceae. Pages 736-738 *in*: J.C. Hickman (ed.). The Jepson manual: higher plants of California.. University of California Press, Berkeley, California, 1400 pp.

U.S. Fish and Wildlife Service (Service). 1992. Endangered and threatened wildlife and plants; determination of endangered status for the plant *Limnanthes floccosa* ssp. *californica* (Butte County meadowfoam). **Federal Register** 57:24192-24199.

_____ 2003. Endangered and threatened wildlife and plants; Final determination of critical habitat for four vernal pool crustaceans and eleven vernal pool plants in California and Southern Oregon; Final Rule. **Federal Register** 68:46684-46867.

_____ 2006. Endangered and Threatened Wildlife and Plants; Designation of Critical Habitat for Four Vernal Pool Crustaceans and Eleven Vernal Pool Plants; Final Rule. **Federal Register** 71: 7118-7316.

(Blank)

STATE OF CALIFORNIA • DEPARTMENT OF TRANSPORTATION

ENCROACHMENT PERMIT

TR-0120 (REV 6/200)

Permit No.	0311-NMC1011
Dist/Co/Rte/PM	03-BUT-32-10.3/11.3
Date	December 22, 2011
Fee Paid	$ Exempt
Deposit	$ N/A
Performance Bond Amount (1)	$ N/A
Payment Bond Amount (2)	$ N/A
Bond Company	
Bond Number (1)	
Bond Number (2)	

In compliance with (Check one):

☒ Your application of December 22, 2011

☐ Utility Notice No. _____ of _____

☐ Agreement No. _____ of _____

☐ R/W Contract No. _____ of _____

TO: City of Chico
P.O. Box 3420
Chico, CA 95927
Attn: Bob Greenlaw
(530)879-6930

Ref No. Caltrans EA: 031E490

, PERMITTEE

and subject to the following, PERMISSION IS HEREBY GRANTED to:
Widen State Highway 32 from Two (2) lanes to Four (4) lanes from Park & Ride Lot to El Monte Ave in the city of Chico as per attached approved plans and specifications. Work includes but is not limited to Drainage Improvements, Steel-Backed Timber Guardrailing, landscape planting, and precast soundwall.

Notwithstanding General Provision #6, work hours and lane closure durations are approved as provided in the attached specifications.

Notwithstanding General Provision #4, your contractor must obtain a Permit (Double Permit) to perform the work authorized. No fee/deposit is required at the time of application for the Double Permit.

----------Continue on Page 2----------

THIS PERMIT IS NOT A PROPERTY RIGHT AND DOES NOT TRANSFER WITH THE PROPERTY TO A NEW OWNER.

The following attachments are also included as part of this permit *(Check applicable)*:

☒ Yes	☐ No	General Provisions
☐ Yes	☒ No	Utility Maintenance Provisions
☒ Yes	☐ No	Special Provisions **TRAFFIC CONTROL**
☐ Yes	☒ No	A Cal-OSHA permit, if required: Permit No. _____
☐ Yes	☒ No	As-Built Plans Submittal Route Slip for Locally Advertised Projects
☐ Yes	☒ No	Storm Water Pollution Protection Plan

In addition to fee, the permittee will be billed actual costs for:

☐ Yes	☒ No	Review
☐ Yes	☒ No	Inspection
☒ Yes	☐ No	Field work

(If any Caltrans effort expended)

☐ Yes ☒ No The information in the environmental documentation has been reviewed and considered prior to approval of this permit.

This permit is void unless the work is completed before December 31, 2012

This permit is to be strictly construed and no other work other than specifically mentioned is hereby authorized.
No project work shall be commenced until all other necessary permits and environmental clearances have been obtained

Jim Rogers, RE, D-3 Chico
(530) 895-5245 Office, (530)521-4540 Cell
cc: Stan Richins, Sutter/Sierra Maint. Region
Andy Poliquin, Permit Inspector
Rebecca Mowry, Project Manager

APPROVED:

JODY JONES, District Director

BY: Barinder Dhaliwal

BRUCE D. CAPAUL, Chief-Encroachment Permits Branch

ADA Notice For individuals with sensory disabilities, this document is available in alternate formats. For information call (916) 653-3657 or TDD (916) 654-3880 or write Records and Forms Management, 1120 N Street, MS-89, Sacramento, CA 95814.

FM 91 1436

PERMISSIONS Conditions Continued:

Permittee shall contact Resident Engineer Jim Rogers at Cell (530)521-4540, SEVEN (7) working days prior to commencing work, to arrange a pre-job meeting. A 24-hour notification before restarting work shall be strictly adhered to. All work shall be conducted and completed to the satisfaction of Caltrans representative. Immediately following completion of the work permitted herein, the Permittee shall fill out and mail the Notice of Completion attached to this Permit.

1. **AUTHORITY:** The Department's authority to issue encroachment permits is provided under, Div. 1, Chpt. 3, Art. 1, Sect. 660 to 734 of the Streets and Highways Code.

2. **REVOCATION:** Encroachment permits are revocable on five days notice unless otherwise stated on the permit and except as provided by law for public corporations, franchise holders, and utilities. These General Provisions and the Encroachment Permit Utility Provisions are subject to modification or abrogation at any time. Permittees' joint use agreements, franchise rights, reserved rights or any other agreements for operating purposes in State highway right of way are exceptions to this revocation.

3. **DENIAL FOR NONPAYMENT OF FEES:** Failure to pay permit fees when due can result in rejection of future applications and denial of permits.

4. **ASSIGNMENT:** No party other than the permittee or permittee's authorized agent is allowed to work under this permit.

5. **ACCEPTANCE OF PROVISIONS:** Permittee understands and agrees to accept these General Provisions and all attachments to this permit, for any work to be performed under this permit.

6. **BEGINNING OF WORK:** When traffic is not impacted (see Number 35), the permittee shall notify the Department's representative, two (2) days before the intent to start permitted work. Permittee shall notify the Department's Representative if the work is to be interrupted for a period of five (5) days or more, unless otherwise agreed upon. All work shall be performed on weekdays during regular work hours, excluding holidays, unless otherwise specified in this permit.

7. **STANDARDS OF CONSTRUCTION:** All work performed within highway right of way shall conform to recognized construction standards and current Department Standard Specifications, Department Standard Plans High and Low Risk Facility Specifications, and Utility Special Provisions. Where reference is made to "Contractor and Engineer," these are amended to be read as "Permittee and Department representative."

8. **PLAN CHANGES:** Changes to plans, specifications, and permit provisions are not allowed without prior approval from the State representative.

9. **INSPECTION AND APPROVAL:** All work is subject to monitoring and inspection. Upon completion of work, permittee shall request a final inspection for acceptance and approval by the Department. The local agency permittee shall not give final construction approval to its contractor until final acceptance and approval by the Department is obtained.

10. **PERMIT AT WORKSITE:** Permittee shall keep the permit package or a copy thereof, at the work site and show it upon request to any Department representative or law enforcement officer. If the permit package is not kept and made available at the work site, the work shall be suspended.

11. **CONFLICTING ENCROACHMENTS:** Permittee shall yield start of work to ongoing, prior authorized, work adjacent to or within the limits of the project site. When existing encroachments conflict with new work, the permittee shall bear all cost for rearrangements, (e.g., relocation, alteration, removal, etc.).

12. **PERMITS FROM OTHER AGENCIES:** This permit is invalidated if the permittee has not obtained all permits necessary and required by law, from the Public Utilities Commission of the State of California (PUC), California Occupational Safety and Health Administration (Cal-OSHA), or any other public agency having jurisdiction.

13. **PEDESTRIAN AND BICYCLIST SAFETY:** A safe minimum passageway of 4' shall be maintained through the work area at existing pedestrian or bicycle facilities. At no time shall pedestrians be diverted onto a portion of the street used for vehicular traffic. At locations where safe alternate passageways cannot be provided, appropriate signs and barricades shall be installed at the limits of construction and in advance of the limits of construction at the nearest crosswalk or intersection to detour pedestrians to facilities across the street. Attention is directed to Section 7-1.09 Public Safety of the Department Standard Specifications.

14. **PUBLIC TRAFFIC CONTROL:** As required by law, the permittee shall provide traffic control protection warning signs, lights, safety devices, etc., and take all other measures necessary for traveling public's safety. While providing traffic control, the needs and control of all road users [motorists, bicyclists and pedestrians, including persons with disabilities in accordance with the Americans with Disabilities Act of 1990 (ADA)] shall be an essential part of the work activity.

    Day and night time lane closures shall comply with the California Manual on Uniform Traffic Control Devices (Part 6, Temporary Traffic Control), Standard Plans, and Standard Specifications for traffic control systems. These General Provisions are not intended to impose upon the permittee, by third parties, any duty or standard of care, greater than or different from, as required by law.

15. **MINIMUM INTERFERENCE WITH TRAFFIC:** Permittee shall plan and conduct work so as to create the least possible inconvenience to the traveling public; traffic shall not be unreasonably delayed. On conventional highways, permittee shall place properly attired flagger(s) to stop or warn the traveling public in compliance with the California Manual on Uniform Traffic Control Devices (Chapter 6E, Flagger Control).

16. **STORAGE OF EQUIPMENT AND MATERIALS:** The storage of equipment or materials **is not** allowed within State highway right-of-way, **unless specified** within the Special Provisions of this specific encroachment permit. If Encroachment Permit Special Provisions allow for the storage of equipment or materials within the State right of way, the equipment and material storage shall comply with Standard Specifications, Standard Plans, Special Provisions, and the Highway Design Manual. The clear recovery zone widths must be followed and are the minimum desirable for the type of facility indicated below: freeways and expressways - 30', conventional highways (no curbs) - 20', conventional highways (with curbs) – 1.5'. If a fixed object cannot be eliminated, moved outside the clear recovery zone, or modified to be made yielding, it should be shielded by a guardrail or a crash cushion.

17. **CARE OF DRAINAGE:** Permittee shall provide alternate drainage for any work interfering with an existing drainage facility in compliance with the Standard Specifications, Standard Plans and/or as directed by the Department's representative.

18. **RESTORATION AND REPAIRS IN RIGHT OF WAY:** Permittee is responsible for restoration and repair of State highway right of way resulting from permitted work (State Streets and Highways Code, Sections 670 et. seq.).

The duty of the permittee to indemnify and save harmless includes the duties to defend as set forth in Section 2778 of the Civil Code. The permittee waives any and all rights to any type of expressed or implied indemnity against the State, its officers, employees, and State contractors. It is the intent of the parties that the permittee will indemnify and hold harmless the State, its officers, employees, and State's contractors, from any and all claims, suits or actions as set forth above regardless of the existence or degree of fault or negligence, whether active or passive, primary or secondary, on the part of the State, the permittee, persons employed by the permittee, or acting on behalf of the permittee.

For the purpose of this section, "State's contractors" shall include contractors and their subcontractors under contract to the State of California performing work within the limits of this permit.

29. **NO PRECEDENT ESTABLISHED:** This permit is issued with the understanding that it does not establish a precedent.

30. **FEDERAL CIVIL RIGHTS REQUIREMENTS FOR PUBLIC ACCOMMODATION:**
A. The permittee, for himself, his personal representative, successors in interest, and assigns as part of the consideration hereof, does hereby covenant and agree that:
1. No person on the grounds of race, color, or national origin shall be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination in the use of said facilities.
2. That in connection with the construction of any improvements on said lands and the furnishings of services thereon, no discrimination shall be practiced in the selection and retention of first-tier subcontractors in the selection of second-tier subcontractors.
3. That such discrimination shall not be practiced against the public in their access to and use of the facilities and services provided for public accommodations (such as eating, sleeping, rest, recreation), and operation on, over, or under the space of the right of way.
4. That the permittee shall use the premises in compliance with all other requirements imposed pursuant to Title 15, Code of Federal Regulations, Commerce and Foreign Trade, Subtitle A. Office of the Secretary of Commerce, Part 8 (15 C.F.R. Part 8) and as said Regulations may be amended.
5. That in the event of breach of any of the above nondiscrimination covenants, the State shall have the right to terminate the permit and to re-enter and repossess said land and the land and the facilities thereon, and hold the same as if said permit had never been made or issued.

31. **MAINTENANCE OF HIGHWAYS:** The permittee agrees, by acceptance of a permit, to properly maintain any encroachment. This assurance requires the permittee to provide inspection and repair any damage, at permittee's expense, to State facilities resulting from the encroachment.

32. **SPECIAL EVENTS:** In accordance with subdivision (a) of Streets and Highways Code Section 682.5, the Department of Transportation shall not be responsible for the conduct or operation of the permitted activity, and the applicant agrees to defend, indemnify, and hold harmless the State and the city or county against any and all claims arising out of any activity for which the permit is issued.

The permittee understands and agrees to comply with the obligations of Titles II and III of the Americans with Disabilities Act of 1990 in the conduct of the event, and further agrees to indemnify and save harmless the State of California, all officers and employees thereof, including but not limited to the Director of Transportation, from any claims or liability arising out of or by virtue of said Act.

33. **PRIVATE USE OF RIGHT OF WAY:** Highway right of way shall not be used for private purposes without compensation to the State.

The gifting of public property use and therefore public funds is prohibited under the California Constitution, Article 16.

34. **FIELD WORK REIMBURSEMENT:** Permittee shall reimburse State for field work performed on permittee's behalf to correct or remedy hazards or damaged facilities, or clear debris not attended to by the permittee.

35. **NOTIFICATION OF DEPARTMENT AND TMC:** The permittee shall notify the Department's representative and the Transportation Management Center (TMC) at least 7 days before initiating a lane closure or conducting an activity that may cause a traffic impact. A confirmation notification should occur 3 days before closure or other potential traffic impacts. In emergency situations when the corrective work or the emergency itself may affect traffic, TMC and the Department's representative shall be notified as soon as possible.

36. **SUSPENSION OF TRAFFIC CONTROL OPERATION:** The permittee, upon notification by the Department's representative, shall immediately suspend all lane closure operations and any operation that impedes the flow of traffic. All costs associated with this suspension shall be borne by the permittee.

37. **UNDERGROUND SERVICE ALERT (USA) NOTIFICATION:** Any excavation requires compliance with the provisions of Government Code Section 4216 et. seq., including, but not limited to notice to a regional notification center, such as Underground Service Alert (USA). The permittee shall provide notification at least 48 hours before performing any excavation work within the right of way.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 1, 2006
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER Greg W. Edwards NO. C36386 EXP. 6-30-06 CIVIL STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site go to http://www.dot.ca.gov

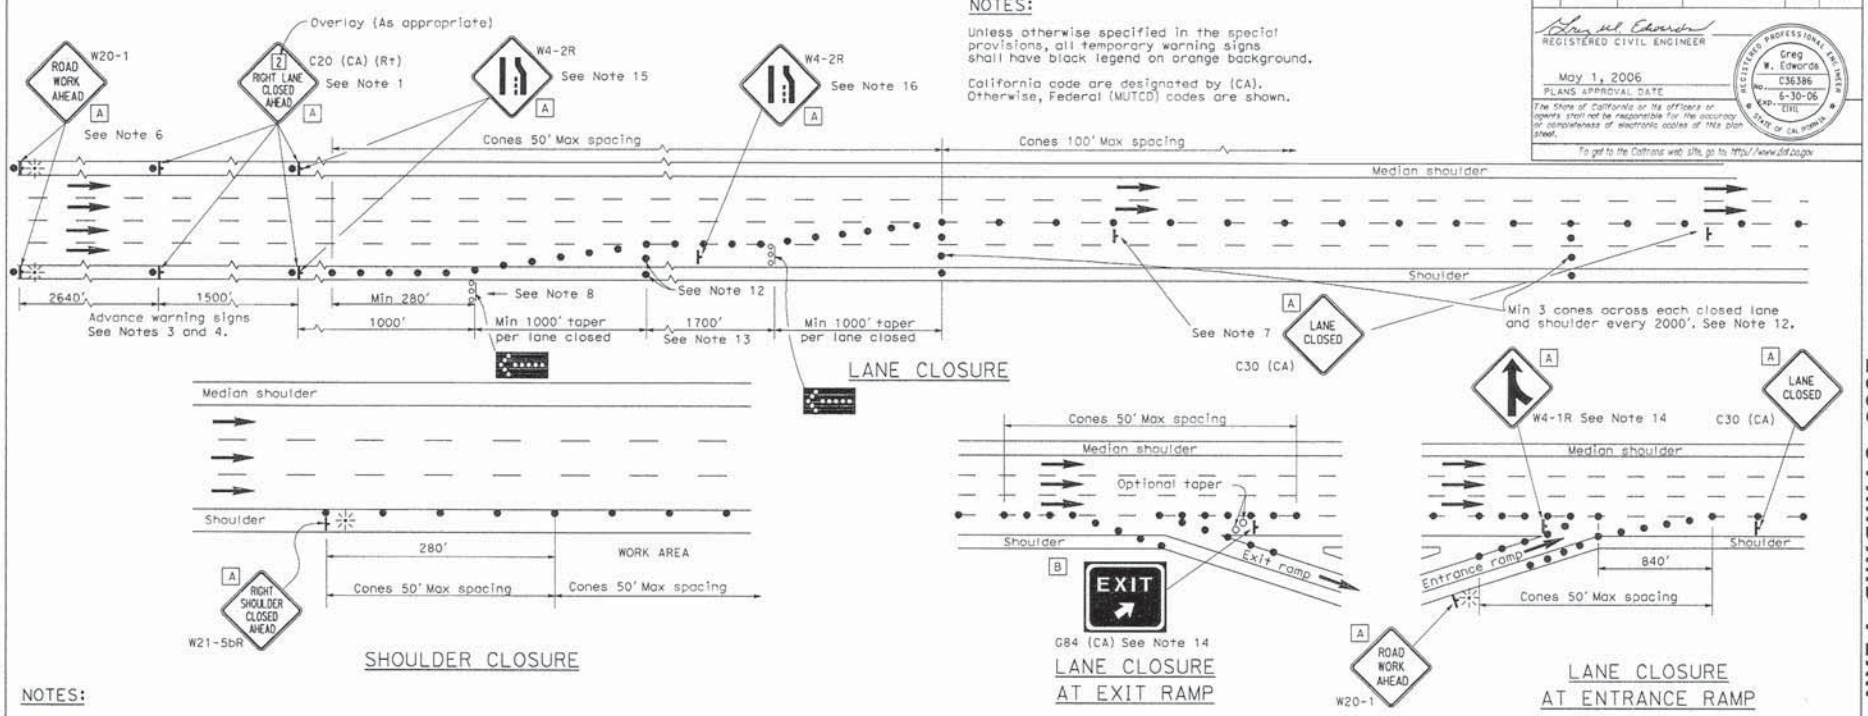

NOTES:

Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on orange background.

California code are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

NOTES:

1. Median lane closures shall conform to the details for outside lane closures except that C20 (CA) (Lt) signs shall be used.
2. At least one person shall be assigned to provide full time maintenance of traffic control devices for lane closures.
3. Duplicate sign installations are not required:
   a) On opposite shoulder if at least one-half of the available lanes remain open to traffic.
   b) In the median if the width of the median shoulder is less than 8' and the outside lanes are to be closed.
4. Each advance warning sign on each side of the roadway shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
5. A C14 (CA) "END ROAD WORK" sign, as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious or ends within a larger project's limits.
6. If the W20-1 sign would follow within 2000' of a stationary W20-1 or C11 (CA) "ROAD WORK NEXT _____ MILES", use a C20 (CA) sign for the first advance warning sign.
7. Place a C30 (CA) sign every 2000' throughout length of lane closure.
8. One flashing arrow sign for each lane closed. The first flashing arrow sign shall be Type I. All others may be either Type I or Type II.
9. A minimum 1500' of sight distance shall be provided where possible for vehicles approaching the first flashing arrow sign. Lane closures shall not begin at top of crest vertical curve or on a horizontal curve.
10. All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
11. Portable delineators, placed at one-half the spacing indicated for traffic cones may be used instead of cones for daytime closures only.
12. Unless otherwise specified in the special provisions, a minimum of 3 cones shall be placed transversely across each closed lane and shoulder at each location where a taper across a traffic lane ends and every 2000' as shown on the "Lane Closure" detail. Two Type II barricades may be used instead of the 3 cones. The transverse alignment of the cones or barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.
13. Unless otherwise specified in the special provisions, the 1700' tangent shown along lane lines shall be used between the 1000' tapers required for each closed traffic lane.
14. Unless otherwise specified in the special provisions, the G84 (CA) and W4-1 signs shall be used as shown.
15. When specified in the special provisions, a W4-2 "LANE ENDS" symbol sign is to be used in place of the C20 (CA) "RIGHT LANE CLOSED AHEAD" sign.
16. The W4-2 "LANE ENDS" symbol sign shown at this location is to be used where the W4-2 sign is used as advance warning as described in Note 15.

SIGN PANEL SIZE (Min)

A	48" x 48"
B	54" x 48"

LEGEND

- Traffic Cone
- Traffic Cone (optional taper)
- Temporary Sign
- Flashing Arrow Sign (FAS)
- FAS Support or Trailer
- Direction of Travel
- Portable Flashing Beacon

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE ON FREEWAYS AND EXPRESSWAYS

NO SCALE

T10

10-3-05

2006 STANDARD PLAN T10

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 1, 2006
PLANS APPROVAL DATE

Greg W. Edwards C36386 6-30-06 CIVIL STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: http://www.dot.ca.gov

TYPICAL LANE CLOSURE

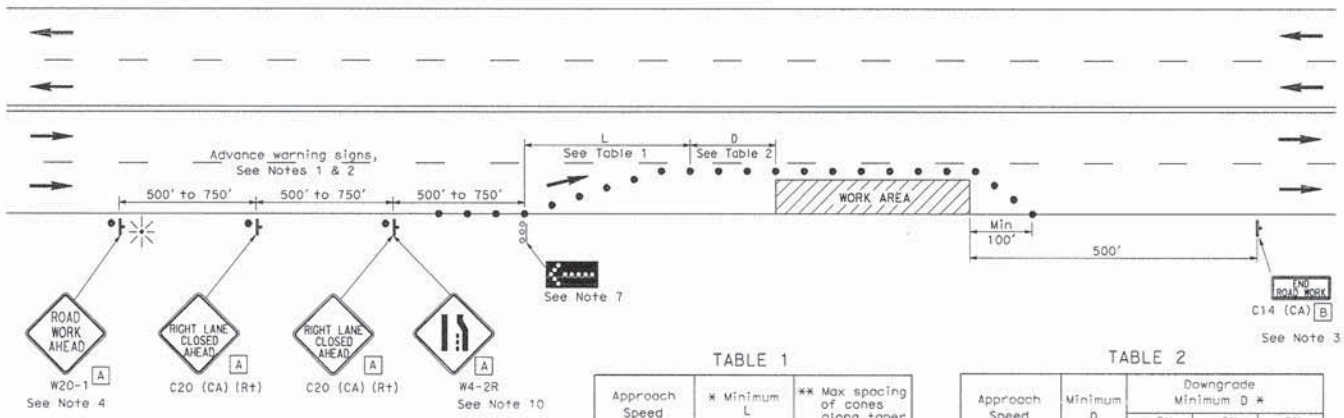

NOTES:

Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on orange background.

California code are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

TABLE 1

Approach Speed	* Minimum L	** Max spacing of cones along taper
mph	ft	ft
20 and below	80	20
25	125	25
30	180	30
35	245	35
40	320	40
45	540	45
50	600	50
Over 50	See Note 9	

* Use L for lane widths less than or equal to 12'.
** See Note 8.

TABLE 2

Approach Speed	Minimum D	Downgrade Minimum D *		
		-3%	-6%	-9%
mph	ft	ft	ft	ft
25 and below	155	158	165	173
30	200	205	215	227
35	250	257	271	287
40	305	315	333	354
45	360	378	400	427
50	425	446	474	507
Over 50	See Note 9			

* Use on sustained downgrade steeper than -3 percent and longer than 1 mile.

LEGEND

- Traffic Cone
- Temporary Sign
- Direction of Travel
- Flashing Arrow Sign (FAS)
- FAS Support or Trailer
- Portable Flashing Beacon

SIGN PANEL SIZE (Min)

A 36" x 36"
B 36" x 18"

NOTES:

1. Where approach speeds are low, advance warning signs may be placed at 300' spacing and placed closer in urban areas.
2. Each advance warning sign shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
3. A C14 (CA) "END ROAD WORK" sign, as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious, or ends within a larger project's limits.
4. If the W20-1 sign would follow within 2000' of a stationary W20-1 or C11 (CA) "ROAD WORK NEXT _____ MILES", use a C20 (CA) sign for the first advance warning sign.
5. All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
6. Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime closures only.
7. Flashing arrow sign shall be either Type I or Type II.
8. The maximum spacing between cones along a tangent shall be 50' and along a taper shall be approximately as shown in Table 1.
9. For approach speeds over 50 mph, use the "Traffic Control System for Lane Closure On Freeways And Expressways" plan for lane closure details and requirements.
10. When specified in the special provisions, a W4-2 "LANE ENDS" symbol sign is to be used in place of the C20 (CA) "RIGHT LANE CLOSED AHEAD" sign.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE ON MULTILANE CONVENTIONAL HIGHWAYS

NO SCALE

T11

2006 STANDARD PLAN T11

9-28-06

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 1, 2006
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER Greg W. Edwards No. C36386 Exp. 6-30-06 CIVIL STATE OF CALIFORNIA

To get to the Caltrans web site, go to: http://www.dot.ca.gov

NOTES:

Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on orange background.

California code are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

TYPICAL LANE CLOSURE WITH REVERSIBLE CONTROL

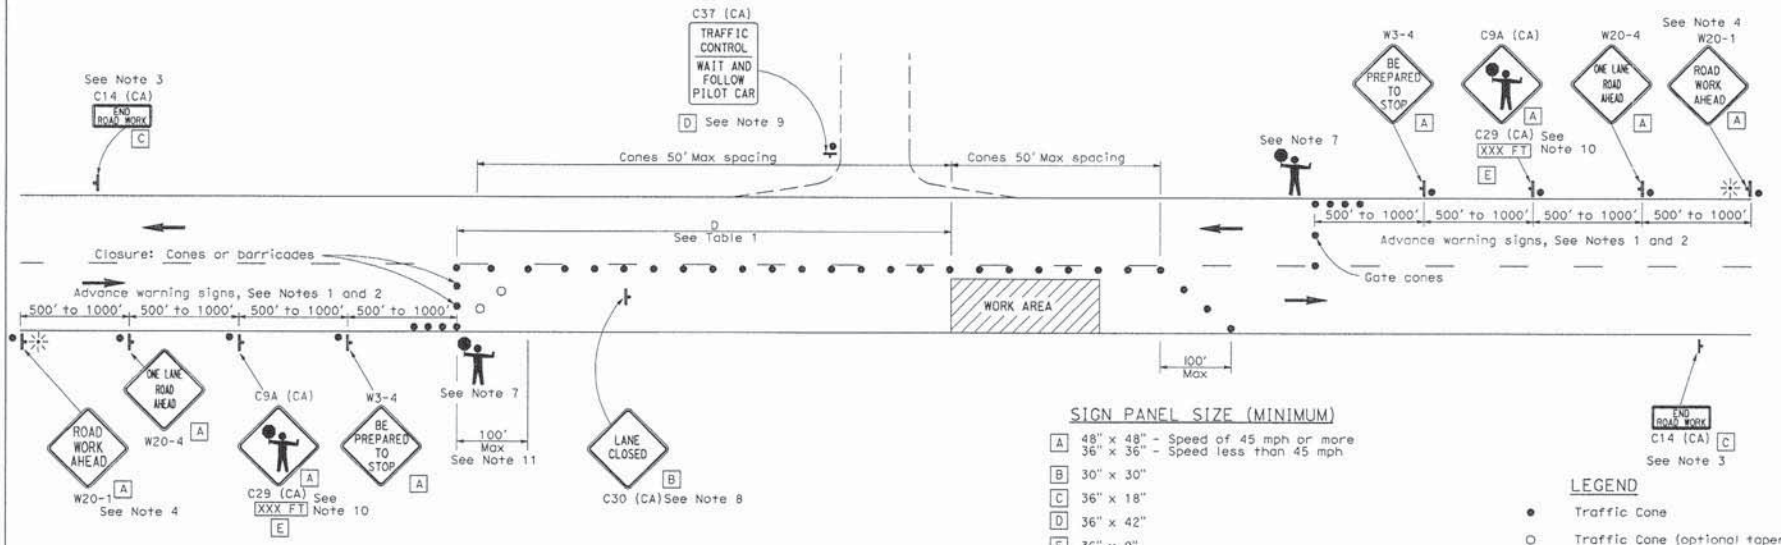

SIGN PANEL SIZE (MINIMUM)

- A 48" x 48" - Speed of 45 mph or more
  36" x 36" - Speed less than 45 mph
- B 30" x 30"
- C 36" x 18"
- D 36" x 42"
- E 36" x 9"

LEGEND

- Traffic Cone
- Traffic Cone (optional taper)
- Temporary Sign
- Direction of Travel
- Portable Flashing Beacon
- Flagger

NOTES:

1. Where approach speeds are low, advance warning signs may be placed at 300' spacing, and closer in urban areas.
2. Each advance warning sign in each direction of travel shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
3. A C14 (CA) "END ROAD WORK" sign, as appropriate, shall be placed at the end of the lane control unless the end of work area is obvious, or ends within a larger project's limits.
4. If the W20-1 sign would follow within 2000' of a stationary W20-1 or C11 (CA) "ROAD WORK NEXT _____MILES", use a W20-4 sign for the first advance warning sign.
5. All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
6. Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime closures only.
7. Additional advance flaggers may be required. Flagger should stand in a conspicuous place, be visible to approaching traffic as well as approaching vehicles after the first vehicle has stopped. During the hours of darkness, the flagging-station and flagger shall be illuminated and clearly visible to approaching traffic. The illumination footprint of the lighting on the ground shall be at least 20' in diameter. Place a minimum of four cones at 50' intervals in advance of flagger station as shown.
8. Place C30 (CA) "LANE CLOSED" sign at 500' to 1000' intervals throughout extended work areas. They are optional if the work area is visible from the flagger station.
9. When a pilot car is used, place a C37 (CA) "TRAFFIC CONTROL-WAIT AND FOLLOW PILOT CAR" sign at all intersections within traffic control area. Signs shall be clean and visible at all times.
10. An optional C29 (CA) sign may be placed below the C9A (CA) sign.
11. Traffic cones or barricades may be placed on the optional taper as shown, barricades shall be Type I, II, or III.

TABLE 1

Approach Speed	Minimum D	Downgrade Minimum D *		
		-3%	-6%	-9%
mph	ft	ft	ft	ft
25 and below	155	158	165	173
30	200	205	215	227
35	250	257	271	287
40	305	315	333	354
45	360	378	400	427
50	425	446	474	507
55	495	520	553	593
60	570	598	638	686
65	645	682	728	785

* Use on sustained downgrade steeper than -3 percent and longer than 1 mile.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE ON TWO LANE CONVENTIONAL HIGHWAYS

NO SCALE

T13

2006 STANDARD PLAN T13

9-28-05

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 1, 2006
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

Greg W. Edwards C36386 EXP. 6-30-06 CIVIL STATE OF CALIFORNIA REGISTERED PROFESSIONAL ENGINEER

To get to the Caltrans web site, go to: http://www.dot.ca.gov

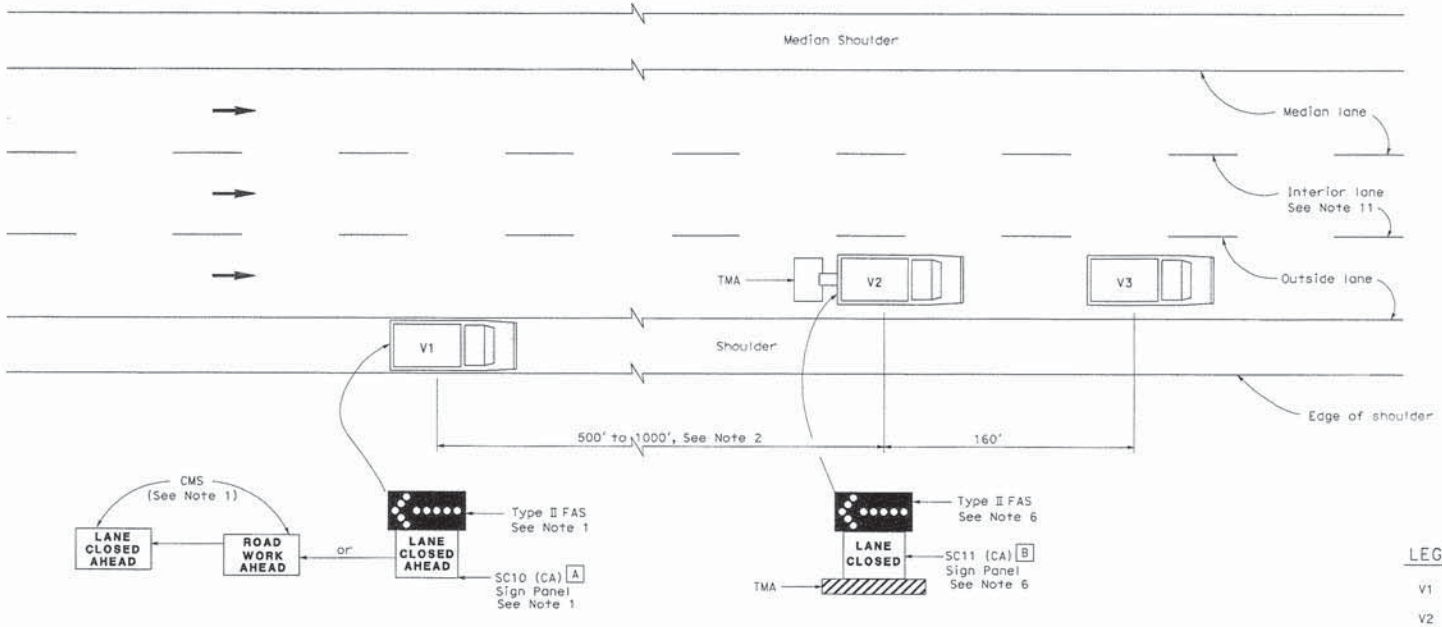

MOVING LANE CLOSURE ON MEDIAN LANE OR OUTSIDE LANE OF MULTILANE HIGHWAYS

SIGN PANEL SIZE (Min)

A 66" x 36"
B 54" x 42"

LEGEND

V1	Sign Vehicle
V2	Shadow Vehicle
V3	Work/Application Vehicle
	Flashing Arrow Sign (FAS)
CMS	Changeable Message Sign
TMA	Truck-Mounted Attenuator
→	Direction of Travel

NOTES:

1. Either a changeable message sign or a SC10 (CA) sign panel and a Type II flashing arrow sign shall be mounted on the rear of sign vehicle V1. A Type II flashing arrow sign shall be mounted on the rear of sign vehicle V1 and used with the SC10 (CA) sign panel. A Type II flashing arrow sign will not be required with the changeable message sign provided the flashing arrow sign symbol is displayed on the changeable message sign board. The changeable message sign shall be sequenced to show the "ROAD WORK AHEAD" message first, followed by the "LANE CLOSED AHEAD" message and then the flashing arrow sign symbol. For median lane closure, the flashing arrow symbol shall be reversed with the arrowhead on the right.
2. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue. Sign vehicle V1 shall be positioned where highly visible when shoulders are not available.
3. A minimum sight distance of 1500' should be provided in advance of sign vehicle V1.
4. Sign vehicle V1 should remain at the beginning of horizontal or vertical curves until the other vehicles (V2 and V3) are far enough beyond the curve to resume the minimum sight distance of 1500'.
5. Vehicle-mounted sign panels shall be Type III, IV, VII, VIII or IX retroreflective sheeting, black on white, black on orange, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
6. Gross Vehicle Weight of shadow vehicle V2 shall be a minimum of 20,000 pounds and shall be equipped with a truck-mounted attenuator. The sign panel shown and a Type II flashing arrow sign shall be mounted on the rear of shadow vehicle V2. For median lane closure the flashing arrow sign symbol shall be displayed with the arrowhead on the right.
7. All vehicles used for lane closures shall be equipped with two-way radios, and the vehicle operators shall maintain communication during the work or application operation.
8. All vehicles shall be equipped with flashing or rotating amber lights.
9. Where sufficient shoulder width is not available, sign vehicle V1 may encroach into the traffic lane staying as close to the edge of shoulder as practicable. Both V1 and V2 shall be equipped with a truck-mounted attenuator. The Gross Vehicle Weight of V1 and V2 shall be at least 20,000 pounds, respectively.
10. Where workers would be on foot in the work area, a stationary type lane closure (Standard Plan T10, T11, etc., as applicable) shall be used instead of this plan.
11. For moving lane closure on interior lane of multilane highways, use Standard Plan T16.
12. When multiple work vehicles are used in close proximity to each other, only one shadow vehicle is required, and spacing between work vehicles shall be minimized in order to deter traffic from entering the closedlane.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL SYSTEM FOR MOVING LANE CLOSURE ON MULTILANE HIGHWAYS

NO SCALE

T15

2006 STANDARD PLAN T15

9-28-06

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

May 1, 2006
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER Greg W. Edwards No. C36386 Exp. 6-30-06 CIVIL STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: http://www.dot.ca.gov

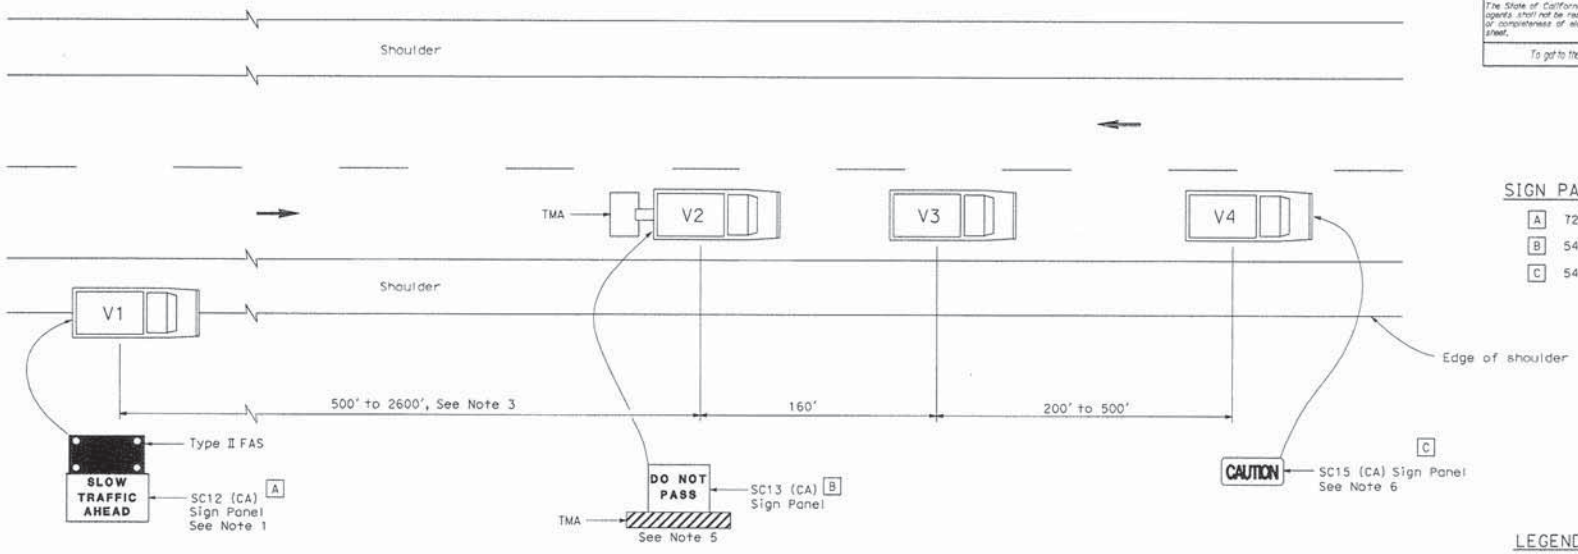

SIGN PANEL SIZE (Min)

A	72" x 42"
B	54" x 42"
C	54" x 24"

LEGEND

V1	Sign Vehicle
V2	Shadow Vehicle
V3	Work/Application Vehicle
V4	Sign Vehicle
TMA	Truck-Mounted Attenuator
→	Direction of Travel
▭	Flashing Arrow Sign (FAS) in flashing caution mode

NOTES:

1. Either a changeable message sign or a SC12 (CA) "SLOW TRAFFIC AHEAD" sign shall be mounted on the rear of sign vehicle V1. A Type II flashing arrow sign may be used with the SC12 (CA) sign panel.
2. Sign vehicle V1 should be positioned where highly visible when shoulders are not available.
3. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue.
4. Vehicle-mounted sign panels shall be Type III, IV XII, XIII or IX retroreflective sheeting, black on white, black on orange, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
5. Gross Vehicle Weight of shadow vehicle shall be a minimum of 20,000 pounds and shall be equipped with a truck-mounted attenuator. The sign panel shown shall be mounted on the rear of shadow vehicle V2. The message "LANE CLOSED" may be used in place of the "DO NOT PASS" message.
6. The sign panel shown shall be mounted on the front of sign vehicle V4, facing opposing traffic.
7. All vehicles shall be equipped with flashing or rotating amber lights.
8. Sign vehicle V4 will not be required when the work and vehicles V2 and V3 are 2' or more from the centerline of the highway during the work or application operations.
9. All vehicles used for lane closures shall be equipped with two-way radios and the vehicle operators shall maintain communication during the work or application operation.
10. This plan shall not be used where workers would be on foot in the work area. Use a stationary type lane closure (Standard Plan T13) for this condition.
11. When multiple work vehicles are used in close proximity to each other, only one shadow vehicle is required and spacing between work vehicles shall be minimized in order to deter traffic from entering the closed lane.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL SYSTEM FOR MOVING LANE CLOSURE ON TWO LANE HIGHWAYS

NO SCALE

T17

10-3-06

2006 STANDARD PLAN T17

(Blank)

V. CITY OF CHICO STANDARD PLANS

(Blank)

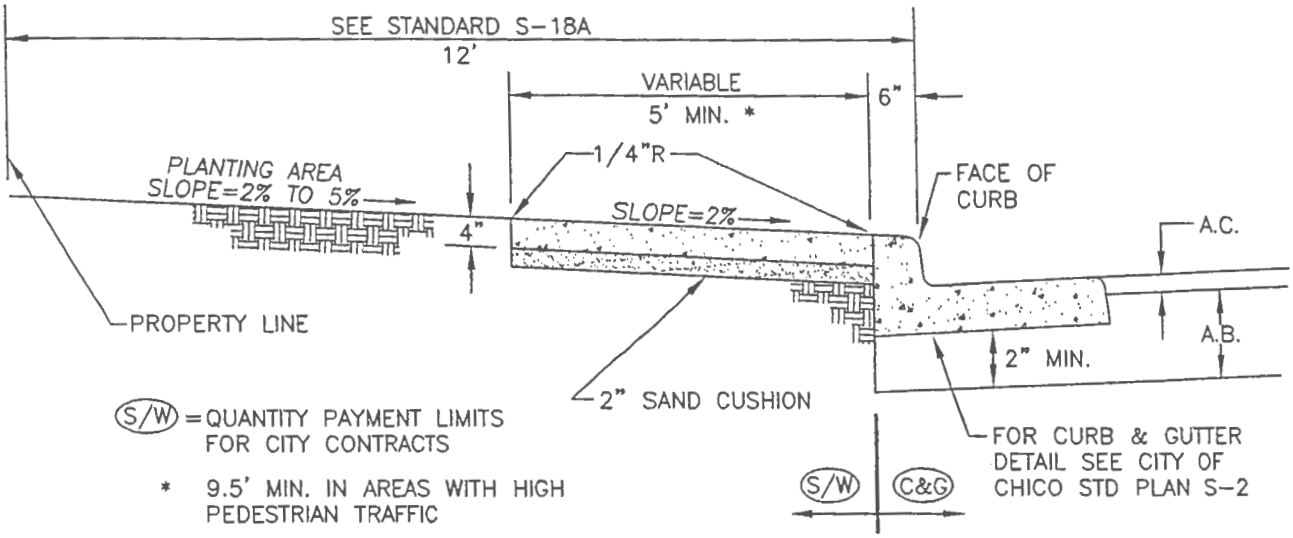

CONTIGUOUS CURB, GUTTER & SIDEWALK

NOTE: IF AUTHORIZED, THIS SIDEWALK CONFIGURATION MAY BE USED IN EXISTING DEVELOPED AREAS TO MATCH AN ESTABLISHED SIDEWALK CONFIGURATION.

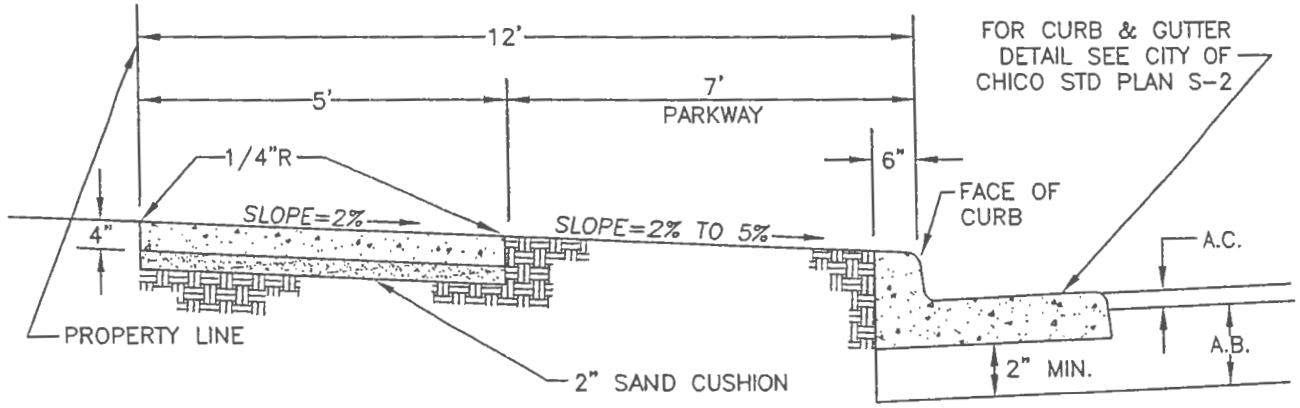

SEPARATED CURB, GUTTER & SIDEWALK

NOTE: THIS SIDEWALK CONFIGURATION SHALL BE USED IN CONJUNCTION WITH ALL NEW DEVELOPMENT AND/OR NEW CONSTRUCTION.

NOTE:
INSTALL 1/4" EXPANSION JOINTS ON 48' CENTERS

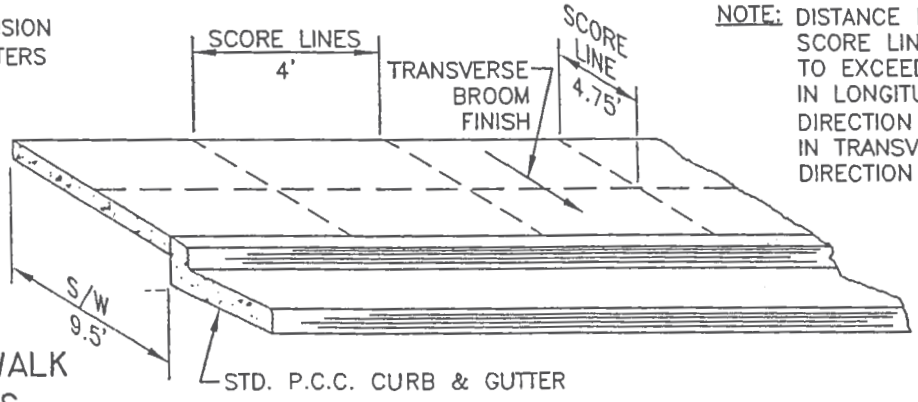

NOTE: DISTANCE BETWEEN SCORE LINES NOT TO EXCEED 4 FEET IN LONGITUDINAL DIRECTION OR 4.75' IN TRANSVERSE DIRECTION

TYPICAL SIDEWALK SCORE LINES

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO **STANDARD PLAN**

DRAWN BY: GL DATE: 1/05
CHECKED BY: MJ SCALE: NONE
APPROVED: DIRECTOR OF ENGINEERING

P.C.C. SIDEWALK DETAILS

NO. S-1

SHEET 1 OF 1

EXHIBIT A

ROLLED CURB & GUTTER SECTION

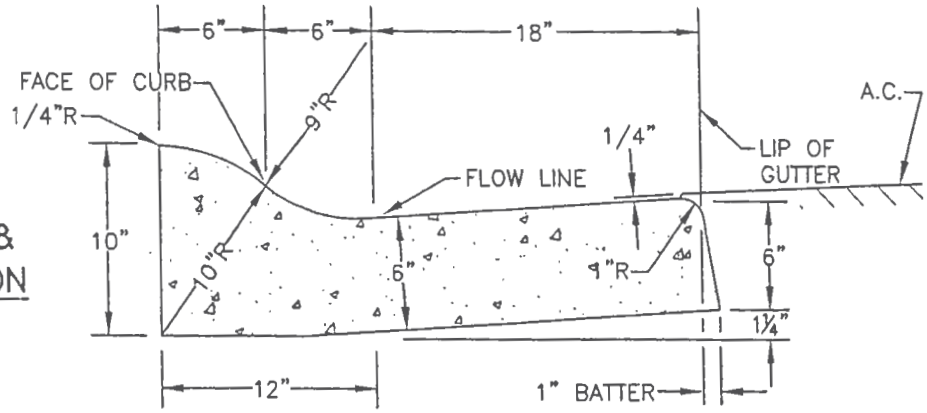

VERTICAL CURB & GUTTER SECTION

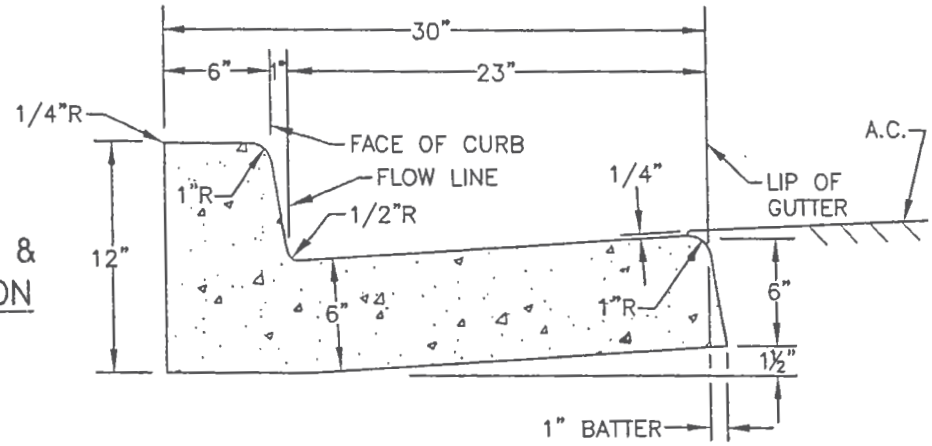

MEDIAN CURB & GUTTER SECTION

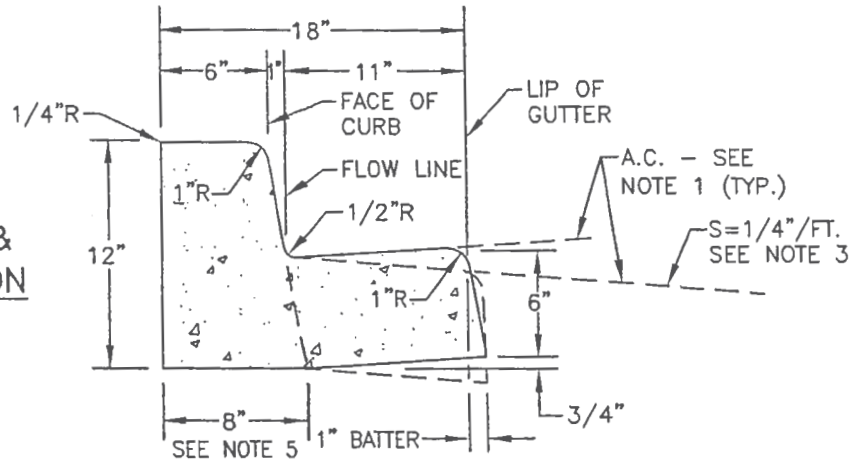

NOTES:

1. A.C. PAVING ADJACENT TO ALL GUTTERS SHALL BE 1/4" ABOVE THE LIP OF GUTTER.
2. INSTALL 1/4" WIDE EXPANSION JOINTS AT 48' MAX. INTERVALS AND 1/8" SCORED CONTROL JOINTS AT 12' MAX. INTERVALS ON ALL CURBS AND GUTTERS.
3. THE DIRECTION OF FALL OF MEDIAN GUTTER CROSS-SLOPES SHALL BE THE SAME AS THE ADJACENT STREET.
4. SEE STANDARD S-3 FOR DETAIL OF INSTALLATION OF GUTTER ADJACENT TO EXISTING A.C.
5. INSTALL MEDIAN CURB WITHOUT THE GUTTER, UNLESS SPECIFICALLY SHOWN ON IMPROVEMENT PLANS.
6. PLACE AGGREGATE BASE UNDER CURB AND GUTTER TO DEPTH OF STRUCTURAL SECTION WITH 2" MINIMUM THICKNESS.

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO — **STANDARD PLAN**

DRAWN BY: GL DATE: 1/05
CHECKED BY: MJ SCALE: NONE
APPROVED: DIRECTOR OF ENGINEERING

P.C.C. CURB AND GUTTER

NO. S-2

SHEET 1 OF 1

EXHIBIT B

STD. 24" FRAME & COVER

SOUTH BAY FOUNDRY NO. SBF-624 OR EQUAL
APPROX. WT. 294 LBS.

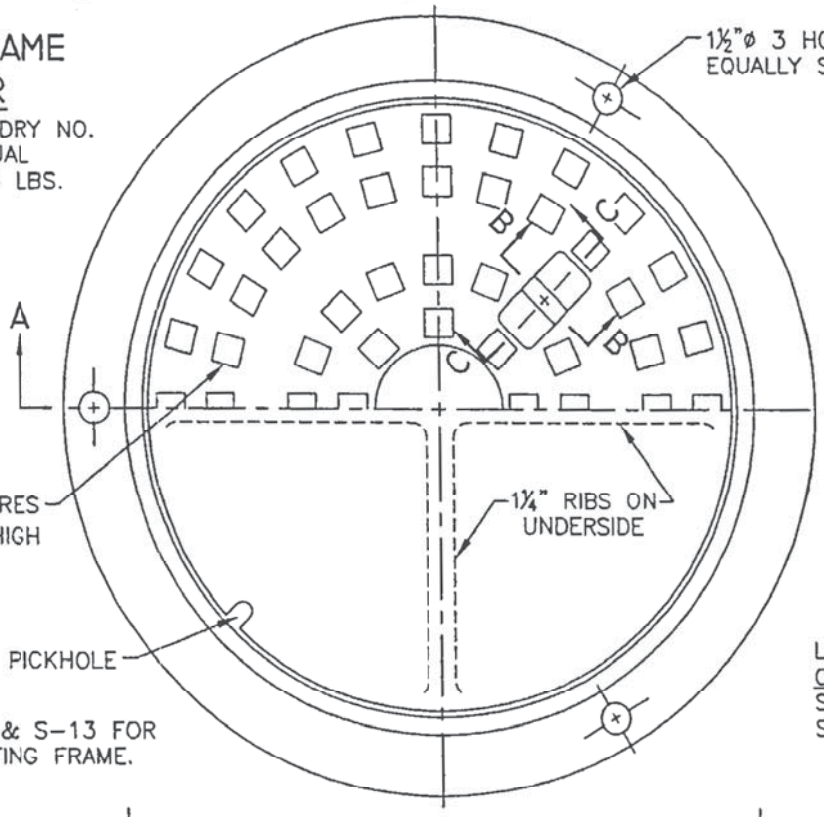

NOTE:
2 PRY HOLES OPPOSITE 180°



LETTERING REQUIRED ON ALL M.H. COVERS:
SS=SANITARY SEWER
SD=STORM DRAIN

NOTE:
SEE STD. S-10 & S-13 FOR METHOD OF SETTING FRAME.

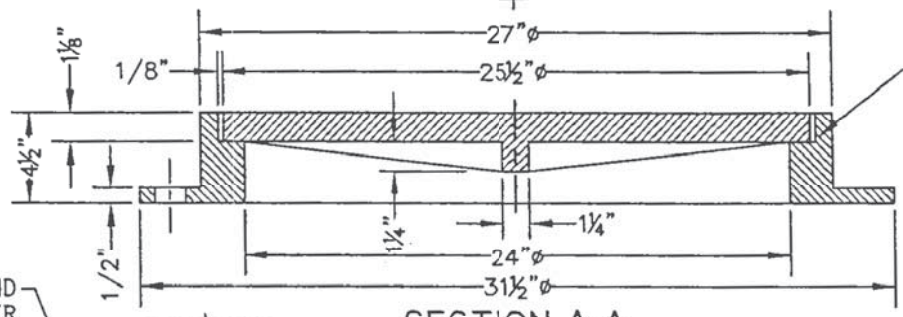

SECTION A-A

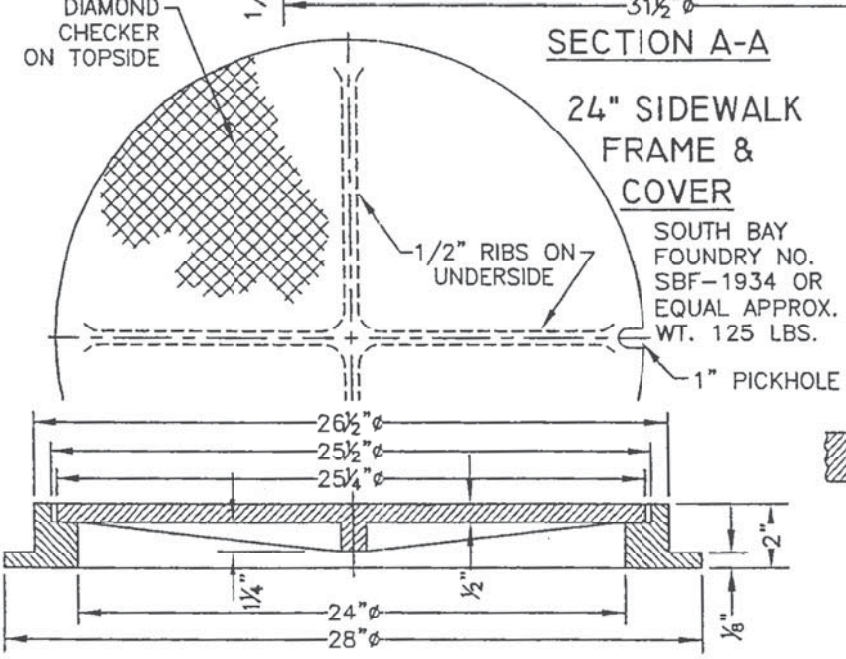

24" SIDEWALK FRAME & COVER

SOUTH BAY FOUNDRY NO. SBF-1934 OR EQUAL APPROX. WT. 125 LBS.

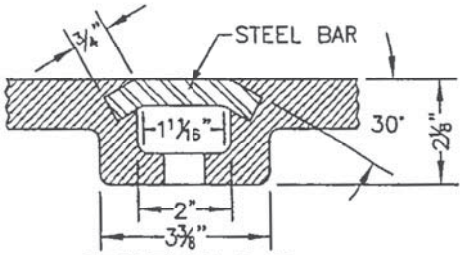

SECTION B-B

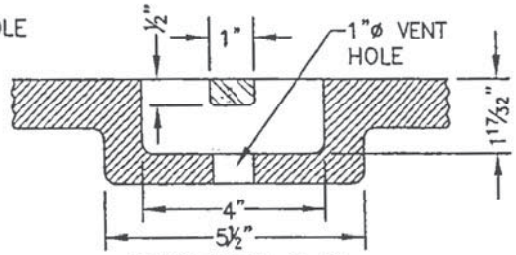

SECTION C-C

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO — STANDARD PLAN

DRAWN BY: GL DATE: 1/05
CHECKED BY: MJ SCALE: NONE
APPROVED: DIRECTOR OF ENGINEERING

MANHOLE FRAME & COVER DETAILS

NO. S-14

SHEET 1 OF 1

EXHIBIT R

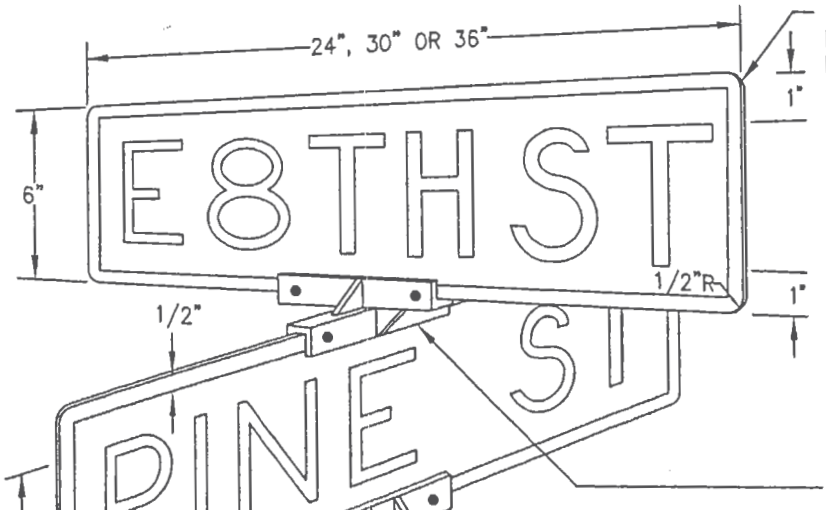

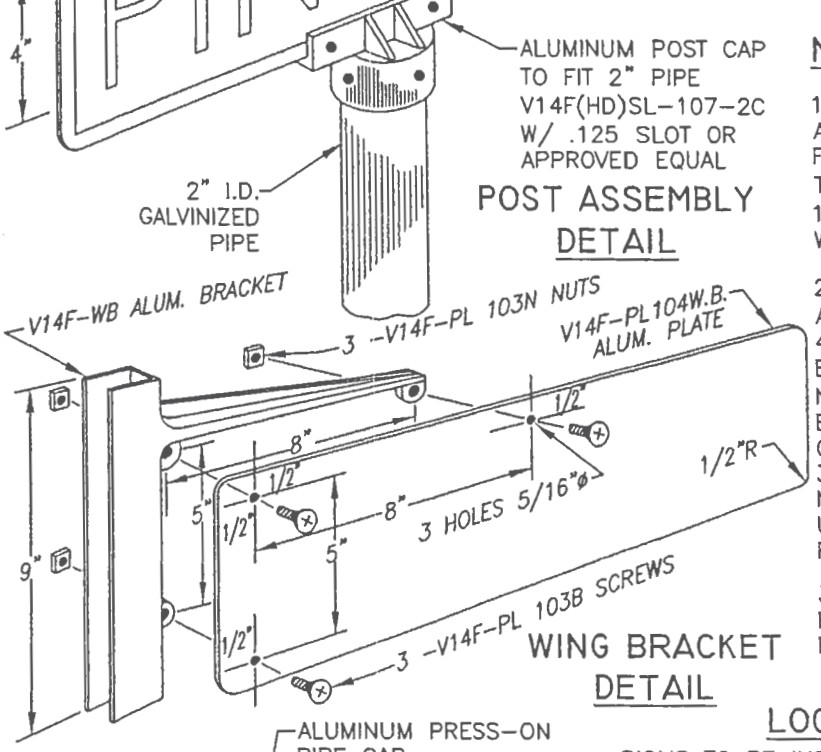

POST ASSEMBLY DETAIL

WING BRACKET DETAIL

NOTES:

1. LETTERING TO BE STD. HWY. SIGN ALPHABET, U.S. PUBLIC ROAD ADMIN. CUT FROM SCOTCHLITE ELECTROCUT TRANSLUCENT FILM (E.C.FILM), SERIES 1170, GREEN OR BLUE, WITH 1/2-1NCH WHITE BORDER AND WHITE LETTERING

2. STREET NAMES (INCLUDING ABBREVIATIONS: ST., AVE., ETC.) SHALL BE 4-INCHES HIGH AND SERIES B, C, D OR E. 2-INCH HIGH LETTERS TO FOLLOW NUMBERED STREETS (1ST, 2ND, ETC.). EACH NAME SHALL BE INDIVIDUALLY LAID OUT AND SPACED TO FIT 24, 30 OR 36-INCH PLATES. USE LETTER SERIES NECESSARY TO FIT WITHIN 36-INCHES, USING THE LARGEST LETTERS POSSIBLE FOR BALANCED LAYOUT

3. ALL CATALOGUE NUMBERS ARE HAWKINS & HAWKINS, 1255 EASTSHORE HIGHWAY, BERKELEY, CALIFORNIA 94710

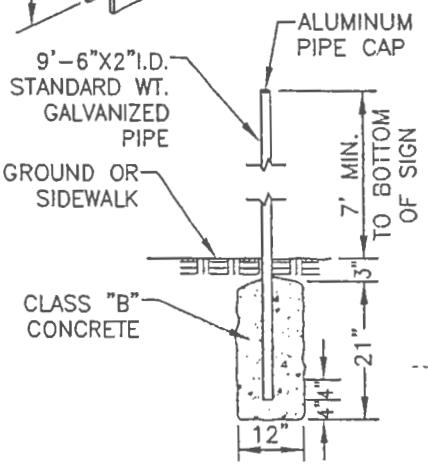

INSTALLATION DETAILS

LOCATION DETAILS

SIGNS TO BE INSTALLED GENERALLY ON NEAR LEFT AND FAR RIGHT CORNERS OF MAJOR STREETS

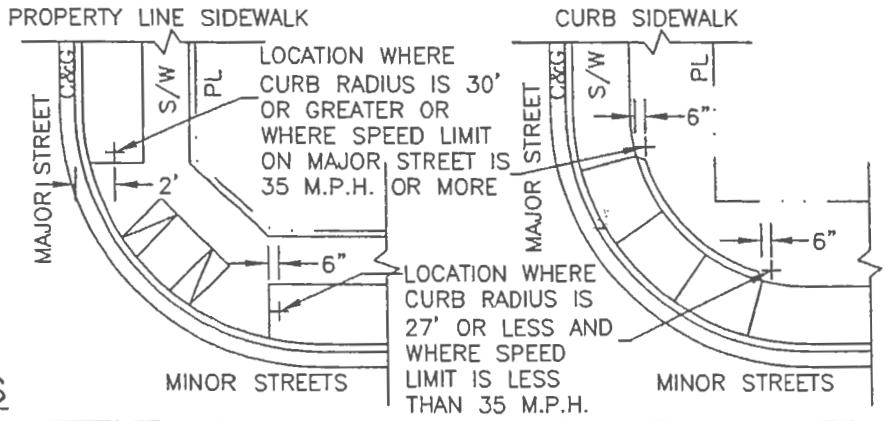

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO **STANDARD PLAN**

DRAWN BY: GL DATE: 1/05
CHECKED BY: MJ SCALE: NONE
APPROVED: DIRECTOR OF ENGINEERING

STREET NAME SIGN DETAILS

NO. S-16

SHEET 1 OF 1

EXHIBIT U

VI. ARTISAN PRECAST SPECIFICATIONS AND DRAWINGS

(Blank)

SPECIFICATION FOR CONSTRUCTION & INSTALLATION FOR CEDARCRETE® PRE-CAST CONCRETE SYSTEM

SECTION 1 - GENERAL

1.01 INTENT:

1. This specification states the conditions and requirements applicable to Artisan Precast, Inc.'s precast concrete fences CEDARCRETE®.

2. Specifications and drawings supplement each other and together constitute one complete set of specifications and drawings, so that any work exhibited in one and not in the other shall be executed just as if it had been set forth in both.

3. It is understood and agreed that the work shall be performed and completed according to the true spirit, meaning, and intent of the contract and specifications.

4. Shall anything be omitted from the specifications, which is necessary to a clear understanding of the work, or should it appear that various instructions are in conflict, then the contractor shall secure written instructions from the Owner before proceeding with the construction affected by such omissions and / or discrepancies.

1.02 STANDARDS:

1. Applicable ASTM Standards, latest revision, as published by the American Society for Testing and Materials and indicated hereinafter.

A. CONTRACTOR RESPONSIBILITIES

1. Fence contractor is responsible for laying out the fence lines, including fence corners and gate locations.

2. Fence contractor is responsible for clearing all trees & underbrush, which may be in the fence lines. All cleared trees and underbrush shall be removed from the job site by the fence contractor.

3. Fence contractor is responsible for contacting appropriate personnel for locating all underground utilities within the work area. Owner to provide assistance when requested by Contractor.

4. Fence contractor is responsible for providing a competent crew with a minimum of three workers on the job at all times.

B. SAFETY

1. The work shall be performed in accordance with all applicable federal, state, and local safety laws and regulations, including the Occupational Health and Safety Act of 1970 as amended (OSHA).

2. The contractor shall be responsible for the observance of proper safety practices and the avoidance of damage to property by all personnel engaged in the work. It is the Contractor's responsibility to be aware of and observe any recommended practice or regulations concerning the handling of construction materials called for on this project.

3. The Contractor shall take all steps necessary to prevent damage to or interference with the existing power lines, communication facilities, roadways, railroads, waterways, buried cables, pipelines, and other facilities on, adjacent to, or crossing the project property.

C. SUBMITTALS

1. Color to be selected by Owner from manufacturer's range of standard colors.

2. Shop Drawings: Owner or Contractor, if requested, to provide working drawings indicating all information necessary for precast fence elements. Drawings shall illustrate the shape and dimension of precast components; the size, quantity and details of the reinforcing steel; the quantity, type, size and details of connection and lifting hardware (if needed); the size and location of drain openings; and any additional details necessary. Drawings shall bear the seal of a registered professional engineer.

3. Design Calculations: Owner or Contractor, if requested, to furnish design calculations which include a summary of all design parameters used, including material types, strength values, allowable stresses, assumed loads and load combinations. Calculations shall be submitted covering the range of heights and loading conditions on the project. Calculations shall bear the seal of a registered professional engineer.

4. Soil Conditions: Owner to provide soil samples or a copy of a soils report to Contractor and/or engineer for design of piers/posts based on wind load calculations.

5. Samples: Manufacturer to furnish samples of each type, texture and color of concrete screening wall of interest where applicable.

D. QUALITY ASSURANCE

1. Qualifications: Engage an experienced Installer who has experience with architectural precast concrete fence projects with same material and of similar scope to the Project.

2. Obtain concrete fence materials trade marked as CEDARCRETE®manufactured in the United States.

3. Manufacturer Qualifications: A firm experienced in producing precast concrete fence units in accordance to those indicated for the Project, as well as sufficient production capacity to produce required units without delaying the Work.

E. PROJECT CONDITIONS

1. Field Measurements: Verify layout information for fences and gates shown on the Drawings in relation to the property survey and existing structures. Verify dimensions by field measurements.

2. All existing fence or fence line obstructions are to be removed by fence contractor prior to commencement of work.

SECTION 2 – PRODUCTS

A. MATERIALS

1. Suppliers: Subject to compliance with requirements, that may be incorporated in the work include the following:

   a. Artisan Precast, Inc.
      Contact: Christopher Miller
      1180 S. Beverly Drive
      Suite 608
      Los Angeles, CA 90035
      Phone: (800) 511-2747 / (310) 556-3200
      Fax: (310) 556-3201

   b. No substitutions allowed.

   c. Product to be manufactured by a NPCA (National Precast Concrete Association) certified factory in the USA.

2. Precast Concrete Fence Wall System (panels and posts) designated as CEDARCRETE®.

   a. 1’-0” - 10’-0” high
   b. Panels and posts to have same texture on both sides.
   c. Includes textured post caps (line, end and corner) and / or panel caps.
   d. Panel, Posts and caps shall be normal weight concrete having sand and gravel or crushed stone aggregates mixed with ASTM-C150, Type I or Type III Portland Cement and shall have a compression strength of 5,000 psi @ 28 days.
   e. Integral color and concrete to be thoroughly mixed and vibrated.
   f. Steel reinforced panels and rebar reinforced posts and rails. Rebar conforms to ASTM A615, grade 60. Fiber to be used in all components as a secondary reinforcement.
   g. Wall posts set 6’-4” feet apart, or per manufacturer’s recommendations.
   h. Post footings: 6’-4” on center (maximum).
   i. Loading: Wind loading and surcharge loads will be applied to the panels, columns, and foundation components per local building code requirements and per section G (Design Loading).

B. PRECAST FENCE COMPONENTS DIMENSIONS

1. Posts shall have a typical cross sectional dimension of 5.5” x 6.25” as measured from face-to-face.
2. All posts to 8’ high shall be reinforced with 1 #4 rebar, each face. All post higher than 8’ in length shall have 2 #5 rebar each face.
3. Method of post attachment to concrete footing / pier shall be by embedment in poured concrete. Depth of concrete pier, and embedment of post shall be as shown on Shop Drawing from manufacturer.
4. Panels shall have typical dimensions of 12 3/8” wide by 2” thick by a length to satisfy the fence height.
5. Panels shall have an interlock construction.
6. Panel caps shall have typical dimensions of 72.25“ long by 5” high by 5.5” wide.
7. Panel caps shall be reinforced with 1 - #4 rebar positioned in mold with rebar clip #RCL 75 by Conac or equivalent.

C. COLOR

1. Integrally colored iron oxide pigments.
2. As selected from manufacturer’s range of standard colors.

D. PIERS (POST FOOTINGS) DESIGN

1. 6’-4” on center (maximum)
2. Diameter: 12” minimum and per design calculations.
3. Depth: 30” minimum and per design calculations.
4. Reinforcement: None, unless required per design calculations.
5. Where a precast fence post shares the same pier with a steel gatepost, size of pier shall be increased to accommodate both posts. Concrete for this pier shall have a minimum compressive strength of 3,000 psi @ 28 days.
6. Concrete for line post piers shall be normal weight concrete having sand and gravel or crushed stone aggregates mixed with ASTM-C150, Type I or Type III Portland Cement and shall have a minimum compression strength of 2,500 psi @ 28 days.

E. HEIGHT

1. 1’-0” - 10’-0” height (min) above grade, i.e., above top of crushed rock.
2. Lower panel shall be supported by concrete panel cap.

F. DESIGN LOADING (example) – actual depends on soil conditions and other requirements.

1. Loads Criteria
   a. Wind velocity (V): 85 MPH
   b. Exposure: B
   c. Importance Factor (I): 1.0
   d. Velocity Pressure Exposure Coefficient (K_Z): 0.70
   e. Wind Directionality Factor (K_D): 0.85
   f. Topographical Factor (K_{ZT}): 1.0
   g. Wind Pressure P = 0.00256 (K_Z) (K_{ZT}) (K_D) (V^2) (I)
      P = 0.00256 (0.70) (1.0) (0.85) (85^2) (1.0)
      P = 11.0 psf
   h. Working Design Stress: 33% Increase (1.33)
   i. Seismic Design: Site Class D

G. CONCRETE

1. Concrete Material

a. Concrete shall be normal weight concrete having sand and gravel or crushed stone aggregates, mixed with ASTM-C150, Type I or Type III Portland Cement to meet the minimum compressive strengths as follows.

- Panels & posts: 5,000 psi @ 28 days
- Line post piers: 2,500 psi @ 28 days
- Gate post / line post shared pier: 2,500 psi @ 28 days

b. Water used for concrete shall be clean water and free from injurious amounts of oils, alkalis, organic or other deleterious substances.

c. All concrete permanently exposed to the weather shall contain an air entraining admixture resulting in 3 to 6% entrained air or as recommended by the manufacturer.

3. Reinforcing Materials:

a. All reinforcing steel shall be deformed type bars and conform to ASTM – A615, Grade 60, placed as shown on the drawings.

b. All ties and stirrups shall conform to the requirements of ASTM-A615, Grade 40.

c. All wire mesh shall be 9 gauge galvanized having 2 horizontal bars and at least 4 vertical bars.

4. Color: As selected from manufacturer's range of standard colors.

SECTION 3 – EXECUTION

A. INSTALLATION

1. Install precast concrete fence per manufacturer's recommendations.

2. Reinforcement steel, bars and wire fabric shall be thoroughly cleaned before placing and again before the concrete is placed, shall be accurately positioned and secured in place. Provide standard bar charts for all beam steel off the ground.

3. Install all reinforcement with the following clearances between reinforcing steel and face of concrete:
   - Footing, pier or beam bottom: 3"
   - Earth-formed pier of beam sides: 2"
   - Formed footing, pier or beam sides exposed: 1"
   - Precast exposed to weather: panels ¾"; post 1 ¼"

4. Splices within continuous unscheduled reinforcing steel shall have a minimum lap of 30 bar diameters.

5. Footing size shall be based on soil properties at the site.

6. Fresh poured concrete shall be tamped into place by steel rammer, slicing tools or mechanical vibrator until concrete is thoroughly compact and without void.

7. Make excavations for footing to undisturbed soil or to the depth noted on the drawings. Leave the bottom-bearing surface clean and smooth. If footing excavations are made deeper than intended, only concrete shall be used for fill. Remove all loose material from grade beam excavations prior to concrete pour.

8. Align and level posts and panels to be plumb.

B. TESTING OF CONCRETE

1. The contractor shall be responsible for the following concrete tests (varies according to customer requirements):

- 1 air entrainment test of fence and also each gate opening.
- 2 slump tests of fence and also at each gate opening.
- 4 test cylinders of fence and also at each gate opening including 1-7 day break, 2-28 day breaks, 1-spare

2. Slump test shall be done under the direct supervision of Owner. Slump of concrete shall be determined in conformity with ASTM, Standard Method C-143. The contractor shall be responsible for securing, transporting and testing of all concrete test specimens. Concrete test reports shall be forwarded to and shall become the property of the Owner.

3. Owner reserves the right to make any tests necessary to insure that the concrete conforms to the specifications.

4. All cost involving the testing of concrete by the contractor shall be the responsibility of the contractor, if included in price.

C. DAMAGED UNITS

1. Contractor shall replace panels and other components of work that have been damaged.

2. Cleaning: Prior to substantial completion of fence, Contractor shall clean surfaces of fence as recommended by fence manufacturer.

D. CLEANUP

1. Contractor shall clean up site and dispose of all debris, trash, excavated soil, etc. to the satisfaction of the construction inspector.

E. WARRANTIES

1. General

   a. The fence manufacturer shall furnish written warranties covering materials and workmanship and color finish of precast elements. Such warranties shall cover the full cost of materials to replace or repair defective materials per the conditions of the manufacturer

2. Durations of Warranties

   a. All materials and workmanship shall be warranted for a period of 5 years from the date of shipment.

F. LIMITATIONS

1. Product is intended for residential and commercial exterior fencing applications.

2. Product shall not be used alone as a retaining wall for the support of soils and other structural elements unless otherwise noted by the structural engineer.

END

APSD-6

CONCRETE

1. All concrete shall:
   (a) have a minimum ultimate compressive strength (f'c) as follows:
      i) Panels & Posts : 4000 psi at 28 days
      i) Per Foundations : 2500 psi @ 28 days
   (b) have a maximum slump of 5" at point of placement.
   (c) have a W/C ratio of 0.55 or less for all walls and columns, and 0.60 or less for all foundations.
   (d) a normal dry-weight density (UNO).
   (e) be mixed with Portland Cement Type I or II and shall conform to ASTM C 150.
2. All aggregates shall conform to ASTM C33
3. Testing of materials if requested shall be performed in accordance with the governing building standards.
4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense.
5. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:
   i. Cast against earth: 3"
   i. Precast against forms: Panels: 3/4"; Posts 1 1/2"
6. Minimum lap splice length for all reinforcing steel s hall be 40 bar diameter unless specifically noted otherwise on the structural plans and/or details. All lap splices to be staggered.
7. All reinforcing steel and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items.
8. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement.
9. The Contractor shall obtain approval from the Architect and the Engineer prior to placing sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All pipes or conduits passing through concrete members shall be sleeved with standard steel pipe sections.
10. All concrete (except slabs-on-grade 6" or less) shall be placed by steel hammer, sliding tools or mechanically vibrator until concrete is thoroughly compact and without void.
11. Concrete shall be maintained in a moist condition for a minimum of five (5) days after placement.
12. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six (6) feet, use tremie, pump or other method consistent with applicable standards.
13. When specified ultimate compressive strength is greater than 2500 psi, Contractors hall submit mix designs to Architect and Engineer for approval seven (7) days prior to placement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be provided for all admixtures.

REINFORCEMENT

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond.
2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except that #3 & #4 bars may be Grade 40. All welded wire fabric (WWF) shall conform to ASTM A185.
3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.
4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement.
5. Fabrication, placement and installation of reinforcing steel shall conform to:
   (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice
   (b) CBC Section 1907.
7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

FOUNDATIONS

1. All Pier Foundations shall be located in Undisturbed Soil.
2. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer immediately.
3. All compaction, fill, backfilling and site preparation shall be performed in accordance with CBC Appendix Chapter 33.
4. Excavate to required depths into natural soil (as indicated in the drawings) or as verified by building official or soils engineer. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. If footing excavations are made deeper than intended, only concrete shall be used for fill.
5. Foundations shall be poured in neat excavations.
6. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.
7. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s).
8. The sides and bottoms of dry excavations must be moistened just prior to placing concrete. Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions.
9. The Contractor shall be solely responsible for all excavation procedures including lagging, shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

PRODUCT DATA

1. Manufacturer
   Manufactured In NPCA Certified Plant for: Artisan Precast, Inc

   Artisan Precast, Inc
   1180 South Beverly Dr. #608, Los Angeles, CA 90035
   Phone #: (310) 556 - 3200 FAX #: (310 556-3201
   Web Site: www.artisanprecast.com
2. Product Description:
   Productions are Intended for Residential, Commercial and Industrial Exterior Fencing, Screening Walls and Noise Barriers.
3. Composition and Materials:
   A mix of High Strength Portland Cement meeting for exceeding the requirements of ASTM-C150, natural aggregates, and Iron Oxide colors placed and cast within factory molds, cured and packaged for shipment.
4. Sizes:
   Screening fence columns are typically placed at 60 inches on center with he screen fence panels being 12 inches in height and approximately 2 inches in thickness. Overall heights are 6 or 8 feet dependant on local codes and site conditions. contact manufacturer for engineering not included in these specifications.
5. Limitations:
   Should not be used as a retaining wall for the support of soils or other structural elements, unless modifications in deign and construction are done and approved by the manufacturer.
6. Technical data for Loading:
   Each screen fence is designed to meet the local building codes as they apply. Wind loading and surcharge loads as they occur, will be applied to the panels, columns and foundation components.
7. Installation:
   The posts are positioned and erected by site-casting the column or post into a drilled pier. The pier size, depth and reinforcement is constructed as specified with site specific engineered drawings. After the posts are accurately spaced, plumbed and leveled, they are braced, until the pier concrete has obtained its initial strength. With the posts erected the panels are manually slid into place. Post caps and panel caps are bonded into place by applying a silicone-based adhesive between the cap and fence component.
   The posts spacing must be less than 152.4 cm. The panels are sawcut to a length as required to Fit.
8. Drainage:
   Panels can be arranged to allow for continuous or intermittent drainage beneath the fence where applicable.

THE CONTRACTOR/OWNER IS RESPONSIBLE FOR HIRING A GEOTECHNICAL ENGINEER TO DETERMINE IF LOCAL SOIL CONDITIONS MEET OR EXCEED MINIMUM SOIL PROPERTIES SHOWN ON THIS PLAN.

THIS FOUNDATION HAS BEEN DESIGNED BASED ON MINIMUM SOIL PROPERTIES SET FORTH BY THE 2007 CALIFORNIA BUILDING CODE.

PIER INSTALLATION MAY ENCOUNTER AREAS OF GRANULAR, COLLAPSING SOILS THAT MAY CONTAIN PERCHED GROUNDWATER. PIERS MUST BE EXTENDED THROUGH SOFT AND ORGANIC DEPOSITS TO PROVIDE ADEQUATE LATERAL AND VERTICAL SUPPORT. TEMPORARY CASING MAY BE NECESSARY FOR THE DRILLED PIER INSTALLATION OPERATIONS TO MAINTAIN THE DRILLED SHAFT OPEN THROUGH THESE SOILS DURING CONSTRUCTION.

IF THE CONTRACTOR FINDS ANY DISCREPANCIES BETWEEN THE SITE AND THESE PLANS, HE SHALL NOTIFY THE ENGINEER IMMEDIATELY.

Footing Depth Schedule

Soil Type	B: Fence height = 6ft max. (12" Ø)	B: Fence height = 6ft max. (18" Ø)
1. Massive Crystalline Bedrock	2'-3"	2'-0"
2. Sedimentary Rock	2'-9"	2'-6"
3. Sandy Gravel	3'-6"	3'-0"
4. Silty Sand	4'-0"	3'-3"
5. Sandy Clay**	4'-6"	4'-0"

** Assume Type 5 - Sandy Clay Soil OR Soil Types 1-4 may be used with the Approval of the Building Official or Soils Engineer

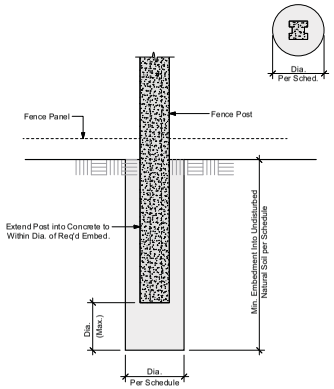

FENCE FOUNDATION SUPPORT



END POST



LINE POST



CORNER POST



CEDARCRETE® TOP CAP - SECTION



CEDARCRETE® BOTTOM CAP - SECTION



CEDARCRETE® PANEL - SECTION



CEDARCRETE® TOP CAP



CEDARCRETE® BOTTOM CAP



CEDARCRETE® STANDARD PANEL

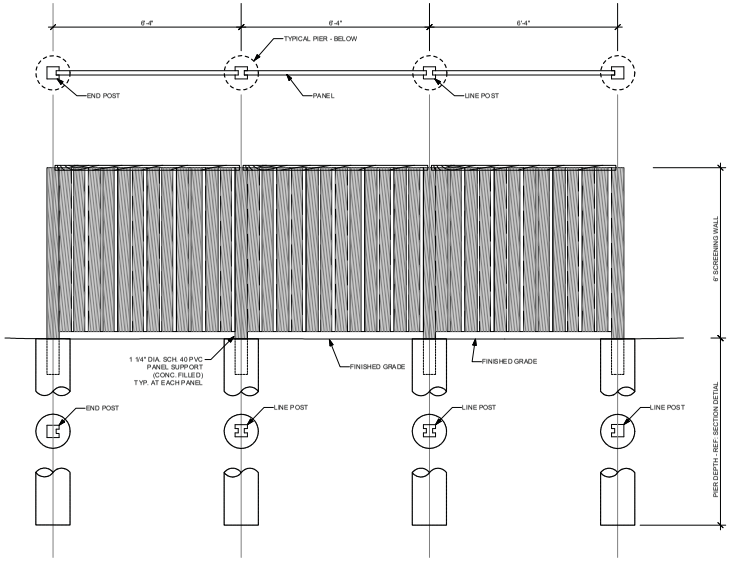

ELEVATION - 6' SCREENING WALL AND PIERS

Project Name:	Highway 32
Project Address:	Chico, CA
Product:	CEDARCRETE
Fence Height:	6 ft , 7 ft, 8 ft, 9ft, 10ft
Governing Code:	2007 CBC
Wind Load:	90 MPH
Exposure:	B
Site Class	D

Ashley&Vance ENGINEERING, INC.
860 Walnut St. Suite C
San Luis Obispo, CA 93401
P: (805) 545-9010
F: (805) 545-9011
www.ashleyvance.com

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

Engineer of Record:

REGISTERED PROFESSIONAL ENGINEER CHARLES R. ASHLEY III S 5228 STRUCTURAL STATE OF CALIFORNIA

CEDARCRETE WALL SYSTEM
ARTISAN PRECAST, INC

1180 South Beverly Dr. #608, Los Angeles, CA 90035
(310) 556-3200 FAX (310) 556-3201
www.artisanprecast.com

Revisions:

Date: 22 Nov 2010	Scale: NTS
Job No.: 0217 - 0006	

SHEET 1 OF 5

DO NOT SCALE THESE DRAWINGS. Refer to Architectural plans for all dimensions.

APSD-7

CONCRETE

1. All concrete shall:
   (a) have a minimum ultimate compressive strength (f'c) as follows:
   i) Panels & Posts : 4000 psi at 28 days
   ii) Per Foundations : 2500 psi @ 28 days
   (b) have a maximum slump of 5" at point of placement.
   (c) have a W/C ratio of 0.55 or less for all walls and columns, and 0.60 or less for all foundations.
   (d) a normal dry-weight density (UNO).
   (e) be mixed with Portland Cement Type I or II and shall conform to ASTM C 150.
2. All aggregates shall conform to ASTM C33
3. Testing of materials if requested shall be performed in accordance with the governing building standards.
4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense.
5. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:
   i. Cast against earth: 3"
   ii. Precast against forms: Panels: 3/4"; Posts 1 1/2"
6. Minimum lap splice length for all reinforcing steel s hall be 40 bar diameter unless specifically noted otherwise on the structural plans and/or details. All lap splices to be staggered.
7. All reinforcing steel and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items.
8. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement.
9. The Contractor shall obtain approval from the Architect and the Engineer prior to placing sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All pipes or conduits passing through concrete members shall be sleeved with standard steel pipe sections.
10. All concrete (except slabs-on-grade 6" or less) shall be placed by steel hammer, sliding tools or mechanically vibrator until concrete is thoroughly compact and without void.
11. Concrete shall be maintained in a moist condition for a minimum of five (5) days after placement.
12. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six (6) feet, use tremie, pump or other method consistent with applicable standards.
13. When specified ultimate compressive strength is greater than 2500 psi, Contractor s hall submit mix designs to Architect and Engineer for approval seven (7) days prior to placement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be provided for all admixtures.

REINFORCEMENT

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond.
2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except that #3 & #4 bars may be Grade 40. All welded wire fabric (WWF) shall conform to ASTM A185.
3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.
4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement.
5. Fabrication, placement and installation of reinforcing steel shall conform to:
   (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice
   (b) CBC Section 1907.
7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

FOUNDATIONS

1. All Pier Foundations shall be located in Undisturbed Soil.
2. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer immediately.
3. All compaction, fill, backfilling and site preparation shall be performed in accordance with CBC Appendix Chapter 33.
4. Excavate to required depths into natural soil (as indicated in the drawings) or as verified by building official or soils engineer. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. If footing excavations are made deeper than intended, only concrete shall be used for fill.
5. Foundations shall be poured in neat excavations.
6. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.
7. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s).
8. The sides and bottoms of dry excavations must be moistened just prior to placing concrete. Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions.
9. The Contractor shall be solely responsible for all excavation procedures including lagging, shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

PRODUCT DATA

1. Manufacturer
   Manufactured In NPCA Certified Plant for: Artisan Precast, Inc

   Artisan Precast, Inc
   1180 South Beverly Dr. #608, Los Angeles, CA 90035
   Phone #: (310) 556 - 3200 FAX #: (310 556-3201
   Web Site: www.artisanprecast.com
2. Product Description:
   Productions are Intended for Residential, Commercial and Industrial Exterior Fencing, Screening Walls and Noise Barriers.
3. Composition and Materials:
   A mix of High Strength Portland Cement meeting for exceeding the requirements of ASTM-C150, natural aggregates, and Iron Oxide colors placed and cast within factory molds, cured and packaged for shipment.
4. Sizes:
   Screening fence columns are typically placed at 60 inches on center with he screen fence panels being 12 inches in height and approximately 2 inches in thickness. Overall heights are 6 or 8 feet dependant on local codes and site conditions. contact manufacturer for engineering not included in these specifications.
5. Limitations:
   Should not be used as a retaining wall for the support of soils or other structural elements, unless modifications in deign and construction are done and approved by the manufacturer.
6. Technical data for Loading:
   Each screen fence is designed to meet the local building codes as they apply. Wind loading and surcharge loads as they occur, will be applied to the panels, columns and foundation components.
7. Installation:
   The posts are positioned and erected by site-casting the column or post into a drilled pier. The pier size, depth and reinforcement is constructed as specified with site specific engineered drawings. After the posts are accurately spaced, plumbed and leveled, they are braced, until the pier concrete has obtained its initial strength. With the posts erected the panels are manually slid into place. Post caps and panel caps are bonded into place by applying a silicone-based adhesive between the cap and fence component.
   The posts spacing must be less than 152.4 cm. The panels are sawcut to a length as required to Fit.
8. Drainage:
   Panels can be arranged to allow for continuous or intermittent drainage beneath the fence where applicable.

THE CONTRACTOR/OWNER IS RESPONSIBLE FOR HIRING A GEOTECHNICAL ENGINEER TO DETERMINE IF LOCAL SOIL CONDITIONS MEET OR EXCEED MINIMUM SOIL PROPERTIES SHOWN ON THIS PLAN.

THIS FOUNDATION HAS BEEN DESIGNED BASED ON MINIMUM SOIL PROPERTIES SET FORTH BY THE 2007 CALIFORNIA BUILDING CODE.

PIER INSTALLATION MAY ENCOUNTER AREAS OF GRANULAR, COLLAPSING SOILS THAT MAY CONTAIN PERCHED GROUNDWATER. PIERS MUST BE EXTENDED THROUGH SOFT AND ORGANIC DEPOSITS TO PROVIDE ADEQUATE LATERAL AND VERTICAL SUPPORT. TEMPORARY CASING MAY BE NECESSARY FOR THE DRILLED PIER INSTALLATION OPERATIONS TO MAINTAIN THE DRILLED SHAFT OPEN THROUGH THESE SOILS DURING CONSTRUCTION.

IF THE CONTRACTOR FINDS ANY DISCREPANCIES BETWEEN THE SITE AND THESE PLANS, HE SHALL NOTIFY THE ENGINEER IMMEDIATELY.

Footing Depth Schedule	B	
	Fence height = 7ft max.	
Soil Type	(12" Ø)	(18" Ø)
1. Massive Crystalline Bedrock	2'-9"	2'-6"
2. Sedimentary Rock	3'-3"	2'-9"
3. Sandy Gravel	4'-3"	3'-6"
4. Silty Sand	4'-9"	4'-0"
5. Sandy Clay**	5'-6"	4'-9"
** Assume Type 5 - Sandy Clay Soil OR Soil Types 1-4 may be used with the Approval of the Building Official or Soils Engineer		



END POST



LINE POST



CORNER POST



CEDARCRETE® TOP CAP - SECTION



CEDARCRETE® BOTTOM CAP - SECTION



CEDARCRETE® PANEL - SECTION



CEDARCRETE® TOP CAP



CEDARCRETE® BOTTOM CAP



CEDARCRETE® STANDARD PANEL

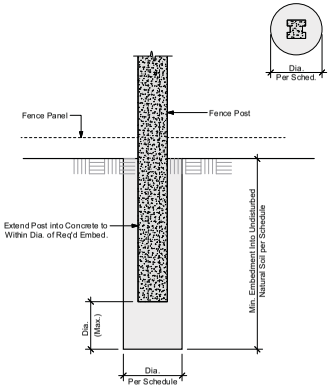

FENCE FOUNDATION SUPPORT

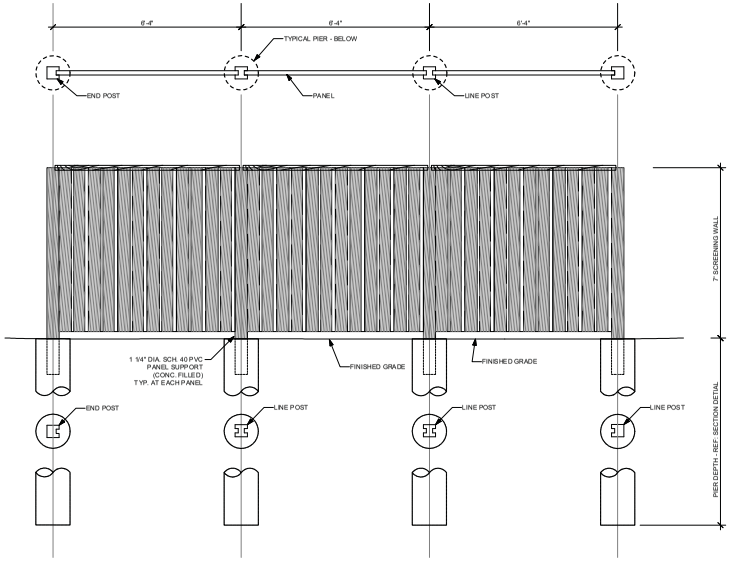

ELEVATION - 7' SCREENING WALL AND PIERS

Project Name:	Highway 32
Project Address:	Chico, CA
Product:	CEDARCRETE
Fence Height:	6 ft , 7 ft, 8 ft, 9ft, 10ft
Governing Code:	2007 CBC
Wind Load:	90 MPH
Exposure:	B
Site Class	D

Ashley&Vance ENGINEERING, INC.
860 Walnut St. Suite C
San Luis Obispo, CA 93401
P: (805) 545-9010
F: (805) 545-9011
www.ashleyvance.com

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

Engineer of Record:

REGISTERED PROFESSIONAL ENGINEER CHARLES R. ASHLEY JR. S 5228 STRUCTURAL STATE OF CALIFORNIA

CEDARCRETE WALL SYSTEM
ARTISAN PRECAST, INC

1180 South Beverly Dr. #608, Los Angeles, CA 90035
(310) 556-3200 FAX (310) 556-3201
www.artisanprecast.com

Revisions:

Date: 22 Nov 2010	Scale: NTS
Job No.: 0217 - 0006	

SHEET 2 OF 5

DO NOT SCALE THESE DRAWINGS. Refer to Architectural plans for all dimensions.

APSD-8

CONCRETE

1. All concrete shall:
   (a) have a minimum ultimate compressive strength (f'c) as follows:
   i) Panels & Posts : 4000 psi at 28 days
   ii) Per Foundations : 2500 psi @ 28 days
   (b) have a maximum slump of 5" at point of placement.
   (c) have a W/C ratio of 0.55 or less for all walls and columns, and 0.60 or less for all foundations.
   (d) a normal dry-weight density (UNO).
   (e) be mixed with Portland Cement Type I or II and shall conform to ASTM C 150.
2. All aggregates shall conform to ASTM C33
3. Testing of materials if requested shall be performed in accordance with the governing building standards.
4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense.
5. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:
   i. Cast against earth: 3"
   ii. Precast against forms: Panels: 3/4"; Posts 1 1/2"
6. Minimum lap splice length for all reinforcing steel s hall be 40 bar diameter unless specifically noted otherwise on the structural plans and/or details. All lap splices to be staggered.
7. All reinforcing steel and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items.
8. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement.
9. The Contractor shall obtain approval from the Architect and the Engineer prior to placing sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All pipes or conduits passing through concrete members shall be sleeved with standard steel pipe sections.
10. All concrete (except slabs-on-grade 6" or less) shall be placed by steel hammer, sliding tools or mechanically vibrator until concrete is thoroughly compact and without void.
11. Concrete shall be maintained in a moist condition for a minimum of five (5) days after placement.
12. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six (6) feet, use tremie, pump or other method consistent with applicable standards.
13. When specified ultimate compressive strength is greater than 2500 psi, Contractor s hall submit mix designs to Architect and Engineer for approval seven (7) days prior to placement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be provided for all admixtures.

REINFORCEMENT

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond.
2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except that #3 & #4 bars may be Grade 40. All weld wire fabric (WWF) shall conform to ASTM A185.
3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.
4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement.
5. Fabrication, placement and installation of reinforcing steel shall conform to:
   (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice
   (b) CBC Section 1907.
7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

FOUNDATIONS

1. All Pier Foundations shall be located in Undisturbed Soil.
2. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer immediately.
3. All compaction, fill, backfilling and site preparation shall be performed in accordance with CBC Appendix Chapter 33.
4. Excavate to required depths into natural soil (as indicated in the drawings) or as verified by building official or soils engineer. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. If footing excavations are made deeper than intended, only concrete shall be used for fill.
5. Foundations shall be poured in neat excavations.
6. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.
7. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s).
8. The sides and bottoms of dry excavations must be moistened just prior to placing concrete. Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions.
9. The Contractor shall be solely responsible for all excavation procedures including lagging, shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

PRODUCT DATA

1. Manufacturer
   Manufactured In NPCA Certified Plant for: Artisan Precast, Inc

   Artisan Precast, Inc
   1180 South Beverly Dr. #608, Los Angeles, CA 90035
   Phone #: (310) 556 - 3200 FAX #: (310 556-3201
   Web Site: www.artisanprecast.com
2. Product Description:
   Productions are Intended for Residential, Commercial and Industrial Exterior Fencing, Screening Walls and Noise Barriers.
3. Composition and Materials:
   A mix of High Strength Portland Cement meeting for exceeding the requirements of ASTM-C150, natural aggregates, and Iron Oxide colors placed and cast within factory molds, cured and packaged for shipment.
4. Sizes:
   Screening fence columns are typically placed at 60 inches on center with he screen fence panels being 12 inches in height and approximately 2 inches in thickness. Overall heights are 6 or 8 feet dependant on local codes and site conditions. contact manufacturer for engineering not included in these specifications.
5. Limitations:
   Should not be used as a retaining wall for the support of soils or other structural elements, unless modifications in deign and construction are done and approved by the manufacturer.
6. Technical data for Loading:
   Each screen fence is designed to meet the local building codes as they apply. Wind loading and surcharge loads as they occur, will be applied to the panels, columns and foundation components.
7. Installation:
   The posts are positioned and erected by site-casting the column or post into a drilled pier. The pier size, depth and reinforcement is constructed as specified with site specific engineered drawings. After the posts are accurately spaced, plumbed and leveled, they are braced, until the pier concrete has obtained its initial strength. With the posts erected the panels are manually slid into place. Post caps and panel caps are bonded into place by applying a silicone-based adhesive between the cap and fence component.
   The posts spacing must be less than 152.4 cm. The panels are sawcut to a length as required to Fit.
8. Drainage:
   Panels can be arranged to allow for continuous or intermittent drainage beneath the fence where applicable.

THE CONTRACTOR/OWNER IS RESPONSIBLE FOR HIRING A GEOTECHNICAL ENGINEER TO DETERMINE IF LOCAL SOIL CONDITIONS MEET OR EXCEED MINIMUM SOIL PROPERTIES SHOWN ON THIS PLAN.

THIS FOUNDATION HAS BEEN DESIGNED BASED ON MINIMUM SOIL PROPERTIES SET FORTH BY THE 2007 CALIFORNIA BUILDING CODE.

PIER INSTALLATION MAY ENCOUNTER AREAS OF GRANULAR, COLLAPSING SOILS THAT MAY CONTAIN PERCHED GROUNDWATER. PIERS MUST BE EXTENDED THROUGH SOFT AND ORGANIC DEPOSITS TO PROVIDE ADEQUATE LATERAL AND VERTICAL SUPPORT. TEMPORARY CASING MAY BE NECESSARY FOR THE DRILLED PIER INSTALLATION OPERATIONS TO MAINTAIN THE DRILLED SHAFT OPEN THROUGH THESE SOILS DURING CONSTRUCTION.

IF THE CONTRACTOR FINDS ANY DISCREPANCIES BETWEEN THE SITE AND THESE PLANS, HE SHALL NOTIFY THE ENGINEER IMMEDIATELY.

Footing Depth Schedule

Soil Type	B: Fence height = 8ft max. (12" Ø)	B: Fence height = 8ft max. (18" Ø)
1. Massive Crystalline Bedrock	2'-9"	2'-6"
2. Sedimentary Rock	3'-3"	2'-9"
3. Sandy Gravel	4'-3"	3'-6"
4. Silty Sand	4'-9"	4'-0"
5. Sandy Clay**	5'-6"	4'-9"

** Assume Type 5 - Sandy Clay Soil OR Soil Types 1-4 may be used with the Approval of the Building Official or Soils Engineer

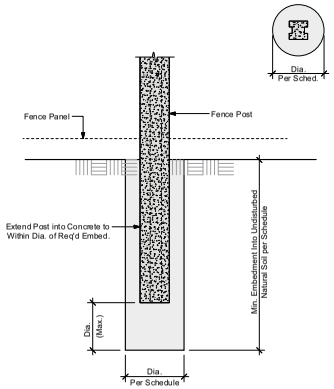

FENCE FOUNDATION SUPPORT



END POST



LINE POST



CORNER POST



CEDARCRETE® TOP CAP - SECTION



CEDARCRETE® BOTTOM CAP - SECTION



CEDARCRETE® PANEL - SECTION



CEDARCRETE® TOP CAP



CEDARCRETE® BOTTOM CAP



CEDARCRETE® STANDARD PANEL

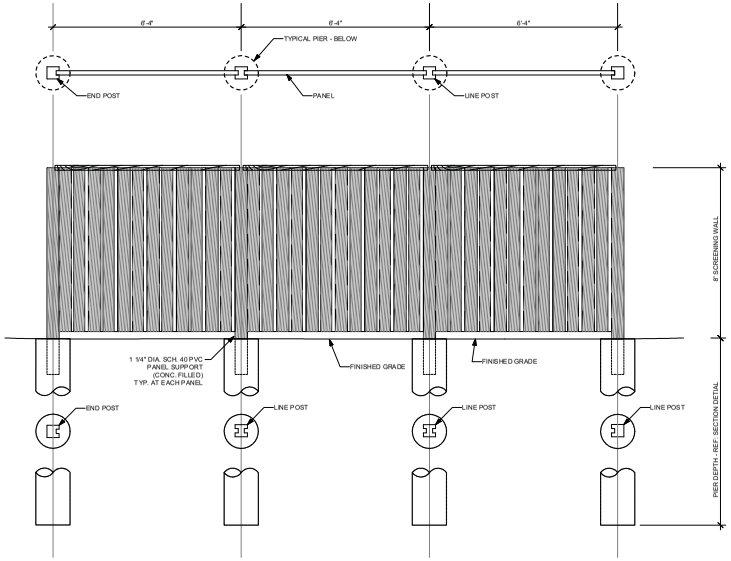

ELEVATION - 8' SCREENING WALL AND PIERS

Project Name:	Highway 32
Project Address:	Chico, CA
Product:	CEDARCRETE
Fence Height:	6 ft , 7 ft, 8 ft, 9ft, 10ft
Governing Code:	2007 CBC
Wind Load:	90 MPH
Exposure:	B
Site Class	D

Ashley&Vance ENGINEERING, INC.
860 Walnut St. Suite C
San Luis Obispo, CA 93401
P: (805) 545-9010
F: (805) 545-9011
www.ashleyvance.com

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

Engineer of Record:

REGISTERED PROFESSIONAL ENGINEER CHARLES R. ASHLEY JR. S 5298 STRUCTURAL STATE OF CALIFORNIA

CEDARCRETE WALL SYSTEM
ARTISAN PRECAST, INC

1180 South Beverly Dr. #608, Los Angeles, CA 90035
(310) 556 - 3200 FAX (310) 556 - 3201
www.artisanprecast.com

Revisions:

Date: 22 Nov 2010 Scale: NTS

Job No.: 0217 - 0006

SHEET 3 OF 5

DO NOT SCALE THESE DRAWINGS. Refer to Architectural plans for all dimensions.

APSD-9

CONCRETE

1. All concrete shall:
   (a) have a minimum ultimate compressive strength (f'c) as follows:
      i) Panels & Posts : 4000 psi at 28 days
      i) Per Foundations : 2500 psi @ 28 days
   (b) have a maximum slump of 5" at point of placement.
   (c) have a W/C ratio of 0.55 or less for all walls and columns, and 0.60 or less for all foundations.
   (d) a normal dry-weight density (UNO).
   (e) be mixed with Portland Cement Type I or II and shall conform to ASTM C 150.
2. All aggregates shall conform to ASTM C33
3. Testing of materials if requested shall be performed in accordance with the governing building standards.
4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense.
5. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:
   i. Cast against earth: 3"
   i. Precast against forms: Panels: 3/4"; Posts 1 1/2"
6. Minimum lap splice length for all reinforcing steel s hall be 40 bar diameter unless specifically noted otherwise on the structural plans and/or details. All lap splices to be staggered.
7. All reinforcing steel and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items.
8. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement.
9. The Contractor shall obtain approval from the Architect and the Engineer prior to placing sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All pipes or conduits passing through concrete members shall be sleeved with standard steel pipe sections.
10. All concrete (except slabs-on-grade 6" or less) shall be placed by steel hammer, sliding tools or mechanically vibrator until concrete is thoroughly compact and without void.
11. Concrete shall be maintained in a moist condition for a minimum of five (5) days after placement.
12. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six (6) feet, use tremie, pump or other method consistent with applicable standards.
13. When specified ultimate compressive strength is greater than 2500 psi, Contractor s hall submit mix designs to Architect and Engineer for approval seven (7) days prior to placement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be provided for all admixtures.

REINFORCEMENT

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond.
2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except that #3 & #4 bars may be Grade 40. All welded wire fabric (WWF) shall conform to ASTM A185.
3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.
4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement.
5. Fabrication, placement and installation of reinforcing steel shall conform to:
   (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice
   (b) CBC Section 1907.
7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

FOUNDATIONS

1. All Pier Foundations shall be located in Undisturbed Soil.
2. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer immediately.
3. All compaction, fill, backfilling and site preparation shall be performed in accordance with CBC Appendix Chapter 33.
4. Excavate to required depths into natural soil (as indicated in the drawings) or as verified by building official or soils engineer. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. If footing excavations are made deeper than intended, only concrete shall be used for fill.
5. Foundations shall be poured in neat excavations.
6. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.
7. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s).
8. The sides and bottoms of dry excavations must be moistened just prior to placing concrete. Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions.
9. The Contractor shall be solely responsible for all excavation procedures including lagging, shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

PRODUCT DATA

1. Manufacturer
   Manufactured In NPCA Certified Plant for: Artisan Precast, Inc

   Artisan Precast, Inc
   1180 South Beverly Dr. #608, Los Angeles, CA 90035
   Phone #: (310) 556 - 3200 FAX #: (310 556-3201
   Web Site: www.artisanprecast.com
2. Product Description:
   Productions are Intended for Residential, Commercial and Industrial Exterior Fencing, Screening Walls and Noise Barriers.
3. Composition and Materials:
   A mix of High Strength Portland Cement meeting for exceeding the requirements of ASTM-C150, natural aggregates, and Iron Oxide colors placed and cast within factory molds, cured and packaged for shipment.
4. Sizes:
   Screening fence columns are typically placed at 60 inches on center with he screen fence panels being 12 inches in height and approximately 2 inches in thickness. Overall heights are 6 or 8 feet dependant on local codes and site conditions. contact manufacturer for engineering not included in these specifications.
5. Limitations:
   Should not be used as a retaining wall for the support of soils or other structural elements, unless modifications in deign and construction are done and approved by the manufacturer.
6. Technical data for Loading:
   Each screen fence is designed to meet the local building codes as they apply. Wind loading and surcharge loads as they occur, will be applied to the panels, columns and foundation components.
7. Installation:
   The posts are positioned and erected by site-casting the column or post into a drilled pier. The pier size, depth and reinforcement is constructed as specified with site specific engineered drawings. After the posts are accurately spaced, plumbed and leveled, they are braced, until the pier concrete has obtained its initial strength. With the posts erected the panels are manually slid into place. Post caps and panel caps are bonded into place by applying a silicone-based adhesive between the cap and fence component.
   The posts spacing must be less than 152.4 cm. The panels are sawcut to a length as required to Fit.
8. Drainage:
   Panels can be arranged to allow for continuous or intermittent drainage beneath the fence where applicable.

THE CONTRACTOR/OWNER IS RESPONSIBLE FOR HIRING A GEOTECHNICAL ENGINEER TO DETERMINE IF LOCAL SOIL CONDITIONS MEET OR EXCEED MINIMUM SOIL PROPERTIES SHOWN ON THIS PLAN.

THIS FOUNDATION HAS BEEN DESIGNED BASED ON MINIMUM SOIL PROPERTIES SET FORTH BY THE 2007 CALIFORNIA BUILDING CODE.

PIER INSTALLATION MAY ENCOUNTER AREAS OF GRANULAR, COLLAPSING SOILS THAT MAY CONTAIN PERCHED GROUNDWATER. PIERS MUST BE EXTENDED THROUGH SOFT AND ORGANIC DEPOSITS TO PROVIDE ADEQUATE LATERAL AND VERTICAL SUPPORT. TEMPORARY CASING MAY BE NECESSARY FOR THE DRILLED PIER INSTALLATION OPERATIONS TO MAINTAIN THE DRILLED SHAFT OPEN THROUGH THESE SOILS DURING CONSTRUCTION.

IF THE CONTRACTOR FINDS ANY DISCREPANCIES BETWEEN THE SITE AND THESE PLANS, HE SHALL NOTIFY THE ENGINEER IMMEDIATELY.

Footing Depth Schedule	B	
	Fence height = 9ft max.	
Soil Type	(12" Ø)	(18" Ø)
1. Massive Crystalline Bedrock	3'-6"	3'-0"
2. Sedimentary Rock	4'-0"	3'-6"
3. Sandy Gravel	5'-3"	4'-6"
4. Silty Sand	5'-9"	4'-9"
5. Sandy Clay**	6'-9"	5'-9"

** Assume Type 5 - Sandy Clay Soil OR Soil Types 1-4 may be used with the Approval of the Building Official or Soils Engineer



END POST



LINE POST



CORNER POST



CEDARCRETE® TOP CAP - SECTION



CEDARCRETE® BOTTOM CAP - SECTION



CEDARCRETE® PANEL - SECTION



CEDARCRETE® TOP CAP



CEDARCRETE® BOTTOM CAP



CEDARCRETE® STANDARD PANEL

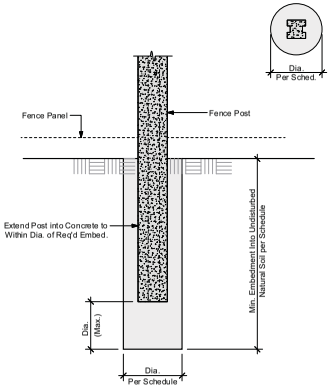

FENCE FOUNDATION SUPPORT

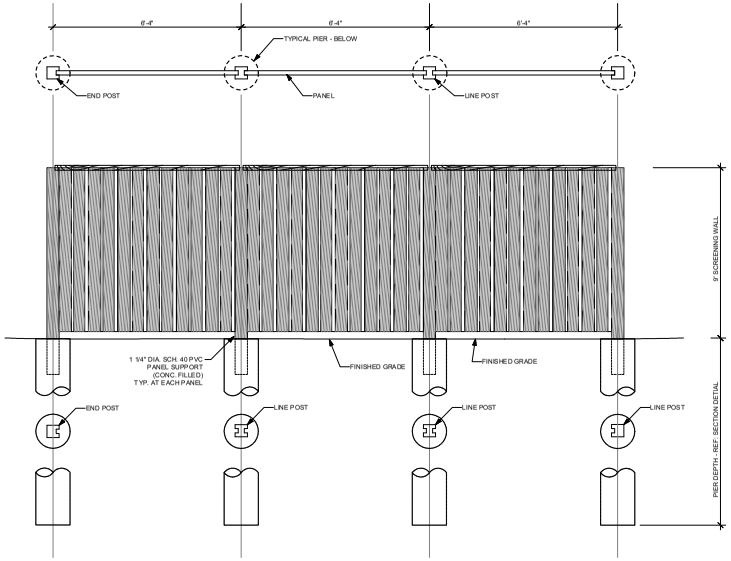

ELEVATION - 9' SCREENING WALL AND PIERS

Project Name:	Highway 32
Project Address:	Chico, CA
Product:	CEDARCRETE
Fence Height:	6 ft , 7 ft, 8 ft, 9ft, 10ft
Governing Code:	2007 CBC
Wind Load:	90 MPH
Exposure:	B
Site Class	D

Ashley&Vance ENGINEERING, INC.
860 Walnut St. Suite C
San Luis Obispo, CA 93401
P: (805) 545-9010
F: (805) 545-9011
www.ashleyvance.com

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

Engineer of Record:

REGISTERED PROFESSIONAL ENGINEER
CHARLES R. ASHLEY JR.
S 5228
STRUCTURAL
STATE OF CALIFORNIA

CEDARCRETE WALL SYSTEM
ARTISAN PRECAST, INC

1180 South Beverly Dr. #608, Los Angeles, CA 90035
(310) 556-3200 FAX (310) 556-3201
www.artisanprecast.com

Revisions:

Date: 22 Nov 2010	Scale: NTS
Job No.: 0217 - 0006	

SHEET 4 OF 5

DO NOT SCALE THESE DRAWINGS. Refer to Architectural plans for all dimensions.

APSD-10

CONCRETE

1. All concrete shall:
   (a) have a minimum ultimate compressive strength (f'c) as follows:
   i) Panels & Posts : 4000 psi at 28 days
   ii) Per Foundations : 2500 psi @ 28 days
   (b) have a maximum slump of 5" at point of placement.
   (c) have a W/C ratio of 0.55 or less for all walls and columns, and 0.60 or less for all foundations.
   (d) a normal dry-weight density (UNO).
   (e) be mixed with Portland Cement Type I or II and shall conform to ASTM C 150.
2. All aggregates shall conform to ASTM C33
3. Testing of materials if requested shall be performed in accordance with the governing building standards.
4. The Contractor shall remove and replace any concrete which fails to attain specified 28 day compressive strength if so directed by the Engineer. Any defects in the hardened concrete shall be repaired to the satisfaction of the Engineer and/or Architect or the hardened concrete shall be replaced at the Contractor's expense.
5. Where not specifically detailed, the minimum concrete cover on reinforcing steel shall be:
   i. Cast against earth: 3"
   ii. Precast against forms: Panels: 3/4"; Posts 1 1/2"
6. Minimum lap splice length for all reinforcing steel s hall be 40 bar diameter unless specifically noted otherwise on the structural plans and/or details. All lap splices to be staggered.
7. All reinforcing steel and any other hardware to be cast in concrete shall be well secured in position prior to foundation inspection. All hardware to be installed in accordance with respective manufacturer's specifications. Refer to architectural and structural plans for locations of embedded items.
8. All surfaces to receive fresh concrete shall be maintained continuously wet at least three (3) hours in advance of concrete placement.
9. The Contractor shall obtain approval from the Architect and the Engineer prior to placing sleeves, pipes, ducts, chases, coring and opening on or through structural concrete beams, walls, floors, and roof slabs unless specifically detailed or noted on the plans. All pipes or conduits passing through concrete members shall be sleeved with standard steel pipe sections.
10. All concrete (except slabs-on-grade 6" or less) shall be placed by steel hammer, sliding tools or mechanically vibrator until concrete is thoroughly compact and without void.
11. Concrete shall be maintained in a moist condition for a minimum of five (5) days after placement.
12. Concrete shall not be permitted to free fall more than six (6) feet. For heights greater than six (6) feet, use tremie, pump or other method consistent with applicable standards.
13. When specified ultimate compressive strength is greater than 2500 psi, Contractors hall submit mix designs to Architect and Engineer for approval seven (7) days prior to placement. Mix designs shall be prepared by an approved testing laboratory. Sufficient data must be provided for all admixtures.

REINFORCEMENT

1. Reinforcing steel shall be to deformed, clean, free of rust, grease or any other material likely to impair concrete bond.
2. All bars shall conform to ASTM A615, Grade 60 minimum (UNO on structural plans), except that #3 & #4 bars may be Grade 40. All welded wire fabric (WWF) shall conform to ASTM A185.
3. Reinforcing steel that is to be welded shall conform to ASTM A706. All welding of reinforcement shall be subject to special inspection.
4. Contractor shall take necessary steps (standard ties, anchorage devices, etc.) to secure all reinforcing steel in their true position and prevent displacement during concrete placement.
5. Fabrication, placement and installation of reinforcing steel shall conform to:
   (a) Concrete Reinforcing Steel Institute (CRSI) Manual of Standard Practice
   (b) CBC Section 1907.
7. Heating of reinforcing steel to aid in bending and shaping of bars is not permitted. All bends in reinforcing steel are to be made cold. All bend radii shall conform to CRSI Manual of Standard Practice.

FOUNDATIONS

1. All Pier Foundations shall be located in Undisturbed Soil.
2. Unexpected Soil Conditions: Allowable values and subsequent foundation designs are based on soil conditions which are shown by test borings. Actual soil conditions which deviate appreciably from that shown in the test borings shall be reported to the Engineer immediately.
3. All compaction, fill, backfilling and site preparation shall be performed in accordance with CBC Appendix Chapter 33.
4. Excavate to required depths into natural soil (as indicated in the drawings) or as verified by building official or soils engineer. Care shall be taken not to over-excavate foundation at lower elevation and prevent disturbance of soils around high elevation. If footing excavations are made deeper than intended, only concrete shall be used for fill.
5. Foundations shall be poured in neat excavations.
6. All foundations shall be inspected and approved by the appropriate building official and/or a representative of the soils engineer prior to forming and placement of reinforcing or concrete.
7. Foundations shall not be poured until all required reinforcing steel, framing hardware, sleeves, inserts, conduits, pipes, etc. and formwork is properly placed and inspected by the appropriate building official/inspector(s).
8. The sides and bottoms of dry excavations must be moistened just prior to placing concrete. Conversely, de-water footings as required to remove standing water and to maintain optimum working conditions.
9. The Contractor shall be solely responsible for all excavation procedures including lagging, shoring, and the protection of adjacent property, structures, streets, and utilities in accordance with all federal, state and local safety ordinances. The Contractor shall provide for the design and installation of all cribbing, bracing and shoring required.

PRODUCT DATA

1. Manufacturer
   Manufactured In NPCA Certified Plant for: Artisan Precast, Inc

   Artisan Precast, Inc
   1180 South Beverly Dr. #608, Los Angeles, CA 90035
   Phone #: (310) 556 - 3200 FAX #: (310 556-3201
   Web Site: www.artisanprecast.com
2. Product Description:
   Productions are Intended for Residential, Commercial and Industrial Exterior Fencing, Screening Walls and Noise Barriers.
3. Composition and Materials:
   A mix of High Strength Portland Cement meeting for exceeding the requirements of ASTM-C150, natural aggregates, and Iron Oxide colors placed and cast within factory molds, cured and packaged for shipment.
4. Sizes:
   Screening fence columns are typically placed at 60 inches on center with he screen fence panels being 12 inches in height and approximately 2 inches in thickness. Overall heights are 6 or 8 feet dependant on local codes and site conditions. contact manufacturer for engineering not included in these specifications.
5. Limitations:
   Should not be used as a retaining wall for the support of soils or other structural elements, unless modifications in deign and construction are done and approved by the manufacturer.
6. Technical data for Loading:
   Each screen fence is designed to meet the local building codes as they apply. Wind loading and surcharge loads as they occur, will be applied to the panels, columns and foundation components.
7. Installation:
   The posts are positioned and erected by site-casting the column or post into a drilled pier. The pier size, depth and reinforcement is constructed as specified with site specific engineered drawings. After the posts are accurately spaced, plumbed and leveled, they are braced, until the pier concrete has obtained its initial strength. With the posts erected the panels are manually slid into place. Post caps and panel caps are bonded into place by applying a silicone-based adhesive between the cap and fence component.
   The posts spacing must be less than 152.4 cm. The panels are sawcut to a length as required to Fit.
8. Drainage:
   Panels can be arranged to allow for continuous or intermittent drainage beneath the fence where applicable.

THE CONTRACTOR/OWNER IS RESPONSIBLE FOR HIRING A GEOTECHNICAL ENGINEER TO DETERMINE IF LOCAL SOIL CONDITIONS MEET OR EXCEED MINIMUM SOIL PROPERTIES SHOWN ON THIS PLAN.

THIS FOUNDATION HAS BEEN DESIGNED BASED ON MINIMUM SOIL PROPERTIES SET FORTH BY THE 2007 CALIFORNIA BUILDING CODE.

PIER INSTALLATION MAY ENCOUNTER AREAS OF GRANULAR, COLLAPSING SOILS THAT MAY CONTAIN PERCHED GROUNDWATER. PIERS MUST BE EXTENDED THROUGH SOFT AND ORGANIC DEPOSITS TO PROVIDE ADEQUATE LATERAL AND VERTICAL SUPPORT. TEMPORARY CASING MAY BE NECESSARY FOR THE DRILLED PIER INSTALLATION OPERATIONS TO MAINTAIN THE DRILLED SHAFT OPEN THROUGH THESE SOILS DURING CONSTRUCTION.

IF THE CONTRACTOR FINDS ANY DISCREPANCIES BETWEEN THE SITE AND THESE PLANS, HE SHALL NOTIFY THE ENGINEER IMMEDIATELY.

Footing Depth Schedule	B	
	Fence height = 10ft max.	
Soil Type	(12" Ø)	(18" Ø)
1. Massive Crystalline Bedrock	3'-6"	3'-0"
2. Sedimentary Rock	4'-0"	3'-6"
3. Sandy Gravel	5'-3"	4'-6"
4. Silty Sand	5'-9"	4'-9"
5. Sandy Clay**	6'-9"	5'-9"

** Assume Type 5 - Sandy Clay Soil OR Soil Types 1-4 may be used with the Approval of the Building Official or Soils Engineer



END POST



LINE POST



CORNER POST



CEDARCRETE® TOP CAP - SECTION



CEDARCRETE® BOTTOM CAP - SECTION



CEDARCRETE® PANEL - SECTION



CEDARCRETE® TOP CAP



CEDARCRETE® BOTTOM CAP



CEDARCRETE® STANDARD PANEL

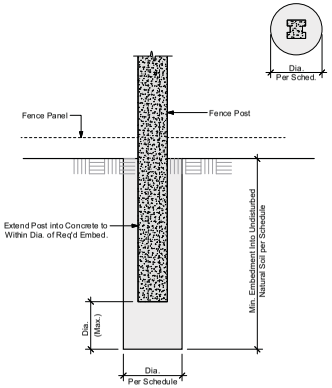

FENCE FOUNDATION SUPPORT

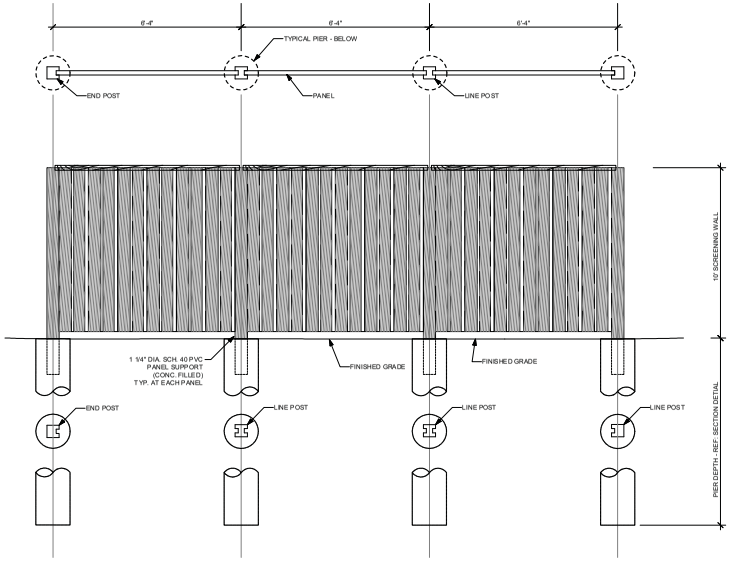

ELEVATION - 10' SCREENING WALL AND PIERS

Project Name:	Highway 32
Project Address:	Chico, CA
Product:	CEDARCRETE
Fence Height:	6 ft , 7 ft, 8 ft, 9ft, 10ft
Governing Code:	2007 CBC
Wind Load:	90 MPH
Exposure:	B
Site Class	D

Ashley&Vance ENGINEERING, INC.
860 Walnut St. Suite C
San Luis Obispo, CA 93401
P. (805) 545-9010
F. (805) 545-9011
www.ashleyvance.com

The use of these plans and specifications shall be restricted to the original site for which they were prepared and publication thereof is expressly limited to such use. Reproduction or publication by any method, in whole or in part, is prohibited. Title to these plans and specifications remain with Ashley & Vance Engineering, Inc. without prejudice. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

Engineer of Record:

REGISTERED PROFESSIONAL ENGINEER
CHARLES R. ASHLEY JR.
S 5228
STRUCTURAL
STATE OF CALIFORNIA

CEDARCRETE WALL SYSTEM
ARTISAN PRECAST, INC

1180 South Beverly Dr. #608, Los Angeles, CA 90035
(310) 556-3200 FAX (310) 556-3201
www.artisanprecast.com

Revisions:

Date: 22 Nov 2010	Scale: NTS
Job No.: 0217 - 0006	

SHEET
5 OF 5

DO NOT SCALE THESE DRAWINGS. Refer to Architectural plans for all dimensions.

(Blank)

VII. BATTERY BACKUP SYSTEM DETAILS

(Blank)

Dist	COUNTY	LOCATION CODE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Theresa Gabriel 12-20-07
REGISTERED CIVIL ENGINEER DATE

PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER Theresa A. Gabriel No. E15129 Exp. 6-30-10 ELECT STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

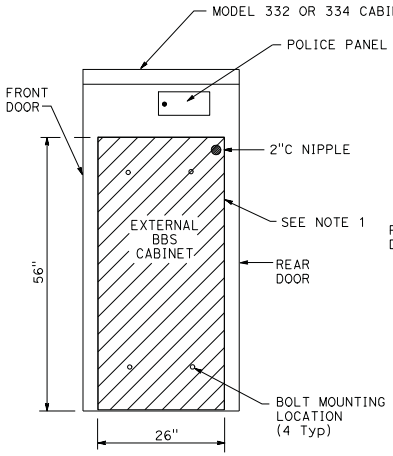

SIDE VIEW



TOP VIEW

EXTERNAL BBS CABINET MOUNTED TO THE MODEL 332 OR 334 CABINET

NOTE: (THIS SHEET ONLY)

1. THE EXTERNAL BBS CABINET SHALL BE MOUNTED TO THE MODEL 332 OR 334 CABINET WITH FOUR 18-8 STAINLESS STEEL HEX HEAD, FULLY-THREADED, ⅜"-16 X 1" BOLTS; TWO WASHERS PER BOLT, DESIGNED FOR ⅜" BOLTS AND ARE 18-8 STAINLESS STEEL, 1" OUTSIDE DIAMETER, ROUND, AND FLAT; AND ONE K-LOCK NUT PER BOLT THAT IS 18-8 STAINLESS STEEL AND A HEX-NUT. THE ENGINEER WILL HAVE TO APPROVE THE BOLT MOUNTING LOCATION PRIOR TO INSTALLATION.
2. THE ANCHOR BOLTS SHALL BE ¾" Dia X 15" WITH A 2"-90° BEND. THE CABINET MANUFACTURER'S SPECIFICATION SHALL DETERMINE THE LOCATION OF THE ANCHOR BOLTS IN THE FOUNDATION. THE ENGINEER WILL HAVE TO APPROVE THE ANCHOR BOLTS AND ITS LOCATION IN THE FOUNDATION PRIOR TO CONSTRUCTION.
3. THE CONTRACTOR SHALL VERIFY THE DIMENSIONS OF THE BBS CABINET PRIOR TO CONSTRUCTING THE FOUNDATION OF THE MODIFIED PORTION OF THE Std MODEL 332 AND 334 CABINET FOUNDATION. THE ENGINEER WILL HAVE TO APPROVE ANY NECESSARY DEVIATIONS PRIOR TO CONSTRUCTION.
4. ALL DIMENSIONS ARE NOMINAL.

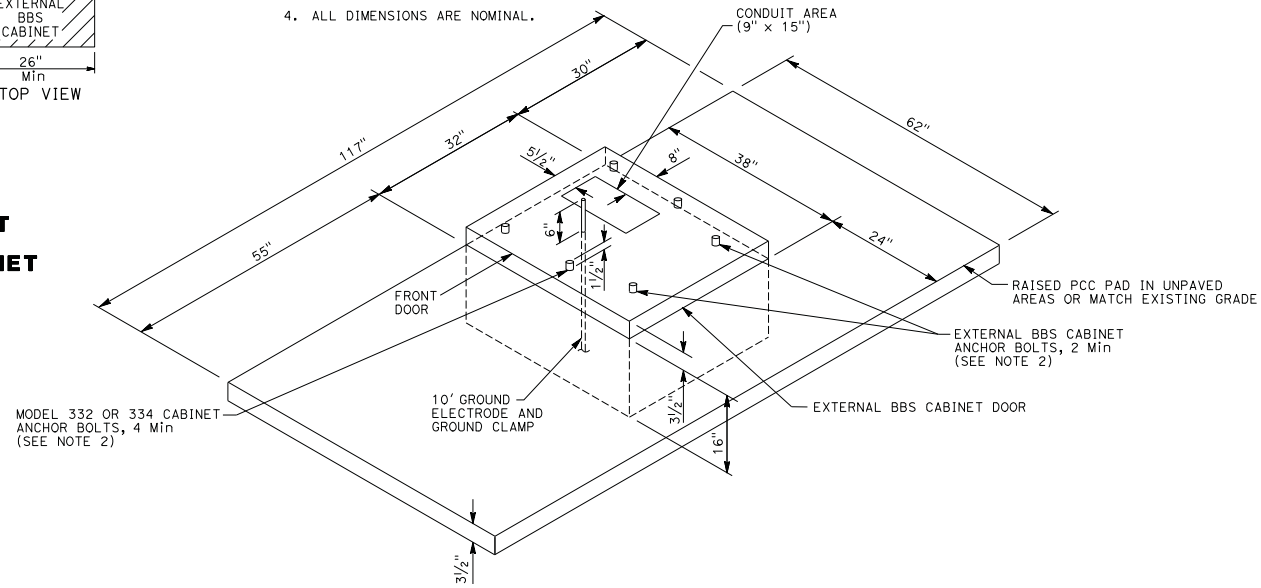

MODIFIED MODEL 332 AND 334 CABINET FOUNDATION DETAIL FOR BATTERY BACKUP SYSTEM (BBS)

(FOR DIMENSIONS AND DETAILS NOT SHOWN AND ADDITIONAL NOTES, SEE SHEET ES-3C OF THE STANDARD PLANS FOR MODEL 332 AND 334 CABINETS)

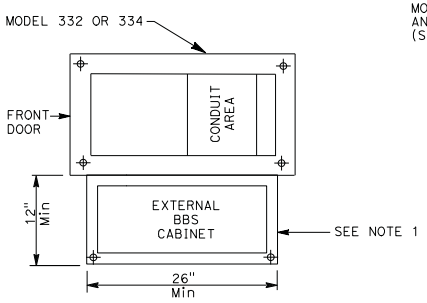

BASE PLAN FOR BBS MOUNTED TO THE MODEL 332 OR 334 CABINET

(FOR DIMENSIONS AND DETAILS NOT SHOWN, SEE SHEET A6-1 TO A6-4, CABINET HOUSING DETAILS OF THE TRANSPORTATION ELECTRICAL EQUIPMENT SPECIFICATION (TEES))

ELECTRICAL SYSTEMS
(BBS FOUNDATION DETAILS)

NO SCALE

THIS PLAN IS ACCURATE FOR ELECTRICAL WORK ONLY.

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION
Caltrans

FUNCTIONAL SUPERVISOR | CALCULATED-DESIGNED BY | CHECKED BY | REVISED BY | DATE REVISED

LAST REVISION 2-2-09 | DATE PLOTTED => 13-APR-2010 | TIME PLOTTED => 11:41

LEGEND: (THIS SHEET ONLY)

PTS = POWER TRANSFER SWITCH
UPS = UNINTERRUPTIBLE POWER SUPPLY
UPSC = UNINTERRUPTIBLE POWER SUPPLY CONTROLLER
UPSM = UPS MODE
BP = BYPASS
MBPS = MANUAL BYPASS SWITCH
AC+ = UNGROUNDED CONDUCTOR
AC- = GROUNDED CONDUCTOR
C = COMMON
Grn = GREEN
Blk = BLACK
Wht = WHITE
SF = STATE-FURNISHED
TB = TERMINAL BOARD
Cntl = CONTROL
Gnd = GROUND
Temp = TEMPERATURE
Batt = BATTERY

NOTES: (THIS SHEET ONLY)

1. TYPE A REFERS TO THE BBS EQUIPMENT FROM MANUFACTURER A.
2. CASE-1 REFERS TO THE SITUATION WHEN THE ENTIRE BBS EQUIPMENT INCLUDING THE BATTERIES ARE INSTALLED IN THE BBS CABINET.
3. THE LOCATION OF THE 2"C NIPPLE WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
4. THE CONTRACTOR SHALL FURNISH AND INSTALL A NEMA-1 ENCLOSURE WITH 30 A, 1P, 120/240 VOLTS RATED CIRCUIT BREAKER MANUFACTURED PER UL STANDARD 489.
5. A TEMPERATURE PROBE SHALL BE ATTACHED TO THE BATTERY BY TAPE OR ATTACHED TO THE NEGATIVE TERMINAL OF THE BATTERY.
6. THE ELECTRICAL POWER FOR THE COOLING FAN FOR THE BBS CABINET SHALL BE TAPPED FROM THE BOTTOM OF THE TB IN THE 332 CABINET.
7. THE CONTRACTOR SHALL PROVIDE A 9-WIRE WIRING HARNESS OR BUNDLED 9 MULTICOLOR CONDUCTORS, #18 AWG WIRES FROM THE RELAY ON THE INVERTER/CHARGER UNIT TO THE CONTROLLER. THE ENDS OF THE CONDUCTORS SHALL BE INSULATED WITH TAPE AND A SIX-FOOT COIL ON EACH END.

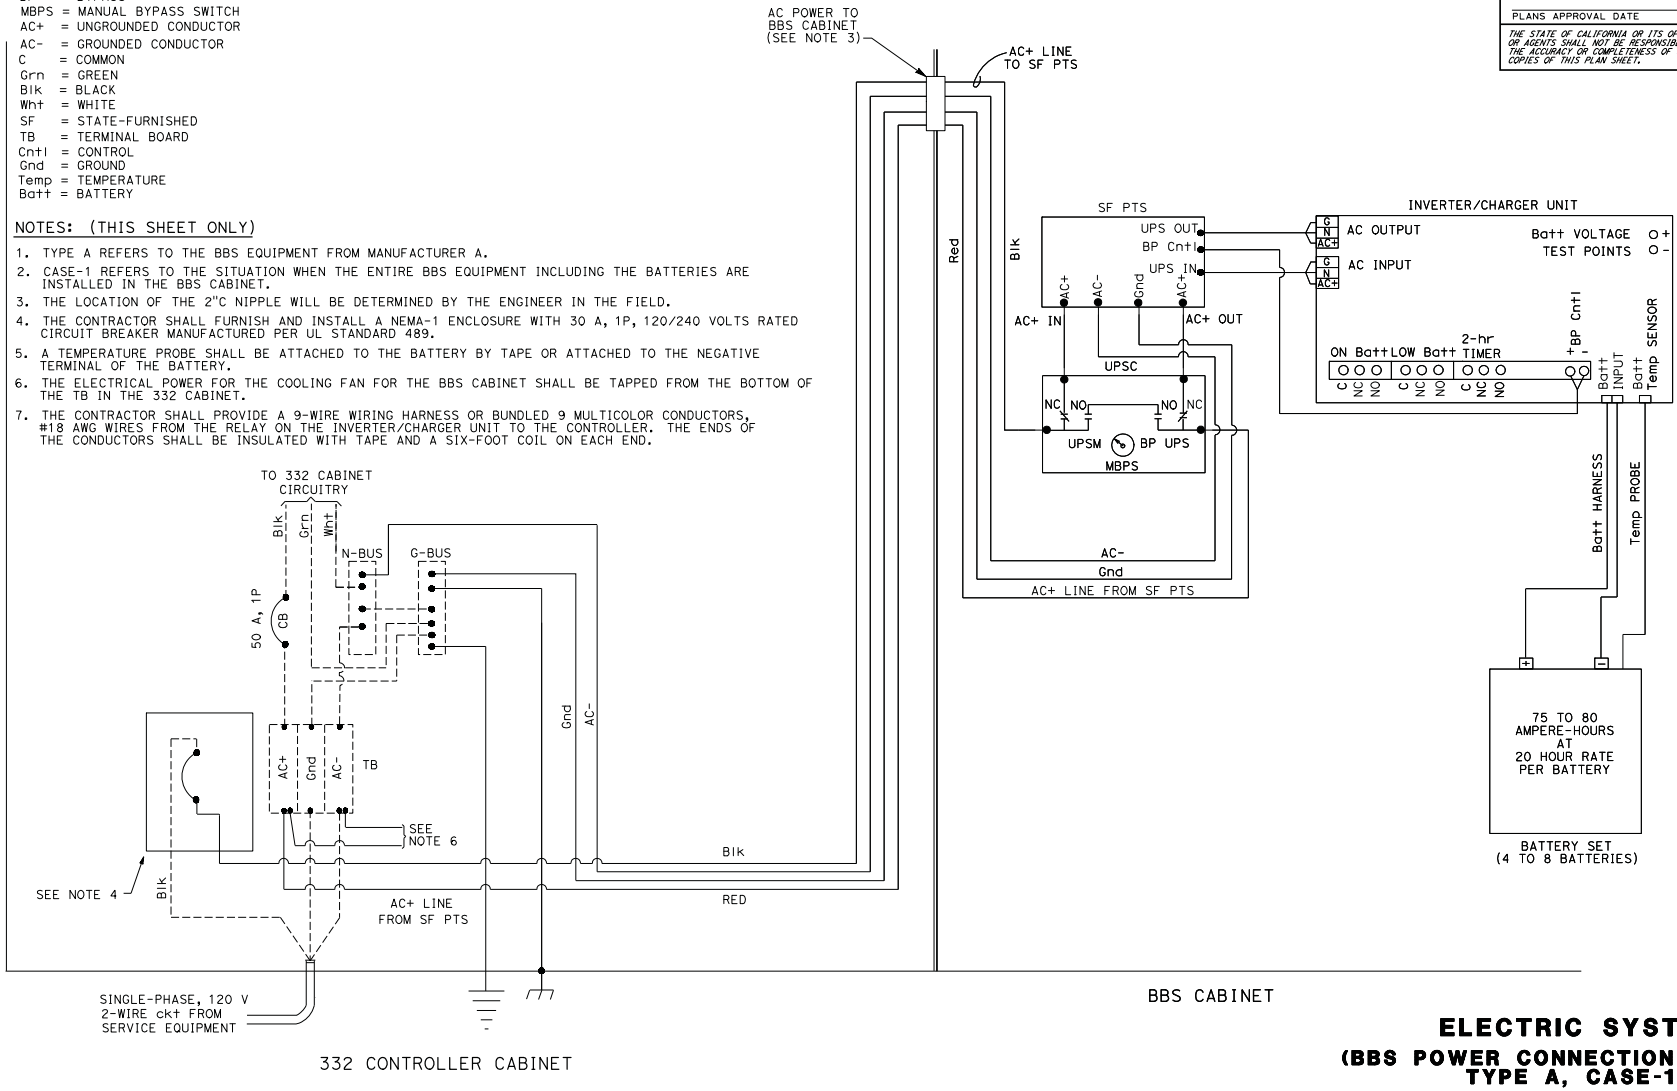

Dist	COUNTY	LOCATION CODE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Theresa Gabriel 12-20-07
REGISTERED CIVIL ENGINEER DATE

PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER Theresa A. Gabriel No. E15129 Exp. 6-30-10 ELECT STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

ELECTRIC SYSTEM
(BBS POWER CONNECTION DIAGRAM, TYPE A, CASE-1)

REVISED BY | DATE REVISED
CALCULATED-DESIGNED BY | CHECKED BY
FUNCTIONAL SUPERVISOR

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION
Caltrans

LAST REVISION 3-11-09 | DATE PLOTTED => 13-MAR-2009 | TIME PLOTTED => 09:06

Dist	COUNTY	LOCATION CODE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER 12-20-07 DATE

PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER Theresa A. Gabriel No. E15129 Exp. 6-30-10 ELECT STATE OF CALIFORNIA

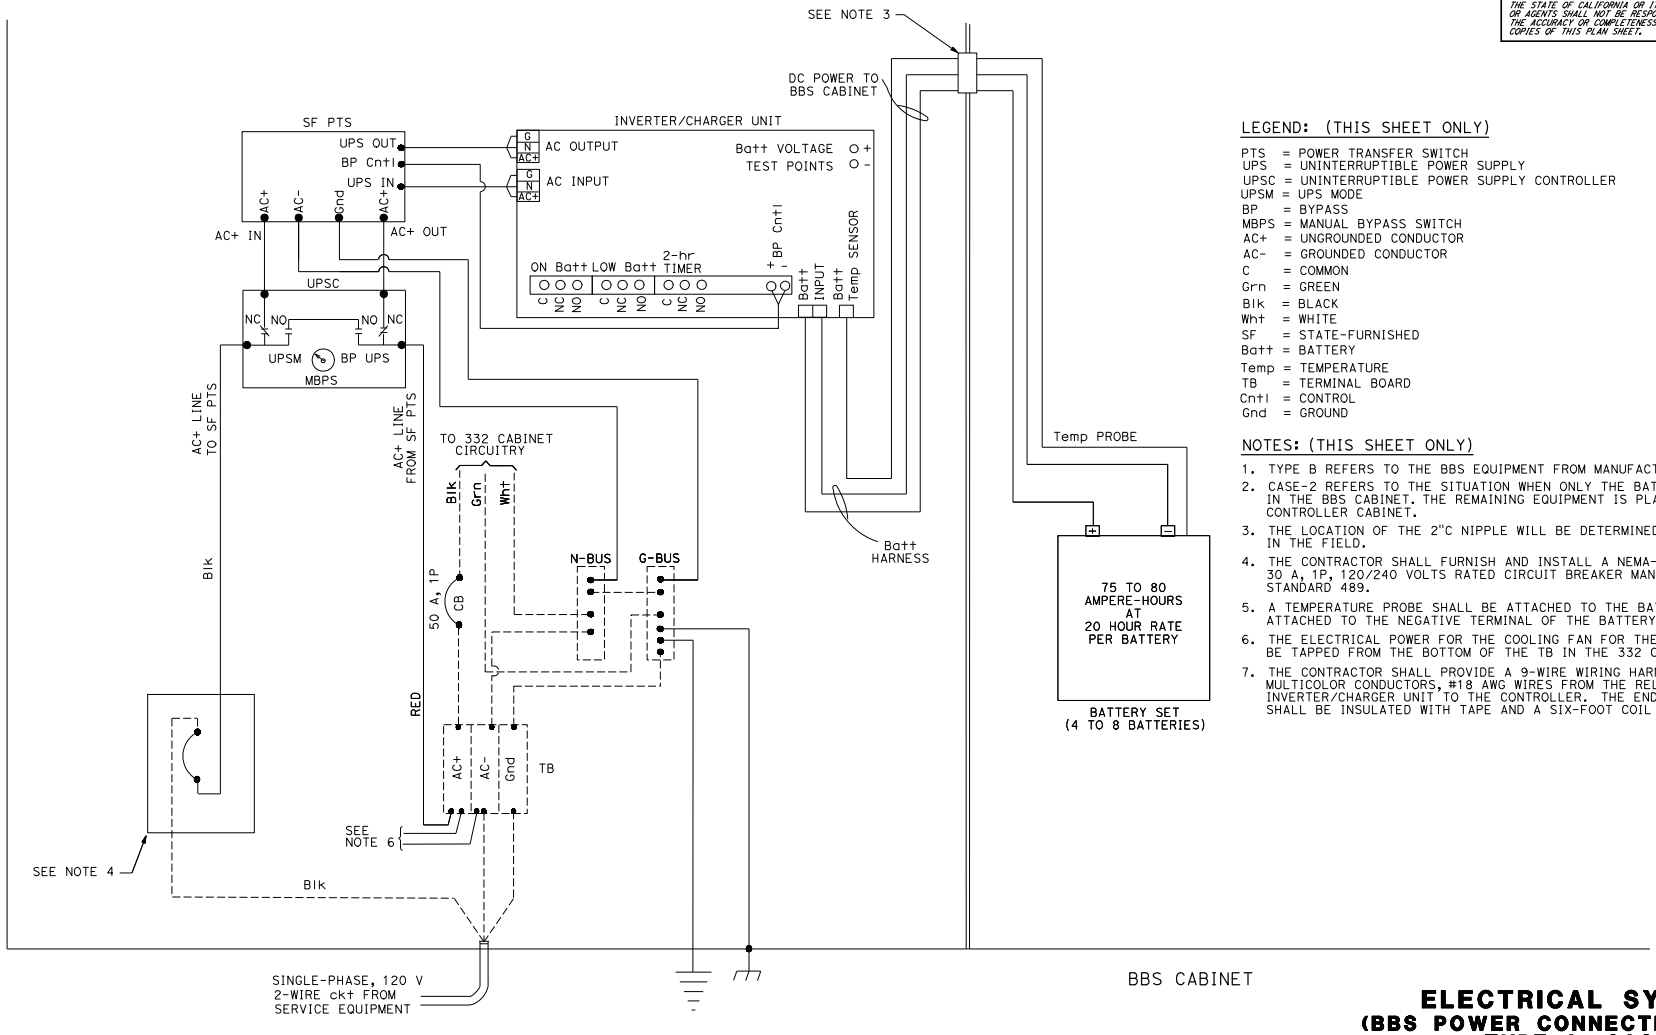

LEGEND: (THIS SHEET ONLY)

PTS = POWER TRANSFER SWITCH
UPS = UNINTERRUPTIBLE POWER SUPPLY
UPSC = UNINTERRUPTIBLE POWER SUPPLY CONTROLLER
UPSM = UPS MODE
BP = BYPASS
MBPS = MANUAL BYPASS SWITCH
AC+ = UNGROUNDED CONDUCTOR
AC- = GROUNDED CONDUCTOR
C = COMMON
Grn = GREEN
Blk = BLACK
Wht = WHITE
SF = STATE-FURNISHED
Batt = BATTERY
Temp = TEMPERATURE
TB = TERMINAL BOARD
Cntl = CONTROL
Gnd = GROUND

NOTES: (THIS SHEET ONLY)

1. TYPE B REFERS TO THE BBS EQUIPMENT FROM MANUFACTURER B.
2. CASE-2 REFERS TO THE SITUATION WHEN ONLY THE BATTERIES ARE INSTALLED IN THE BBS CABINET. THE REMAINING EQUIPMENT IS PLACED IN THE 332 CONTROLLER CABINET.
3. THE LOCATION OF THE 2"C NIPPLE WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
4. THE CONTRACTOR SHALL FURNISH AND INSTALL A NEMA-1 ENCLOSURE WITH 30 A, 1P, 120/240 VOLTS RATED CIRCUIT BREAKER MANUFACTURED PER UL STANDARD 489.
5. A TEMPERATURE PROBE SHALL BE ATTACHED TO THE BATTERY BY TAPE OR ATTACHED TO THE NEGATIVE TERMINAL OF THE BATTERY.
6. THE ELECTRICAL POWER FOR THE COOLING FAN FOR THE BBS CABINET SHALL BE TAPPED FROM THE BOTTOM OF THE TB IN THE 332 CABINET.
7. THE CONTRACTOR SHALL PROVIDE A 9-WIRE WIRING HARNESS OR BUNDLED 9 MULTICOLOR CONDUCTORS, #18 AWG WIRES FROM THE RELAY ON THE INVERTER/CHARGER UNIT TO THE CONTROLLER. THE ENDS OFTHE CONDUCTORS SHALL BE INSULATED WITH TAPE AND A SIX-FOOT COIL ON EACH END.

ELECTRICAL SYSTEMS
(BBS POWER CONNECTION DIAGRAM, TYPE A, CASE-2)

NO SCALE

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION

Caltrans

FUNCTIONAL SUPERVISOR | CALCULATED-DESIGNED BY | CHECKED BY | REVISED BY | DATE REVISED

LAST REVISION 2-2-09 | DATE PLOTTED => 13-MAR-2009 | TIME PLOTTED => 09:07

BORDER LAST REVISED 4/11/2008 | RELATIVE BORDER SCALE IS IN INCHES 0 1 2 3 | USERNAME => trcarol | DGN FILE => BBS 1250FSP.dgn | CU 00000 | EA 000000

Dist	COUNTY	LOCATION CODE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER 12-20-07 DATE

PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER Theresa A. Gabriel No. E15129 Exp. 6-30-10 ELECT STATE OF CALIFORNIA

LEGEND: (THIS SHEET ONLY)

PTS = POWER TRANSFER SWITCH
UPS = UNINTERRUPTIBLE POWER SUPPLY
UPSC = UNINTERRUPTIBLE POWER SUPPLY CONTROLLER
UPSM = UPS MODE
BP = BYPASS
MBPS = MANUAL BYPASS SWITCH
AC+ = UNGROUNDED CONDUCTOR
AC- = GROUNDED CONDUCTOR
C = COMMON
Grn = GREEN
Blk = BLACK
Wht = WHITE
SF = STATE-FURNISHED
Batt = BATTERY
Temp = TEMPERATURE
TB = TERMINAL BOARD
Cntl = CONTROL
Gnd = GROUND

NOTES: (THIS SHEET ONLY)

1. TYPE B REFERS TO THE BBS EQUIPMENT FROM MANUFACTURER B.
2. CASE-1 REFERS TO THE SITUATION WHEN THE ENTIRE BBS EQUIPMENT INCLUDING THE BATTERIES ARE INSTALLED IN THE BBS CABINET.
3. THE LOCATION OF THE 2"C NIPPLE WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
4. THE CONTRACTOR SHALL FURNISH AND INSTALL A NEMA-1 ENCLOSURE WITH 30 A, 1P, 120/240 VOLTS RATED CIRCUIT BREAKER MANUFACTURED PER UL STANDARD 489.
5. A TEMPERATURE PROBE SHALL BE ATTACHED TO THE BATTERY BY TAPE OR ATTACHED TO THE NEGATIVE TERMINAL OF THE BATTERY.
6. THE ELECTRICAL POWER FOR THE COOLING FAN FOR THE BBS CABINET SHALL BE TAPPED FROM THE BOTTOM OF THE TB IN THE 332 CABINET.
7. THE CONTRACTOR SHALL PROVIDE A 9-WIRE WIRING HARNESS OR BUNDLED 9 MULTICOLOR CONDUCTORS, #18 AWG WIRES FROM THE RELAY ON THE INVERTER/CHARGER UNIT TO THE CONTROLLER. THE ENDS OF THE CONDUCTORS SHALL BE INSULATED WITH TAPE AND A SIX-FOOT COIL ON EACH END.

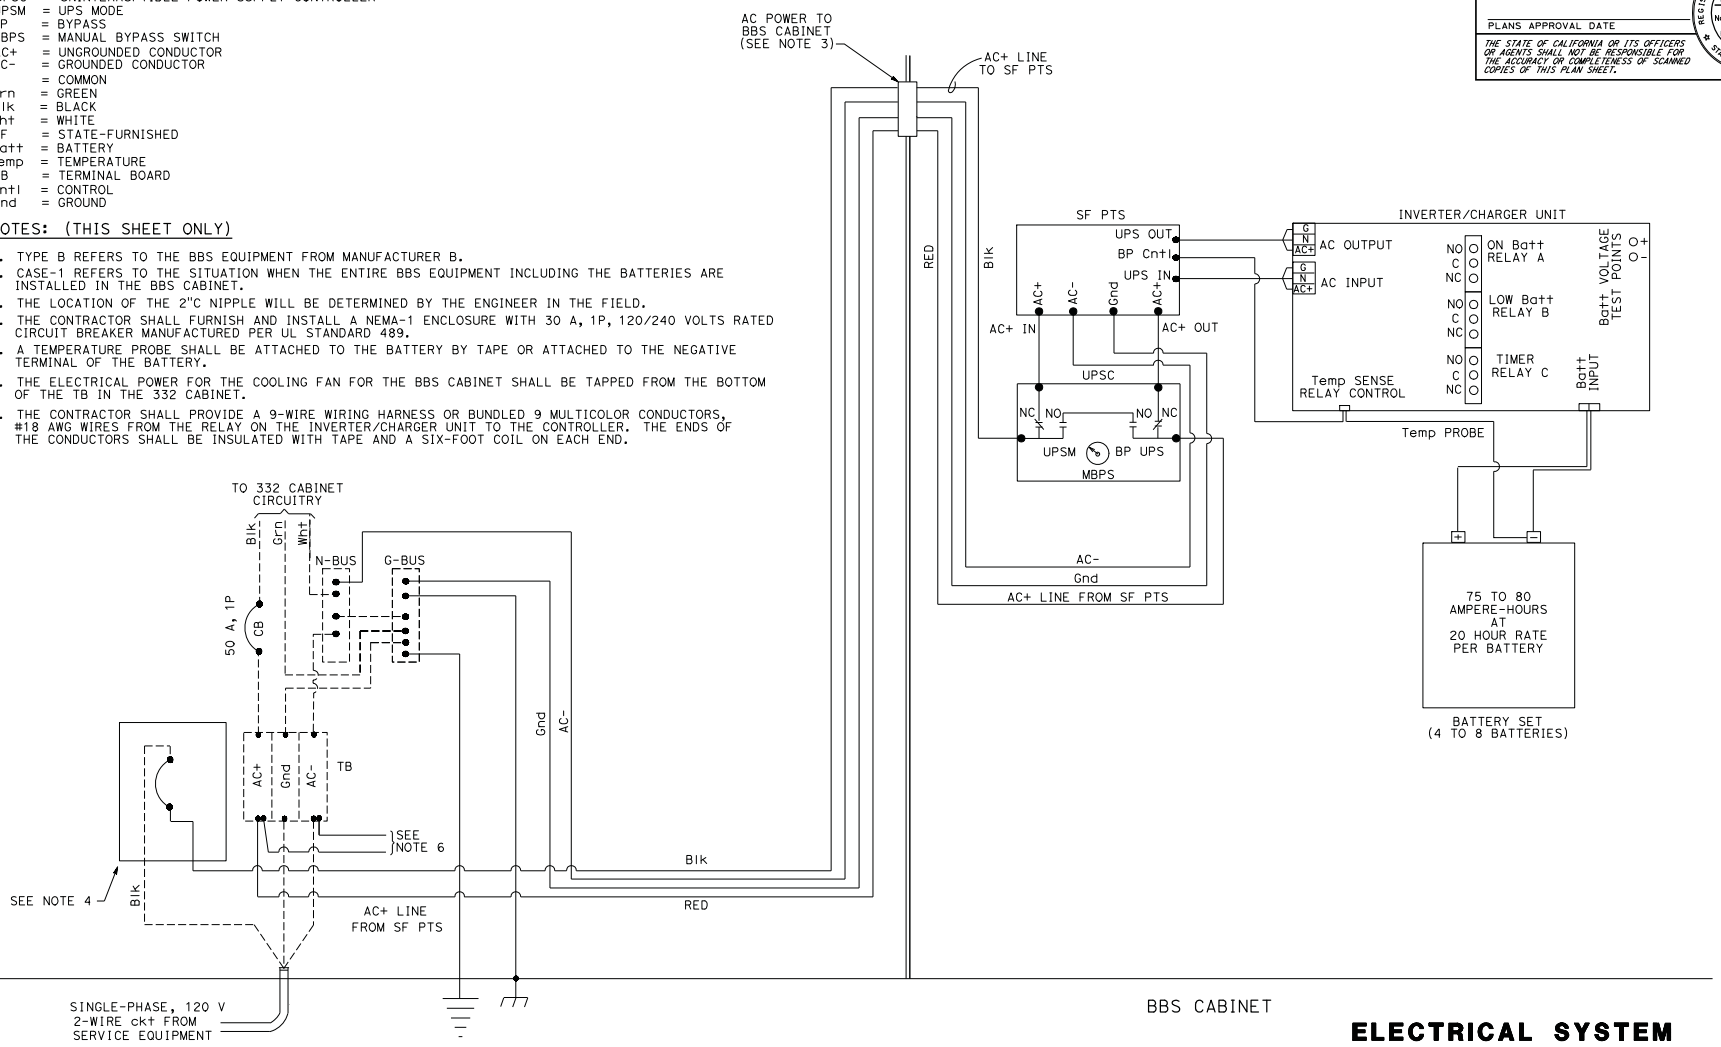

ELECTRICAL SYSTEM

(BBS POWER CONNECTION DIAGRAM, TYPE B, CASE-1)

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION

Caltrans

FUNCTIONAL SUPERVISOR

CALCULATED-DESIGNED BY | CHECKED BY

REVISED BY | DATE REVISED

LAST REVISION 3-11-09 | DATE PLOTTED => 21-SEP-2009 | TIME PLOTTED => 13:33

BORDER LAST REVISED 4/11/2008 | RELATIVE BORDER SCALE IS IN INCHES 0 1 2 3 | USERNAME => trcarol | DGN FILE => BBS DUIFSM.dgn | CU 00000 | EA 000000

Dist	COUNTY	LOCATION CODE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Theresa Gabriel 12-20-07
REGISTERED CIVIL ENGINEER DATE

PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER Theresa A. Gabriel No. E15129 Exp. 6-30-10 ELECT STATE OF CALIFORNIA

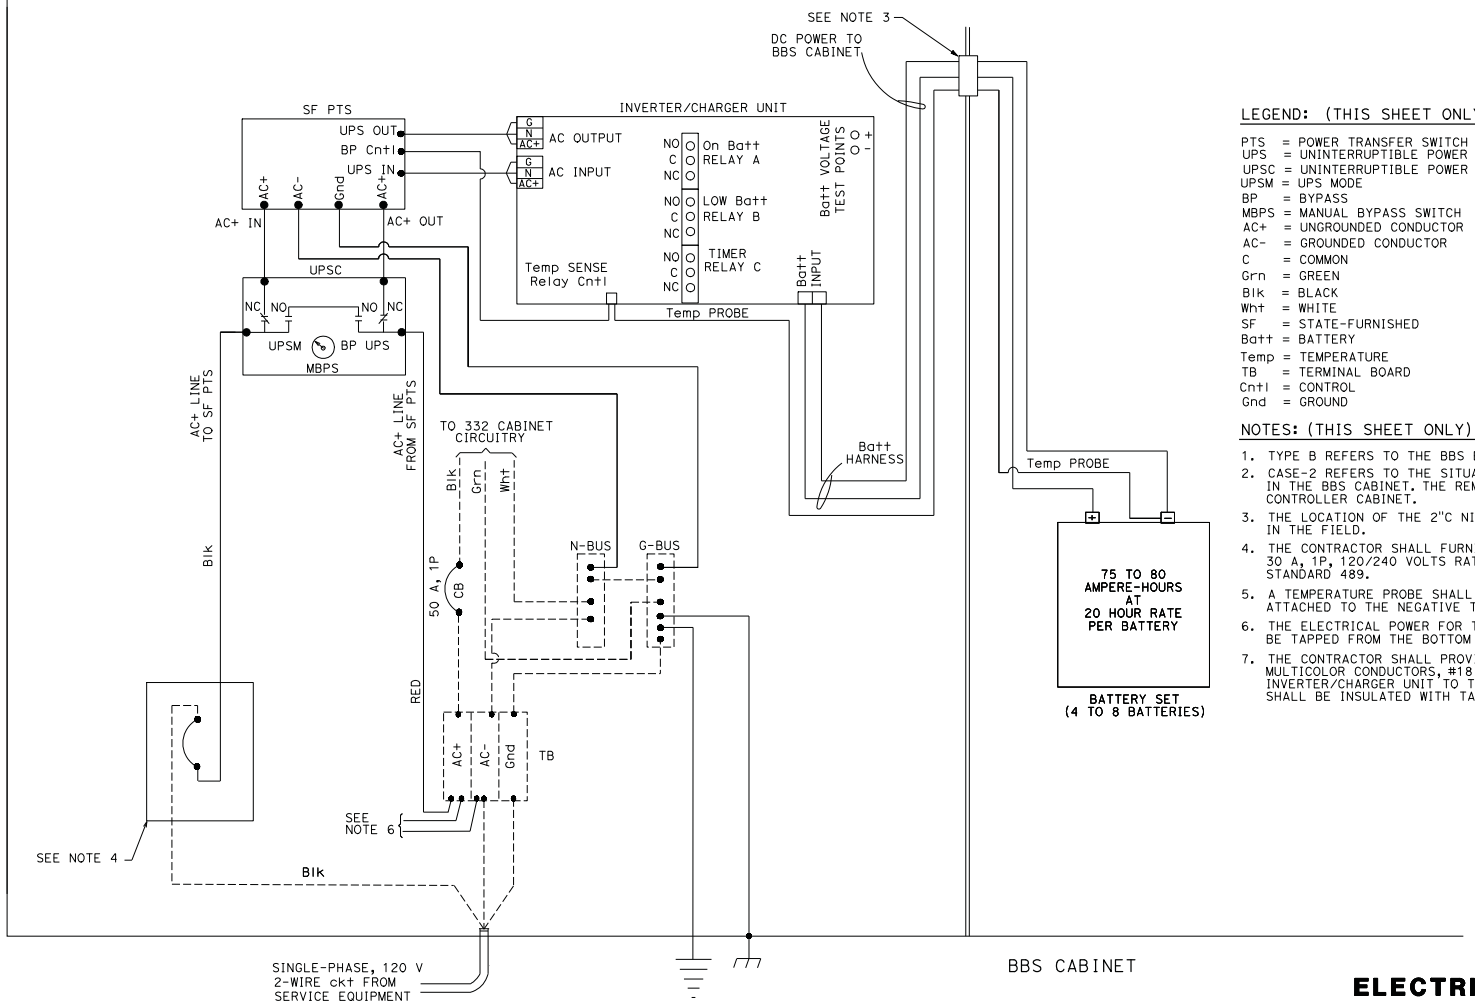

LEGEND: (THIS SHEET ONLY)

PTS = POWER TRANSFER SWITCH
UPS = UNINTERRUPTIBLE POWER SUPPLY
UPSC = UNINTERRUPTIBLE POWER SUPPLY CONTROLLER
UPSM = UPS MODE
BP = BYPASS
MBPS = MANUAL BYPASS SWITCH
AC+ = UNGROUNDED CONDUCTOR
AC- = GROUNDED CONDUCTOR
C = COMMON
Grn = GREEN
Blk = BLACK
Wht = WHITE
SF = STATE-FURNISHED
Batt = BATTERY
Temp = TEMPERATURE
TB = TERMINAL BOARD
Cntl = CONTROL
Gnd = GROUND

NOTES: (THIS SHEET ONLY)

1. TYPE B REFERS TO THE BBS EQUIPMENT FROM MANUFACTURER B.
2. CASE-2 REFERS TO THE SITUATION WHEN ONLY THE BATTERIES ARE INSTALLED IN THE BBS CABINET. THE REMAINING EQUIPMENT IS PLACED IN THE 332 CONTROLLER CABINET.
3. THE LOCATION OF THE 2"C NIPPLE WILL BE DETERMINED BY THE ENGINEER IN THE FIELD.
4. THE CONTRACTOR SHALL FURNISH AND INSTALL A NEMA-1 ENCLOSURE WITH 30 A, 1P, 120/240 VOLTS RATED CIRCUIT BREAKER MANUFACTURED PER UL STANDARD 489.
5. A TEMPERATURE PROBE SHALL BE ATTACHED TO THE BATTERY BY TAPE OR ATTACHED TO THE NEGATIVE TERMINAL OF THE BATTERY.
6. THE ELECTRICAL POWER FOR THE COOLING FAN FOR THE BBS CABINET SHALL BE TAPPED FROM THE BOTTOM OF THE TB IN THE 332 CABINET.
7. THE CONTRACTOR SHALL PROVIDE A 9-WIRE WIRING HARNESS OR BUNDLED 9 MULTICOLOR CONDUCTORS, #18 AWG WIRES FROM THE RELAY ON THE INVERTER/CHARGER UNIT TO THE CONTROLLER. THE ENDS OFTHE CONDUCTORS SHALL BE INSULATED WITH TAPE AND A SIX-FOOT COIL ON EACH END.

ELECTRICAL SYSTEM

(BBS POWER CONNECTION DIAGRAM, TYPE B, CASE-2)

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION
Caltrans

FUNCTIONAL SUPERVISOR | CALCULATED-DESIGNED BY | CHECKED BY | REVISED BY | DATE REVISED

LAST REVISION 3-11-09 | DATE PLOTTED => 13-MAR-2009 | TIME PLOTTED => 09:10

(Blank)

VIII. PROJECT FUNDING SIGN DETAILS

(Blank)

CALTRANS LOGO DETAILS

CHICO REDEVELOPMENT AGENCY LOGO DETAILS

CITY OF CHICO LOGO DETAILS

PROP 1-B BOND FUNDS-GENERAL SIGN SPECIFICATION

DESIGN NOTES:

1. Main text (example: Highway Widening) use 6” series D text minimum.
2. Completion date text (example: Completion 2013) use 8” series D text minimum for all text. Optionally, if “Completion” is uses on a separate line and to the left or right of a logo, it may be used as small text, 4” series D minimum.
3. All funding agency participant logos are to be displayed.
4. Individual logo height variable up to 23” maximum.
5. Caltrans logo shall be displayed as the uppermost and leftmost logo amongst a group or group of logos.
6. Overall sign size shall not exceed 11’x11’ (132”x132”).

FABRICATION NOTES:

1. Comply with 2006 Standard Plans S93 and S94 for sign panel.
2. Comply with ASTM type II retroreflective sheeting (or higher grade) for all colors except black.
3. Legend and artwork may be transparent film, ink, or applied decals.
4. Overlay entire sign face with premium grade graffiti film.
5. Comply with retroreflective sheeting manufacturer’s recommendations for transparent film, ink, applied decals, and graffiti film.

COLORS: BORDER - PURPLE (PANTONE #520)
LEGEND - BLACK, WHITE, AND ORANGE
BACKGROUND - PURPLE, (PANTONE #520) AND WHITE
CT LOGO - GREEN (PANTONE #326) AND BLUE (PANTONE #299)

(Blank)

IX. CONTRACT

(Blank)

CITY OF CHICO, CAPITAL PROJECTS SERVICES DEPARTMENT
CONTRACT - PUBLIC WORKS PROJECT
CITY OF CHICO / XXXXXXXXXXXXXX
(Contractor)

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
(Project Title)

MAJGC/15010-300-4150
(Budget Account Number)

THIS CONTRACT is executed this ____ day of _____, 2011, between the CITY OF CHICO, hereinafter called "City", and _____, a(n) (individual), (partnership), (corporation), (enter as appropriate) hereinafter called "Contractor."

ARTICLE I - WITNESSETH, that for and in consideration of the payments and agreements hereinafter mentioned to be made and performed by City, Contractor hereby agrees to, at its own proper cost and expense, do all the work and furnish all labor and materials necessary to complete in a good, workmanlike and substantial manner, the public work indicated above and described in the documents listed below and made a part of this Contract by reference thereto, and the same as though set forth herein. Said documents are more fully described as follows:

1. NOTICE TO CONTRACTORS dated _____
2. GENERAL PROVISIONS
3. SPECIAL PROVISIONS entitled STATE ROUTE 32 WIDENING PROJECT (PHASE 1) PROJECT No. 15010 – FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
4. PROPOSAL dated _____
5. CONTRACT DRAWINGS entitled STATE ROUTE 32 WIDENING PROJECT (PHASE 1) – PROJECT No. 15010 – FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE

Said public work is located in or near the City of Chico, County of Butte, State of California.

A requirement shown in any of said documents is as binding as though occurring in all. They are intended to be coordinated and to describe and provide for a complete work. Should it appear that the work to be done or any of the matters relative thereto are not sufficiently explained in said documents or should any of said documents appear to be conflicting, the Contractor shall apply to the City for such

further explanation as may be necessary, and shall conform to them as part of the Contract. The decisions of the City as to the true meaning of any of said documents shall be final.

The work shall be performed in accordance with the directions and specifications set forth in the above named documents and also in accordance with the following specifications entitled:

1. STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION, STANDARD SPECIFICATIONS, MAY 2006, as amended.
2. STANDARD SPECIFICATIONS OF THE CITY OF CHICO

Said specifications are hereby specifically referred to and by such reference made a part hereof.

ARTICLE II - Contractor agrees to receive and accept the prices set forth in Exhibit “A” attached hereto and by reference incorporated herein as full compensation for furnishing all labor and materials and doing all the work contemplated and embraced in this Contract; also for all loss or damage arising out of the nature of the work aforesaid, or from the action of the elements, or from any unforeseen difficulties or obstruction which may arise or be encountered in the prosecution of the work connected with the work; also for all expenses incurred by or in consequence of the suspension or discontinuance of work, and for well and faithfully completing the work, and the whole thereof, in the manner and according to the plans and specifications and the requirements of the Director of Engineering under them.

ARTICLE III - City hereby promises and agrees with Contractor to employ, and does hereby employ, Contractor to provide the labor and materials and to do the public work according to the terms and conditions herein contained and referred to, for the prices aforesaid, and hereby contracts to pay the same at the time, in the manner, and upon the conditions in said GENERAL PROVISIONS, SPECIAL PROVISIONS, PROPOSAL and SPECIFICATIONS as above set forth; and the said parties, for themselves, their heirs, executors, administrators, successors, and assigns, do hereby agree to the full performance of the covenants herein contained.

ARTICLE IV - It is further expressly agreed by and between the parties hereto that should there be any conflict between the terms of this instrument and the bid or proposal of said Contract, then this instrument shall control, and nothing herein shall be considered as acceptance of the said terms of said proposal conflicting herewith.

IN WITNESS WHEREOF, the parties hereto have executed these presents in the day and year first above written.

///

_____ CONTRACTOR	CITY OF CHICO, A Municipal Corporation
_____ ADDRESS	_____ BY David Burkland, City Manager
_____ CITY/STATE/ZIP	_____ DATE:
BY _____ Signature	APPROVED AS TO FORM: Lori Barker, City Attorney
_____	BY _____ Alicia M. Rock, Assistant City Attorney
_____ TITLE	
DATE: _____	
_____ CONTRACTOR'S LICENSE NO.	

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
1		PROGRESS SCHEDULE (CRITICAL PATH METHOD)	LS			
2		CONSTRUCTION SITE MANAGEMENT	LS			
3		STORM WATER POLLUTION PREVENTION PLAN	LS			
4		WATER POLLUTION CONTROL	LS			
5		STORM WATER ANNUAL REPORTS	EA			
6		CONSTRUCTION AREA SIGNS	LS			
7	P	TRAFFIC CONTROL SYSTEM	LS			
8		TYPE III BARRICADE	EA			
9		TEMPORARY PAVEMENT MARKING (PAINT)	SF			
10		TEMPORARY TRAFFIC STRIPE (PAINT)	LF			
11		CHANNELIZERS (SURFACE MOUNTED)	EA			
12		TEMPORARY PAVEMENT MARKER	EA			
13		PORTABLE CHANGEABLE MESSAGE SIGN	LS			
14		TEMPORARY RAILING (TYPE K)	LF			
15		TEMPORARY CRASH CUSION (TYPE ABSORB 350)	EA			
16		REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE	LF			
17		OBLITERATE SURFACING	SY			
18		REMOVE FENCE	LF			
19		REMOVE FLARED END SECTION	EA			
20		REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF			
21		REMOVE THERMOPLASTIC PAVEMENT MARKING	SF			
22		REMOVE PAVEMENT MARKER	EA			
23		REMOVE ROADSIDE SIGN	EA			
24		RELOCATE ROADSIDE SIGN	EA			
25		MODIFY INLET TO MANHOLE	EA			
26		COLD PLANE AC PAVEMENT (0.15 MAX)	SY			

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
27		REMOVE CONCRETE (CURB AND GUTTER)	LF			
28		REMOVE CONCRETE (SIDEWALK)	CY			
29		CLEAN BRIDGE DECK	SF			
30		REMOVE METAL BEAM GUARD RAILING	LF			
31		BRIDGE REMOVAL (PORTION)	LS			
32	P	CLEARING AND GRUBBING	LS			
33		REMOVE TREE	EA			
34	P	DEVELOP WATER SUPPLY	LS			
35		ROADWAY EXCAVATION	CY			
36		LEAD COMPLIANCE PLAN	LS			
37	F	STRUCTURE EXCAVATION (BRIDGE)	CY			
38	F	STRUCTURE BACKFILL (BRIDGE)	CY			
39		DITCH EXCAVATION	CY			
40		IMPORTED BORROW	CY			
41		IMPORTED MATERIAL (SHOULDER BACKING)	TON			
42		COMPOST (INCORPORATE)	SY			
43		EROSION CONTROL (HYDROSEED)	SF			
44		2" CONDUIT	LF			
45		3" CONDUIT	LF			
46		6" CONDUIT	LF			
47		CLASS 2 AGGREGATE BASE	CY			
48		AGGREGATE BASE (APPROACH SLAB)	CY			
49		HOT MIX ASPHALT	TON			
50		HOT MIX ASPHALT (OPEN GRADED FRICTION COURSE)	TON			
51		PLACE HOT MIX ASPHALT DIKE (TYPE C)	LF			
52		PLACE HOT MIX ASPHALT DIKE (TYPE E)	LF			

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
53		PLACE HOT MIX ASPHALT DIKE (TYPE F)	LF			
54		PLACE HOT MIX ASPHALT (MISC AREA)	SY			
55		COLD FOAM IN PLACE RECYCLING	SY			
56	P-F	FURNISH PILING (CLASS 90) (ALTERNATIVE X)	LF			
57		DRIVE PILE (CLASS 90) (ALTERNATIVE X)	EA			
58	P-F	FURNISH PILING (15" PRECAST PILE EXTENSION)	LF			
59		DRIVE PILE (15" PRECAST PILE EXTENSION)	EA			
60	F	STRUCTURAL CONCRETE, BRIDGE	CY			
61	F	STRUCTURAL CONCRETE, APPROACH SLAB (TYPE EQ)	CY			
62	F	STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R)	CY			
63		PAVING NOTCH EXTENSION	CF			
64	F	DRILL AND BOND DOWEL	LF			
65		DRILL AND BOND DOWEL (CHEMICAL ADHESIVE)	EA			
66		JOINT SEAL (MR 1/2")	LF			
67	P-F	BAR REINFORCING STEEL (BRIDGE)	LB			
68	F	TREAT BRIDGE DECK	SF			
69		FURNISH BRIDGE DECK TREATMENT MATERIAL	GAL			
70	P	PRECAST CONCRETE SOUNDWALL	SF			
71		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.063"- UNFRAMED)	SF			
72		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.080"- UNFRAMED)	SF			
73		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.063"-FRAMED)	SF			
74		ROADSIDE SIGN (ONE POST)	EA			
75		ROADSIDE SIGN (TWO POST)	EA			
76		INSTALL SIGN (STRAP AND SADDLE BRACKET METHOD)	EA			
77		18" APC	LF			
78		24" APC	LF			

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
79		18" AFES	EA			
80		24" AFES	EA			
81		DRAINAGE INLET	EA			
82		ROCK SLOPE PROTECTION (LIGHT, METHOD B)	CY			
83		ROCK SLOPE PROTECTION (BACKING No. 2, METHOD B)	CY			
84		ROCK SLOPE PROTECTION FABRIC	SY			
85		MINOR CONCRETE (MEDIAN CURB)	CY			
86		MINOR CONCRETE (RETAINING CURB)	CY			
87		MINOR CONCRETE (CURB & GUTTER)	CY			
88		MINOR CONCRETE (SIDEWALK)	CY			
89		MINOR CONCRETE (CURB RAMP)	CY			
90		MINOR CONCRETE (TEXTURED PAVING)	CY			
91		MISCELLANEOUS IRON AND STEEL	LB			
92		DELINEATOR	EA			
93		HIGHWAY POST MARKER	EA			
94		OBJECT MARKER	EA			
95		METAL BEAM GUARD RAILING (WOOD POST)	LF			
96		MINOR CONCRETE (VEGETATION CONTROL)	CY			
97	P-F	TUBULAR BICYCLE RAILING	LF			
98		DOUBLE METAL BEAM GUARD RAILING (WOOD POST)	LF			
99	P	STEEL-BACKED TIMBER GUARD RAILING	LF			
100	P	STEEL-BACKED TIMBER GUARD RAILING (DOUBLE SIDED)	LF			
101		TRANSITION RAILING (TYPE WB)	EA			
102		TERMINAL SYSTEM (TYPE CAT)	EA			
103		TEMINAL SYSTEM (TYPE CAT) BACKUP	EA			
104		ALTERNATIVE FLARED TERMINAL SYSTEM	EA			

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
105	F	CONCRETE BARRIER (TYPE 732R)	LF			
106	F	CONCRETE BARRIER (TYPE 732)	LF			
107		THERMOPLASTIC TRAFFIC STRIPE	LF			
108		THERMOPLASTIC PAVEMENT MARKING	SF			
109		PAVEMENT MARKER (RETRO-REFLECTIVE)	EA			
110		MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION	LS			
111		SIGNAL AND LIGHTING (TEMPORARY)	LS			
112		INTERCONNECTION CONDUIT AND CABLE	LS			
113		MODIFY SIGNAL AND LIGHTING (LOCATION 1)	LS			
114		MODIFY SIGNAL AND LIGHTING (LOCATION 2)	LS			
115		RAISED PLANTER WALL CAP	LF			
116		RAISED PLANTER WALL FOOTING	LF			
117		FRONT RAISED PLANTER WALL	SF			
118		BACK RAISED PLANTER WALL	SF			
119		IMPORT TOPSOIL AND PLACEMENT	CY			
120		RAISED PLANTER BACKFILL	CY			
121		TREE PLANTING (15 GALLON SIZE, STAKED)	EA			
122		TREE PLANTING (15 GALLON SIZE,UN- STAKED)	EA			
123		SHRUB PLANTING (5 GALLON SIZE)	EA			
124		SHRUBS (1 GALLON SIZE)	EA			
125		VINES (1 GALLON)	EA			
126		WEED CONTROL	SF			
127		ROOT BARRIER	LF			
128		WOOD CHIP MULCH	CY			
129		WATER POINT OF CONNECTION	EA			
130		BACKFLOW PREVENTER ASSEMBLY	EA			

CONTRACTORS COMPENSATION SCHEDULE
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
131		CONTROLLER	EA			
132		FLOW SENSING ASSEMBLY	EA			
133		ISOLATION VALVES	EA			
134		REMOTE CONTROL VALVES (SPRAY)	EA			
135		REMOTE CONTROL VALVES (DRIP)	EA			
136		2-WIRE DECODERS	EA			
137		QUICK COUPLER VALVES	EA			
138	P	PVC MAINLINE	LF			
139	P	PVC LATERAL LINES	LF			
140	P	CONDUIT	LF			
141		SLEEVING	LF			
142		LIGHTING ARRESTOR	EA			
143		PULL BOXES	EA			
144		SWING PIPE	LF			
145		EMITTERS	EA			
146		IRRIGATION HEAD	EA			
147		2 WIRE DECODER CABLE	LF			
148		WATER AUDIT	EA			
149		PLANT ESTABLISHMENT PERIOD	SF			
150		MOBILIZATION	LS			
					TOTAL BID	

Notes: (a) Contractors must use this form to provide bids (no exceptions or alterations are permitted).

(b) In order to be considered responsive, the bid schedule included in the proposal form must be filled out in its entirety. The City reserves the right to accept or reject any and all bids.

(Blank)

X. PROPOSAL

(Blank)

PROPOSAL

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
(Project Title)

MAJGC/15010-300-4150
(Budget Account Number)

TO THE CITY OF CHICO

The undersigned declares that he/she has carefully examined the location of the proposed work, that he/she has examined the contract plans and specifications, and read the accompanying General and Special Provisions, and hereby proposed to furnish all materials and do all the work required to complete the said work in accordance with said contract plans, if any, and specifications, and General and Special Provisions, for the unit prices or lump sum set forth in the following attached schedules.

The undersigned further agrees that in case of default in executing the required contract, with necessary bonds within ten (10) days, not including Sunday, after having received notice that the contract is ready for signature, the proceeds of the Bidder's guaranty accompanying his or her bid shall become the property of the CITY OF CHICO.

In case of discrepancy between the unit price and the total set forth for a unit basis item, the unit price shall prevail, except as provided in (a) or (b), as follows:

(a) If the amount set forth as a unit price is unreadable or otherwise unclear, or is omitted, or is the same as the amount as the entry in the item total column, then the amount set forth in the item total column for the item shall prevail and shall be divided by the estimated quantity for the item and the price thus obtained shall be the unit price:

(b) (Decimal Errors) If the product of the entered unit price and the estimated quantity is exactly off by a factor of ten, one hundred, etc., or one-tenth, or one-hundredth, etc. from the entered total, the discrepancy will be resolved by using the entered unit price or item total, whichever most closely approximates percentagewise the unit price or item total in the Department's Final Estimate of cost.

If both the unit price and the item total are unreadable or otherwise unclear, or are omitted, the bid may be deemed irregular. Likewise if the item total for a lump sum item is unreadable or otherwise unclear, or is omitted, the bid may be deemed irregular unless the project being bid has only a single item and a clear, readable

total bid is provided.

Symbols such as commas and dollar signs will be ignored and have no mathematical significance in establishing any unit price or item total or lump sums. Written unit prices, item totals and lump sums will be interpreted according to the number of digits and, if applicable, decimal placement. Cents symbols also have no significance in establishing any unit price or item total since all such figures are assumed to be expressed in dollars and/or decimal fractions of a dollar. Bids on lump sum items shall be item totals only; if any unit price for a lump sum item is included in a bid and it differs from the item total, the items total shall prevail.

The foregoing provisions for the resolution of specific irregularities cannot be so comprehensive as to cover every omission, inconsistency, error or other irregularity which may occur in a bid. Any situation not specifically provided for will be determined in the discretion of the Department, and such discretion will be exercised in the manner deemed by the Department to best protect the public interest in the prompt and economical completion of the work. The decision of the Department respecting the amount of a bid, or the existence or treatment of an irregularity in a bid shall be final.

City of Chico Business License No._____

Taxpayer Identification No._____

Licensed in accordance with an act providing for the registration of contractors:

License No._____

Signature of Bidder:_____

(Check appropriate box below. State individual name or (if a firm or partnership), state the firm name and give names of all individual co-partners composing the firm. If a corporation, state legal name of corporation, also names of president, secretary, treasurer, and manager thereof.)

☐ Individual ☐ Corporation ☐ Partnership ☐ Other

Name

_____

_____

_____

Date:_____2011

Business Address

_____

_____

(Zip Code)

Phone No. _____

STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT NO. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
(Project Title)

MAJGC/15010-300-4150
(Budget Account Number)

LIST OF SUBCONTRACTORS
FOR CONTRACTOR_____

SUBCONTRACTORS NAME	ADDRESS & TELEPHONE #	RESPONSIBLE FOR CONTRACT ITEM NO.	DOLLAR AMOUNT OF SUBCONTRACT WORK

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
1		PROGRESS SCHEDULE (CRITICAL PATH METHOD)	LS	1		
2		CONSTRUCTION SITE MANAGEMENT	LS	1		
3		STORM WATER POLLUTION PREVENTION PLAN	LS	1		
4		WATER POLLUTION CONTROL	LS	1		
5		STORM WATER ANNUAL REPORTS	EA	2		
6		CONSTRUCTION AREA SIGNS	LS	1		
7	P	TRAFFIC CONTROL SYSTEM	LS	1		
8		TYPE III BARRICADE	EA	14		
9		TEMPORARY PAVEMENT MARKING (PAINT)	SF	850		
10		TEMPORARY TRAFFIC STRIPE (PAINT)	LF	29000		
11		CHANNELIZERS (SURFACE MOUNTED)	EA	310		
12		TEMPORARY PAVEMENT MARKER	EA	570		
13		PORTABLE CHANGEABLE MESSAGE SIGN	LS	1		
14		TEMPORARY RAILING (TYPE K)	LF	6740		
15		TEMPORARY CRASH CUSION (TYPE ABSORB 350)	EA	8		
16		REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE	LF	7820		
17		OBLITERATE SURFACING	SY	1360		
18		REMOVE FENCE	LF	5530		
19		REMOVE FLARED END SECTION	EA	2		
20		REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF	4710		
21		REMOVE THERMOPLASTIC PAVEMENT MARKING	SF	700		
22		REMOVE PAVEMENT MARKER	EA	410		
23		REMOVE ROADSIDE SIGN	EA	15		
24		RELOCATE ROADSIDE SIGN	EA	2		
25		MODIFY INLET TO MANHOLE	EA	1		
26		COLD PLANE AC PAVEMENT (0.15 MAX)	SY	2800		

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
27		REMOVE CONCRETE (CURB AND GUTTER)	LF	210		
28		REMOVE CONCRETE (SIDEWALK)	CY	9		
29		CLEAN BRIDGE DECK	SF	5980		
30		REMOVE METAL BEAM GUARD RAILING	LF	330		
31		BRIDGE REMOVAL (PORTION)	LS	1		
32	P	CLEARING AND GRUBBING	LS	1		
33		REMOVE TREE	EA	170		
34	P	DEVELOP WATER SUPPLY	LS	1		
35		ROADWAY EXCAVATION	CY	4790		
36		LEAD COMPLIANCE PLAN	LS	1		
37	F	STRUCTURE EXCAVATION (BRIDGE)	CY	196		
38	F	STRUCTURE BACKFILL (BRIDGE)	CY	82		
39		DITCH EXCAVATION	CY	1000		
40		IMPORTED BORROW	CY	8110		
41		IMPORTED MATERIAL (SHOULDER BACKING)	TON	120		
42		COMPOST (INCORPORATE)	SY	2840		
43		EROSION CONTROL (HYDROSEED)	SF	148000		
44		2" CONDUIT	LF	200		
45		3" CONDUIT	LF	89		
46		6" CONDUIT	LF	200		
47		CLASS 2 AGGREGATE BASE	CY	9620		
48		AGGREGATE BASE (APPROACH SLAB)	CY	2		
49		HOT MIX ASPHALT	TON	11600		
50		HOT MIX ASPHALT (OPEN GRADED FRICTION COURSE)	TON	2450		
51		PLACE HOT MIX ASPHALT DIKE (TYPE C)	LF	39		
52		PLACE HOT MIX ASPHALT DIKE (TYPE E)	LF	400		

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
53		PLACE HOT MIX ASPHALT DIKE (TYPE F)	LF	50		
54		PLACE HOT MIX ASPHALT (MISC AREA)	SY	5		
55		COLD FOAM IN PLACE RECYCLING	SY	14200		
56	P-F	FURNISH PILING (CLASS 90) (ALTERNATIVE X)	LF	700		
57		DRIVE PILE (CLASS 90) (ALTERNATIVE X)	EA	16		
58	P-F	FURNISH PILING (15" PRECAST PILE EXTENSION)	LF	1596		
59		DRIVE PILE (15" PRECAST PILE EXTENSION)	EA	30		
60	F	STRUCTURAL CONCRETE, BRIDGE	CY	442		
61	F	STRUCTURAL CONCRETE, APPROACH SLAB (TYPE EQ)	CY	26		
62	F	STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R)	CY	18		
63		PAVING NOTCH EXTENSION	CF	120		
64	F	DRILL AND BOND DOWEL	LF	432		
65		DRILL AND BOND DOWEL (CHEMICAL ADHESIVE)	EA	130		
66		JOINT SEAL (MR 1/2")	LF	230		
67	P-F	BAR REINFORCING STEEL (BRIDGE)	LB	102342		
68	F	TREAT BRIDGE DECK	SF	5972		
69		FURNISH BRIDGE DECK TREATMENT MATERIAL	GAL	67		
70	P	PRECAST CONCRETE SOUNDWALL	SF	50700		
71		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.063"-UNFRAMED)	SF	91		
72		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.080"-UNFRAMED)	SF	120		
73		FURNISH SINGLE SHEET ALUMINUM SIGN PANEL (0.063"-FRAMED)	SF	21		
74		ROADSIDE SIGN (ONE POST)	EA	12		
75		ROADSIDE SIGN (TWO POST)	EA	1		
76		INSTALL SIGN (STRAP AND SADDLE BRACKET METHOD)	EA	3		
77		18" APC	LF	20		
78		24" APC	LF	120		

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
79		18" AFES	EA	1		
80		24" AFES	EA	2		
81		DRAINAGE INLET	EA	2		
82		ROCK SLOPE PROTECTION (LIGHT, METHOD B)	CY	880		
83		ROCK SLOPE PROTECTION (BACKING No. 2, METHOD B)	CY	13		
84		ROCK SLOPE PROTECTION FABRIC	SY	1020		
85		MINOR CONCRETE (MEDIAN CURB)	CY	3		
86		MINOR CONCRETE (RETAINING CURB)	CY	7		
87		MINOR CONCRETE (CURB & GUTTER)	CY	27		
88		MINOR CONCRETE (SIDEWALK)	CY	22		
89		MINOR CONCRETE (CURB RAMP)	CY	11		
90		MINOR CONCRETE (TEXTURED PAVING)	CY	1		
91		MISCELLANEOUS IRON AND STEEL	LB	480		
92		DELINEATOR	EA	20		
93		HIGHWAY POST MARKER	EA	2		
94		OBJECT MARKER	EA	3		
95		METAL BEAM GUARD RAILING (WOOD POST)	LF	50		
96		MINOR CONCRETE (VEGETATION CONTROL)	CY	87		
97	**P-F**	TUBULAR BICYCLE RAILING	LF	288		
98		DOUBLE METAL BEAM GUARD RAILING (WOOD POST)	LF	200		
99	**P**	STEEL-BACKED TIMBER GUARD RAILING	LF	3520		
100	**P**	STEEL-BACKED TIMBER GUARD RAILING (DOUBLE SIDED)	LF	80		
101		TRANSITION RAILING (TYPE WB)	EA	2		
102		TERMINAL SYSTEM (TYPE CAT)	EA	2		
103		TEMINAL SYSTEM (TYPE CAT) BACKUP	EA	2		
104		ALTERNATIVE FLARED TERMINAL SYSTEM	EA	2		

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
105	**F**	CONCRETE BARRIER (TYPE 732R)	LF	141		
106	**F**	CONCRETE BARRIER (TYPE 732)	LF	147		
107		THERMOPLASTIC TRAFFIC STRIPE	LF	30200		
108		THERMOPLASTIC PAVEMENT MARKING	SF	1950		
109		PAVEMENT MARKER (RETRO-REFLECTIVE)	EA	760		
110		MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION	LS	1		
111		SIGNAL AND LIGHTING (TEMPORARY)	LS	1		
112		INTERCONNECTION CONDUIT AND CABLE	LS	1		
113		MODIFY SIGNAL AND LIGHTING (LOCATION 1)	LS	1		
114		MODIFY SIGNAL AND LIGHTING (LOCATION 2)	LS	1		
115		RAISED PLANTER WALL CAP	LF	340		
116		RAISED PLANTER WALL FOOTING	LF	340		
117		FRONT RAISED PLANTER WALL	SF	590		
118		BACK RAISED PLANTER WALL	SF	320		
119		IMPORT TOPSOIL AND PLACEMENT	CY	1660		
120		RAISED PLANTER BACKFILL	CY	75		
121		TREE PLANTING (15 GALLON SIZE, STAKED)	EA	88		
122		TREE PLANTING (15 GALLON SIZE,UN- STAKED)	EA	39		
123		SHRUB PLANTING (5 GALLON SIZE)	EA	1690		
124		SHRUBS (1 GALLON SIZE)	EA	620		
125		VINES (1 GALLON)	EA	590		
126		WEED CONTROL	SF	86800		
127		ROOT BARRIER	LF	1040		
128		WOOD CHIP MULCH	CY	790		
129		WATER POINT OF CONNECTION	EA	1		
130		BACKFLOW PREVENTER ASSEMBLY	EA	1		

CONTRACTORS PROPOSAL FORM FOR
STATE ROUTE 32 WIDENING PROJECT (PHASE 1)
PROJECT No. 15010
FROM EAST OF PARK AND RIDE LOT TO EL MONTE AVENUE
BUDGET ACCOUNT No. MAJGC/15010-300-4150

ITEM NO.	P-F	DESCRIPTION	UNIT	QTY	UNIT PRICE	AMOUNT
131		CONTROLLER	EA	1		
132		FLOW SENSING ASSEMBLY	EA	1		
133		ISOLATION VALVES	EA	9		
134		REMOTE CONTROL VALVES (SPRAY)	EA	3		
135		REMOTE CONTROL VALVES (DRIP)	EA	14		
136		2-WIRE DECODERS	EA	17		
137		QUICK COUPLER VALVES	EA	55		
138	**P**	PVC MAINLINE	LF	7400		
139	**P**	PVC LATERAL LINES	LF	23000		
140	**P**	CONDUIT	LF	6600		
141		SLEEVING	LF	80		
142		LIGHTING ARRESTOR	EA	14		
143		PULL BOXES	EA	15		
144		SWING PIPE	LF	23000		
145		EMITTERS	EA	5050		
146		IRRIGATION HEAD	EA	83		
147		2 WIRE DECODER CABLE	LF	6600		
148		WATER AUDIT	EA	1		
149		PLANT ESTABLISHMENT PERIOD	SF	243000		
150		MOBILIZATION	LS	1		
					TOTAL BID	

Notes: (a) Contractors must use this form to provide bids (no exceptions or alterations are permitted).
(b) In order to be considered responsive, the bid schedule included in the proposal form must be filled out in its entirety. The City reserves the right to accept or reject any and all bids.

(Blank)