


PLAN VIEW

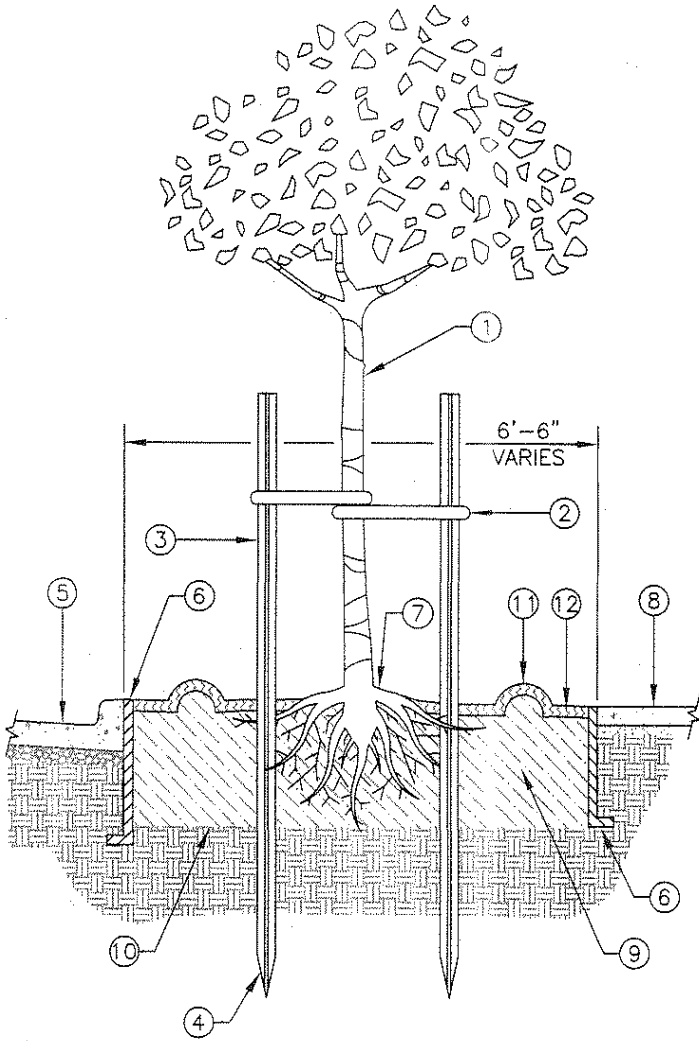

SECTION VIEW

NOTES:

- ① TREE AS PER C.D.F. STANDARDS FOR PURCHASING CONTAINER GROWN LANDSCAPE TREES.
- ② 3/4" WIDE REINFORCED PLASTIC GREEN TREE TIE.
- ③ 8' HEAVY DUTY STEEL GREEN T-POST. PLACE POSTS PERPENDICULAR TO PREVAILING WINDS AND OUTSIDE ROOTBALL IN UNDISTURBED NATIVE SOIL.
- ④ DRIVE POST 1' MIN. INTO UNDISTURBED SOIL. PLACE POSTS MINIMUM 18" AWAY FROM TRUNK.
- ⑤ CURB AND GUTTER OR OTHER PAVING.
- ⑥ ROOT CONTROL BARRIER BY "DEEP ROOT CORP." OR APPROVED EQUAL. SET AT LEVEL OF SURROUNDING CEMENT OR SOIL. 10' LONG CENTERED TO TREE, 12" DEPTH (LB 12-2) NEXT TO SIDEWALKS AND 18" DEPTH (LB 18-2) NEXT TO CURBING.
- ⑦ FIRST ROOTS SHALL BE VISIBLE AT TOP OF ROOTBALL. SET TOP OF ROOTBALL 1" ABOVE FINISH GRADE TO ALLOW FOR SETTLEMENT. BREAK UP SIDES OF BALL AND SPREAD OUT ROOTS. NO CIRCLING ROOTS SHALL REMAIN WITHIN 12" OF THE TREE TRUNK.
- ⑧ SIDEWALK.
- ⑨ BACKFILL MIX PER SPECIFICATIONS OR SOIL REPORT. SOIL SHALL BE 2" BELOW WALK. COVER SOIL WITH 2" OF MULCH TO GRADE.
- ⑩ PLANTING HOLE SHALL BE TWICE THE DIAMETER OF THE ROOTBALL AND NO DEEPER THAN THE TREE ROOTBALL. SCARIFY SIDES AND BOTTOM OF HOLE. IN PARKING AREAS OVER EXCAVATION OF COMPACTED SOIL MAY BE REQUIRED.
- ⑪ WATER RETENTION BERMS SHOULD BE SET 3' FROM THE TRUNK.
- ⑫ MULCH.

NOTE:

IN TURF AREAS PROVIDE ARBOR GUARD BRAND TRUNK PROTECTANT AND PROVIDE A BENDER BOARD AT THE OUTSIDE EDGE OF THE BERM.

REVISION	BY	DATE	APP. BY COUNCIL

CITY OF CHICO

STANDARD PLAN

DRAWN BY: GL DATE: 9/09  
 CHECKED BY: DB SCALE: NONE  
 APPROVED: \_\_\_\_\_  
 CPSD DIRECTOR

FIFTEEN GALLON  
 TREE PLANTING DETAIL  
 AT PARKWAY STRIP

NO.  
 LS-I

SHEET 1 OF 3